



Implemented CSS audit B

Slice B · 118 Implemented properties · font-family "Liberation Sans" · local images

IMPLEMENTED-PROPS-B







Each row names an Implemented property, explains the expected effect in plain words, and applies that property in the Effect cell so print output can be checked by eye. Generate with `--font-path testdata/fonts/implemented-audit`.

#	Property	What it should do	Effect (live)
1	border-top-radius shorthand · (ungrouped)	With <code>`border-top-radius: 12px`</code> the top corners should be 12px curved.	
2	border-top-right-radius longhand · CSS Backgrounds and Borders	With <code>`border-top-right-radius: 12px`</code> the top-right corner should be 12px curved.	
3	border-top-style longhand · CSS Backgrounds and Borders	With <code>`border-top-style: solid`</code> the border edges should be solid.	
4	border-top-width longhand · CSS Backgrounds and Borders	With <code>`border-top-width: 3px`</code> the border thickness should be 3px.	
5	border-width shorthand · CSS Backgrounds and Borders	With <code>`border-width: 3px`</code> the border thickness should be 3px.	
6	bottom longhand · CSS Anchor Positioning	With <code>`bottom: 4px`</code> the positioned box should be offset 4px.	
7	box-decoration-break longhand · CSS Fragmentation	With <code>`box-decoration-break: auto`</code> the effect should match auto.	
8	box-shadow shorthand · CSS Backgrounds and Borders	With <code>`box-shadow: 2px 2px 0 #333`</code> the box should cast a shadow as 2px 2px 0 #333.	
9	box-shadow-blur longhand · (ungrouped)	With <code>`box-shadow-blur: 8px`</code> the box should cast a shadow as 8px.	
10	box-shadow-color longhand · (ungrouped)	With <code>`box-shadow-color: #333`</code> the text or border should appear #333.	
11	box-shadow-offset longhand · (ungrouped)	With <code>`box-shadow-offset: 4px`</code> the box should cast a shadow as 4px.	
12	box-shadow-position longhand · (ungrouped)	With <code>`box-shadow: 3px 3px 10px`</code> plus <code>`box-shadow-position: inset`</code> , Chrome print keeps an outer shadow (this Borders 4 longhand is not applied in Chrome). Match that outer print look.	
13	box-shadow-spread longhand · (ungrouped)	With <code>`box-shadow-spread: 4px`</code> the box should cast a shadow as 4px.	
14	box-sizing longhand · CSS Box Sizing	With <code>`box-sizing: border-box`</code> the effect should match border-box.	
15	break-after longhand · CSS Fragmentation	With <code>`break-after: auto`</code> the effect should match auto.	
16	break-before longhand · CSS Fragmentation	With <code>`break-before: auto`</code> the effect should match auto.	

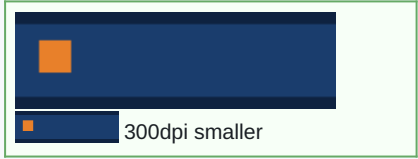




#	Property	What it should do	Effect (live)		
17	break-inside longhand · CSS Fragmentation	With `break-inside: avoid` the effect should match avoid.	fragmentation: break-inside		
18	caption-side longhand · CSS Table	With `caption-side: bottom` the table caption should be at bottom.	<table><tr><td>td</td><td>td</td></tr></table> cap	td	td
td	td				
19	clear longhand · CSS Positioned Layout	With `clear: left` the layout should be left.	F following text wraps beside the float.		
20	color longhand · CSS Color	With `color: #0b5` the text or border should appear #0b5.	colored text		
21	color-adjust shorthand · (ungrouped)	With `color-adjust: exact` the blue fill survives when background printing is off; the initial `economy` drops it.	exact keeps this fill		
22	color-scheme longhand · CSS Color	Root-scoped: only the html element's `dark` paints the #121212 canvas with light default text; this cell's value is not read.	color-scheme: dark (root-scoped)		
23	column-count longhand · CSS Multi-column Layout	With `column-count: 2` the columns should be 2.	Multi-column sample text repeated. Multi-column sample text sample text repeated. Multi-column sample text		
24	column-fill longhand · CSS Multi-column Layout	With `column-fill: auto` the columns should be auto.	Multi-column sample text repeated. Multi-column sample text repeated. Multi-column sample text repeated.		
25	column-gap longhand · CSS Box Alignment	With `column-gap: 20px` the flex items should be arranged as 20px.	231		
26	column-rule shorthand · CSS Multi-column Layout	With `column-rule: 1px solid #666` a 1px solid #666 rule should sit in the column gap.	Multi-column sample text repeated. Multi-column sample text sample text repeated. Multi-column sample text		
27	column-rule-color longhand · CSS Multi-column Layout	With `column-rule-color: #c00` the gap rule should be red (#c00).	Multi-column sample text repeated. Multi-column sample text sample text repeated. Multi-column sample text		
28	column-rule-style longhand · CSS Multi-column Layout	With `column-rule-style: dashed` the gap rule should be dashed.	Multi-column sample text repeated. Multi-column sample text sample text repeated. Multi-column sample text		

#	Property	What it should do	Effect (live)
29	column-rule-width longhand · CSS Multi-column Layout	With `column-rule-width: thick` the gap rule should be thick.	Multi-column sample text repeated. Multi-column sample text repeated. Multi-column sample text
30	column-span longhand · CSS Multi-column Layout	With `column-span: all` on a child, that child should span the full multicol width.	Before span. Before span. Before span. Before span. SPAN ALL After span. After
31	column-width longhand · CSS Box Sizing	With `column-width: 48px` the engine should fit as many ~48px columns as the box allows.	Multi-column n sample text repeated. Multi-column n sample text repeated. Multi-column text repeated. Multi-column n sample text
32	columns shorthand · CSS Multi-column Layout	With `columns: 2` the content should flow in two columns.	Multi-column sample text repeated. Multi-column sample text repeated. Multi-column sample text
33	contain longhand · CSS Containment	With `contain:size` the box is sized by contain-intrinsic-size (48px tall), not by its taller child.	tall 80px child overflows
34	contain-intrinsic-block-size longhand · CSS Box Sizing	With `contain:size`, contain-intrinsic-block-size maps to height in horizontal-tb: 44px.	block axis = 44px
35	contain-intrinsic-height longhand · CSS Box Sizing	With `contain:size` the placeholder height is 36px; the taller child overflows.	height 36px
36	contain-intrinsic-inline-size longhand · CSS Box Sizing	With `contain:size` the inline-axis placeholder is 96px wide in horizontal-tb.	inline 96px placeholder
37	contain-intrinsic-size shorthand · CSS Box Sizing	With `contain:size` the 110px x 52px placeholder replaces the content size.	placeholder 110x52
38	contain-intrinsic-width longhand · CSS Box Sizing	With `contain:size` the width placeholder is 88px; content width is ignored.	width 88px placeholder
39	container shorthand · CSS Conditional Rules	With `container: inherit` the effect should match inherit.	container applied
40	container-name longhand · CSS Conditional Rules	With `container-name: inherit` the effect should match inherit.	container - name applied
41	container-type longhand · CSS Conditional Rules	With `container-type: inherit` the effect should match inherit.	container - type applied

#	Property	What it should do	Effect (live)
42	content longhand · CSS Generated Content	With <code>`content: none`</code> on <code>::before`</code> , no generated prefix should appear (contrast the labeled sibling).	>> labeled · plain (none)
43	content-visibility longhand · CSS Containment	<code>`content-visibility:hidden`</code> skips descendant layout and paint; the box keeps its own size.	
44	counter-increment longhand · CSS Lists and Counters	With <code>`counter-increment: none`</code> the middle item should keep the prior number (1. A, 1. B, 2. C).	1. A 1. B 2. C
45	counter-reset longhand · CSS Lists and Counters	With nested <code>`counter-reset: none`</code> numbering should continue (1. A 2. B 3. C), not restart.	1. A 2. B 3. C
46	direction longhand · CSS Writing Modes	With <code>`direction: rtl`</code> the effect should match rtl.	ABC 123
47	display longhand · CSS Display	With <code>`display: flex`</code> the layout should be flex.	A B
48	dynamic-range-limit longhand · CSS Color	<code>`standard`</code> clamps output to sRGB; the PDF writer is sRGB, so this red fill is unchanged.	sRGB red, unchanged
49	fill longhand · Scalable Vector Graphics	With <code>`fill: #0a7`</code> the effect should match <code>#0a7`</code> .	
50	fill-opacity longhand · Scalable Vector Graphics	With <code>`fill-opacity: 0.5`</code> the element should look faded as 0.5.	
51	filter longhand · Filter Effects	With <code>`filter: opacity(0.5)`</code> the element should look faded as <code>opacity(0.5)`</code> .	fx
52	flex shorthand · CSS Flexible Box Layout	With <code>`flex: 1 1 auto`</code> the flex items should be arranged as 1 1 auto.	1 2 3
53	flex-basis longhand · CSS Flexible Box Layout	With <code>`flex-basis: 64px`</code> the flex items should be arranged as 64px.	1 2 3
54	flex-direction longhand · CSS Flexible Box Layout	With <code>`flex-direction: column`</code> the flex items should be arranged as column.	1 2 3
55	flex-flow shorthand · CSS Flexible Box Layout	With <code>`flex-flow: row wrap`</code> the flex items should be arranged as row wrap.	1 2 3
56	flex-grow longhand · CSS Flexible Box Layout	With <code>`flex-grow: 1`</code> the flex items should be arranged as 1.	1 2 3
57	flex-shrink longhand · CSS Flexible Box Layout	With <code>`flex-shrink: 1`</code> the flex items should be arranged as 1.	1 2 3
58	flex-wrap longhand · CSS Flexible Box Layout	With <code>`flex-wrap: wrap`</code> the flex items should be arranged as wrap.	1 2 3

#	Property	What it should do	Effect (live)
59	float longhand · CSS Positioned Layout	With <code>`float: left`</code> the layout should be left.	
60	font shorthand · CSS Fonts	With <code>`font: italic 700 14pt/1.4`</code> the font should be italic 700 14pt/1.4 ".	
61	font-family longhand · CSS Fonts	With <code>`font-family: `</code> the typeface should change to ".	Serif stack Aa Bb vs Mono
62	font-language-override longhand · CSS Fonts	SRB selects DejaVu Sans Serbian locl; the Cyrillic 6 draws the localized glyph (right) instead of the default form (left).	
63	font-optical-sizing longhand · CSS Fonts	Static bundled faces have no opsz axis, so <code>`auto`</code> is a spec no-op today.	
64	font-palette longhand · CSS Fonts	No bundled color-palette (COLR/CPAL) faces, so <code>`dark`</code> has no visible effect today.	
65	font-size longhand · CSS Fonts	With <code>`font-size: 9pt`</code> the text should be larger at 9pt.	9pt 16pt Aa
66	font-style longhand · CSS Fonts	With <code>`font-style: normal`</code> the line should be normal.	normal / <i>italic Aa</i>
67	font-variation-settings longhand · CSS Fonts	Parsed and validated; bundled faces are static (no fvar axes), so no visible change.	
68	font-weight longhand · CSS Fonts	With <code>`font-weight: 400`</code> the line should be bolder (400).	400 / 700 bold Aa
69	footnote-display longhand · (ungrouped)	With <code>`footnote-display: inherit`</code> the effect should match inherit.	
70	footnote-policy longhand · (ungrouped)	With <code>`footnote-policy: inherit`</code> the effect should match inherit.	
71	forced-color-adjust longhand · CSS Color	Print has no forced-colors mode; <code>`none`</code> keeps author colors and opts out of the dark-scheme text default.	
72	gap shorthand · CSS Box Alignment	With <code>`gap: 20px`</code> the flex items should be arranged as 20px.	
73	grid shorthand · CSS Grid Layout	With <code>`grid: 28px 28px / 48px 48px`</code> items should fill a 2x2 track grid.	
74	grid-area shorthand · CSS Grid Layout	With <code>`grid-area: 1 / 1 / 2 / 3`</code> on a child, that item should span both columns on row 1.	
75	grid-auto-flow longhand · CSS Grid Layout	With <code>`grid-auto-flow: column`</code> auto-placed items should fill down columns (A above B).	

#	Property	What it should do	Effect (live)
76	grid-column shorthand · CSS Grid Layout	With <code>`grid-column: 1 / -1`</code> on a child, that item should span the full row.	
77	grid-column-end longhand · CSS Grid Layout	With <code>`grid-column-end: 3`</code> (and start 1) the item should span both columns.	
78	grid-column-start longhand · CSS Grid Layout	With <code>`grid-column-start: 2`</code> the item should sit in the second column.	
79	grid-row shorthand · CSS Grid Layout	With <code>`grid-row: 1 / 3`</code> on a child, that item should span both rows.	
80	grid-row-end longhand · CSS Grid Layout	With <code>`grid-row-end: 3`</code> (and start 1) the item should span both rows.	
81	grid-row-start longhand · CSS Grid Layout	With <code>`grid-row-start: 2`</code> the item should sit on the second row.	
82	grid-template shorthand · CSS Grid Layout	With <code>`grid-template: 28px 28px / 48px 48px`</code> items should fill a 2x2 template.	
83	grid-template-areas longhand · CSS Grid Layout	With named areas <code>`hd hd` / `sd mn`</code> , children with matching <code>`grid-area`</code> should place into HD, SD, MN.	
84	grid-template-columns longhand · CSS Grid Layout	With <code>`grid-template-columns: 40px 40px`</code> A and B should sit side by side in 40px tracks.	
85	grid-template-rows longhand · CSS Grid Layout	With <code>`grid-template-rows: 1fr 1fr`</code> and a fixed height, A and B should share two equal rows.	
86	height longhand · CSS Box Sizing	With <code>`height: 72px`</code> the box sizing should be 72px.	
87	hyphenate-character longhand · CSS Text	With <code>`hyphenate-character: auto`</code> the effect should match auto.	
88	hyphens longhand · CSS Text	With <code>`hyphens: auto`</code> the effect should match auto.	

#	Property	What it should do	Effect (live)
89	image-orientation longhand · CSS Images	An explicit angle rotates the image; `from-image` would honor JPEG EXIF instead.	
90	image-resolution longhand · CSS Images	`300dpi` renders the image smaller than the 96dpi default; the smaller copy may wrap within the cell.	
91	inline-size longhand · CSS Logical Properties and Values	With `inline-size: 72px` the box sizing should be 72px.	
92	inset shorthand · CSS Logical Properties and Values	With `inset: 4px` the positioned box should be offset 4px.	
93	inset-block shorthand · CSS Logical Properties and Values	With `inset-block: 4px` the positioned box should be offset 4px.	
94	inset-block-end longhand · CSS Logical Properties and Values	With `inset-block-end: 4px` the positioned box should be offset 4px.	
95	inset-block-start longhand · CSS Logical Properties and Values	With `inset-block-start: 4px` the positioned box should be offset 4px.	
96	inset-inline shorthand · CSS Logical Properties and Values	With `inset-inline: 4px` the positioned box should be offset 4px.	
97	inset-inline-end longhand · CSS Logical Properties and Values	With `inset-inline-end: 4px` the positioned box should be offset 4px.	
98	inset-inline-start longhand · CSS Logical Properties and Values	With `inset-inline-start: 4px` the positioned box should be offset 4px.	
99	isolation longhand · Compositing and Blending	`isolate` gives its child a transparent backdrop, so multiply keeps the blue; the plain sibling multiplies with the orange fill and darkens.	
100	justify-content longhand · CSS Box Alignment	With `justify-content: center` the alignment should place items as center.	
101	justify-items longhand · CSS Box Alignment	With `justify-items: center` the alignment should place items as center.	
102	justify-self longhand · CSS Box Alignment	With `justify-self: center` the alignment should place items as center.	
103	left longhand · CSS Anchor Positioning	With `left: 4px` the positioned box should be offset 4px.	
104	letter-spacing longhand · CSS Text	With `letter-spacing: 0.22em` the effect should match 0.22em.	

#	Property	What it should do	Effect (live)
105	line-break longhand · CSS Text	With `line-break: anywhere` the effect should match anywhere.	supercalifragilistic wr apping-hyphenation s ample
106	line-clamp shorthand · CSS Overflow	With `line-clamp: 2` the effect should match 2.	Line one keeps. Line two keeps. Line three and four .
107	line-height longhand · CSS Inline	With `line-height: 2.1` the effect should match 2.1.	Tall leading line one. Tall leading line two. Tall leading line three.
108	list-style shorthand · CSS Lists and Counters	With `list-style: none` the effect should match none.	no bullet one no bullet two
109	list-style-image longhand · CSS Lists and Counters	With `list-style-image: none` the effect should match none.	▪ square one ▪ square two
110	list-style-position longhand · CSS Lists and Counters	With `list-style-position: inside` the effect should match inside.	inside marker flows with wrapping text sample second item wraps too
111	list-style-type longhand · CSS Lists and Counters	With `list-style-type: decimal` the effect should match decimal.	1. first item 2. second item
112	margin shorthand · CSS Box Model	With `margin: 12px` the outer margin should be 12px.	all-sides 12px
113	margin-block shorthand · CSS Logical Properties and Values	With `margin-block: 14px` the outer margin should be 14px.	block 14px
114	margin-block-end longhand · CSS Logical Properties and Values	With `margin-block-end: 16px` the outer margin should be 16px.	block-end 16px
115	margin-block-start longhand · CSS Logical Properties and Values	With `margin-block-start: 16px` the outer margin should be 16px.	block-start 16px
116	margin-bottom longhand · CSS Anchor Positioning	With `margin-bottom: 18px` the outer margin should be 18px.	bottom 18px
117	margin-break longhand · (ungrouped)	With `margin-break: keep` the outer margin should be keep.	break:keep (+top)
118	margin-inline shorthand · CSS Logical Properties and Values	With `margin-inline: 14px` the outer margin should be 14px.	inline 14px