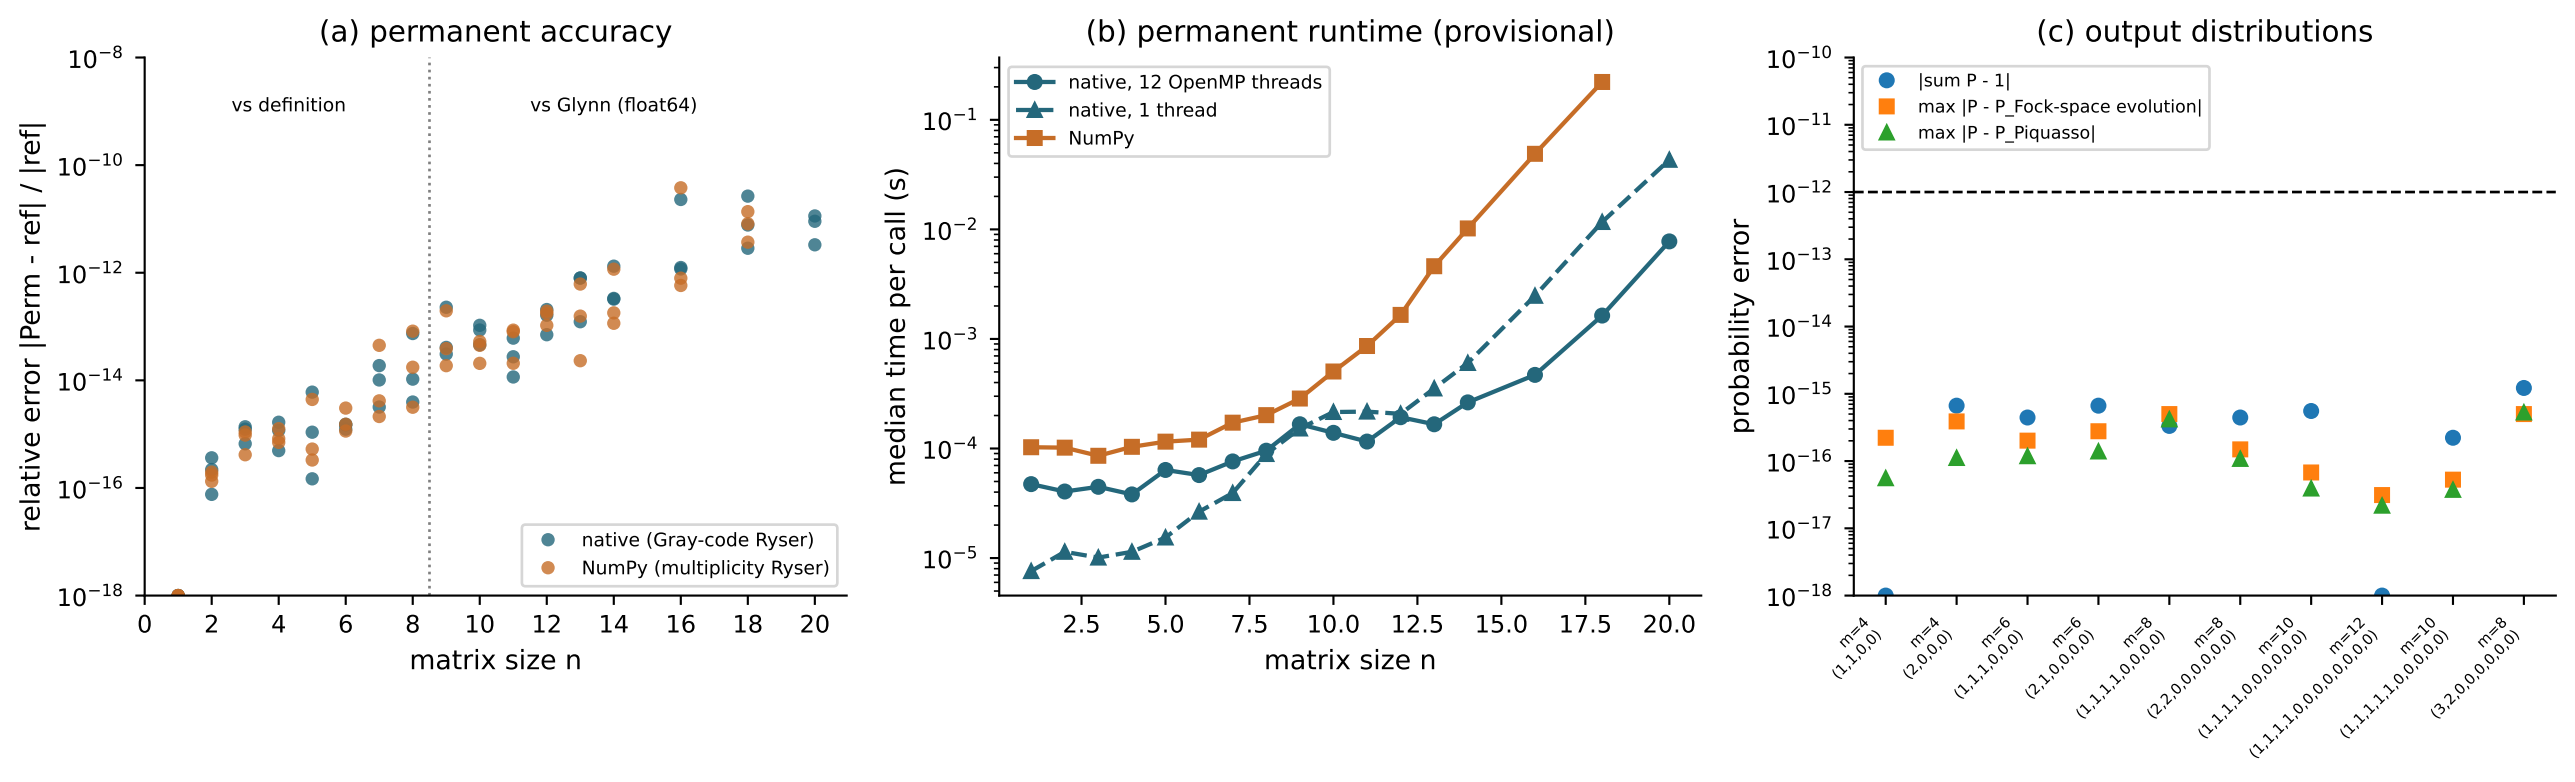
(a) permanent accuracy
vs definition
vs Glynn (float64)
relative error |Perm - ref| / |ref|
matrix size n
native (Gray-code Ryser)
NumPy (multiplicity Ryser)
(b) permanent runtime (provisional)
native, 12 OpenMP threads
native, 1 thread
NumPy
median time per call (s)
matrix size n
(c) output distributions
|sum P - 1|
max |P - P_Fock-space evolution|
max |P - P_Piquasso|
probability error
m=4 (1,1,0,0)
m=4 (2,0,0,0)
m=6 (1,1,1,0,0,0)
m=6 (2,1,0,0,0,0)
m=8 (1,1,1,1,0,0,0,0)
m=8 (2,2,0,0,0,0,0,0)
m=10 (1,1,1,1,0,0,0,0,0,0)
m=12 (1,1,1,1,0,0,0,0,0,0,0,0)
m=10 (1,1,1,1,1,0,0,0,0,0)
m=8 (3,2,0,0,0,0,0,0)