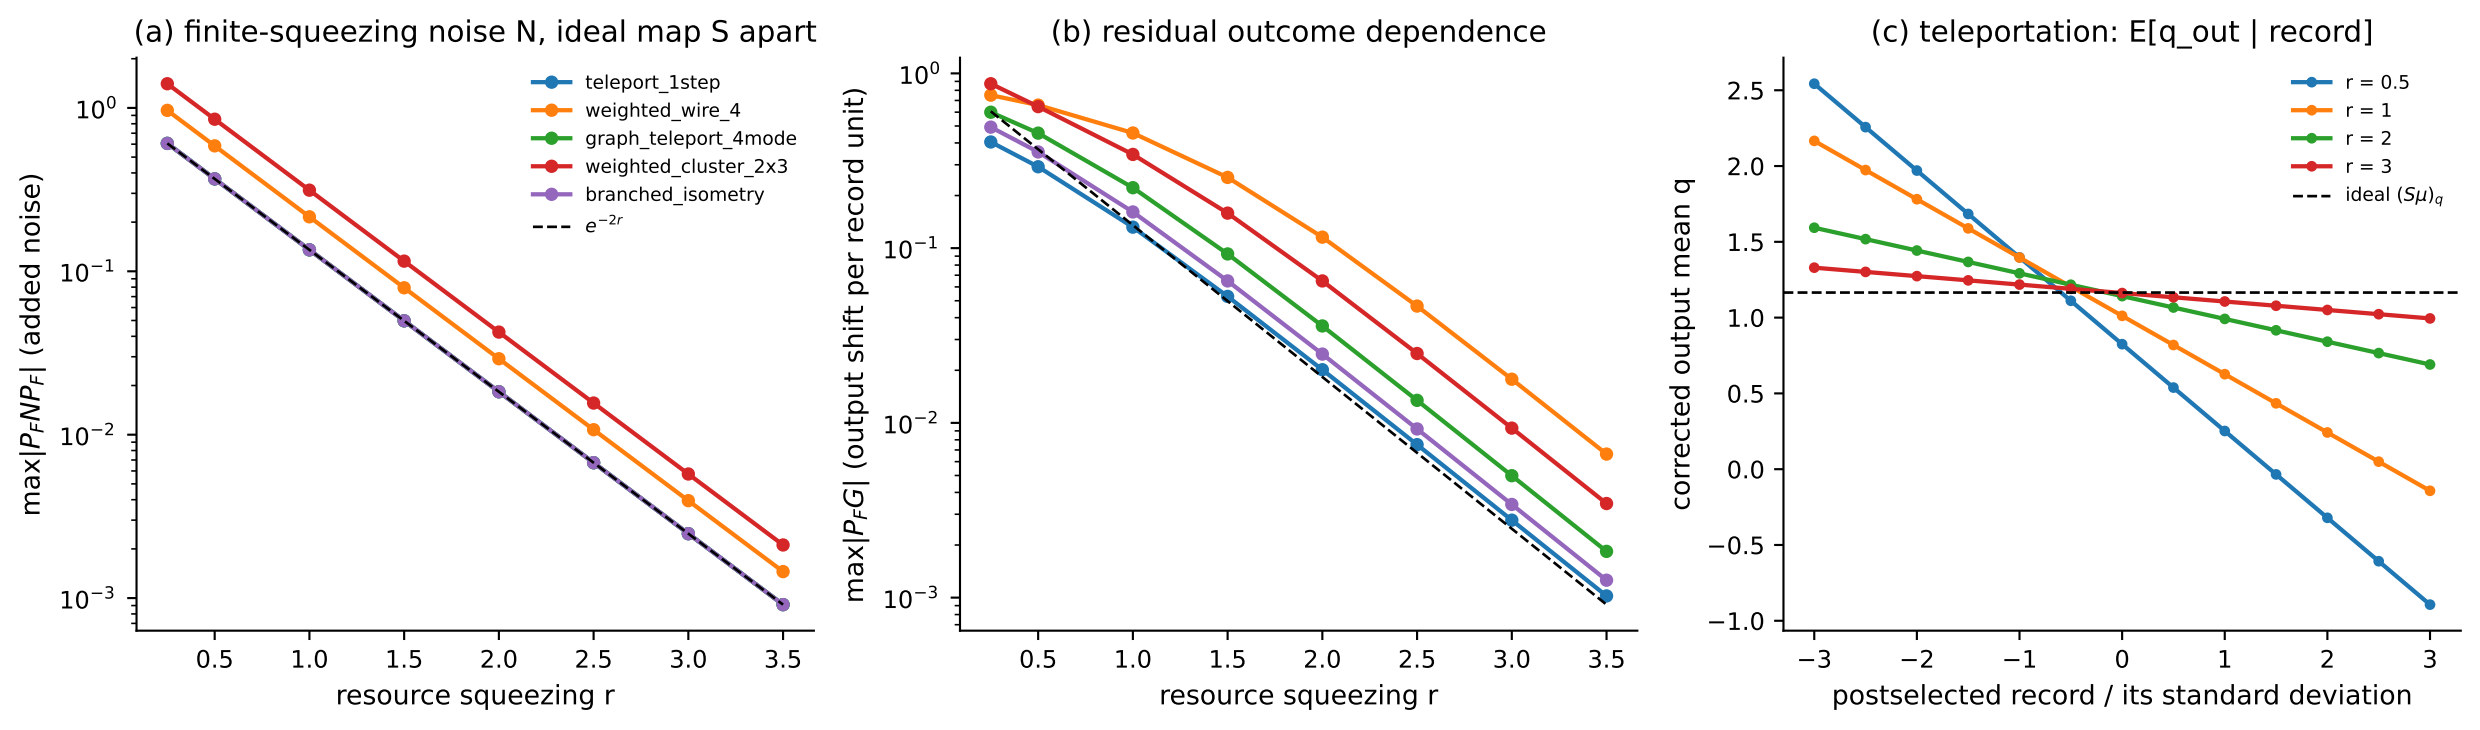
(a) finite-squeezing noise N, ideal map S apart
max|$P_F N P_F$| (added noise)
resource squeezing r
teleport_1step
weighted_wire_4
graph_teleport_4mode
weighted_cluster_2x3
branched_isometry
e^{-2r}
(b) residual outcome dependence
max|$P_F G$| (output shift per record unit)
resource squeezing r
(c) teleportation: E[q_out | record]
corrected output mean q
postselected record / its standard deviation
r = 0.5
r = 1
r = 2
r = 3
ideal $(S\mu)_q$