

TRANSACTIONS



Scalaris:

Users and Developers Guide

Version 0.2.0 draft

January 17, 2011

Copyright 2007-2010 Konrad-Zuse-Zentrum für Informationstechnik Berlin and onScale solutions.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Contents

I. Users Guide	5
1. Introduction	6
1.1. Brewer's CAP Theorem	6
1.2. Scientific Background	7
2. Download and Installation	8
2.1. Requirements	8
2.2. Download	8
2.2.1. Development Branch	8
2.2.2. Releases	8
2.3. Configuration	8
2.4. Build	9
2.4.1. Linux	9
2.4.2. Windows	9
2.4.3. Java-API	10
2.5. Running Scalaris	10
2.5.1. Running on a local machine	10
2.5.2. Running distributed	11
2.6. Installation	11
2.7. Logging	12
3. Using the system	13
3.1. JSON API	13
3.1.1. Deleting a key	16
3.2. Java command line interface	16
3.3. Java API	17
4. Testing the system	18
4.1. Running the unit tests	18
5. Troubleshooting	19
5.1. Network	19
II. Developers Guide	20
6. General Hints	21
6.1. Coding Guidelines	21
6.2. Testing Your Modifications and Extensions	21
6.3. Help with Digging into the System	21
6.4. General Erlang server loop	21

7. System Infrastructure	23
7.1. Groups of Processes	23
7.2. The Communication Layer <code>comm</code>	23
7.3. The <code>gen_component</code>	23
7.3.1. A basic <code>gen_component</code> including a message handler	24
7.3.2. How to start a <code>gen_component</code> ?	25
7.3.3. When does a <code>gen_component</code> terminate?	25
7.3.4. What happens when unexpected events / messages arrive?	26
7.3.5. What if my message handler generates an exception or crashes the process?	26
7.3.6. Changing message handlers and implementing state dependent message responsiveness as a state-machine	26
7.3.7. Halting and pausing a <code>gen_component</code>	27
7.3.8. Integration with <code>pid_groups</code> : Redirecting events / messages to other <code>gen_components</code>	27
7.3.9. Replying to ping messages	27
7.3.10. The debugging interface of <code>gen_component</code> : Breakpoints and step-wise execution	27
7.3.11. Future use and planned extensions for <code>gen_component</code>	30
7.4. The Process' Database (<code>pdb</code>)	30
7.5. Writing Unittests	31
7.5.1. Plain unittests	31
7.5.2. Randomized Testing using <code>tester.erl</code>	31
8. Basic Structured Overlay	32
8.1. Ring Maintenance	32
8.2. T-Man	32
8.3. Routing Tables	32
8.3.1. The routing table process (<code>rt_loop</code>)	34
8.3.2. Simple routing table (<code>rt_simple</code>)	35
8.3.3. Chord routing table (<code>rt_chord</code>)	38
8.4. Local Datastore	42
8.5. Cyclon	42
8.6. Vivaldi Coordinates	42
8.7. Estimated Global Information (Gossiping)	42
8.8. Load Balancing	42
8.9. Broadcast Trees	42
9. Transactions in Scalaris	43
9.1. The Paxos Module	43
9.2. Transactions using Paxos Commit	43
9.3. Applying the Tx-Modules to replicated DHTs	43
10. How a node joins the system	44
10.1. Supervisor-tree of a Scalaris node	45
10.2. Starting the <code>sup_dht_node</code> supervisor and general processes of a node	45
10.3. Starting the <code>sup_dht_node_core</code> supervisor with a peer and some paxos processes	47
10.4. Initializing a <code>dht_node-process</code>	47
10.5. Actually joining the ring	48
10.5.1. A single node joining an empty ring	48
10.5.2. A single node joining an existing (non-empty) ring	49
11. Directory Structure of the Source Code	57

Part I.

Users Guide

1. Introduction

Scalaris is a scalable, transactional, distributed key-value store based on the peer-to-peer principle. It can be used to build scalable Web 2.0 services. The concept of Scalaris is quite simple: Its architecture consists of three layers.

It provides self-management and scalability by replicating services and data among peers. Without system interruption it scales from a few PCs to thousands of servers. Servers can be added or removed on the fly without any service downtime.



Scalaris takes care of:

- Fail-over
- Data distribution
- Replication
- Strong consistency
- Transactions

The Scalaris project was initiated by Zuse Institute Berlin and onScale solutions and was partly funded by the EU projects Selfman and XtreamOS. Additional information (papers, videos) can be found at <http://www.zib.de/CSR/Projects/scalaris> and <http://www.onscale.de/scalarix.html>.

1.1. Brewer's CAP Theorem

In distributed computing there exists the so called CAP theorem. It basically says that there are three desirable properties for distributed systems but one can only have any two of them.

Strict Consistency. Any read operation has to return the result of the latest write operation on the same data item.

Availability. Items can be read and modified at any time.

Partition Tolerance. The network on which the service is running may split into several partitions which cannot communicate with each other. Later on the networks may re-join again.

For example, a service is hosted on one machine in Seattle and one machine in Berlin. This service is partition tolerant if it can tolerate that all Internet connections over the Atlantic (and Pacific) are interrupted for a few hours and then get repaired.

The goal of Scalaris is to provide strict consistency and partition tolerance. We are willing to sacrifice availability to make sure that the stored data is always consistent. I.e. when you are running Scalaris with a replication degree of 4 and the network splits into two partitions, one partition with three replicas and one partition with one replica, you will be able to continue to use the service only in the larger partition. All requests in the smaller partition will time out until the two networks merge again. Note, most other key-value stores tend to sacrifice consistency.

1.2. Scientific Background

Basics. The general structure of Scalaris is modelled after Chord. The Chord paper [4] describes the ring structure, the routing algorithms, and basic ring maintenance.

The main routines of our Chord node are in `src/dht_node.erl` and the join protocol is implemented in `src/dht_node_join.erl` (see also Chap. 10). Our implementation of the routing algorithms is described in more detail in Sect. 8.3 and the actual implementation is in `src/rt_chord.erl`.

Transactions. The most interesting part is probably the transaction algorithms. The most current description of the algorithms and background is in [6].

We have currently two generations of transaction algorithms. The older one is in `src/transstore`. The newer one is more modular. It provides an implementation of the paxos algorithm in `src/paxos` and the transaction algorithms itself in `src/transactions` (see also Chap. 9).

Ring Maintenance. We changed the ring maintenance algorithm in Scalaris. It is not the standard Chord one, but a variation of T-Man [5]. It is supposed to fix the ring structure faster. In some situations, the standard Chord algorithm is not able to fix the ring structure while T-Man can still fix it. For node sampling, our implementation relies on Cyclon [7].

The T-Man implementation can be found in `src/rm_tman.erl` and the Cyclon implementation in `src/cyclon`.

Vivaldi Coordinates. For some experiments, we implemented so called Vivaldi coordinates [2]. They can be used to estimate the network latency between arbitrary nodes.

The implementation can be found in `src/vivaldi.erl`.

Gossiping. For some algorithms, we use estimates of global information. These estimates are aggregated with the help of gossiping techniques [8].

The implementation can be found in `src/gossip.erl`.

2. Download and Installation

2.1. Requirements

For building and running Sclaris, some third-party modules are required which are not included in the Sclaris sources:

- Erlang R13B01 or newer
- GNU-like Make

To build the Java API (and the command-line client) the following modules are required additionally:

- Java Development Kit 6
- Apache Ant

Before building the Java API, make sure that `JAVA_HOME` and `ANT_HOME` are set. `JAVA_HOME` has to point to a JDK installation, and `ANT_HOME` has to point to an Ant installation.

2.2. Download

The sources can be obtained from <http://code.google.com/p/scalaris>. RPMs and DEBs are available from <http://download.opensuse.org/repositories/home:/tschuett/>.

2.2.1. Development Branch

You find the latest development version in the svn repository:

```
# Non-members may check out a read-only working copy anonymously over HTTP.  
svn checkout http://scalaris.googlecode.com/svn/trunk/ scalaris-read-only
```

2.2.2. Releases

Releases can be found under the 'Download' tab on the web-page.

2.3. Configuration

Sclaris reads two configuration files from the working directory: `bin/scalaris.cfg` (mandatory) and `bin/scalaris.local.cfg` (optional). The former defines default settings and is included in the release. The latter can be created by the user to alter settings. A sample file is provided as `bin/scalaris.local.cfg.example`. To run Sclaris distributed over several nodes, each node requires a `bin/scalaris.local.cfg`:

File `scalaris.local.cfg`:

```
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% Settings for distributed Erlang
% (see scalaris.hrl to switch)

% {boot_host, {boot, 'boot@foo.bar.com'}}}.
% {known_hosts, [{service_per_vm, 'boot@foo.bar.com'}]}.

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% Settings for TCP mode.
% (see scalaris.hrl to switch)

% Insert the appropriate IP-addresses for your setup
% as comma separated integers:
% IP Address, Port, and label of the boot server
{boot_host, {{127,0,0,1},14195,boot}}.

% IP Address, Port, and label of a node which is already in the system
{known_hosts, [{{{127,0,0,1},14195, service_per_vm}]}].
```

Scalaris currently distinguishes two different kinds of nodes: (a) the boot-server and (b) regular nodes. For the moment, we limit the number of boot-servers to exactly one. The remaining nodes are regular nodes. The boot-server is contacted to join the system. On all servers, the `boot_host` option defines the server where the boot server is running. In the example, it is an IP address plus a TCP port.

2.4. Build

2.4.1. Linux

Scalaris uses `autoconf` for configuring the build environment and `GNU Make` for building the code.

```
%> ./configure
%> make
%> make docs
```

For more details read `README` in the main Scalaris checkout directory.

2.4.2. Windows

We are currently not supporting Scalaris on Windows. However, we have two small bat files for building and running scalaris nodes. It seems to work but we make no guarantees.

- Install Erlang
<http://www.erlang.org/download.html>
- Install OpenSSL (for crypto module)
<http://www.slproweb.com/products/Win32OpenSSL.html>
- Checkout scalaris code from SVN
- adapt the path to your Erlang installation in `build.bat`
- start a `cmd.exe`
- go to the scalaris directory
- run `build.bat` in the cmd window

- check that there were no errors during the compilation; warnings are fine
- go to the bin sub-directory
- adapt the path to your Erlang installation in `boot.bat`, `cs_local.bat`, `cs_local2.bat` and `cs_local3.bat`
- run `boot.bat` or one of the other start scripts in the cmd window

`build.bat` will generate a `Emakefile` if there is none yet. If you have Erlang < R13B04, you will need to adapt the `Emakefile`. There will be empty lines in the first three blocks ending with “`}]`.”: add the following to these lines and try to compile again. It should work now.

```
, {d, type_forward_declarations_are_not_allowed}
, {d, forward_or_recursive_types_are_not_allowed}
```

For the most recent description please see the FAQ at <http://code.google.com/p/scalaris/wiki/FAQ>.

2.4.3. Java-API

The following commands will build the Java API for Scalaris:

```
%> make java
```

This will build `scalaris.jar`, which is the library for accessing the overlay network. Optionally, the documentation can be build:

```
%> cd java-api
%> ant doc
```

2.5. Running Scalaris

As mentioned above, in Scalaris there are two kinds of nodes:

- boot servers
- regular nodes

In every Scalaris, at least one boot server is required. It will maintain a list of nodes taking part in the system and allows other nodes to join the ring. For redundancy, it is also possible to have several boot servers. In the future, we want to eliminate this distinction, so any node is also a boot-server.

2.5.1. Running on a local machine

Open at least two shells. In the first, inside the Scalaris directory, start the boot script (`boot.bat` on Windows):

```
%> ./bin/boot.sh
```

This will start the boot server. On success <http://localhost:8000> should point to the management interface page of the boot server. The main page will show you the number of nodes currently in

the system. After a couple of seconds a first Scalaris should have started in the boot server and the number should increase to one. The main page will also allow you to store and retrieve key-value pairs but should not be used by applications to access Scalaris. See Chapter 3 on page 13 for application APIs.

In a second shell, you can now start a second Scalaris node. This will be a ‘regular server’:

```
%> ./bin/cs_local.sh
```

The second node will read the configuration file and use this information to contact the boot server and join the ring. The number of nodes on the web page should have increased to two by now.

Optionally, a third and fourth node can be started on the same machine. In a third shell:

```
%> ./bin/cs_local2.sh
```

In a fourth shell:

```
%> ./bin/cs_local3.sh
```

This will add 3 nodes to the network. The web pages at <http://localhost:8000> should show the additional nodes.

On linux you can also use the `scalarisctl` script to start boot and ‘regular’ nodes.

2.5.2. Running distributed

Scalaris can be installed on other machines in the same way as described in Section 2.6. In the default configuration, nodes will look for the boot server on localhost on port 14195. You should create a `scalaris.local.cfg` pointing to the node running the boot server.

```
% Insert the appropriate IP-addresses for your setup
% as comma separated integers:
% IP Address, Port, and label of the boot server
{boot_host, {{127,0,0,1},14195,boot}}.
```

If you are using the default configuration on the boot server it will listen on port 14195 and you only have to change the IP address in the configuration file. Otherwise the other nodes will not find the boot server. On the remote nodes, you only need to call `./cs_local.sh` and they will automatically contact the configured boot server.

2.6. Installation

For simple tests, you do not need to install Scalaris. You can run it directly from the source directory. Note: make `install` will install scalaris into `/usr/local` and place `scalarisctl` into `/usr/local/bin`. But is more convenient to build an RPM and install it.

```
svn checkout http://scalaris.googlecode.com/svn/trunk/ scalaris-0.0.1
tar -cvjf scalaris-0.0.1.tar.bz2 scalaris-0.0.1 --exclude-vcs
cp scalaris-0.0.1.tar.bz2 /usr/src/packages/SOURCES/
rpmbuild -ba scalaris-0.0.1/contrib/scalaris.spec
```

Your source and binary RPM will be generated in `/usr/src/packages/SRPMS` and `RPMS`. We build RPMs and Debs using checkouts from svn and provide them using the openSUSE BuildService at <http://download.opensuse.org/repositories/home:/tschuett/>. Packages are available for

- Fedora 9, 10, 11, 12, 13,
- Mandriva 2008, 2009, 2009.1, 2010,
- openSUSE 11.0, 11.1, 11.2, 11.3, Factory,
- SLE 10, 11,
- CentOS 5.4,
- RHEL 5,
- Debian 5.0 and
- Ubuntu 9.04, 9.10, 10.04.

Inside those repositories you will also find an erlang package - you don't need this if you already have a recent enough erlang version!

2.7. Logging

Description is based on SVN revision r1083.

Scalaris uses the `log4erl` library (see `contrib/log4erl`) for logging status information and error messages. The log level can be configured in `bin/scalaris.cfg` for both the stdout and file logger. The default value is `warn`; only warnings, errors and severe problems are logged.

```
%% @doc Loglevel: debug < info < warn < error < fatal < none
{log_level, warn}.
{log_level_file, warn}.
```

In some cases, it might be necessary to get more complete logging information, e.g. for debugging. In Chapter 10 on page 44, we are explaining the startup process of Scalaris nodes in more detail, here the `info` level provides more detailed information.

```
%% @doc Loglevel: debug < info < warn < error < fatal < none
{log_level, info}.
{log_level_file, info}.
```

3. Using the system

3.1. JSON API

Scalaris supports a JSON API for transactions. To minimize the necessary round trips between a client and Scalaris, it uses request lists, which contain all requests that can be done in parallel. The request list is then send to a Scalaris node with a POST message. The result is an opaque TransLog and a list containing the results of the requests. To add further requests to the transaction, the TransLog and another list of requests may be send to Scalaris. This process may be repeated as often as necessary. To finish the transaction, the request list can contain a 'commit' request as the last element, which triggers the validation phase of the transaction processing.

The JSON-API can be accessed via the Scalaris-Web-Server running on port 8000 by default and the page `jsonrpc.yaws` (For example at: <http://localhost:8000/jsonrpc.yaws>). The following example illustrates the message flow:

Client

Make a transaction, that sets two keys:

Scalaris node

→

```
{
  "method": "req_list",
  "version": "1.1",
  "params":
  [
    [
      { "write": { "keyA": "valueA" } },
      { "write": { "keyB": "valueB" } },
      { "commit": "commit" }
    ]
  ],
  "id": 0
}
```

← Scalaris sends results back

```
{ "result":
  { "results":
    [
      { "op": "commit",
        "value": "ok",
        "key": "ok" },
      { "op": "write",
        "value": "valueB",
        "key": "keyB" },
      { "op": "write",
        "value": "valueA",
        "key": "keyA" }
    ],
    "translog":
      [...]
  },
  "id" : 0
}
```

In a second transaction: Read the two keys →

```
{
  "method": "req_list",
  "version": "1.1",
  "params":
    [
      [
        { "read": "keyA" },
        { "read": "keyB" }
      ]
    ]
  "id": 0
}
```

← Scalaris sends results back

```
{ "result":
  { "results":
    [
      { "op": "read",
        "value": "valueB",
        "key": "keyB" },
      { "op": "read",
        "value": "valueA",
        "key": "keyA" }
    ],
    "translog":
      [...] // this list is the translog
              // for further operations!
              // We name it TLOG here.
  },
  "id" : 0
}
```

Calculate something with the read values →
 and make further requests, here a write
 and the commit for the whole transaction.
 Also include the latest translog we got from
 Scalaris (named TLOG here).

```
{
  "method": "req_list",
  "version": "1.1",
  "params":
    [
      TLOG, // translog from prev. result
      [
        { "write": { "keyA": "valueA2" } },
        { "commit": "commit" }
      ]
    ],
  "id" : 0
}
```

← Scalaris sends results back

```
{ "result":
  { "results":
    [ { "op": "commit",
        "value": "ok",
        "key": "ok" },
      { "op": "write",
        "value": "valueA2",
        "key": "keyA" }
    ],
    "translog":
    [...]
  },
  "id" : 0
}
```

A sample usage of the JSON API using Ruby can be found in contrib/jsonrpc.rb.

A single request list must not contain a key more than once!

The allowed requests are:

```
{ "read": "any_key" }

{ "write": { "any_key": "any_value" } }

{ "commit": "commit" }
```

The possible results are:

```
{ "op": "read", "key": "any_key", "value": "any_value" }
{ "op": "read", "key": "any_value", "fail": "reason" } // 'not_found' or 'timeout'

{ "op": "write", "key": "any_key", "value": "any_value" }
{ "op": "read", "key": "any_key", "fail": "reason" }

{ "op": "commit", "value": "ok", "key": "ok" }
{ "op": "commit", "value": "fail", "fail": "reason" }
```

3.1.1. Deleting a key

Outside transactions keys can also be deleted, but it has to be done with care, as explained in the following thread on the mailing list: http://groups.google.com/group/scalaris/browse_thread/thread/ff1d9237e218799.

```
{
  "method": "delete",
  "version": "1.1",
  "params":
    [
      { "key": "any_key" }
    ],
  "id" : 0
}
```

Two sample results

```
{ "result":
  { "ok":2, // how many replicas were deleted successssfully
    "results": [ "ok", "ok", "locks_set", "undef" ]
  }
}
```

```
{ "result":
  { "failure": "reason" }
}
```

3.2. Java command line interface

The jar file contains a small command line interface client. For convenience, we provide a wrapper script called `scalaris` which sets up the Java environment:

```
%> ./java-api/scalaris -help
Script Options:
  --help, --h          print this message and scalaris help
  --noconfig           suppress sourcing of /etc/scalaris/scalaris-java.conf
                      and $HOME/.scalaris/scalaris-java.conf config files
  --execdebug         print scalaris exec line generated by this
                      launch script

usage: scalaris [Options]
  -b,--minibench        run mini benchmark
  -d,--delete <key> <[timeout]> delete an item (default timeout: 2000ms)
                          WARNING: This function can lead to inconsistent data
                          (e.g. deleted items can re-appear). Also when
                          re-creating an item the version before the delete can
                          re-appear.
  -g,--getsubscribers <topic> get subscribers of a topic
  -h,--help            print this message
  -lh,--localhost      gets the local host's name as known to
                          Java (for debugging purposes)
  -p,--publish <topic> <message> publish a new message for the given
                          topic
  -r,--read <key>      read an item
  -s,--subscribe <topic> <url> subscribe to a topic
  -u,--unsubscribe <topic> <url> unsubscribe from a topic
  -v,--verbose         print verbose information, e.g. the
                          properties read
  -w,--write <key> <value> write an item
```


read, write and delete can be used to read, write and delete from/to the overlay, respectively. getsubscribers, publish, and subscribe are the PubSub functions. The others provide debugging and testing functionality.

```
%> ./java-api/scalaris -write foo bar  
write(foo, bar)  
%> ./java-api/scalaris -read foo  
read(foo) == bar
```

Per default, the scalaris script tries to connect to a boot server at localhost. You can change the node it connects to (and further connection properties) by adapting the values defined in java-api/scalaris.properties.

3.3. Java API

The scalaris.jar provides the command line client as well as a library for Java programs to access Scalaris. The library provides two classes:

- Scalaris provides a high-level API similar to the command line client.
- Transaction provides a low-level API to the transaction mechanism.

For details we refer the reader to the Javadoc:

```
%> cd java-api  
%> ant doc  
%> firefox doc/index.html
```

4. Testing the system

4.1. Running the unit tests

There are some unit tests in the `test` directory. You can call them by running `make test` in the main directory. The results are stored in a local `index.html` file.

The tests are implemented with the `common-test` package from the Erlang system. For running the tests we rely on `run_test`, which is part of the `common-test` package, but (on `erlang < R14`) is not installed by default. `configure` will check whether `run_test` is available. If it is not installed, it will show a warning and a short description of how to install the missing file.

Note: for the unit tests, we are setting up and shutting down several overlay networks. During the shut down phase, the runtime environment will print extensive error messages. These error messages do not indicate that tests failed! Running the complete test suite takes about 3 minutes, depending on your machine. Only if the complete suite finishes, it will present statistics on failed and successful tests.

5. Troubleshooting

5.1. Network

Scalaris uses a couple of TCP ports for communication. It does not use UDP at the moment.

- 8000 HTTP Server on the boot node
- 8001 HTTP Server on the other nodes
- 14195 Port for inter-node communication (boot server)
- 14196 Port for inter-node communication (other nodes)

Please make sure that at least 14195 and 14196 are not blocked by firewalls.

Part II.

Developers Guide

6. General Hints

6.1. Coding Guidelines

- Keep the code short
- Use `gen_component` to implement additional processes
- Don't use `receive` by yourself (Exception: to implement single threaded user API calls (`cs_api`, `yaws_calls`, etc))
- Don't use `erlang:now/0`, `erlang:send_after/3`, `receive after` etc. in performance critical code, consider using `msg_delay` instead.
- Don't use `timer:tc/3` as it catches exceptions. Use `util:tc/3` instead.

6.2. Testing Your Modifications and Extensions

- Run the testsuites using `make test`
- Run the java api test using `make java-test` (Scalaris output will be printed if a test fails; if you want to see it during the tests, start a `bin/boot.sh` and run the tests by `cd java; ant test`)
- Run the Ruby client by starting Scalaris and running `cd contrib; ./jsonrpc.rb`

6.3. Help with Digging into the System

- use `ets:i/0,1` to get details on the local state of some processes
- consider changing `pdb.erl` to use `ets` instead of `erlang:put/get`
- Have a look at `strace -f -p PID` of beam process
- Get message statistics via the Web-interface
- enable/disable tracing for certain modules
- Use `etop` and look at the total memory size and atoms generated
- send processes `sleep` or `kill` messages to test certain behaviour (see `gen_component.erl`)
- use `boot_server:number_of_nodes(). flush().`
- use `admin_checkring(). flush().`

6.4. General Erlang server loop

Servers in Erlang often use the following structure to maintain a state while processing received messages:

```
loop(State) ->  
  receive  
    Message ->  
      State1 = f(State),  
      loop(State1)  
  end.
```

The server runs an endless loop, that waits for a message, processes it and calls itself using tail-recursion in each branch. The loop works on a State, which can be modified when a message is handled.

7. System Infrastructure

7.1. Groups of Processes

- What is it? How to distinguish from Erlangs internal named processes?
- Joining a process group
- Why do we do this... (managing several independent nodes inside a single Erlang VM for testing)

7.2. The Communication Layer `comm`

- in general
- format of messages (tuples)
- use messages with cookies (server and client side)
- What is a message tag?

7.3. The `gen_component`

Description is based on SVN revision r993.

The generic component model implemented by `gen_component` allows to add some common functionality to all the components that build up the Scalaris system. It supports:

event-handlers: message handling with a similar syntax as used in [3].

FIFO order of messages: components cannot be inadvertently locked as we do not use selective receive statements in the code.

sleep and halt: for testing components can sleep or be halted.

debugging, breakpoints, stepwise execution: to debug components execution can be steered via breakpoints, step-wise execution and continuation based on arriving events and user defined component state conditions.

basic profiling ,

state dependent message handlers: depending on its state, different message handlers can be used and switched during runtime. Thereby a kind of state-machine based message handling is supported.

prepared for `pid_groups`: allows to send events to named processes inside the same group as the actual component itself (`send_to_group_member`) when just holding a reference to any group member, and

unit-testing of event-handlers: as message handling is separated from the main loop of the component, the handling of individual messages and thereby performed state manipulation can easily be tested in unit-tests by directly calling message handlers.

In Scalaris all Erlang processes should be implemented as `gen_component`. The only exception are functions interfacing to the client, where a transition from asynchronous to synchronous request handling is necessary and that are executed in the context of a client's process or a process that behaves as a proxy for a client (`cs_api`).

7.3.1. A basic `gen_component` including a message handler

To implement a `gen_component`, the component has to provide the `gen_component` behaviour:

File `gen_component.erl`:

```

48 -spec behaviour_info(atom()) -> [{atom(), arity()}] | undefined.
49 behaviour_info(callbacks) ->
50 [
51     {init, 1}      % initialize component
52     % note: can use arbitrary on-handler, but by default on/2 is used:
53     {on, 2}        % handle a single message
54     % on(Msg, State) -> NewState | unknown_event | kill
55 ];

```

This is illustrated by the following example:

File `msg_delay.erl`:

```

71 %% initialize: return initial state.
72 -spec init([]) -> state().
73 init([]) ->
74     MyGroup = pid_groups:my_groupname(),
75     ?TRACE("msg_delay:init for pid group ~p~n", [MyGroup]),
76     TableName =
77         list_to_atom(lists:flatten(
78             io_lib:format("~p_msg_delay", [MyGroup]))),
79     %% use random table name provided by ets to *not* generate an atom
80     %% TableName = pdb:new(?MODULE, [set, private]),
81     pdb:new(TableName, [set, protected, named_table]),
82     comm:send_local(self(), {msg_delay_periodic}),
83     _State = {TableName, _Round = 0}.
84
85 -spec on(message(), state()) -> state().
86 on({msg_delay_req, Seconds, Dest, Msg}, {TableName, Counter} = State) ->
87     ?TRACE("msg_delay:on(msg_delay...)~n", []),
88     Future = trunc(Counter + Seconds),
89     case pdb:get(Future, TableName) of
90         undefined ->
91             pdb:set({Future, [{Dest, Msg}]}, TableName);
92         {_, Queue} ->
93             pdb:set({Future, [{Dest, Msg}| Queue]}, TableName)
94     end,
95     State;
96
97 %% periodic trigger
98 on({msg_delay_periodic} = Trigger, {TableName, Counter} = _State) ->
99     ?TRACE("tx_tm_rtm:on(msg_delay_periodic)~n", []),
100     case pdb:get(Counter, TableName) of
101         undefined -> ok;
102         {_, Queue} ->
103             _ = [ comm:send_local(Dest, Msg) || {Dest, Msg} <- Queue ],
104             pdb:delete(Counter, TableName)
105     end,
106     comm:send_local_after(1000, self(), Trigger),
107     {TableName, Counter + 1};
108
109 on({web_debug_info, Requestor}, {TableName, Counter} = State) ->
110     KeyValueTypeList =
111         [{"queued messages (in 0-10s, messages):", ""}] |
112         [begin

```



```

113         Future = trunc(Counter + Seconds),
114         Queue = case pdb:get(Future, TableName) of
115             undefined -> none;
116             {_, Q}    -> Q
117         end,
118         {lists:flatten(io_lib:format("~p", [Seconds])),
119          lists:flatten(io_lib:format("~p", [Queue]))}
120     end || Seconds <- lists:seq(0, 10)]],
121     comm:send_local(Requestor, {web_debug_info_reply, KeyValueType}),
122     State.

```

`your_gen_component:init/1` is called during start-up of a `gen_component` and should return the initial state to be used for this `gen_component`. Later, the current state of the component can be retrieved using `gen_component:get_state/1`.

To react on messages / events, a message handler is used. The default message handler is called `your_gen_component:on/2`. This can be changed by calling `gen_component:change_handler/2` (see Section 7.3.6). When an event / message for the component arrives, this handler is called with the event itself and the current state of the component. In the handler, the state of the component may be adjusted depending upon the event. The handler itself may trigger new events / messages for itself or other components and has finally to return the updated state of the component or the atoms `unknown_event` or `kill`. It must neither call `receive` nor `timer:sleep/1` nor `erlang:exit/1`.

7.3.2. How to start a `gen_component`?

A `gen_component` can be started using one of:

```
gen_component:start(Module, Args, GenCOptions = [])
```

```
gen_component:start_link(Module, Args, GenCOptions = [])
```

Module: the name of the module your component is implemented in

Args: List of parameters passed to `Module:init/1` for initialization

GenCOptions: optional parameter. List of options for `gen_component`

`{pid_groups_join_as, ProcessGroup, ProcessName}`: registers the new process with the given process group (also called `instanceid`) and name using `pid_groups`.

`{erlang_register, ProcessName}`: registers the process as a named Erlang process.

`wait_for_init`: wait for `Module:init/1` to return before returning to the caller.

These functions are compatible to the Erlang/OTP supervisors. They spawn a new process for the component which itself calls `Module:init/1` with the given `Args` to initialize the component. `Module:init/1` should return the initial state for your component. For each message sent to this component, the default message handler `Module:on(Message, State)` will be called, which should react on the message and return the updated state of your component.

`gen_component:start()` and `gen_component:start_link()` return the pid of the spawned process as `{ok, Pid}`.

7.3.3. When does a `gen_component` terminate?

A `gen_component` can be stopped using:

`gen_component:kill(Pid)` or by returning `kill` from the current message handler.

7.3.4. What happens when unexpected events / messages arrive?

Your message handler (default is `your_gen_component:on/2`) should return `unknown_event` in the final clause (`your_gen_component:on(_,_)`). `gen_component` then will nicely report on the unhandled message, the component's name, its state and currently active message handler, as shown in the following example:

```
# bin/boot.sh
[...]
(boot@localhost)10> pid_groups ! {no_message}.
{no_message}
[error] unknown message: {no_message} in Module: pid_groups and
handler on in State null
(boot@localhost)11>
```

The `pid_groups` (see Section 7.1) is a `gen_component` which registers itself as named Erlang process with the `gen_component` option `erlang_register` and therefore can be addressed by its name in the Erlang shell. We send it a `{no_message}` and `gen_component` reports on the unhandled message. The `pid_groups` module itself continues to run and waits for further messages.

7.3.5. What if my message handler generates an exception or crashes the process?

`gen_component` catches exceptions generated by message handlers and reports them with a stack trace, the message, that generated the exception, and the current state of the component.

If a message handler terminates the process via `erlang:exit/1`, this is out of the responsibility scope of `gen_component`. As usual in Erlang, all linked processes will be informed. If for example `gen_component:start_link/2` or `/3` was used for starting the `gen_component`, the spawning process will be informed, which may be an Erlang supervisor process taking further actions.

7.3.6. Changing message handlers and implementing state dependent message responsiveness as a state-machine

Sometimes it is beneficial to handle messages depending on the state of a component. One possibility to express this is implementing different clauses depending on the state variable, another is introducing case clauses inside message handlers to distinguish between current states. Both approaches may become tedious, error prone, and may result in confusing source code.

Sometimes the use of several different message handlers for different states of the component leads to clearer arranged code, especially if the set of handled messages changes from state to state. For example, if we have a component with an initialization phase and a production phase afterwards, we can handle in the first message handler messages relevant during the initialization phase and simply queue all other requests for later processing using a common default clause.

When initialization is done, we handle the queued user requests and switch to the message handler for the production phase. The message handler for the initialization phase does not need to know about messages occurring during production phase and the message handler for the production phase does not need to care about messages used during initialization. Both handlers can be made independent and may be extended later on without any adjustments to the other.

One can also use this scheme to implement complex state-machines by changing the message handler from state to state.

To switch the message handler `gen_component:change_handler(State, new_handler)` is called as

the last operation after a message in the active message handler was handled, so that the return value of `gen_component:change_handler/2` is propagated to `gen_component`. The new handler is given as an atom, which is the name of the 2-ary function in your component module to be called.

Starting with non-default message handler.

It is also possible to change the message handler right from the start in your `your_gen_component:init/1` to avoid the default message handler `your_gen_component:on/2`. Just create your initial state as usual and call `gen_component:change_handler(State, my_handler)` as the final call in your `your_gen_component:init/1`. We prepared `gen_component:change_handler/2` to return `State` itself, so this will work properly.

7.3.7. Halting and pausing a gen_component

Using `gen_component:kill(Pid)` and `gen_component:sleep(Pid, Time)` components can be terminated or paused.

7.3.8. Integration with pid_groups: Redirecting events / messages to other gen_components

Each `gen_component` by itself is prepared to support `comm:send_to_group_member/3` which forwards messages inside a group of processes registered via `pid_groups` (see Section 7.1) by their name. So, if you hold a `Pid` of one member of a process group, you can send messages to other members of this group, if you know their registered Erlang name. You do not necessarily have to know their individual `Pid`.

In consequence, no `gen_component` can individually handle messages of the form `{send_to_group_member, _, _}` as such messages are consumed by `gen_component` itself.

7.3.9. Replying to ping messages

Each `gen_component` replies automatically to `{ping, Pid}` requests with a `{pong}` send to the given `Pid`. Such messages are generated, for example, by `vivaldi_latency` which is used by our `vivaldi` module.

In consequence, no `gen_component` can individually handle messages of the form: `{ping, _}` as such messages are consumed by `gen_component` itself.

7.3.10. The debugging interface of gen_component: Breakpoints and step-wise execution

We equipped `gen_component` with a debugging interface, which especially is beneficial, when testing the interplay between several `gen_components`. It supports breakpoints (bp) which can pause the `gen_component` depending on the arriving messages or depending on user defined conditions. If a breakpoint is reached, the execution can be continued step-wise (message by message) or until the next breakpoint is reached.

We use it in our unit tests to steer protocol interleavings and to perform tests using random protocol interleavings between several processes (see `paxos_SUITE`). It allows also to reproduce given protocol interleavings for better testing.

Managing breakpoints.

Breakpoints are managed by the following functions:

`gen_component:bp_set(Pid, MsgTag, BPName)`: For the component running under `Pid` a breakpoint `BPName` is set. It is reached, when a message with a message tag `MsgTag` is next to be handled by the component (See `comm:get_msg_tag/1` and Section 7.2 for more information on message tags). The `BPName` is used as a reference for this breakpoint, for example to delete it later.

`gen_component:bp_set_cond(Pid, Cond, BPName)`: The same as `gen_component:bp_set/3` but a user defined condition implemented in `{Module, Function, Params = 2} = Cond` is checked by calling `Module:Function(Message, State)` to decide whether a breakpoint is reached or not. `Message` is the next message to be handled by the component and `State` is the current state of the component. `Module:Function/2` should return a boolean.

`gen_component:bp_del(Pid, BPName)`: The breakpoint `BPName` is deleted. If the component is in this breakpoint, it will not be released by this call. This has to be done separately by `gen_component:bp_cont/1`. But the deleted breakpoint will no longer be considered for newly entering a breakpoint.

`gen_component:bp_barrier(Pid)`: Delay all further handling of breakpoint requests until a breakpoint is actually entered.

Note, that the following call sequence may not catch the breakpoint at all, as during the sleep the component not necessarily consumes a ping message and the set breakpoint 'sample_bp' may already be deleted before a ping message arrives.

```
gen_component:bp_set(Pid, ping, sample_bp),
timer:sleep(10),
gen_component:bp_del(Pid, sample_bp),
gen_component:bp_cont(Pid).
```

To overcome this, `gen_component:bp_barrier/1` can be used:

```
gen_component:bp_set(Pid, ping, sample_bp),
gen_component:bp_barrier(Pid),
%% After the bp_barrier request, following breakpoint requests
%% will not be handled before a breakpoint is actually entered.
%% The gen_component itself is still active and handles messages as usual
%% until it enters a breakpoint.
gen_component:bp_del(Pid, sample_bp),
% Delete the breakpoint after it was entered once (ensured by bp_barrier).
% Release the gen_component from the breakpoint and continue.
gen_component:bp_cont(Pid).
```

None of the calls in the sample listing above is blocking. It just schedules all the operations, including the `bp_barrier`, for the `gen_component` and immediately finishes. The actual events of entering and continuing the breakpoint in the `gen_component` happens independently later on, when the next ping message arrives.

Managing execution.

The execution of a `gen_component` can be managed by the following functions:

`gen_component:bp_step(Pid)`: This is the only blocking breakpoint function. It waits until the `gen_component` is in a breakpoint and has handled a single message. It returns the module, the active message handler, and the handled message as a tuple `{Module, On, Message}`. This function does not actually finish the breakpoint, but just lets a single message pass through. For further messages, no breakpoint condition has to be valid, the original breakpoint is still active. To leave a breakpoint, use `gen_component:bp_cont/1`.

`gen_component:bp_cont(Pid)`: Leaves a breakpoint. `gen_component` runs as usual until the next breakpoint is reached.

If no further breakpoints should be entered after continuation, you should delete the registered breakpoint using `gen_component:bp_del/2` before continuing the execution with `gen_component:bp_cont/1`. To ensure, that the breakpoint is entered at least once, `gen_component:bp_barrier/1` should be used before deleting the breakpoint (see the example above). Otherwise it could happen, that the delete request arrives at your `gen_component` before it was actually triggered. The following continuation request would then unintentional apply to an unrelated breakpoint that may be entered later on.

`gen_component:runnable(Pid)`: Returns whether a `gen_component` has messages to handle and is runnable. If you know, that a `gen_component` is in a breakpoint, you can use this to check, whether a `gen_component:bp_step/1` or `gen_component:bp_cont/1` is applicable to the component.

Tracing handled messages – getting a message interleaving protocol.

We use the debugging interface of `gen_component` to test protocols with random interleaving. First we start all the components involved, set breakpoints on the initialization messages for a new Paxos consensus and then start a single Paxos instance on all of them. The outcome of the Paxos consensus is a `learner_decide` message. So, in `paxos_SUITE:step_until_decide/3` we look for runnable processes and select randomly one of them to perform a single step until the protocol finishes with a decision.

File `paxos_SUITE.erl`:

```
223 -spec prop_rnd_interleave(1..4, 4..16, {pos_integer(), pos_integer(), pos_integer()})
224     -> boolean().
225 prop_rnd_interleave(NumProposers, NumAcceptors, Seed) ->
226   ct:pal("Called with: paxos_SUITE:prop_rnd_interleave(~p, ~p, ~p).~n",
227     [NumProposers, NumAcceptors, Seed]),
228   Majority = NumAcceptors div 2 + 1,
229   {Proposers, Acceptors, Learners} =
230     make(NumProposers, NumAcceptors, 1, rnd_interleave),
231   %% set bp on all processes
232   [ gen_component:bp_set(element(3, X), proposer_initialize, bp)
233     || X <- Proposers ],
234   [ gen_component:bp_set(element(3, X), acceptor_initialize, bp)
235     || X <- Acceptors ],
236   [ gen_component:bp_set(element(3, X), learner_initialize, bp)
237     || X <- Learners ],
238   %% start paxos instances
239   [ proposer:start_paxosid(X, paxidrndinterl, Acceptors,
240     proposal, Majority, NumProposers, Y)
241     || {X,Y} <- lists:zip(Proposers, lists:seq(1, NumProposers)) ],
242   [ acceptor:start_paxosid(X, paxidrndinterl, Learners)
243     || X <- Acceptors ],
```

```

244 [ learner:start_paxosid(X, paxidrndinterl, Majority,
245                               comm:this(), cpaxidrndinterl)
246   || X <- Learners],
247   %% randomly step through protocol
248   OldSeed = random:seed(Seed),
249   Steps = step_until_decide(Proposers ++ Acceptors ++ Learners, cpaxidrndinterl, 0),
250   ct:pal("Needed ~p steps~n", [Steps]),
251   case OldSeed of
252     undefined -> ok;
253     _ -> random:seed(OldSeed)
254   end,
255   true.
256
257 step_until_decide(Processes, PaxId, SumSteps) ->
258   %% io:format("Step ~p~n", [SumSteps]),
259   Runnable = [ X || X <- Processes, gen_component:runnable(element(3,X)) ],
260   case Runnable of
261     [] ->
262       ct:pal("No runnable processes of ~p~n", [length(Processes)]),
263       timer:sleep(5), step_until_decide(Processes, PaxId, SumSteps);
264     _ -> ok
265   end,
266   Num = random:uniform(length(Runnable)),
267   gen_component:bp_step(element(3,lists:nth(Num, Runnable))),
268   receive
269     {learner_decide, cpaxidrndinterl, _, _Res} = _Any ->
270       %% io:format("Received ~p~n", [_Any]),
271       SumSteps
272   after 0 -> step_until_decide(Processes, PaxId, SumSteps + 1)
273   end.

```

To get a message interleaving protocol, we either can output the results of each `gen_component:bp_step/1` call together with the `Pid` we selected for stepping, or alter the definition of the macro `TRACE_BP_STEPS` in `gen_component`, when we execute all `gen_components` locally in the same Erlang virtual machine.

File `gen_component.erl`:

```

31 %-define(TRACE_BP_STEPS(X,Y), io:format(X,Y)). %% output on console
32 %-define(TRACE_BP_STEPS(X,Y), ct:pal(X,Y)).    %% output even if called by unittest
33 -define(TRACE_BP_STEPS(X,Y), ok).

```

7.3.11. Future use and planned extensions for `gen_component`

`gen_component` could be further extended. For example it could support hot-code upgrade or could be used to implement algorithms that have to be run across several components of *Scalaris* like snapshot algorithms or similar extensions.

7.4. The Process' Database (pdb)

- How to use it and how to switch from `erlang:put/set` to `ets` and implied limitations.

7.5. Writing Unittests

7.5.1. Plain unittests

7.5.2. Randomized Testing using `tester.erl`

8. Basic Structured Overlay

8.1. Ring Maintenance

8.2. T-Man

8.3. Routing Tables

Description is based on SVN revision r1236.

Each node of the ring can perform searches in the overlay.

A search is done by a lookup in the overlay, but there are several other demands for communication between peers. Scalaris provides a general interface to route a message to the (other) peer, which is currently responsible for a given key.

File `lookup.erl`:

```
30 -spec unreliable_lookup(Key::?RT:key(), Msg::comm:message()) -> ok.
31 unreliable_lookup(Key, Msg) ->
32     comm:send_local(pid_groups:find_a(dht_node),
33                     {lookup_aux, Key, 0, Msg}).
34
35 -spec unreliable_get_key(Key::?RT:key()) -> ok.
36 unreliable_get_key(Key) ->
37     unreliable_lookup(Key, {get_key, comm:this(), Key}).
38
39 -spec unreliable_get_key(CollectorPid::comm:mypid(),
40                         ReqId::{rdht_req_id, pos_integer()},
41                         Key::?RT:key()) -> ok.
42 unreliable_get_key(CollectorPid, ReqId, Key) ->
43     unreliable_lookup(Key, {get_key, CollectorPid, ReqId, Key}).
```

The message `Msg` could be a `get_key` which retrieves content from the responsible node or a `get_node` message, which returns a pointer to the node.

All currently supported messages are listed in the file `dht_node.erl`.

The message routing is implemented in `dht_node_lookup.erl`

File `dht_node_lookup.erl`:

```
27 %% @doc Find the node responsible for Key and send him the message Msg.
28 -spec lookup_aux(State::dht_node_state:state(), Key::intervals:key(),
29                 Hops::non_neg_integer(), Msg::comm:message()) -> ok.
30 lookup_aux(State, Key, Hops, Msg) ->
31     case intervals:in(Key, dht_node_state:get(State, succ_range)) of
32     true -> % found node -> terminate
33         P = dht_node_state:get(State, succ_pid),
34         comm:send(P, {lookup_fin, Key, Hops + 1, Msg});
35     _ ->
36         P = ?RT:next_hop(State, Key),
37         comm:send(P, {lookup_aux, Key, Hops + 1, Msg})
38     end.
```


Each node is responsible for a certain key interval. The function `intervals:in/2` is used to decide, whether the key is between the current node and its successor. If that is the case, the final step is delivers a `lookup_fin` message to the local node. Otherwise, the message is forwarded to the next nearest known peer (listed in the routing table) determined by `?RT:next_hop/2`.

`rt_beh.erl` is a generic interface for routing tables. It can be compared to interfaces in Java. In Erlang interfaces can be defined using a so called ‘behaviour’. The files `rt_simple` and `rt_chord` implement the behaviour ‘`rt_beh`’.

The macro `?RT` is used to select the current implementation of routing tables. It is defined in `include/scalaris.hrl`.

File scalaris.hrl:

```

25  %%The RT macro determines which kind of routingtable is used. Uncomment the
26  %%one that is desired.
27
28  %%Standard Chord routingtable
29  -define(RT, rt_chord).
30  % first valid key:
31  -define(MINUS_INFINITY, 0).
32  % first invalid key:
33  -define(PLUS_INFINITY, 16#10000000000000000000000000000000).
34
35  %%Simple routingtable
36  %-define(RT, rt_simple).

```

The functions, that have to be implemented for a routing mechanism are defined in the following file:

File rt_beh.erl:

```

32 -spec behaviour_info(atom()) -> [{atom(), arity()}] | undefined.
33 behaviour_info(callbacks) ->
34 [
35     % create a default routing table
36     {empty, 1}, {empty_ext, 1},
37     % mapping: key space -> identifier space
38     {hash_key, 1}, {get_random_node_id, 0},
39     % routing
40     {next_hop, 2},
41     % trigger for new stabilization round
42     {init_stabilize, 2},
43     % adapt RT to changed neighborhood
44     {update, 3},
45     % dead nodes filtering
46     {filter_dead_node, 2},
47     % statistics
48     {to_pid_list, 1}, {get_size, 1},
49     % gets all (replicated) keys for a given (hashed) key
50     % (for symmetric replication)
51     {get_replica_keys, 1},
52     % address space size, range and split key
53     % (may all throw 'throw:not_supported' if unsupported by the RT)
54     {n, 0}, {get_range, 2}, {get_split_key, 3},
55     % for debugging and web interface
56     {dump, 1},
57     % for bulkowner
58     {to_list, 1},
59     % convert from internal representation to version for dht_node
60     {export_rt_to_dht_node, 2},
61     % handle messages specific to a certain routing-table implementation
62     {handle_custom_message, 2},
63     % common methods
64     {check, 4}, {check, 5},
65     {check_config, 0}
66 ];

```

empty/1 gets a successor and generates an empty routing table for use inside the routing table implementation. The data structure of the routing table is undefined. It can be a list, a tree, a matrix ...

empty_ext/1 similarly creates an empty external routing table for use by the dht_node. This process might not need all the information a routing table implementation requires and can thus work with less data.

hash_key/1 gets a key and maps it into the overlay's identifier space.

get_random_node_id/0 returns a random node id from the overlay's identifier space. This is used for example when a new node joins the system.

next_hop/2 gets a dht_node's state (including the external routing table representation) and a key and returns the node, that should be contacted next when searching for the key, i.e. the known node nearest to the id.

init_stabilize/2 is called periodically to rebuild the routing table. The parameters are the identifier of the node, its successor and the old (internal) routing table state. This method may send messages to the routing_table process which need to be handled by the handle_custom_message/handler since they are implementation-specific.

update/7 is called when the node's ID, predecessor and/or successor changes. It updates the (internal) routing table with the (new) information.

filter_dead_node/2 is called by the failure detector and tells the routing table about dead nodes. This function gets the (internal) routing table and a node to remove from it. A new routing table state is returned.

to_pid_list/1 get the PIDs of all (internal) routing table entries.

get_size/1 get the (internal or external) routing table's size.

get_replica_keys/1 Returns for a given (hashed) Key the (hashed) keys of its replicas. This used for implementing symmetric replication.

n/0 gets the number of available keys. An implementation may throw `throw:not_supported` if the operation is unsupported by the routing table.

dump/1 dump the (internal) routing table state for debugging, e.g. by using the web interface. Returns a list of `{Index, Node_as_String}` tuples which may just as well be empty.

to_list/1 convert the (external) representation of the routing table inside a given `dht_node_state` to a sorted list of known nodes from the routing table, i.e. `first=succ`, `second=next` known node on the ring, ... This is used by bulk-operations to create a broadcast tree.

export_rt_to_dht_node/2 convert the internal routing table state to an external state. Gets the internal state and the node's neighborhood for doing so.

handle_custom_message/2 handle messages specific to the routing table implementation. `rt_loop` will forward unknown messages to this function.

check/5, check/6 check for routing table changes and send an updated (external) routing table to the dht_node process.

check_config/0 check that all required configuration parameters exist and satisfy certain restrictions.

8.3.1. The routing table process (rt_loop)

The `rt_loop` module implements the process for all routing tables. It processes messages and calls the appropriate methods in the specific routing table implementations.

File `rt_loop.erl`:

```

40 -opaque(state_active() :: {NeighbTable :: tid(),
41                               RTState    :: ?RT:rt(),
42                               TriggerState :: trigger:state()}).
```

```

43 -type(state_inactive() :: {inactive,
44                               MessageQueue::msg_queue:msg_queue(),
45                               TriggerState::trigger:state()}).
46 %% -type(state() :: state_active() | state_inactive()).

```

If initialized, the node's id, its predecessor, successor and the routing table state of the selected implementation (the macro RT refers to).

File `rt_loop.erl`:

```

154 on_active({trigger_rt, {NeighbTable, OldRT, TriggerState}} ->
155     % start periodic stabilization
156     % log:log(debug, "[ RT ] stabilize"),
157     Neighbors = rm_loop:get_neighbors(NeighbTable),
158     NewRT = ?RT:init_stabilize(Neighbors, OldRT),
159     ?RT:check(OldRT, NewRT, Neighbors, true),
160     % trigger next stabilization
161     NewTriggerState = trigger:next(TriggerState),
162     new_state(NeighbTable, NewRT, NewTriggerState);

```

Periodically (see `routingtable_trigger` and `pointer_base_stabilization_interval` config parameters) a trigger message is sent to the `rt_loop` process that starts the periodic stabilization implemented by each routing table.

File `rt_loop.erl`:

```

138 % update routing table with changed ID, pred and/or succ
139 on_active({update_rt, OldNeighbors}, {NeighbTable, OldRT, TriggerState}) ->
140     NewNeighbors = rm_loop:get_neighbors(NeighbTable),
141     case ?RT:update(OldRT, OldNeighbors, NewNeighbors) of
142         {trigger_rebuild, NewRT} ->
143             % trigger immediate rebuild
144             NewTriggerState = trigger:now(TriggerState),
145             ?RT:check(OldRT, NewRT, OldNeighbors, NewNeighbors, true),
146             new_state(NeighbTable, NewRT, NewTriggerState);
147         {ok, NewRT} ->
148             ?RT:check(OldRT, NewRT, OldNeighbors, NewNeighbors, true),
149             new_state(NeighbTable, NewRT, TriggerState)
150     end;

```

Every time a node's neighborhood changes, the `dht_node` sends an `update_rt` message to the routing table which will call `?RT:update/7` that decides whether the routing table should be rebuild. If so, it will stop any waiting trigger and schedule an immediate (periodic) stabilization.

8.3.2. Simple routing table (`rt_simple`)

One implementation of a routing table is the `rt_simple`, which routes via the successor. Note that this is inefficient as it needs a linear number of hops to reach its goal. A more robust implementation, would use a successor list. This implementation is also not very efficient in the presence of churn.

Data types

First, the data structure of the routing table is defined:

File `rt_simple.erl`:

```

26 -type key_t() :: 0..16#FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF. % 128 bit numbers
27 -type rt_t() :: Succ::node:node_type().

```

```

28 -type external_rt_t() :: Succ::node:node_type().
29 -type custom_message() :: none().

```

The routing table only consists of a node (the successor). Keys in the overlay are identified by integers ≥ 0 .

A simple `rm_beh` behaviour

File `rt_simple.erl`:

```

41 %% @doc Creates an "empty" routing table containing the successor.
42 empty(Neighbors) -> nodelist:succ(Neighbors).

```

File `rt_simple.erl`:

```

207 empty_ext(Neighbors) -> empty(Neighbors).

```

The empty routing table (internal or external) consists of the successor.

File `rt_simple.erl`:

Keys are hashed using MD5 and have a length of 128 bits.

File `rt_simple.erl`:

```

61 %% @doc Generates a random node id, i.e. a random 128-bit number.
62 get_random_node_id() ->
63     case config:read(key_creator) of
64     random -> hash_key_(randoms:getRandomId());
65     random_with_bit_mask ->
66         {Mask1, Mask2} = config:read(key_creator_bitmask),
67         (hash_key_(randoms:getRandomId()) band Mask2) bor Mask1
68     end.

```

Random node id generation uses the helpers provided by the `randoms` module.

File `rt_simple.erl`:

```

211 %% @doc Returns the next hop to contact for a lookup.
212 next_hop(State, _Key) -> node:pidX(dht_node_state:get(State, rt)).

```

Next hop is always the successor.

File `rt_simple.erl`:

```

76 %% @doc Triggered by a new stabilization round, renews the routing table.
77 init_stabilize(Neighbors, _RT) -> empty(Neighbors).

```

`init_stabilize/2` resets its routing table to the current successor.

File `rt_simple.erl`:

```

81 %% @doc Updates the routing table due to a changed node ID, pred and/or succ.
82 -spec update(OldRT::rt(), OldNeighbors::nodelist:neighborhood(),
83             NewNeighbors::nodelist:neighborhood()) -> {ok, rt()}.
84 update(_OldRT, _OldNeighbors, NewNeighbors) ->
85     {ok, nodelist:succ(NewNeighbors)}.

```

update/7 updates the routing table with the new successor.

File rt_simple.erl:

```
89 %% @doc Removes dead nodes from the routing table (rely on periodic
90 %%     stabilization here).
91 filter_dead_node(RT, _DeadPid) -> RT.
```

filter_dead_node/2 does nothing, as only the successor is listed in the routing table and that is reset periodically in init_stabilize/2.

File rt_simple.erl:

```
95 %% @doc Returns the pids of the routing table entries.
96 to_pid_list(Succ) -> [node:pidX(Succ)].
```

to_pid_list/1 returns the pid of the successor.

File rt_simple.erl:

```
100 %% @doc Returns the size of the routing table.
101 get_size(_RT) -> 1.
```

The size of the routing table is always 1.

File rt_simple.erl:

```
139 %% @doc Returns the replicas of the given key.
140 get_replica_keys(Key) ->
141     [Key,
142      Key bxor 16#40000000000000000000000000000000,
143      Key bxor 16#80000000000000000000000000000000,
144      Key bxor 16#C0000000000000000000000000000000
145     ].
```

This get_replica_keys/1 implements symmetric replication.

File rt_simple.erl:

```
105 %% @doc Returns the size of the address space.
106 n() -> n_().
107 %% @doc Helper for n/0 to make dialyzer happy with internal use of n/0.
108 -spec n_() -> 16#10000000000000000000000000000000.
109 n_() -> 16#FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF + 1.
```

There are 2^{128} available keys.

File rt_simple.erl:

```
149 %% @doc Dumps the RT state for output in the web interface.
150 dump(Succ) -> [{"0", lists:flatten(io_lib:format("~p", [Succ]))}].
```

dump/1 lists the successor.

File rt_simple.erl:

```
222 %% @doc Converts the (external) representation of the routing table to a list
223 %%     in the order of the fingers, i.e. first=succ, second=shortest finger,
224 %%     third=next longer finger,...
225 to_list(State) -> [dht_node_state:get(State, rt)].
```

to_list/1 lists the successor from the external routing table state.

File `rt_simple.erl`:

```
216 %% @doc Converts the internal RT to the external RT used by the dht_node. Both
217 %%      are the same here.
218 export_rt_to_dht_node(RT, _Neighbors) -> RT.
```

`export_rt_to_dht_node/2` states that the external routing table is the same as the internal table.

File `rt_simple.erl`:

```
168 %% @doc There are no custom messages here.
169 -spec handle_custom_message
170       (custom_message() | any(), rt_loop:state_active()) -> unknown_event.
171 handle_custom_message(_Message, _State) -> unknown_event.
```

Custom messages could be send from a routing table process on one node to the routing table process on another node and are independent from any other implementation.

File `rt_simple.hrl`:

```
175 %% @doc Notifies the dht_node and failure detector if the routing table changed.
176 %%      Provided for convenience (see check/5).
177 check(OldRT, NewRT, Neighbors, ReportToFD) ->
178     check(OldRT, NewRT, Neighbors, Neighbors, ReportToFD).
179
180 %% @doc Notifies the dht_node if the (external) routing table changed.
181 %%      Also updates the failure detector if ReportToFD is set.
182 %%      Note: the external routing table only changes the internal RT has
183 %%      changed.
184 check(OldRT, NewRT, _OldNeighbors, NewNeighbors, ReportToFD) ->
185     case OldRT == NewRT of
186     true -> ok;
187     - ->
188         Pid = pid_groups:get_my(dht_node),
189         RT_ext = export_rt_to_dht_node(NewRT, NewNeighbors),
190         comm:send_local(Pid, {rt_update, RT_ext}),
191         % update failure detector:
192         case ReportToFD of
193         true ->
194             NewPids = to_pid_list(NewRT),
195             OldPids = to_pid_list(OldRT),
196             fd:update_subscriptions(OldPids, NewPids);
197         - -> ok
198         end
199     end.
```

Checks whether the routing table changed and in this case sends the `dht_node` an updated (external) routing table state. Optionally the failure detector is updated. This may not be necessary, e.g. if `check` is called after a crashed node has been reported by the failure detector (the failure detector already unsubscribes the node in this case).

8.3.3. Chord routing table (`rt_chord`)

The file `rt_chord.erl` implements Chord's routing.

Data types

File `rt_chord.erl`:

```
26 -type key_t() :: 0..16#FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF. % 128 bit numbers
27 -type rt_t() :: gb_tree().
```

```

28 -type external_rt_t() :: gb_tree().
29 -type index() :: {pos_integer(), non_neg_integer()}.
30 -opaque custom_message() ::
31     {rt_get_node, Source_PID::comm:myid(), Index::index()} |
32     {rt_get_node_response, Index::index(), Node::node:node_type()}.

```

The routing table is a `gb_tree`. Identifiers in the ring are integers. Note that in Erlang integer can be of arbitrary precision. For Chord, the identifiers are in $[0, 2^{128})$, i.e. 128-bit strings.

The `rm_beh` behaviour for Chord (excerpt)

File `rt_chord.erl`:

```

44 %% @doc Creates an empty routing table.
45 empty(_Neighbors) -> gb_trees:empty().

```

File `rt_chord.erl`:

```

274 empty_ext(_Neighbors) -> gb_trees:empty().

```

`empty/1` returns an empty `gb_tree`, same for `empty_ext/1`.

`rt_chord:hash_key/1`, `rt_chord:get_random_node_id/0`, `rt_chord:get_replica_keys/1` and `rt_chord:n/0` are implemented like their counterparts in `rt_simple.erl`.

File `rt_chord.erl`:

```

278 %% @doc Returns the next hop to contact for a lookup.
279 %%     If the routing table has less entries than the rt_size_use_neighbors
280 %%     config parameter, the neighborhood is also searched in order to find a
281 %%     proper next hop.
282 %%     Note, that this code will be called from the dht_node process and
283 %%     it will thus have an external_rt!
284 next_hop(State, Id) ->
285     case intervals:in(Id, dht_node_state:get(State, succ_range)) of
286     true -> dht_node_state:get(State, succ_pid);
287     _ ->
288         % check routing table:
289         RT = dht_node_state:get(State, rt),
290         RTSize = get_size(RT),
291         NodeRT = case util:gb_trees_largest_smaller_than(Id, RT) of
292             {value, _Key, N} ->
293                 N;
294             nil when RTSize == 0 ->
295                 dht_node_state:get(State, succ);
296             nil -> % forward to largest finger
297                 {_Key, N} = gb_trees:largest(RT),
298                 N
299         end,
300         FinalNode =
301             case RTSize < config:read(rt_size_use_neighbors) of
302             false -> NodeRT;
303             _ ->
304                 % check neighborhood:
305                 nodelist:largest_smaller_than(
306                     dht_node_state:get(State, neighbors), Id, NodeRT)
307             end,
308         node:pidX(FinalNode)
309     end.

```

If the (external) routing table contains at least one item, the next hop is retrieved from the `gb_tree`. It will be the node with the largest id that is smaller than the id we are looking for. If the routing

table is empty, the successor is chosen. However, if we haven't found the key in our routing table, the next hop will be our largest finger, i.e. entry.

File `rt_chord.erl`:

```

77 %% @doc Starts the stabilization routine.
78 init_stabilize(Neighbors, RT) ->
79     % calculate the longest finger
80     Id = nodelist:nodeid(Neighbors),
81     Key = calculateKey(Id, first_index()),
82     % trigger a lookup for Key
83     lookup:unreliable_lookup(Key, {send_to_group_member, routing_table,
84                                   {rt_get_node, comm:this(), first_index()}}),
85     RT.

```

The routing table stabilization is triggered for the first index and then runs asynchronously, as we do not want to block the `rt_loop` to perform other request while recalculating the routing table.

We have to find the node responsible for the calculated finger and therefore perform a lookup for the node with a `rt_get_node` message, including a reference to ourselves as the reply-to address and the index to be set.

The lookup performs an overlay routing by passing the message until the responsible node is found. There, the message is delivered to the `routing_table` process. The remote node sends the requested information back directly. It includes a reference to itself in a `rt_get_node_response` message. Both messages are handled by `rt_chord:handle_custom_message/2`:

File `rt_chord.erl`:

```

219 %% @doc Chord reacts on 'rt_get_node_response' messages in response to its
220 %%      'rt_get_node' messages.
221 -spec handle_custom_message
222       (custom_message(), rt_loop:state_active()) -> rt_loop:state_active();
223       (any(), rt_loop:state_active()) -> unknown_event.
224 handle_custom_message({rt_get_node, Source_PID, Index}, State) ->
225     MyNode = nodelist:node(rt_loop:get_neighb(State)),
226     comm:send(Source_PID, {rt_get_node_response, Index, MyNode}),
227     State;
228 handle_custom_message({rt_get_node_response, Index, Node}, State) ->
229     OldRT = rt_loop:get_rt(State),
230     Id = rt_loop:get_id(State),
231     Succ = rt_loop:get_succ(State),
232     NewRT = stabilize(Id, Succ, OldRT, Index, Node),
233     check(OldRT, NewRT, rt_loop:get_neighb(State), true),
234     rt_loop:set_rt(State, NewRT);
235 handle_custom_message(_Message, _State) ->
236     unknown_event.

```

File `rt_chord.erl`:

```

151 %% @doc Updates one entry in the routing table and triggers the next update.
152 -spec stabilize(MyId::key() | key_t(), Succ::node:node_type(), OldRT::rt(),
153               Index::index(), Node::node:node_type()) -> NewRT::rt().
154 stabilize(Id, Succ, RT, Index, Node) ->
155     case (node:id(Succ) /= node:id(Node)) % reached succ?
156     andalso (not intervals:in(           % there should be nothing shorter
157                 node:id(Node),           % than succ
158                 node:mk_interval_between_ids(Id, node:id(Succ)))) of
159     true ->
160         NewRT = gb_trees:enter(Index, Node, RT),
161         Key = calculateKey(Id, next_index(Index)),
162         Msg = {rt_get_node, comm:this(), next_index(Index)},
163         lookup:unreliable_lookup(Key,
164                                   {send_to_group_member, routing_table, Msg}),
165         NewRT;
166     _ -> RT

```



```
167     end.
```

stabilize/5 assigns the received routing table entry and triggers the routing table stabilization for the the next shorter entry using the same mechanisms as described above.

If the shortest finger is the successor, then filling the routing table is stopped, as no further new entries would occur. It is not necessary, that Index reaches 1 to make that happen. If less than 2^{128} nodes participate in the system, it may happen earlier.

File `rt_chord.erl`:

```
171 %% @doc Updates the routing table due to a changed node ID, pred and/or succ.
172 -spec update(OldRT::rt(), OldNeighbors::odelist:neighborhood(),
173             NewNeighbors::odelist:neighborhood()) -> {trigger_rebuild, rt()}.
174 update(_OldRT, _OldNeighbors, NewNeighbors) ->
175     % to be on the safe side ...
176     {trigger_rebuild, empty(NewNeighbors)}.
```

Tells the `rt_loop` process to rebuild the routing table starting with an empty (internal) routing table state.

File `rt_chord.erl`:

```
89 %% @doc Removes dead nodes from the routing table.
90 filter_dead_node(RT, DeadPid) ->
91     DeadIndices = [Index || {Index, Node} <- gb_trees:to_list(RT),
92                          node:same_process(Node, DeadPid)],
93     lists:foldl(fun(Index, Tree) -> gb_trees:delete(Index, Tree) end,
94                 RT, DeadIndices).
```

`filter_dead_node` removes dead entries from the `gb_tree`.

File `rt_chord.erl`:

```
313 export_rt_to_dht_node(RT, Neighbors) ->
314     Id = oodelist:nodeid(Neighbors),
315     Pred = oodelist:pred(Neighbors),
316     Succ = oodelist:succ(Neighbors),
317     Tree = gb_trees:enter(node:id(Succ), Succ,
318                          gb_trees:enter(node:id(Pred), Pred, gb_trees:empty())),
319     util:gb_trees_foldl(fun (_K, V, Acc) ->
320                         % only store the ring id and the according node structure
321                         case node:id(V) == Id of
322                             true -> Acc;
323                             false -> gb_trees:enter(node:id(V), V, Acc)
324                         end
325                     end, Tree, RT).
```

`export_rt_to_dht_node` converts the internal `gb_tree` structure based on indices into the external representation optimised for look-ups, i.e. a `gb_tree` with node ids and the nodes themselves.

File `rt_chord.hrl`:

```
240 %% @doc Notifies the dht_node and failure detector if the routing table changed.
241 %%     Provided for convenience (see check/5).
242 check(OldRT, NewRT, Neighbors, ReportToFD) ->
243     check(OldRT, NewRT, Neighbors, Neighbors, ReportToFD).
244
245 %% @doc Notifies the dht_node if the (external) routing table changed.
246 %%     Also updates the failure detector if ReportToFD is set.
247 %%     Note: the external routing table also changes if the Pred or Succ
248 %%     change.
249 check(OldRT, NewRT, OldNeighbors, NewNeighbors, ReportToFD) ->
250     case OldRT == NewRT andalso
```

```

251         nodelist:pred(OldNeighbors) == nodelist:pred(NewNeighbors) andalso
252         nodelist:succ(OldNeighbors) == nodelist:succ(NewNeighbors) of
253     true -> ok;
254 - ->
255     Pid = pid_groups:get_my(dht_node),
256     RT_ext = export_rt_to_dht_node(NewRT, NewNeighbors),
257     comm:send_local(Pid, {rt_update, RT_ext}),
258     % update failure detector:
259     case ReportToFD of
260     true ->
261         NewPids = to_pid_list(NewRT),
262         OldPids = to_pid_list(OldRT),
263         fd:update_subscriptions(OldPids, NewPids);
264     - -> ok
265     end
266 end.

```

Checks whether the routing table changed and in this case sends the `dht_node` an updated (external) routing table state. Optionally the failure detector is updated. This may not be necessary, e.g. if check is called after a crashed node has been reported by the failure detector (the failure detector already unsubscribes the node in this case).

8.4. Local Datastore

8.5. Cyclon

8.6. Vivaldi Coordinates

8.7. Estimated Global Information (Gossiping)

8.8. Load Balancing

8.9. Broadcast Trees

9. Transactions in Scalaris

9.1. The Paxos Module

9.2. Transactions using Paxos Commit

9.3. Applying the Tx-Modules to replicated DHTs

Introduces transaction processing on top of a Overlay

10. How a node joins the system

Description is based on SVN revision r1329.

After booting a new Scalaris-System as described in Section 2.5.1 on page 10, ten additional local nodes can be started by typing `admin:add_nodes(10)` in the Erlang-Shell that the boot process opened ¹.

```
scalaris> ./bin/boot.sh
[...]  
(boot@csr-pc9)1> admin:add_nodes(10)
```

In the following we will trace what this function does in order to add additional nodes to the system. The function `admin:add_nodes(int)` is defined as follows.

File `admin.erl`:


```
37 % @doc add new Scalaris nodes on the local node  
38 -spec add_node_at_id(?RT:key()) ->  
39     ok | {error, already_present} | {already_started, pid() | undefined} | term().  
40 add_node_at_id(Id) ->  
41     add_node([{{dht_node, id}, Id}, {skip_psv_lb}]).  
42  
43 -spec add_node([tuple()]) ->  
44     ok | {error, already_present} | {already_started, pid() | undefined} | term().  
45 add_node(Options) ->  
46     DhtNodeId = randoms:getRandomId(),  
47     Desc = util:sup_supervisor_desc(  
48         DhtNodeId, config:read(dht_node_sup), start_link,  
49         [[{my_sup_dht_node_id, DhtNodeId} | Options]]),  
50     case supervisor:start_child(main_sup, Desc) of  
51         {ok, _Child} -> ok;  
52         {ok, _Child, _Info} -> ok;  
53         {error, _Error} = X -> X  
54     end.  
55  
56 -spec add_nodes(non_neg_integer()) ->  
57     nothing_to_do | [ok | {error, already_present} |  
58         {already_started, pid() | undefined} | term()],...].  
59 add_nodes(0) -> nothing_to_do;  
60 add_nodes(Count) ->  
61     [add_node([]) || _X <- lists:seq(1, Count)].
```

It calls `admin:add_node([])` Count times. This function starts a new child with the given options for the main supervisor `main_sup`. In particular, it sets a random ID that is passed to the new node as its suggested ID to join at. To actually perform the start, the function `sup_dht_node:start_link/1` is called by the Erlang supervisor mechanism. For more details on the OTP supervisor mechanism see Chapter 18 of the Erlang book [1] or the online documentation at <http://www.erlang.org/doc/man/supervisor.html>.

¹Increase the log level to `info` to get more detailed startup logs. See Section 2.7 on page 12

10.1. Supervisor-tree of a Scalaris node

When a new Erlang VM with a Scalaris node is started, a `sup_scalaris` supervisor is started that creates further workers and supervisors according to the following scheme (processes starting order: left to right, top to bottom):

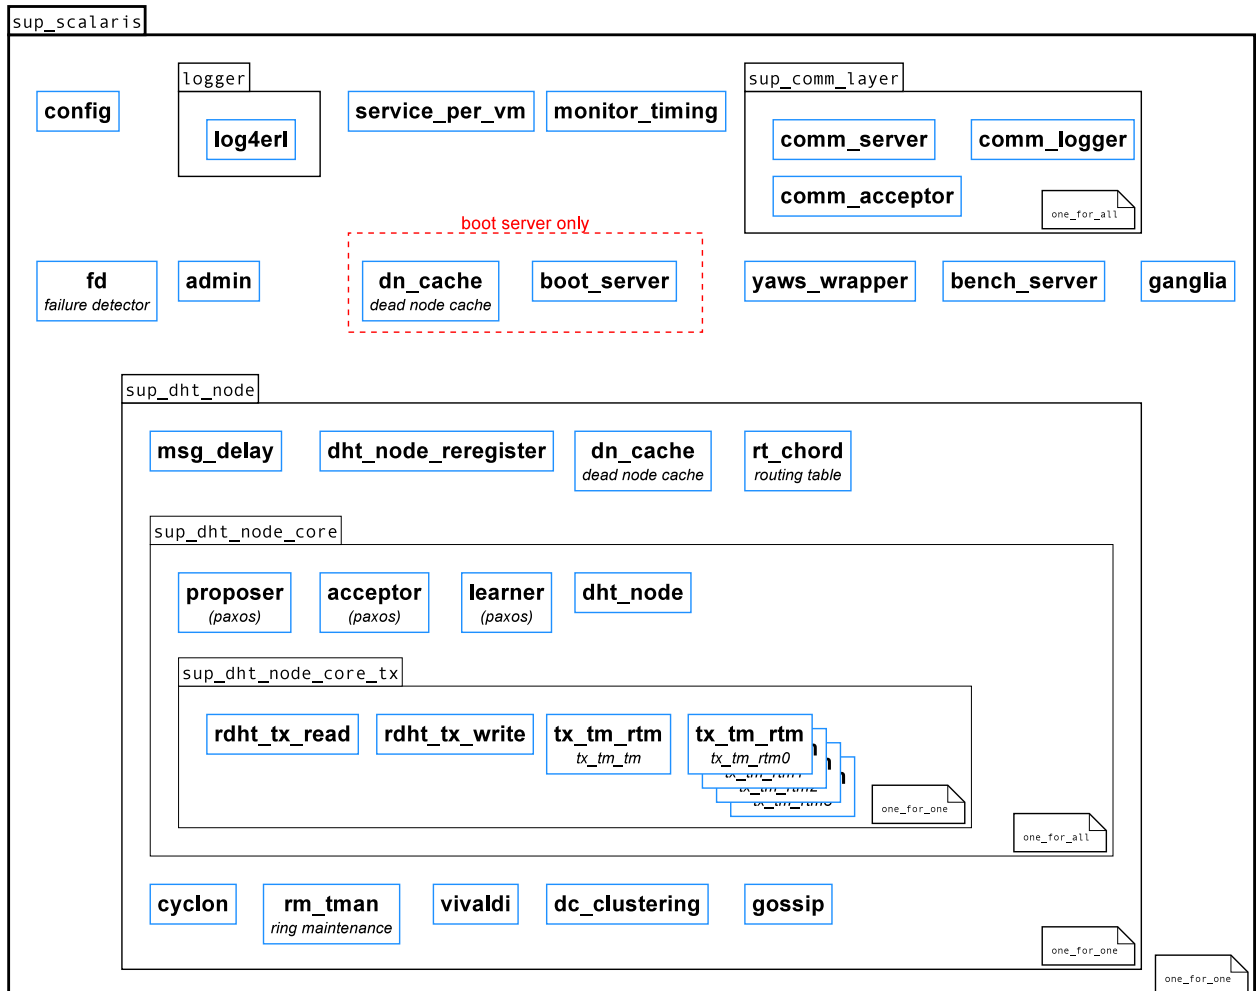

When new nodes are started using `admin:add_node/1`, only new `sup_dht_node` supervisors are started.

10.2. Starting the `sup_dht_node` supervisor and general processes of a node

Starting supervisors is a two step process: a call to `supervisor:start_link/2,3`, e.g. from a custom supervisor's own `start_link` method, will start the supervisor process. It will then call `Module:init/1` to find out about the restart strategy, maximum restart frequency and child processes. Note that `supervisor:start_link/2,3` will not return until `Module:init/1` has returned and all child processes have been started.

Let's have a look at `sup_dht_node:init/1`, the 'DHT node supervisor'.

File `sup_dht_node.erl`:

```
44 -spec init([tuple()]) -> {ok, {{one_for_one, MaxRetries::pos_integer(),
45                               PeriodInSeconds::pos_integer()},
46                               [ProcessDescr::any()]} }.
47 init(Options) ->
48     DHTNodeGroup = pid_groups:new("dht_node_"),
49     pid_groups:join_as(DHTNodeGroup, ?MODULE),
50     boot_server:connect(),
51
52     Cyclon = util:sup_worker_desc(cyclon, cyclon, start_link, [DHTNodeGroup]),
53     DC_Clustering =
54         util:sup_worker_desc(dc_clustering, dc_clustering, start_link,
55                             [DHTNodeGroup]),
56     DeadNodeCache =
57         util:sup_worker_desc(deadnodecache, dn_cache, start_link,
58                             [DHTNodeGroup]),
59     Delayer =
60         util:sup_worker_desc(msg_delay, msg_delay, start_link,
61                             [DHTNodeGroup]),
62     Gossip =
63         util:sup_worker_desc(gossip, gossip, start_link, [DHTNodeGroup]),
64     Reregister =
65         util:sup_worker_desc(dht_node_reregister, dht_node_reregister,
66                             start_link, [DHTNodeGroup]),
67     RingMaintenance =
68         util:sup_worker_desc(ring_maintenance, rm_loop, start_link, [DHTNodeGroup]),
69     RoutingTable =
70         util:sup_worker_desc(routing_table, rt_loop, start_link,
71                             [DHTNodeGroup]),
72     SupDHTNodeCore_AND =
73         util:sup_supervisor_desc(sup_dht_node_core, sup_dht_node_core,
74                                 start_link, [DHTNodeGroup, Options]),
75     Vivaldi =
76         util:sup_worker_desc(vivaldi, vivaldi, start_link, [DHTNodeGroup]),
77
78     %% order in the following list is the start order
79     {ok, {{one_for_one, 10, 1},
80         [
81             Delayer,
82             Reregister,
83             DeadNodeCache,
84             RingMaintenance,
85             RoutingTable,
86             Cyclon,
87             Vivaldi,
88             DC_Clustering,
89             Gossip,
90             SupDHTNodeCore_AND
91         ]}}.
```

The return value of the `init/1` function specifies the child processes of the supervisor and how to start them. Here, we define a list of processes to be observed by a `one_for_one` supervisor. The processes are: `Delayer`, `Reregister`, `DeadNodeCache`, `RoutingTable`, `SupDHTNodeCore_AND`, `Cyclon`, `RingMaintenance`, `Vivaldi`, `DC_Clustering` and a `Gossip` process in this order.

The term `{one_for_one, 10, 1}` specifies that the supervisor should try 10 times to restart each process before giving up. `one_for_one` supervision means, that if a single process stops, only that process is restarted. The other processes run independently.

When the `sup_dht_node:init/1` is finished the supervisor module starts all the defined processes by calling the functions that were defined in the returned list.

For a join of a new node, we are only interested in the starting of the `SupDHTNodeCore_AND` process here. At that point in time, all other defined processes are already started and running.

10.3. Starting the `sup_dht_node_core` supervisor with a peer and some paxos processes

Like any other supervisor the `sup_dht_node_core` supervisor calls its `sup_dht_node_core:init/1` function:

File `sup_dht_node_core.erl`:

```
40 -spec init({pid_groups:groupname(), Options::[tuple()]}) ->
41     {ok, {{one_for_all, MaxRetries::pos_integer(),
42             PeriodInSeconds::pos_integer()},
43           [ProcessDescr::any()]}}.
44 init({DHTNodeGroup, Options}) ->
45     pid_groups:join_as(DHTNodeGroup, ?MODULE),
46     Proposer =
47         util:sup_worker_desc(proposer, proposer, start_link, [DHTNodeGroup]),
48     Acceptor =
49         util:sup_worker_desc(acceptor, acceptor, start_link, [DHTNodeGroup]),
50     Learner =
51         util:sup_worker_desc(learner, learner, start_link, [DHTNodeGroup]),
52     DHTNode =
53         util:sup_worker_desc(dht_node, dht_node, start_link,
54                             [DHTNodeGroup, Options]),
55     TX =
56         util:sup_supervisor_desc(sup_dht_node_core_tx, sup_dht_node_core_tx, start_link,
57                                 [DHTNodeGroup]),
58     {ok, {{one_for_all, 10, 1},
59         [
60             Proposer, Acceptor, Learner,
61             DHTNode,
62             TX
63         ]}}.
```

It defines five processes, that have to be observed using a `one_for_all`-supervisor, which means, that if one fails, all have to be restarted. The `dht_node` module implements the main component of a full Scalaris node which glues together all the other processes. Its `dht_node:start_link/2` function will get the following parameters: (a) the processes' group that is used with the `pid_groups` module and (b) a list of options for the `dht_node`. The process group name was calculated a bit earlier in the code. *Exercise: Try to find where.*

File `dht_node.erl`:

```
398 %% @doc spawns a scalaris node, called by the scalaris supervisor process
399 -spec start_link(pid_groups:groupname(), [tuple()]) -> {ok, pid()}.
400 start_link(DHTNodeGroup, Options) ->
401     gen_component:start_link(?MODULE, Options,
402                             [{pid_groups_join_as, DHTNodeGroup, dht_node}, wait_for_init]).
```

Like many other modules, the `dht_node` module implements the `gen_component` behaviour. This behaviour was developed by us to enable us to write code which is similar in syntax and semantics to the examples in [3]. Similar to the supervisor behaviour, a module implementing this behaviour has to provide an `init/1` function, but here it is used to initialize the state of the component. This function is described in the next section.

Note: `?MODULE` is a predefined Erlang macro, which expands to the module name, the code belongs to (here: `dht_node`).

10.4. Initializing a `dht_node`-process

File `dht_node.erl`:

```
381 %% @doc joins this node in the ring and calls the main loop
382 -spec init(Options::[tuple()]) -> dht_node_state:state().
383 init(Options) ->
384     {my_sup_dht_node_id, MySupDhtNode} = lists:keyfind(my_sup_dht_node_id, 1, Options),
385     erlang:put(my_sup_dht_node_id, MySupDhtNode),
386     % get my ID (if set, otherwise chose a random ID):
387     Id = case lists:keyfind({dht_node, id}, 1, Options) of
388         {{dht_node, id}, IdX} -> IdX;
389         _ -> ?RT:get_random_node_id()
390     end,
391     case is_first(Options) of
392     true -> dht_node_join:join_as_first(Id, 0, Options);
393     _ -> dht_node_join:join_as_other(Id, 0, Options)
394     end.
```

The `gen_component` behaviour registers the `dht_node` in the process dictionary. Formerly, the process had to do this itself, but we moved this code into the behaviour. If an ID was given to `dht_node:init/1` function as a `{{dht_node, id}, KEY}` tuple, the given `Id` will be used. Otherwise a random key is generated. Depending on whether the node is the first inside a VM marked as first or not, the according function in `dht_node_join` is called. Also the pid of the node's supervisor is kept for future reference.

10.5. Actually joining the ring

After retrieving its identifier, the node starts the join protocol which processes the appropriate messages calling `dht_node_join:process_join_state(Message, State)`. On the existing node, join messages will be processed by `dht_node_join:process_join_msg(Message, State)`.

10.5.1. A single node joining an empty ring

File `dht_node_join.erl`:

```
82 -spec join_as_first(Id::?RT:key(), IdVersion::non_neg_integer(), Options::[tuple()])
83     -> dht_node_state:state().
84 join_as_first(Id, IdVersion, _Options) ->
85     % ugly hack to get a valid ip-address into the comm-layer
86     dht_node:trigger_known_nodes(),
87     log:log(info, "[ Node ~w ] joining as first: (~.0p, ~.0p)",
88         [self(), Id, IdVersion]),
89     Me = node:new(comm:this(), Id, IdVersion),
90     % join complete, State is the first "State"
91     finish_join(Me, Me, Me, ?DB:new(), msg_queue:new()).
```

If the ring is empty, the joining node will be the only node in the ring and will thus be responsible for the whole key space. It will trigger all known nodes to initialize the comm layer and then finish the join. `dht_node_join:finish_join/5` just creates a new state for a `Scalaris` node consisting of the given parameters (the node as itself, its predecessor and successor, an empty database and the queued messages that arrived during the join). It then activates all dependent processes and creates a routing table from this information.

The `dht_node_state:state()` type is defined in

File `dht_node_state.erl`:

```
50 -record(state, {rt          = ?required(state, rt)          :: ?RT:external_rt(),
51                 neighbors = ?required(state, neighbors) :: tid(),
```



```

52         join_time = ?required(state, join_time) :: util:time(),
53         trans_log = ?required(state, trans_log) :: #translog{},
54         db = ?required(state, db) :: ?DB:db(),
55         tx_tp_db = ?required(state, tx_tp_db) :: any(),
56         proposer = ?required(state, proposer) :: pid(),
57         % slide with pred (must not overlap with 'slide with succ'):
58         slide_pred = null :: slide_op:slide_op() | null,
59         % slide with succ (must not overlap with 'slide with pred'):
60         slide_succ = null :: slide_op:slide_op() | null,
61         msg_fwd = [] :: [{intervals:interval(), comm:mypid()}],
62         % additional range to respond to during a move:
63         db_range = intervals:empty() :: intervals:interval()
64     }).
65 -opaque state() :: #state{}.


```

10.5.2. A single node joining an existing (non-empty) ring

If a node joins an existing ring, its join protocol will step through the following four phases:

- **phase2** finding nodes to contact with the help of the configured known_hosts
- **phase2b** getting the number of Ids to sample (may be skipped)
- **phase3** lookup nodes responsible for all sampled Ids
- **phase4** joining a selected node and setting up item movements

The following figure shows a (non-exhaustive) overview of the transitions between the phases in the normal case. We will go through these step by step and discuss what happens if errors occur.

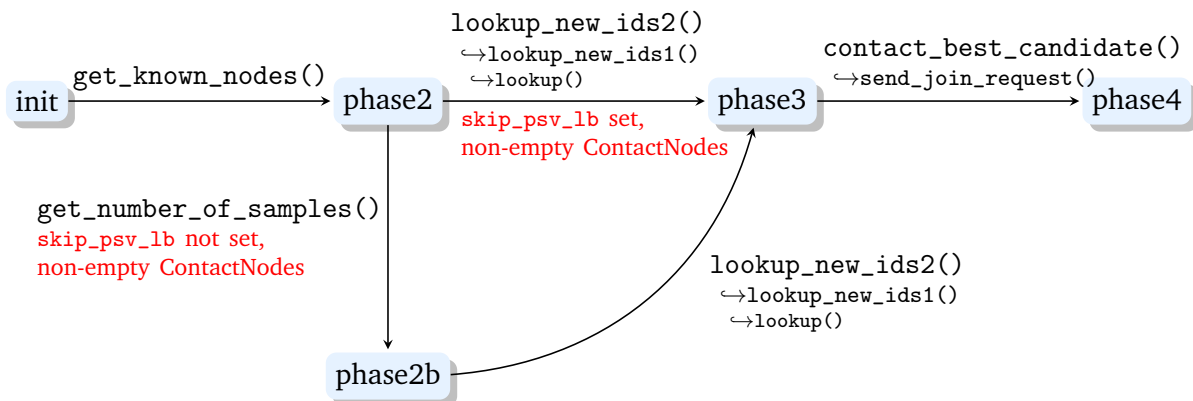

At first all nodes set in the known_hosts configuration parameter are contacted. Their responses are then handled in phase 2.

File dht_node_join.erl:

```

95 -spec join_as_other(Id::?RT:key(), IdVersion::non_neg_integer(), Options::[tuple()])
96     -> {join, phase2(), msg_queue:msg_queue()}.
97 join_as_other(Id, IdVersion, Options) ->
98     log:log(info, "[ Node ~w ] joining, trying ID: (~.0p, ~.0p)",
99         [self(), Id, IdVersion]),
100     get_known_nodes(),
101     msg_delay:send_local(get_join_timeout() div 1000, self(), {join, timeout}),
102     {join, {phase2, Options, IdVersion, [], [Id], []}, msg_queue:new()}.

```

Phase 2 and 2b

Phase 2 collects all `dht_node` processes inside the contacted VMs. It therefor mainly processes `get_dht_nodes_response` messages and integrates all received nodes into the list of `ContactNodes`. The next step depends on whether the `{skip_psv_lb}` option for skipping any passive load balancing algorithm has been given to the `dht_node` or not. If it is present, the node will only use the ID that has been initially passed to `dht_node_join:join_as_other/3`, issue a lookup for the responsible node and move to phase 3. Otherwise, the passive load balancing's `lb_psv_*:-get_number_of_samples/1` method will be called asking for the number of IDs to sample. Its answer will be processed in phase 2b.

`get_dht_nodes_response` messages arriving in phase 2b or later will be processed anyway and received `dht_node` processes will be integrated into the `ContactNodes`. These phases' operations will not be interrupted and nothing else is changed.

File `dht_node_join.erl`:

```
121 % in phase 2 add the nodes and do lookups with them / get number of samples
122 process_join_state({get_dht_nodes_response, Nodes} = _Msg,
123                   {join, JoinState, QueuedMessages})
124   when element(1, JoinState) == phase2 ->
125     ?TRACE1(_Msg, {join, JoinState}),
126     Connections = [{null, Node} || Node <- Nodes, Node /= comm:this()],
127     JoinState1 = add_connections(Connections, JoinState, back),
128     NewJoinState = phase2_next_step(JoinState1, Connections),
129     {join, NewJoinState, QueuedMessages};
130
131 % in all other phases, just add the provided nodes:
132 process_join_state({get_dht_nodes_response, Nodes} = _Msg,
133                   {join, JoinState, QueuedMessages})
134   when element(1, JoinState) == phase2b orelse
135     element(1, JoinState) == phase3 orelse
136     element(1, JoinState) == phase4 ->
137     ?TRACE1(_Msg, {join, JoinState}),
138     Connections = [{null, Node} || Node <- Nodes, Node /= comm:this()],
139     JoinState1 = add_connections(Connections, JoinState, back),
140     {join, JoinState1, QueuedMessages};
```

Phase 2b will handle `get_number_of_samples` messages from the passive load balance algorithm. Once received, new (unique) IDs will be sampled randomly so that the total number of join candidates (selected IDs together with fully processed candidates from further phases) is at least as high as the given number of samples. Afterwards, lookups will be created for all previous IDs as well as the new ones and the node will move to phase 3.

File `dht_node_join.erl`:

```
159 % note: although this message was send in phase2, also accept message in
160 % phase2, e.g. messages arriving from previous calls
161 process_join_state({join, get_number_of_samples, Samples, Conn} = _Msg,
162                   {join, JoinState, QueuedMessages})
163   when element(1, JoinState) == phase2 orelse
164     element(1, JoinState) == phase2b ->
165     ?TRACE1(_Msg, {join, JoinState}),
166     % prefer node that send get_number_of_samples as first contact node
167     JoinState1 = reset_connection(Conn, JoinState),
168     % (re-)issue lookups for all existing IDs
169     JoinState2 = lookup(JoinState1),
170     % then create additional samples, if required
171     {join, lookup_new_ids2(Samples, JoinState2), QueuedMessages};
172
173 % ignore message arriving in other phases:
174 process_join_state({join, get_number_of_samples, _Samples, Conn} = _Msg,
175                   {join, JoinState, QueuedMessages}) ->
176     ?TRACE1(_Msg, {join, JoinState}),
```

```
177 {join, reset_connection(Conn, JoinState), QueuedMessages};
```

Lookups will make Scalaris find the node currently responsible for a given ID and send a request to simulate a join to this node, i.e. a `get_candidate` message. Note that during such an operation, the joining node will become the existing node's predecessor. The simulation will be delegated to the passive load balance algorithm the joining node requested, as set by the `join_lb_psv` configuration parameter.

File `dht_node_join.erl`:

```
403 process_join_msg({join, get_candidate, Source_PID, Key, LbPsv, Conn} = _Msg, State) ->
404     ?TRACE1(_Msg, State),
405     LbPsv:create_join(State, Key, Source_PID, Conn);
```

Phase 3

The result of the simulation will be send in a `get_candidate_response` message and will be processed in phase 3 of the joining node. It will be integrated into the list of processed candidates. If there are no more IDs left to process, the best among them will be contacted. Otherwise further `get_candidate_response` messages will be awaited. Such messages will also be processed in the other phases where the candidate will be simply added to the list.

File `dht_node_join.erl`:

```
197 process_join_state({join, get_candidate_response, OrigJoinId, Candidate, Conn} = _Msg,
198                   {join, JoinState, QueuedMessages})
199     when element(1, JoinState) == phase3 ->
200         ?TRACE1(_Msg, {join, JoinState}),
201         JoinState0 = reset_connection(Conn, JoinState),
202         JoinState1 = remove_join_id(OrigJoinId, JoinState0),
203         JoinState2 = integrate_candidate(Candidate, JoinState1, front),
204         NewJoinState =
205             case get_join_ids(JoinState2) of
206                 [] -> % no more join ids to look up -> join with the best:
207                     contact_best_candidate(JoinState2);
208                 [_|_] -> % still some unprocessed join ids -> wait
209                     JoinState2
210             end,
211         {join, NewJoinState, QueuedMessages};
212
213 % In phase 2 or 2b, also add the candidate but do not continue.
214 % In phase 4, add the candidate to the end of the candidates as they are sorted
215 % and the join with the first has already started (use this candidate as backup
216 % if the join fails). Do not start a new join.
217 process_join_state({join, get_candidate_response, OrigJoinId, Candidate, Conn} = _Msg,
218                   {join, JoinState, QueuedMessages})
219     when element(1, JoinState) == phase2 orelse
220         element(1, JoinState) == phase2b orelse
221         element(1, JoinState) == phase4 ->
222         ?TRACE1(_Msg, {join, JoinState}),
223         JoinState0 = reset_connection(Conn, JoinState),
224         JoinState1 = remove_join_id(OrigJoinId, JoinState0),
225         JoinState2 = case get_phase(JoinState1) of
226             phase4 -> integrate_candidate(Candidate, JoinState1, back);
227             _ -> integrate_candidate(Candidate, JoinState1, front)
228         end,
229         {join, JoinState2, QueuedMessages};
```

If `dht_node_join:contact_best_candidate/1` is called and candidates are available (there should be at this stage!), it will sort the candidates by using the passive load balance algorithm and send a `join_request` message continuing in phase 4.

File dht_node_join.erl:

```
687 %% @doc Contacts the best candidate among all stored candidates and sends a
688 %%      join_request (Timeouts = 0).
689 -spec contact_best_candidate(JoinState::phase_2_4())
690       -> phase2() | phase2b() | phase4().
691 contact_best_candidate(JoinState) ->
692     contact_best_candidate(JoinState, 0).
693 %% @doc Contacts the best candidate among all stored candidates and sends a
694 %%      join_request. Timeouts is the number of join_request_timeout messages
695 %%      previously received.
696 -spec contact_best_candidate(JoinState::phase_2_4(), Timeouts::non_neg_integer())
697       -> phase2() | phase2b() | phase4().
698 contact_best_candidate(JoinState, Timeouts) ->
699     JoinState1 = sort_candidates(JoinState),
700     send_join_request(JoinState1, Timeouts).
```

File dht_node_join.erl:

```
704 %% @doc Sends a join request to the first candidate. Timeouts is the number of
705 %%      join_request_timeout messages previously received.
706 %%      PreCond: the id has been set to the ID to join at and has been updated
707 %%              in JoinState.
708 -spec send_join_request(JoinState::phase_2_4(), Timeouts::non_neg_integer())
709       -> phase2() | phase2b() | phase4().
710 send_join_request(JoinState, Timeouts) ->
711     case get_candidates(JoinState) of
712     [] -> % no candidates -> start over (should not happen):
713         start_over(JoinState);
714     [BestCand | _] ->
715         Id = node_details:get(lb_op:get(BestCand, n1_new), new_key),
716         IdVersion = get_id_version(JoinState),
717         NewSucc = node_details:get(lb_op:get(BestCand, n1succ_new), node),
718         Me = node:new(comm:this(), Id, IdVersion),
719         CandId = lb_op:get(BestCand, id),
720         ?TRACE_SEND(node:pidX(NewSucc), {join, join_request, Me, CandId}),
721         comm:send(node:pidX(NewSucc), {join, join_request, Me, CandId}),
722         msg_delay:send_local(get_join_request_timeout() div 1000, self(),
723                             {join, join_request_timeout, Timeouts, CandId}),
724         set_phase(phase4, JoinState)
725     end.
```

The join_request message will be received by the existing node which will set up a slide operation with the new node or deny the request if it is not responsible for the key (anymore) and reply with a {join, join_response, not_responsible, Node} message.

File dht_node_join.erl:

```
415 process_join_msg({join, join_request, NewPred, CandId} = _Msg, State)
416     when (not is_atom(NewPred)) -> % avoid confusion with not_responsible message
417     ?TRACE1(_Msg, State),
418     TargetId = node:id(NewPred),
419     % only reply to join request with keys in our range:
420     KeyInRange = dht_node_state:is_responsible(node:id(NewPred), State),
421     case KeyInRange andalso
422         dht_node_move:can_slide_pred(State, TargetId, {join, 'rcv'}) of
423     true ->
424         % TODO0: implement step-wise join
425         MoveFullId = util:get_global_uid(),
426         SlideOp = slide_op:new_sending_slide_join(
427             MoveFullId, NewPred, join, State),
428         SlideOp1 = slide_op:set_phase(SlideOp, wait_for_pred_update_join),
429         RMsSubscrTag = {move, slide_op:get_id(SlideOp1)},
430         rm_loop:subscribe(self(), RMsSubscrTag,
431                         fun(_OldNeighbors, NewNeighbors) ->
432                             NewPred := nodelist:pred(NewNeighbors)
433                         end,
434                         fun dht_node_move:rm_notify_new_pred/4),
```

```

435         State1 = dht_node_state:add_db_range(
436             State, slide_op:get_interval(SlideOp1)),
437         send_join_response(State1, SlideOp1, NewPred, CandId);
438     - when not KeyInRange ->
439         ?TRACE_SEND(node:pidX(NewPred),
440             {join, join_response, not_responsible, CandId}),
441         comm:send(node:pidX(NewPred),
442             {join, join_response, not_responsible, CandId}),
443         State;
444     - ->
445         ?TRACE("[ ~.Op ]~n ignoring join_request from ~.Op due to a running slide~n",
446             [self(), NewPred]),
447         State
448     end;

```

If it is responsible for the ID and is not participating in a slide with its current predecessor, it will set up a slide with the joining node:

File `dht_node_join.erl`:

```

759 -spec send_join_response(State::dht_node_state:state(),
760     NewSlideOp::slide_op:slide_op(),
761     NewPred::node:node_type(), CandId::lb_op:id())
762     -> dht_node_state:state().
763 send_join_response(State, SlideOp, NewPred, CandId) ->
764     MoveFullId = slide_op:get_id(SlideOp),
765     NewSlideOp =
766         slide_op:set_timer(SlideOp, get_join_response_timeout(),
767             {join, join_response_timeout, NewPred, MoveFullId, CandId}),
768     MyOldPred = dht_node_state:get(State, pred),
769     MyNode = dht_node_state:get(State, node),
770     ?TRACE_SEND(node:pidX(NewPred),
771         {join, join_response, MyNode, MyOldPred, MoveFullId, CandId}),
772     comm:send(node:pidX(NewPred),
773         {join, join_response, MyNode, MyOldPred, MoveFullId, CandId}),
774     % no need to tell the ring maintenance -> the other node will trigger an update
775     % also this is better in case the other node dies during the join
776     %% rm_loop:notify_new_pred(comm:this(), NewPred),
777     dht_node_state:set_slide(State, pred, NewSlideOp).

```

Phase 4

The joining node will receive the `join_response` message in phase 4 of the join protocol. If everything is ok, it will notify its ring maintenance process that it enters the ring, start all required processes and join the slide operation set up by the existing node in order to receive some of its data.

If the join candidate's node is not responsible for the candidate's ID anymore or the candidate's ID already exists, the next candidate is contacted until no further candidates are available and the join protocol starts over using `dht_node_join:start_over/1`.

Note that the `join_response` message will actually be processed in any phase. Therefore, if messages arrive late, the join can be processed immediately and the rest of the join protocol does not need to be executed again.

File `dht_node_join.erl`:

```

266 process_join_state({join, join_response, not_responsible, CandId} = _Msg,
267     {join, JoinState, QueuedMessages} = State)
268     when element(1, JoinState) == phase4 ->
269         ?TRACE1(_Msg, {join, JoinState}),
270         % the node we contacted is not responsible for the selected key anymore
271         % -> try the next candidate, if the message is related to the current candidate

```

```

272     case get_candidates(JoinState) of
273     [] -> % no candidates -> should not happen in phase4!
274         log:log(error, "[ Node ~w ] empty candidate list in join phase 4, "
275             "starting over", [self()]),
276         {join, start_over(JoinState), QueuedMessages};
277     [Candidate | _Rest] ->
278         case lb_op:get(Candidate, id) == CandId of
279             false -> State; % unrelated/old message
280             _ ->
281                 log:log(info,
282                     "[ Node ~w ] node contacted for join is not responsible "
283                     "for the selected ID (anymore), trying next candidate",
284                     [self()]),
285                 {join, try_next_candidate(JoinState), QueuedMessages}
286         end
287     end;
288
289 % in other phases remove the candidate from the list (if it still exists):
290 process_join_state({join, join_response, not_responsible, CandId} = _Msg,
291     {join, JoinState, QueuedMessages}) ->
292     ?TRACE1(_Msg, {join, JoinState}),
293     {join, remove_candidate(CandId, JoinState), QueuedMessages};
294
295 % note: accept (delayed) join_response messages in any phase
296 process_join_state({join, join_response, Succ, Pred, MoveId, CandId} = _Msg,
297     {join, JoinState, QueuedMessages} = State) ->
298     ?TRACE1(_Msg, {join, JoinState}),
299     % only act on related messages, i.e. messages from the current candidate
300     Phase = get_phase(JoinState),
301     State1 = case get_candidates(JoinState) of
302     [] when Phase == phase4 -> % no candidates -> should not happen in phase4!
303         log:log(error, "[ Node ~w ] empty candidate list in join phase 4, "
304             "starting over", [self()]),
305         {join, start_over(JoinState), QueuedMessages};
306     [] -> State; % in all other phases, ignore the delayed join_response
307         % if no candidates exist
308     [Candidate | _Rest] ->
309         CandidateNode = node_details:get(lb_op:get(Candidate, n1succ_new), node),
310         CandidateNodeSame = node:same_process(CandidateNode, Succ),
311         case lb_op:get(Candidate, id) == CandId of
312             false ->
313                 log:log(warn, "[ Node ~w ] ignoring old or unrelated "
314                     "join_response message", [self()]),
315                 State; % ignore old/unrelated message
316             _ when not CandidateNodeSame ->
317                 % id is correct but the node is not (should never happen!)
318                 log:log(error, "[ Node ~w ] got join_response but the node "
319                     "changed, trying next candidate", [self()]),
320                 {join, try_next_candidate(JoinState), QueuedMessages};
321             _ ->
322                 MyId = node_details:get(lb_op:get(Candidate, n1_new), new_key),
323                 MyIdVersion = get_id_version(JoinState),
324                 case MyId == node:id(Succ) orelse MyId == node:id(Pred) of
325                     true ->
326                         log:log(warn, "[ Node ~w ] chosen ID already exists, "
327                             "trying next candidate", [self()]),
328                         % note: can not keep Id, even if skip_psv_lb is set
329                         JoinState1 = remove_candidate_front(JoinState),
330                         {join, contact_best_candidate(JoinState1), QueuedMessages};
331                     _ ->
332                         ?TRACE(" [ ~.0p ]~n joined MyId:~.0p, MyIdVersion:~.0p~n "
333                             "Succ: ~.0p~n Pred: ~.0p~n",
334                             [self(), MyId, MyIdVersion, Succ, Pred]),
335                         Me = node:new(comm:this(), MyId, MyIdVersion),
336                         log:log(info, "[ Node ~w ] joined between ~w and ~w",
337                             [self(), Pred, Succ]),
338                         rm_loop:notify_new_succ(node:pidX(Pred), Me),
339                         rm_loop:notify_new_pred(node:pidX(Succ), Me),
340
341                         finish_join_and_slide(Me, Pred, Succ, ?DB:new(),
342                             QueuedMessages, MoveId)

```

```

343         end
344     end
345 end,
346 State1;

```

File dht_node_join.erl:

```

781 -spec finish_join(Me::node:node_type(), Pred::node:node_type(),
782                 Succ::node:node_type(), DB::?DB:db(),
783                 QueuedMessages::msg_queue:msg_queue())
784     -> dht_node_state:state().
785 finish_join(Me, Pred, Succ, DB, QueuedMessages) ->
786     rm_loop:activate(Me, Pred, Succ),
787     % wait for the ring maintenance to initialize and tell us its table ID
788     NeighbTable = rm_loop:get_neighbors_table(),
789     rt_loop:activate(NeighbTable),
790     cyclon:activate(),
791     vivaldi:activate(),
792     dc_clustering:activate(),
793     gossip:activate(),
794     dht_node_reregister:activate(),
795     msg_queue:send(QueuedMessages),
796     NewRT_ext = ?RT:empty_ext(rm_loop:get_neighbors(NeighbTable)),
797     dht_node_state:new(NewRT_ext, NeighbTable, DB).
798
799 -spec finish_join_and_slide(Me::node:node_type(), Pred::node:node_type(),
800                             Succ::node:node_type(), DB::?DB:db(),
801                             QueuedMessages::msg_queue:msg_queue(), MoveId::slide_op:id())
802     -> dht_node_state:state().
803 finish_join_and_slide(Me, Pred, Succ, DB, QueuedMessages, MoveId) ->
804     State = finish_join(Me, Pred, Succ, DB, QueuedMessages),
805     SlideOp = slide_op:new_receiving_slide_join(MoveId, Pred, Succ, node:id(Me), join),
806     SlideOp1 = slide_op:set_phase(SlideOp, wait_for_node_update),
807     State1 = dht_node_state:set_slide(State, succ, SlideOp1),
808     State2 = dht_node_state:add_msg_fwd(
809         State1, slide_op:get_interval(SlideOp1),
810         node:pidX(slide_op:get_node(SlideOp1))),
811     RMSubscrTag = {move, slide_op:get_id(SlideOp1)},
812     NewMsgQueue = msg_queue:add(QueuedMessages,
813                                 {move, node_update, RMSubscrTag}),
814     msg_queue:send(NewMsgQueue),
815     State2.

```

The macro ?RT maps to the configured routing algorithm. It is defined in include/scalaris.hrl. For further details on the routing see Chapter 8.3 on page 32.

Timeouts and other errors

The following table summarizes the timeout messages send during the join protocol on the joining node. It shows in which of the phases each of the messages is processed and describes (in short) what actions are taken. All of these messages are influenced by their respective config parameters, e.g. join_timeout parameter in the config files defines an overall timeout for the whole join operation. If it takes longer than join_timeout ms, a {join, timeout} will be send and processed as given in this table.

	known_hosts_ _timeout	get_number_of_ _samples_ _timeout	lookup_ _timeout	join_request_ _timeout	timeout
phase2	get known nodes from configured VMs	ignore	ignore	ignore	
phase2b	ignore	remove contact node, re-start join → phase 2 or 2b	ignore	ignore	
phase3	ignore	ignore	remove contact node, lookup remaining IDs → phase 2 or 3	ignore	
phase3b	ignore	ignore	ignore	ignore	re-start join → phase 2 or 2b
phase4	ignore	ignore	ignore	timeouts < 3? ² → contact candidate otherwise: remove candidate no candidates left? → phase 2 or 2b otherwise: → contact next one → phase 3b or 4	

On the existing node, there is only one timeout message which is part of the join protocol: the `join_response_timeout`. It will be send when a slide operation is set up and if the timeout hits before the next message exchange, it will increase the slide operation's number of timeouts. The slide will be aborted if at least `join_response_timeouts` timeouts have been received. This parameter is set in the config file.

Misc. (all phases)

Note that join-related messages arriving in other phases than those handling them will be ignored. Any other messages during a `dht_node`'s join will be queued and re-send when the join is complete.

²set by the `join_request_timeouts` config parameter

11. Directory Structure of the Source Code

The directory tree of Scalaris is structured as follows:

<code>bin</code>	contains shell scripts needed to work with Scalaris (e.g. start the boot services, start a node, ...)
<code>contrib</code>	necessary third party packages (yaws and log4erl)
<code>doc</code>	generated Erlang documentation
<code>docroot</code>	root directory of the node's webserver
<code>ebin</code>	the compiled Erlang code (beam files)
<code>java-api</code>	a Java API to Scalaris
<code>log</code>	log files
<code>src</code>	contains the Scalaris source code
<code>test</code>	unit tests for Scalaris
<code>user-dev-guide</code>	contains the sources for this document

12. Java API

For the Java API documentation, we refer the reader to the documentation generated by javadoc or doxygen. The following commands create the documentation:

```
%> cd java-api  
%> ant doc  
%> doxygen
```

The documentation can then be found in `java-api/doc/index.html` (javadoc) and `java-api/doc-doxygen/html/index.html` (doxygen).

We provide two kinds of APIs:

- high-level access with `de.zib.scalarisc.Scalaris`
- low-level access with `de.zib.scalarisc.Transaction`

The former provides general functions for reading, writing and deleting single key-value pairs and an API for the built-in PubSub-service. The latter allows the user to write custom transactions which can modify an arbitrary number of key-value pairs within one transaction.

Bibliography

- [1] Joe Armstrong. *Programming Erlang: Software for a Concurrent World*. Pragmatic Programmers, ISBN: 978-1-9343560-0-5, July 2007
- [2] Frank Dabek, Russ Cox, Frans Kaashoek, Robert Morris. *Vivaldi: A Decentralized Network Coordinate System*. ACM SIGCOMM 2004.
- [3] Rachid Guerraoui and Luis Rodrigues. *Introduction to Reliable Distributed Programming*. Springer-Verlag, 2006.
- [4] Ion Stoica, Robert Morris, David Karger, M. Frans Kaashoek and Hari Balakrishnan. *Chord: A Scalable Peer-to-peer Lookup Service for Internet Applications*. ACM SIGCOMM 2001, San Deigo, CA, August 2001, pp. 149-160. http://pdos.csail.mit.edu/papers/chord:sigcomm01/chord_sigcomm.pdf
- [5] Mark Jelasity, Alberto Montresor, Özalp Babaoglu. *T-Man: Gossip-based fast overlay topology construction*. Computer Networks (CN) 53(13):2321-2339, 2009.
- [6] F. Schintke, A. Reinefeld, S. Haridi, T. Schütt. *Enhanced Paxos Commit for Transactions on DHTs*. 10th IEEE/ACM Int. Conf. on Cluster, Cloud and Grid Computing, pp. 448-454, May 2010.
- [7] Spyros Voulgaris, Daniela Gavidia, Maarten van Steen. *CYCLON: Inexpensive Membership Management for Unstructured P2P Overlays*. J. Network Syst. Manage. 13(2): 2005.
- [8] Márk Jelasity, Alberto Montresor, Ozalp Babaoglu. *Gossip-based aggregation in large dynamic networks*. ACM Trans. Comput. Syst. 23(3), 219-252 (2005).

Index

?RT
 next_hop, 33
 update, 35

admin
 add_node, 44, 45

comm, 3, 23, 23
 get_msg_tag, 28
 send_to_group_member, 27

cs_api, 24

dht_node, 34, 35, 38, 42, 47, 50
 init, 48

dht_node_join, 48
 contact_best_candidate, 51, 51
 finish_join, 48, 55
 finish_join_and_slide, 55
 join_as_other, 50
 process_join_msg, 48
 process_join_state, 48
 send_join_request, 52
 send_join_response, 53
 start_over, 53

dht_node_state
 state, 48

erlang
 exit, 25, 26
 now, 21
 send_after, 21

ets
 i, 21

gen_component, 3, 21, 23, 23–30
 bp_barrier, 28, 29
 bp_cont, 28, 29
 bp_del, 28, 29
 bp_set, 28
 bp_set_cond, 28
 bp_step, 29, 30
 change_handler, 25, 26, 26, 27
 get_state, 25
 kill, 25, 27
 runnable, 29
 sleep, 27
 start, 25
 start_link, 25, 26

intervals
 in, 33

lb_psv_*
 get_number_of_samples, 50

msg_delay, 21

paxos_SUITE, 28
 step_until_decide, 29

pdb, 30

pid_groups, 3, 23, 23, 25–27, 47

randoms, 36

rm_beh, 36, 39

routing_table, 40

rt_beh, 32
 check, 34
 check_config, 34
 dump, 34
 empty, 34
 empty_ext, 34
 export_rt_to_dht_node, 34
 filter_dead_node, 34
 get_random_node_id, 34
 get_replica_keys, 34
 get_size, 34
 handle_custom_message, 34
 hash_key, 34
 init_stabilize, 34
 n, 34
 next_hop, 34
 to_list, 34
 to_pid_list, 34
 update, 34

rt_chord, 38
 empty, 39
 empty_ext, 39
 export_rt_to_dht_node, 41

- filter_dead_node, [41](#)
- get_random_node_id, [39](#)
- get_replica_keys, [39](#)
- handle_custom_message, [40](#), [40](#)
- hash_key, [39](#)
- init_stabilize, [40](#)
- n, [39](#)
- next_hop, [39](#)
- stabilize, [40](#)
- update, [41](#)

rt_loop, [34](#), [34](#), [41](#)

rt_simple, [35](#)

- dump, [37](#)
- empty, [36](#)
- empty_ext, [36](#)
- export_rt_to_dht_node, [37](#)
- filter_dead_node, [37](#)
- get_random_node_id, [36](#)
- get_replica_keys, [37](#)
- get_size, [37](#)
- handle_custom_message, [38](#)
- hash_key, [36](#)
- init_stabilize, [36](#)
- n, [37](#)
- next_hop, [36](#)
- to_list, [37](#)
- to_pid_list, [37](#)
- update, [36](#)

sup_dht_node

- init, [45](#), [46](#)
- start_link, [44](#)

sup_dht_node_core, [47](#)

sup_scalaris, [45](#)

supervisor

- start_link, [45](#)

timer

- sleep, [25](#)
- tc, [21](#)

util

- tc, [21](#)

vivaldi, [27](#)

vivaldi_latency, [27](#)

your_gen_component

- init, [25](#), [27](#)
- on, [25–27](#)