

# MySQL Data Types

[< Previous](#)[Next >](#)

The data type of a column defines what value the column can hold: integer, character, money, date and time, binary, and so on.

## MySQL Data Types (Version 8.0)

Each column in a database table is required to have a name and a data type.

An SQL developer must decide what type of data that will be stored inside each column when creating a table. The data type is a guideline for SQL to understand what type of data is expected inside of each column, and it also identifies how SQL will interact with the stored data.

In MySQL there are three main data types: string, numeric, and date and time.

### String Data Types

Data type	Description
CHAR(size)	A FIXED length string (can contain letters, numbers, and special characters). The <i>size</i> parameter specifies the column length in characters - can be from 0 to 255. Default is 1
VARCHAR(size)	A VARIABLE length string (can contain letters, numbers, and special characters). The <i>size</i> parameter specifies the maximum column length in characters - can be from 1 to 65535



	parameter specifies the column length in bytes. Default is 1
VARBINARY(size)	Equal to VARCHAR(), but stores binary byte strings. The <i>size</i> parameter specifies the maximum column length in bytes.
TINYBLOB	For BLOBs (Binary Large Objects). Max length: 255 bytes
TINYTEXT	Holds a string with a maximum length of 255 characters
TEXT(size)	Holds a string with a maximum length of 65,535 bytes
BLOB(size)	For BLOBs (Binary Large Objects). Holds up to 65,535 bytes of data
MEDIUMTEXT	Holds a string with a maximum length of 16,777,215 characters
MEDIUMBLOB	For BLOBs (Binary Large Objects). Holds up to 16,777,215 bytes of data
LONGTEXT	Holds a string with a maximum length of 4,294,967,295 characters
LOBLOB	For BLOBs (Binary Large Objects). Holds up to 4,294,967,295 bytes of data
ENUM(val1, val2, val3, ...)	A string object that can have only one value, chosen from a list of possible values. You can list up to 65535 values in an ENUM list. If a value is inserted that is not in the list, a blank value will be inserted. The values are sorted in the order you enter them
SET(val1, val2, val3, ...)	A string object that can have 0 or more values, chosen from a list of possible values. You can list up to 64 values in a SET list

ADVERTISEMENT



## Numeric Data Types

Data type	Description
BIT( <i>size</i> )	A bit-value type. The number of bits per value is specified in <i>size</i> . The <i>size</i> parameter can hold a value from 1 to 64. The default value for <i>size</i> is 1.
TINYINT( <i>size</i> )	A very small integer. Signed range is from -128 to 127. Unsigned range is from 0 to 255. The <i>size</i> parameter specifies the maximum display width (which is 255)
BOOL	Zero is considered as false, nonzero values are considered as true.
BOOLEAN	Equal to BOOL
SMALLINT( <i>size</i> )	A small integer. Signed range is from -32768 to 32767. Unsigned range is from 0 to 65535. The <i>size</i> parameter specifies the maximum display width (which is 255)
MEDIUMINT( <i>size</i> )	A medium integer. Signed range is from -8388608 to 8388607. Unsigned range is from 0 to 16777215. The <i>size</i> parameter specifies the maximum display width (which is 255)
INT( <i>size</i> )	A medium integer. Signed range is from -2147483648 to 2147483647. Unsigned range is from 0 to 4294967295. The <i>size</i> parameter specifies the maximum display width (which is 255)
INTEGER( <i>size</i> )	Equal to INT( <i>size</i> )
BIGINT( <i>size</i> )	A large integer. Signed range is from

	The <i>size</i> parameter specifies the maximum display width (which is 255)
FLOAT( <i>size</i> , <i>d</i> )	A floating point number. The total number of digits is specified in <i>size</i> . The number of digits after the decimal point is specified in the <i>d</i> parameter. This syntax is deprecated in MySQL 8.0.17, and it will be removed in future MySQL versions
FLOAT( <i>p</i> )	A floating point number. MySQL uses the <i>p</i> value to determine whether to use FLOAT or DOUBLE for the resulting data type. If <i>p</i> is from 0 to 24, the data type becomes FLOAT(). If <i>p</i> is from 25 to 53, the data type becomes DOUBLE()
DOUBLE( <i>size</i> , <i>d</i> )	A normal-size floating point number. The total number of digits is specified in <i>size</i> . The number of digits after the decimal point is specified in the <i>d</i> parameter
DOUBLE PRECISION( <i>size</i> , <i>d</i> )	
DECIMAL( <i>size</i> , <i>d</i> )	An exact fixed-point number. The total number of digits is specified in <i>size</i> . The number of digits after the decimal point is specified in the <i>d</i> parameter. The maximum number for <i>size</i> is 65. The maximum number for <i>d</i> is 30. The default value for <i>size</i> is 10. The default value for <i>d</i> is 0.
DEC( <i>size</i> , <i>d</i> )	Equal to DECIMAL( <i>size</i> , <i>d</i> )

**Note:** All the numeric data types may have an extra option: UNSIGNED or ZEROFILL. If you add the UNSIGNED option, MySQL disallows negative values for the column. If you add the ZEROFILL option, MySQL automatically also adds the UNSIGNED attribute to the column.

## Date and Time Data Types

Data type	Description
DATE	A date. Format: YYYY-MM-DD. The supported range is from '1000-01-01' to '9999-12-31'
DATETIME( <i>fsp</i> )	A date and time combination. Format: YYYY-MM-DD hh:mm:ss. The supported range is from '1 <div> <input type="checkbox"/> Dark mode </div>



	initialization and updating to the current date and time
TIMESTAMP( <i>fsp</i> )	A timestamp. TIMESTAMP values are stored as the number of seconds since the Unix epoch ('1970-01-01 00:00:00' UTC). Format: YYYY-MM-DD hh:mm:ss. The supported range is from '1970-01-01 00:00:01' UTC to '2038-01-09 03:14:07' UTC. Automatic initialization and updating to the current date and time can be specified using DEFAULT CURRENT_TIMESTAMP and ON UPDATE CURRENT_TIMESTAMP in the column definition
TIME( <i>fsp</i> )	A time. Format: hh:mm:ss. The supported range is from '-838:59:59' to '838:59:59'
YEAR	A year in four-digit format. Values allowed in four-digit format: 1901 to 2155, and 0000. MySQL 8.0 does not support year in two-digit format.

[< Previous](#)[Next >](#)

ADVERTISEMENT




HTML

CSS



NEW

We just launched  
W3Schools videos

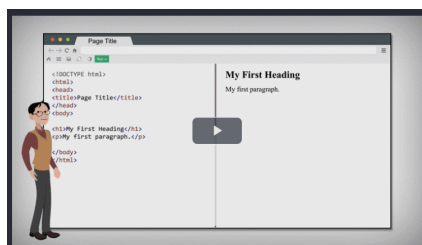

Explore now

COLOR PICKER

☐ Dark mode

☐ Dark code



HTML

CSS



Get certified  
by completing  
a course today!



Get started

CODE GAME



Play Game

ADVERTISEMENT

☐ Dark mode

☐ Dark code



HTML

CSS



ADVERTISEMENT

ADVERTISEMENT

☐ Dark mode

☐ Dark code





HTML

CSS



[Report Error](#)

[Forum](#)

[About](#)

[Buy Certificate](#)

## Top Tutorials

[HTML Tutorial](#)  
[CSS Tutorial](#)  
[JavaScript Tutorial](#)  
[How To Tutorial](#)  
[SQL Tutorial](#)  
[Python Tutorial](#)  
[W3.CSS Tutorial](#)  
[Bootstrap Tutorial](#)  
[PHP Tutorial](#)  
[Java Tutorial](#)  
[C++ Tutorial](#)  
[jQuery Tutorial](#)

## Top References

[HTML Reference](#)  
[CSS Reference](#)  
[JavaScript Reference](#)  
[SQL Reference](#)  
[Python Reference](#)  
[W3.CSS Reference](#)  
[Bootstrap Reference](#)  
[PHP Reference](#)  
[HTML Colors](#)  
[Java Reference](#)  
[Angular Reference](#)  
[jQuery Reference](#)

☐ Dark mode

☐ Dark code

[HTML](#)[CSS](#)[HTML Examples](#)[CSS Examples](#)[JavaScript Examples](#)[How To Examples](#)[SQL Examples](#)[Python Examples](#)[W3.CSS Examples](#)[Bootstrap Examples](#)[PHP Examples](#)[Java Examples](#)[XML Examples](#)[jQuery Examples](#)

## Web Courses

[HTML Course](#)[CSS Course](#)[JavaScript Course](#)[Front End Course](#)[SQL Course](#)[Python Course](#)[PHP Course](#)[jQuery Course](#)[Java Course](#)[C++ Course](#)[C# Course](#)[XML Course](#)[Get Certified »](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.  
W3Schools is Powered by W3.CSS.

