
Officer's screen journey

Five screens the officer moves through when reviewing a single case, with a return path for the next case. Amber marks the only human-decision step.

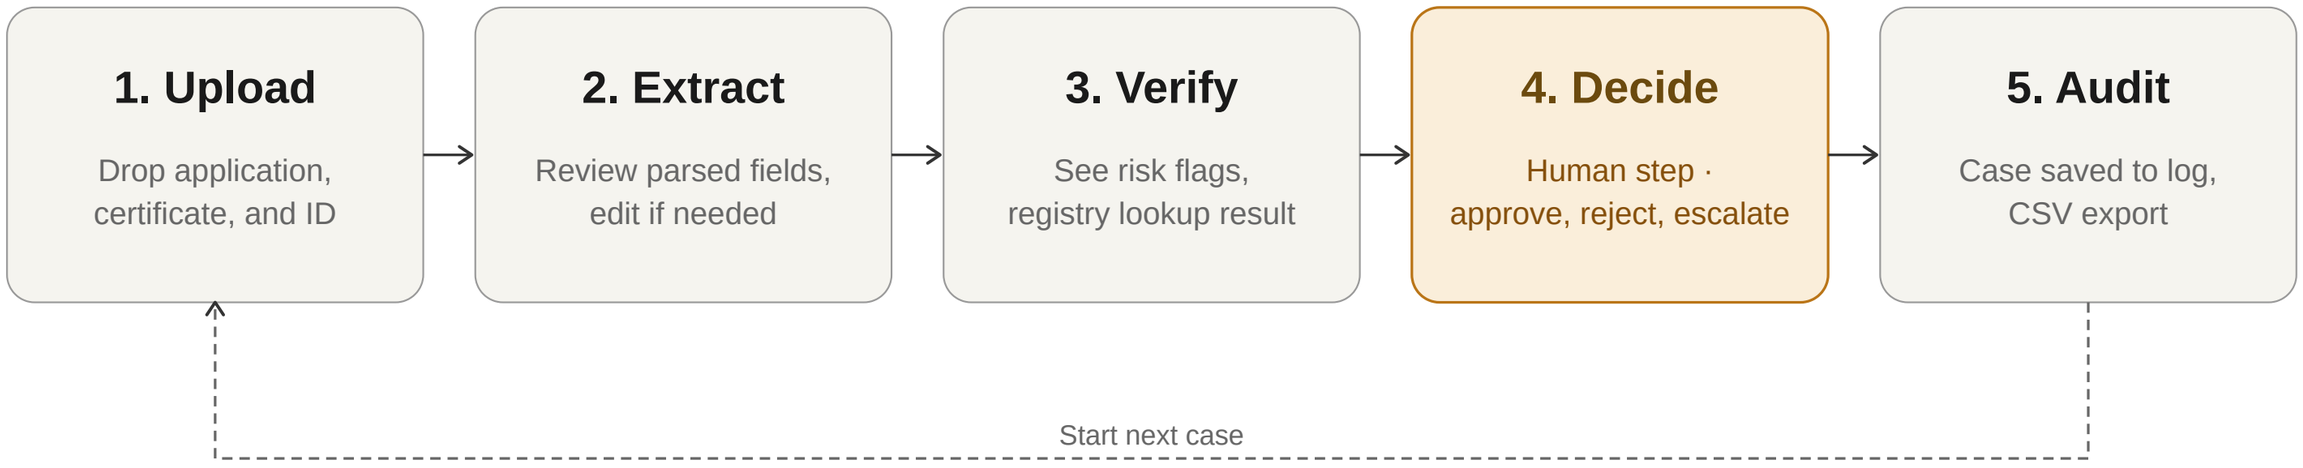

How to read: Screens 1–3 and 5 are handled automatically by the app; screen 4 is where the officer makes the approve/reject/escalate call. The dashed loop shows that after saving, the officer returns to screen 1 for the next case.

Screen layouts

Low-fidelity sketches of the four main screens. Enough detail to see the workflow; the visual polish comes later.

Screen 1 · Case upload — CivicVerify

Upload two or three documents for one candidate.

⇩ Application form

⇩ Academic certificate

⇩ ID document

Screen 2 · Extracted fields — Case #C-2451

Candidate name	Adaeze Okafor
Date of birth	1998-04-12
Institution	Fed. Polytechnic
Certificate no.	MFP-2019-987
Issue date	2019-09-20
ID number (NIN)	NIN-123456

Tap a field to edit before verifying.

Back | Verify

Screens 3–4 · Verify & decide — Risk: medium

⚠ Name on cert differs from form (Adaeze vs Adeze)

✓ Cert MFP-2019-987 found in mock registry

⚠ ID document expired 2024-03

Draft memo: One name mismatch and one expired ID. Registry match confirmed. Suggest applicant clarify name spelling before approval.

Approve | **Escalate** | Reject

Cancel | Save decision

Screen 5 · Audit log — 142 cases

Case	Decision
C-2451 · Adaeze O.	Escalate
C-2450 · Musa I.	Approve
C-2449 · Nkechi A.	Approve
C-2448 · Tunde B.	Reject
C-2447 · Chika E.	Approve


Search · filter · export

Export CSV | New case

How to read: Each panel is one screen. Officer moves through them in order; screens 3 and 4 are combined into one panel here because they share the same view. Amber "Escalate" chip shows the currently selected decision.

Data model


Six entities stored in local SQLite. Case is the central hub; every other entity relates to it. Registry holds the mock credential records the system verifies against.

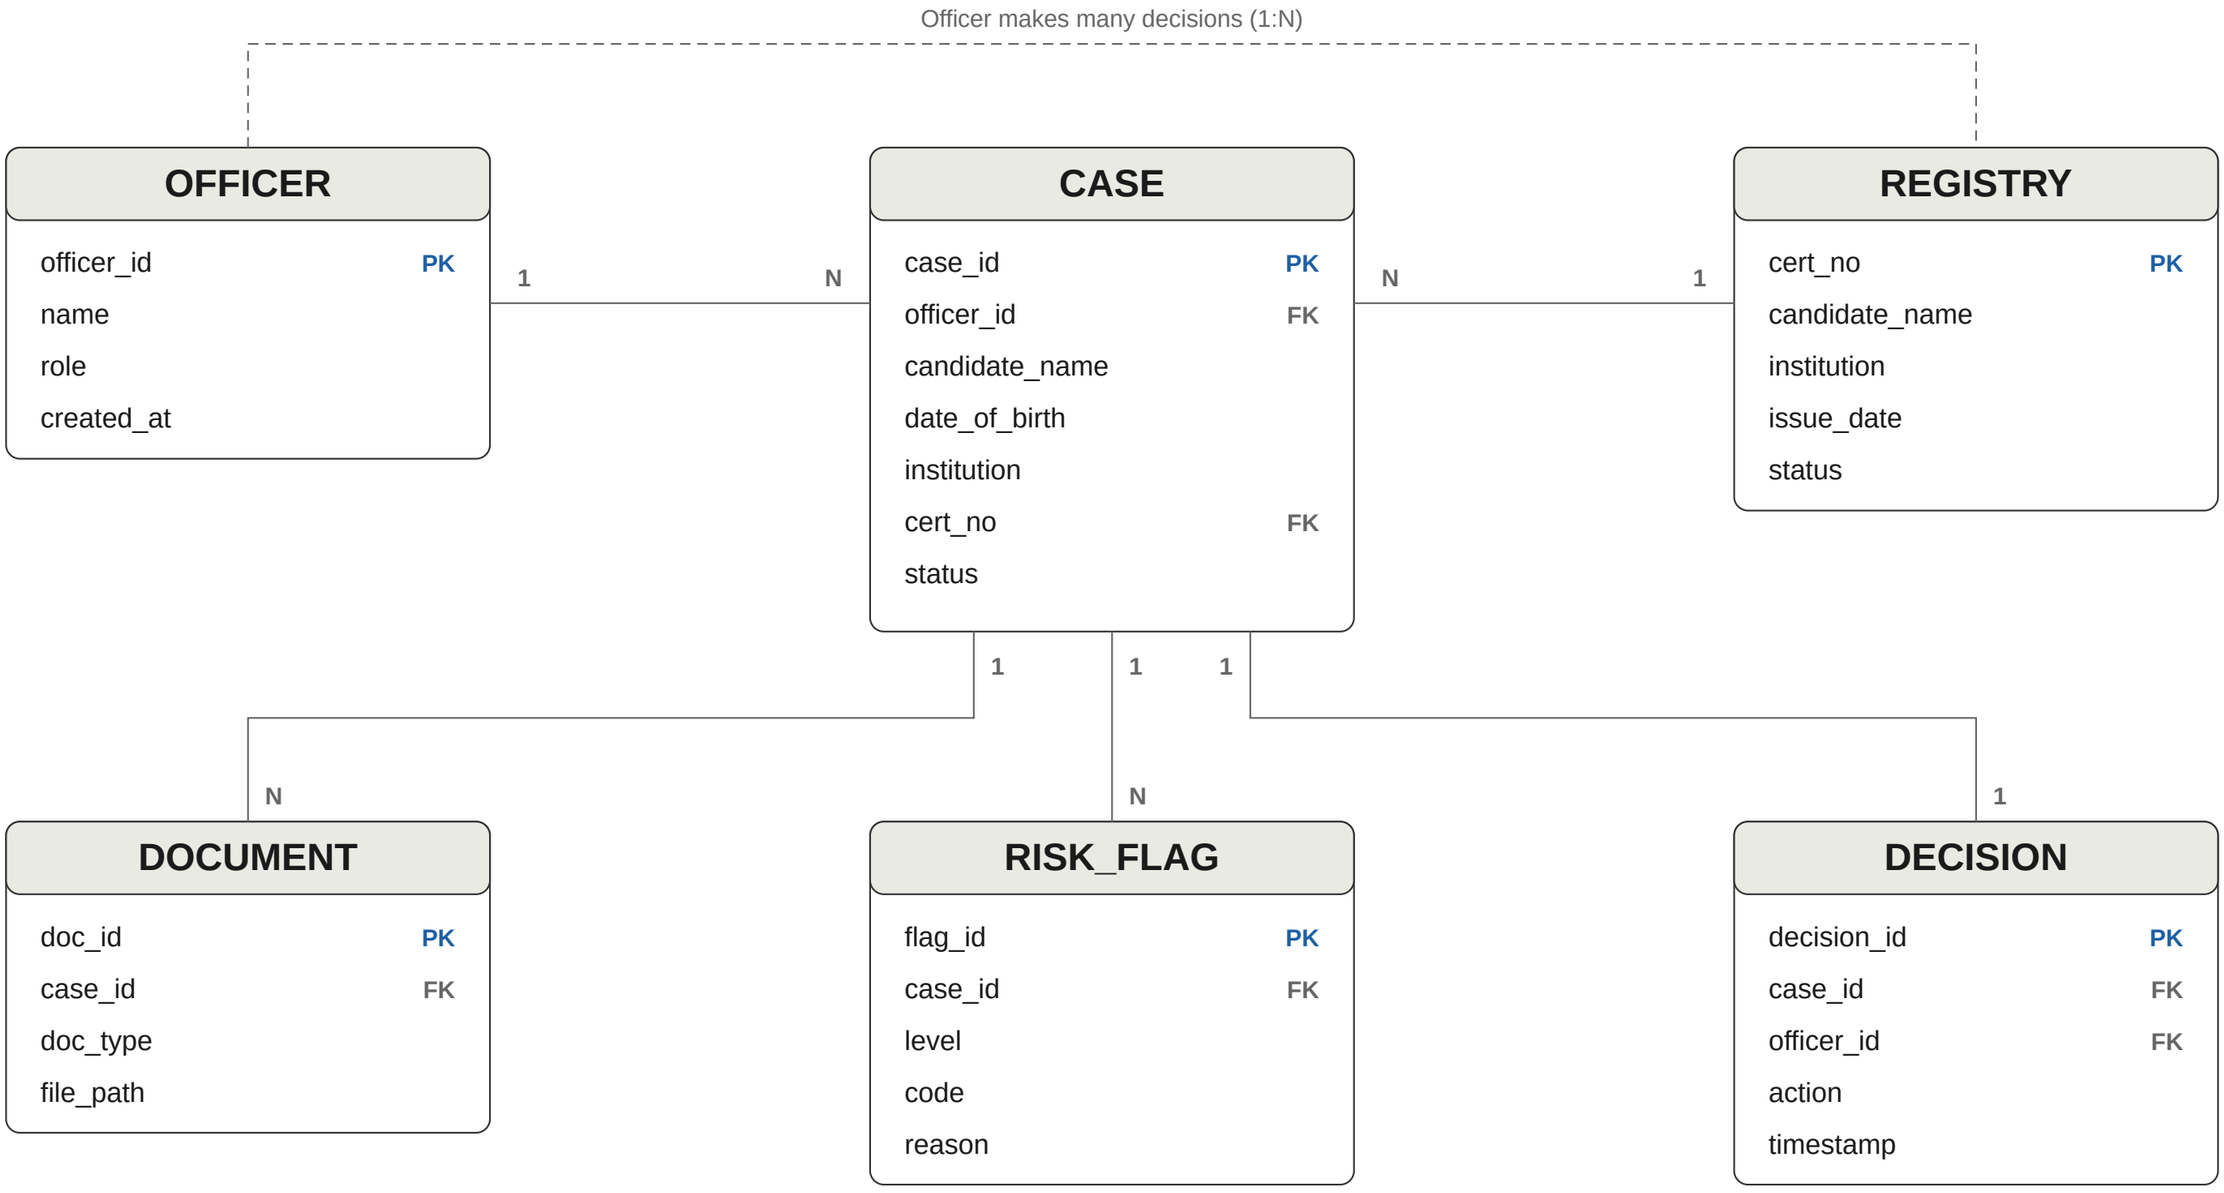

Legend: **PK** = primary key · **FK** = foreign key · **1 / N** labels show cardinality. **CASE** is the hub — every workflow starts by creating one, and Documents, Risk flags, and Decisions all reference it.

Runtime message flow


How the officer, UI, workflow engine, OCR, LLM, rules engine, and SQLite talk to each other over time for one case.
Solid arrows are calls; dashed arrows are returns.

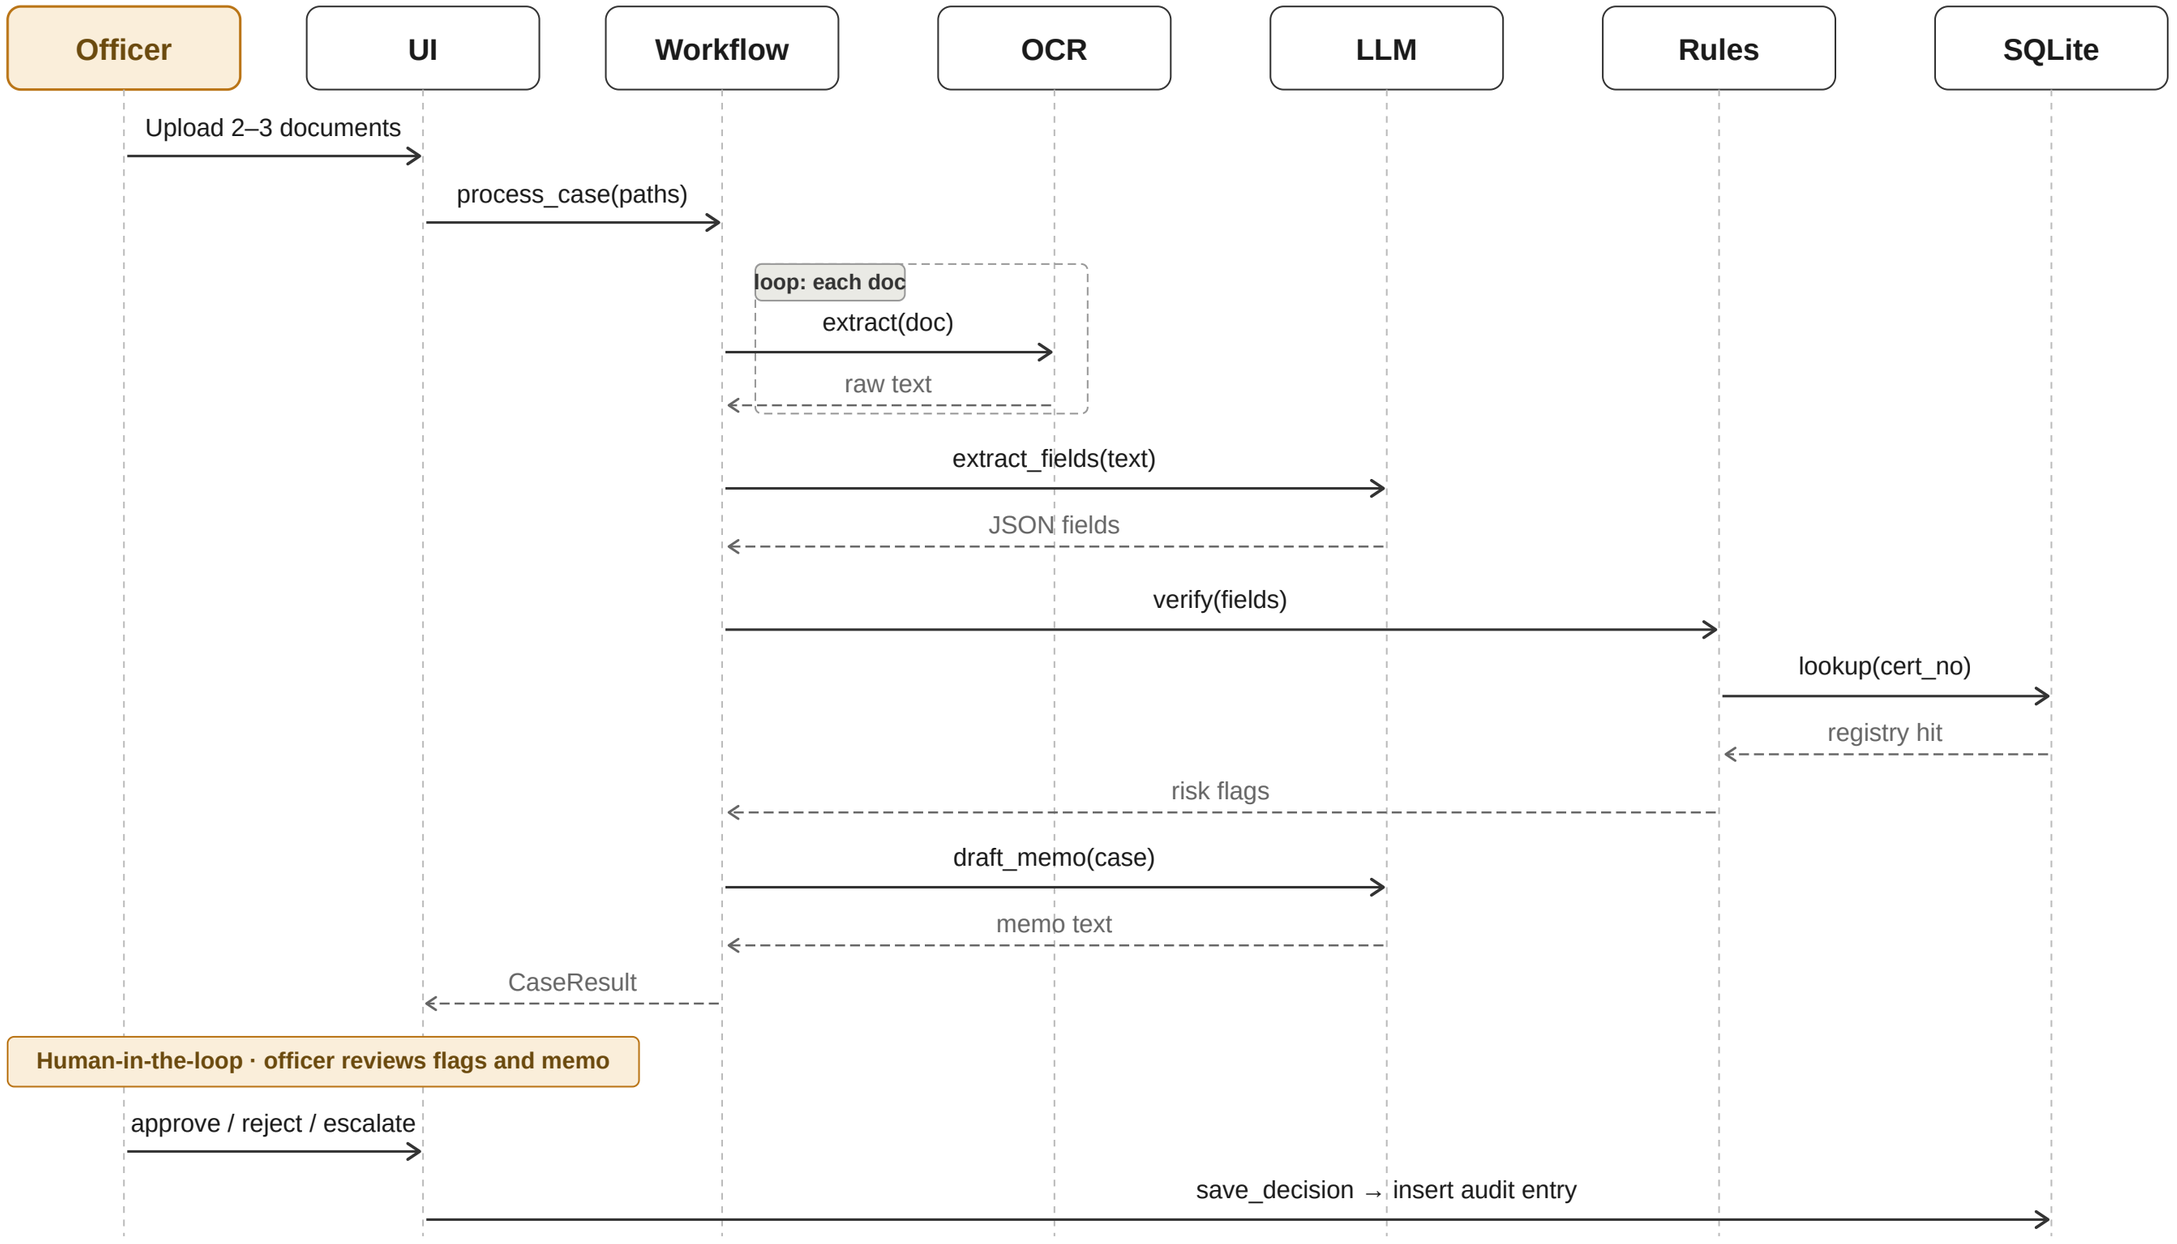

Reading order: top to bottom is time. Solid black arrows are calls; dashed gray arrows are returns. The **loop** block runs once per uploaded document. The amber band marks the only step where the officer takes action.

Code structure

How the codebase is organized: presentation on top, orchestrator underneath, services in the middle, and data classes at the bottom.

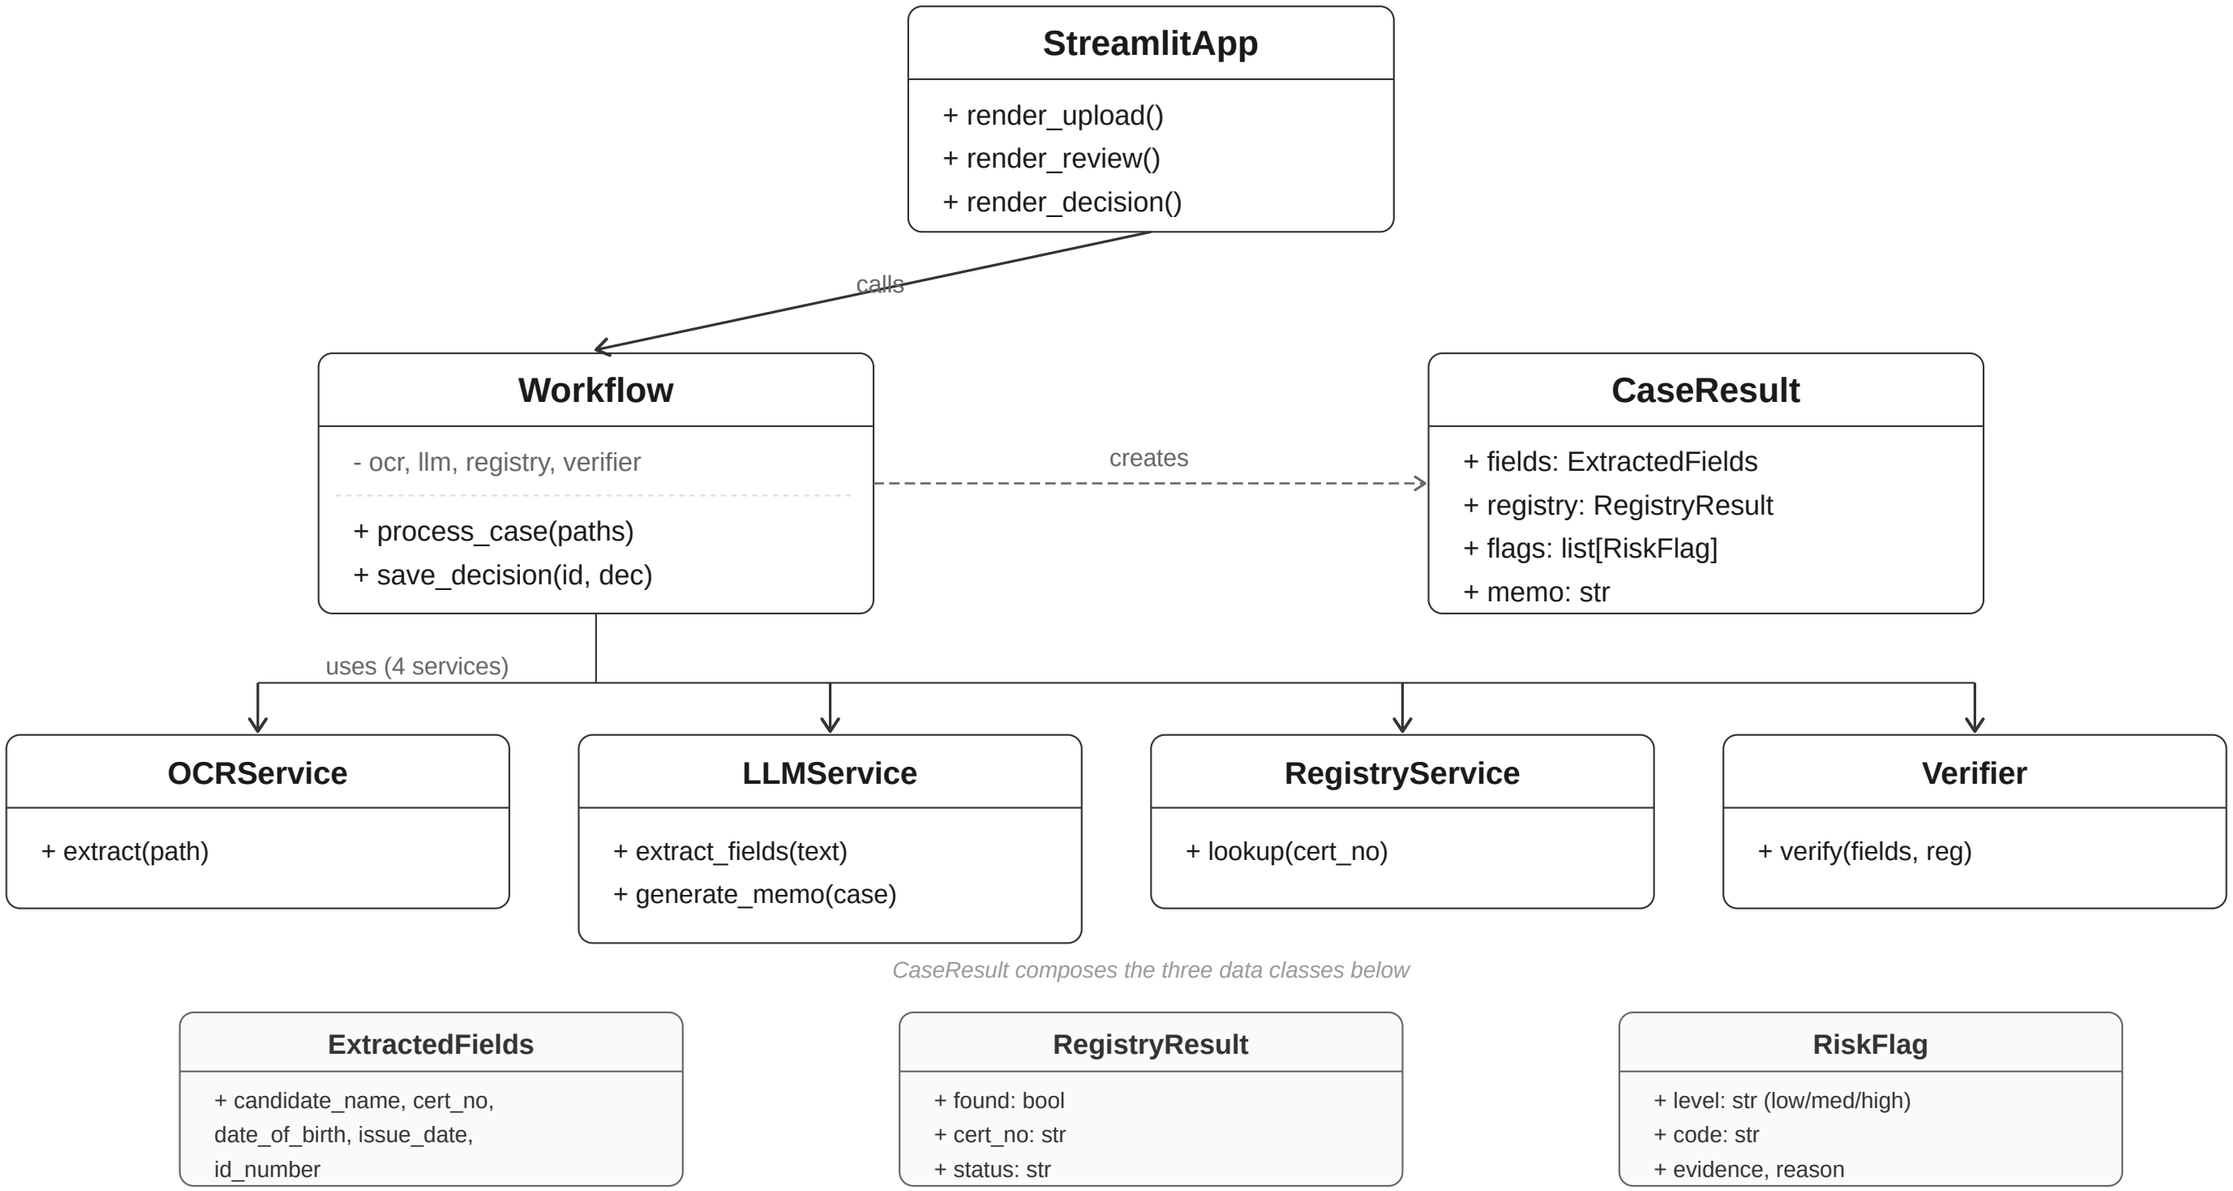

Reading order (top → bottom): Presentation (StreamlitApp) → Orchestrator (Workflow) → Services (OCR, LLM, Registry, Verifier) → Data classes. The Workflow class holds one instance of each service and calls them in sequence, producing a CaseResult that composes the three data classes at the bottom.