

---

# INTERPRETABLE MEDICAL IMAGERY DIAGNOSIS WITH SELF-ATTENTIVE TRANSFORMERS: A REVIEW OF EXPLAINABLE AI FOR HEALTH CARE

---

Tin Lai

School of Computer Science  
University of Sydney  
Australia

## ABSTRACT

Recent advancements in artificial intelligence (AI) have facilitated its widespread adoption in primary medical services, addressing the demand-supply imbalance in healthcare. Vision Transformers (ViT) have emerged as state-of-the-art computer vision models, benefiting from self-attention modules. However, compared to traditional machine-learning approaches, deep-learning models are complex and are often treated as a “black box” that can cause uncertainty regarding how they operate. Explainable Artificial Intelligence (XAI) refers to methods that explain and interpret machine learning models’ inner workings and how they come to decisions, which is especially important in the medical domain to guide the healthcare decision-making process. This review summarises recent ViT advancements and interpretative approaches to understanding the decision-making process of ViT, enabling transparency in medical diagnosis applications.

## 1 Introduction

Artificial intelligence (AI) has made significant strides in various domains in recent years, revolutionising industries and shaping how we approach complex problems. One of AI’s most remarkable applications is in medical imaging (Esteva et al. 2021), where it has brought about unprecedented advancements in automated image analysis, diagnosis, and decision-making. Medical images are one of the most common clinical diagnostic methods (Shung, Smith, and Tsui 2012). These images have properties that vary depending on the medical diagnosis and anatomical local such as skin (Hu, Vasu, and Hoogs 2022; Lucieri et al. 2022; Stieler, Rabe, and Bauer 2021; Lucieri et al. 2020), chest (Lenis et al. 2020; Hu, Vasu, and Hoogs 2022; Brunese, Mercaldo, Reginelli, and Santone 2020; Corizzo et al. 2021; Mondal, Bhattacharjee, Singla, and Prathosh 2021), brain (Bang et al. 2021; Li, Shi, and Hwang 2021), liver (Mohagheghi and Foruzan 2022), and others. Deep learning algorithms have found numerous critical applications in the healthcare domain, ranging from detecting diabetes (Hu, Lai, and Farid 2022), genomics (Yang et al. 2021), and mental health support (Lai, Shi, et al. 2023). Among the latest breakthroughs in computer vision models, Vision Transformers (ViT) (Dosovitskiy et al. 2020) have emerged as cutting-edge architecture, leveraging self-attention mechanisms to achieve state-of-the-art performance in various visual tasks.

As medical professionals increasingly rely on AI-powered systems to aid in diagnosis and treatment planning (Ker, Wang, Rao, and Lim 2017), the need for interpretability and transparency in AI models becomes paramount (MacDonald, Steven, and Trzaskowski 2022). Deep learning models, including ViTs, often exhibit highly complex and intricate internal representations, making it challenging for experts to comprehend their decision-making process. The opaque nature of these models raises concerns about their reliability and safety, especially in critical applications such as medical diagnostics, where accurate and trustworthy results are of utmost importance (Ghosh and Kandasamy 2020). *Explainable Artificial Intelligence* (XAI) is a burgeoning field that seeks to bridge the gap between the black-box nature of AI algorithms and the need for understandable and interpretable decision-making processes (Arrieta et al. 2020). XAI addresses a fundamental challenge: *How can we make AI’s decision-making process more transparent and comprehensible to both experts and non-experts?* While complex models might achieve impressive accuracy, their

inability to provide human-readable explanations hinders their adoption in critical applications such as healthcare, finance, and legal domains. This limitation not only undermines users' trust but also poses ethical and regulatory concerns. The integration of XAI can also lead to improved collaboration between AI systems and human experts, as well as the identification of novel patterns and insights that might have been overlooked otherwise.

In the realm of XAI, several techniques contribute to enhancing the transparency and trustworthiness of complex machine learning models. Local Interpretable Model-Agnostic Explanations (LIME) offer insights into any model's predictions by approximating its behavior with interpretable surrogate models (Ribeiro, Singh, and Guestrin 2016). LIME is model-agnostic, which means it is applicable to most AI models without relying on any specific model architecture. Gradient-based saliency methods, like Grad-CAM, illuminate the model-specific regions of input data that contribute most to predictions, fostering an understanding of where the model focuses its attention (Selvaraju et al. 2017). Furthermore, in medical domain, decision understanding is often achieved through interactive dashboards that visualise model outcomes and insights, allowing end-users to assess predictions, contributing factors, and uncertainties for informed decision-making. These concepts collectively illuminate the intricate inner workings of machine learning models, promoting transparency and user confidence.

This article explores recent advancements in Vision Transformers for medical image analysis and presents a concise review of interpretative approaches that understand the decision-making process of ViT models. Through a detailed analysis of state-of-the-art techniques, we aim to pave the way for transparent and reliable AI systems beneficial for medical diagnosis, ultimately improving patient outcomes and healthcare practices. In the following, we delve into general explainable AI in the medical industry and the method to quantify model output. Subsequently, we provide preliminaries on Vision Transformers, followed by the latest state-of-the-art approaches for interpreting and visualising the model output. Finally, we discuss the current direction of interpretable medical models and explore potential future directions.

## 2 Interpretable Model: eXplainable AI (XAI)

In recent years, AI has witnessed remarkable advancements, showcasing its potential to transform industries and reshape the way we interact with technology. From autonomous vehicles to medical diagnostics, AI systems are increasingly being integrated into various domains to make complex decisions and predictions. However, as AI applications become more ubiquitous, concerns have arisen regarding their transparency, accountability, and trustworthiness (Shin 2020). When AI model is used in mission critical applications like medical diagnosis (Balasubramaniam, Kauppinen, Hiekkonen, and Kujala 2022), Cybersecurity (Lai, Farid, Bello, and Sabrina 2023) or autonomous driving (Imai 2019), transparency enables stakeholders to comprehend the rationale behind the model's predictions, ensuring accountability, identifying potential biases, and facilitating trust in high-stakes scenarios.

Transparency in Machine Learning (ML), also known as interpretability or explainability, aims to uncover the inner workings of intricate models (Gilpin et al. 2018). From a human-centred design standpoint, transparency is not an inherent property of the ML model but rather a relationship between the algorithm and its users. Therefore, achieving transparency requires prototyping and user evaluations to develop solutions that promote transparency (Balasubramaniam, Kauppinen, Hiekkonen, and Kujala 2022). In specialised and high-stakes domains like medical image analysis, adhering to human-centred design principles proves challenging due to restricted access to end users and the knowledge disparity between users and ML designers.

The concept of eXplainable AI (XAI) (Arrieta et al. 2020) has emerged as a crucial research area that seeks to shed light on the inner workings of AI models and elucidate the factors contributing to their decisions. By providing interpretable insights into the decision-making process, XAI bridges the gap between the complexity of deep learning models and the human understanding required in critical domains like medical imaging. In the context of medical imaging, XAI holds immense potential to revolutionise how medical professionals interact with AI systems (Banerjee, Chakraborty, and Rathi Sr 2020). By uncovering the underlying rationales behind AI-generated diagnoses and highlighting the relevant features driving the decisions, XAI enhances medical practitioners' diagnostic accuracy and confidence and enables them to make informed and responsible clinical decisions (Loh et al. 2022). Ultimately, this can provide more confidence for medical professionals and patients to entrust the diagnosis recommendation and guide their decisions. Moreover, interpretable AI models facilitate the identification and rectification of biases, enabling fair and unbiased decision-making.

XAI methods allow end users, such as clinicians, to understand, verify, and troubleshoot the decisions made by these systems (Ahmad, Teredesai, and Eckert 2018). The interpretability of ML models is crucial for ensuring accountability and trust from physicians and patients. For instance, a model detecting pneumonia is less likely to be trusted if it cannot explain why a patient received that diagnosis. In contrast, a model that provides insights into its reasoning is more likely to be appreciated and accepted. Interpretable ML systems offer explanations that enable users to assess the reliability

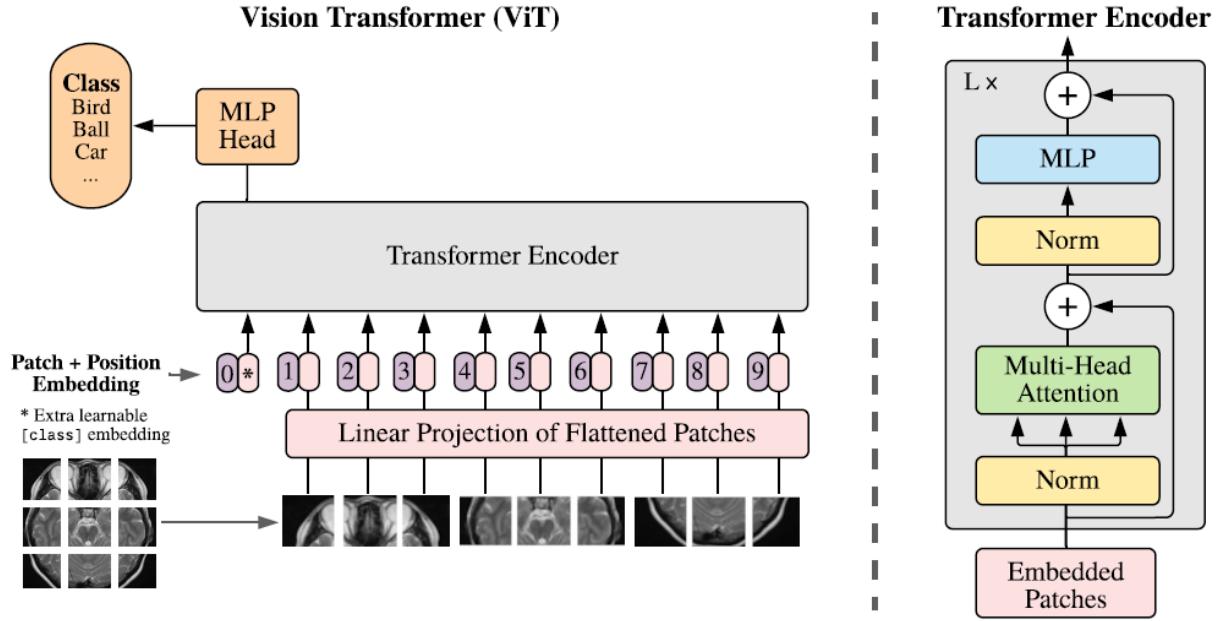


Figure 1: The basic framework of Vision Transformer (ViT) (Dosovitskiy et al. 2020) and its encoder architecture.

of forecasts and recommendations, helping them make informed decisions based on the underlying logic. Moreover, addressing the potential biases in machine learning systems is essential to ensure fair ratings for individuals of all racial and socioeconomic backgrounds (Burrell 2016). The widespread use of predictive algorithms, as seen in streaming services and social networks, has raised concerns about their societal impact, including the deskilling of professionals like doctors (Arnold 2021). Therefore, while the application of machine learning techniques in healthcare is inevitable, establishing standardised criteria for interpretable ML in this field is urgently needed to enhance transparency, fairness, and safety.

### 3 Primaries on Vision Transformer

Vision Transformer (ViT) (Dosovitskiy et al. 2020) is a deep learning model that has gained significant attention in computer vision. In contrast to traditional convolutional neural networks (CNNs), which have been the dominant architecture for image recognition tasks, ViT adopts a transformer-based architecture inspired by its success in natural language processing (NLP) (Vaswani et al. 2017). ViT breaks down an image into fixed-size patches, which are then linearly embedded and processed using a transformer encoder to capture global contextual information. This approach allows ViT to handle local and global image features effectively, leading to remarkable performance in various computer vision tasks, including image classification and object detection.

Generally, a vision Transformer consists of a patch embedding layer and several consecutively connected encoders, as depicted in Fig. 1. The self-attention layer is the key component that enables ViT to achieve many state-of-the-art vision recognition performances. The self-attention layer first transforms the input image into three different vectors—the query vector, the key vector, and the value vector. Subsequently, the attention layer then computes the scores between each pair of vectors and determines the degree of attention when given other tokens.

Formally, given an image  $x \in \mathbb{R}^{H \times W \times 3}$ , the patch embedding layer first splits and flattens the sample  $x$  into sequential patches  $x_p \in \mathbb{R}^{N \times (P^2 d)}$ , where  $(H, W)$  represents the *height* and *width* of the input image,  $(P, P)$  is the resolution of each image patch,  $d$  denotes the output channel, and  $N = HW/P^2$  is the number of image tokens. The list of patch tokens is further fed into Transformer encoders for attention calculation.

Each Transformer encoder mainly consists of two types of sub-layers—a multi-head self-attention layer (MSA) and an MLP layer. In MSA, the tokens are linearly projected and further re-formulated into three vectors, namely  $\mathbf{Q}$ ,  $\mathbf{K}$  and  $\mathbf{V}$ . The self-attention calculation is performed on  $\mathbf{Q}$ ,  $\mathbf{K}$  and  $\mathbf{V}$  by

$$x'_\ell = \text{Attention}(\mathbf{Q}, \mathbf{K}, \mathbf{V}) = \text{Softmax}\left(\frac{\mathbf{Q} \cdot \mathbf{K}^\top}{\sqrt{d}}\right) \cdot \mathbf{V}, \quad (1)$$

where  $x'_\ell$  are the tokens produced by MSA at the  $\ell$ -th layer. We can formulate self-attention as The output tokens  $x'_\ell$  are further normalised with Layer Normalisation (LN) and sent to an MLP block which consists of two fully connected layers with a GELU activation (Hendrycks and Gimpel 2016) in between. This process is formally formulated as follows,

$$x_\ell = \text{MLP}(\text{LN}(x'_\ell)) + x'_\ell, \quad (2)$$

where  $x_\ell$  is the output of the  $\ell$ -th encoder block. At the last transformer layer, the high-dimensional embeddings are used for various downstream tasks, e.g., using the embeddings for training an object recognition model.

## 4 Explainability Methods in XAI

The importance of interpretability in machine learning models is widely acknowledged, but defining what constitutes interpretability remains a challenge (Lipton 2016). Various definitions have been proposed, emphasising openness, accuracy, reliability, and understandability (Lipton 2016; Freitas 2014). However, these definitions often overlook the user's perspective, and their needs are not adequately addressed in the produced explanations (Miller 2017). This is especially relevant in interpretable machine learning systems, where the audience's understanding and trust in the models are crucial.

Interpretability becomes even more critical in medical imaging as it influences clinicians' decision-making and patients' acceptance of the model's predictions. Interpretable machine learning systems offer valuable insights into their reasoning, helping users, such as clinicians, comprehend and verify predictions, ensuring fairness and unbiased outcomes for diverse populations. As deep learning algorithms find numerous applications in healthcare, the demand for interpretable models grows, necessitating the establishment of uniform criteria for interpretable ML in this vital domain. The following summarises explainability methods that are commonly used in the XAI field.

### 4.1 Gradient-weighted Class Activation Mapping (Grad-CAM) Method

Grad-CAM is a gradient-based interpretability technique introduced by Selvaraju et al. (Selvaraju et al. 2017) that aims to generate a localisation map of the significant regions in an image that contribute the most to the decision made by a neural network. Leveraging the spatial information retained in convolutional layers, Grad-CAM utilises the gradients propagated to the last convolutional layer to attribute importance values to each network neuron with respect to the final decision. An appealing advantage of Grad-CAM over similar methods is its applicability without requiring re-training or architectural changes, making it readily adaptable to various CNN-based models. Moreover, combined with Guided Backpropagation through element-wise multiplication, known as Guided Grad-CAM, it enables the generation of high-resolution and class-discriminative visualizations (Selvaraju et al. 2017).

#### 4.1.1 Saliency Maps

Saliency Maps, introduced by Simonyan et al. (Simonyan, Vedaldi, and Zisserman 2013), is a gradient-based visualisation technique that sheds light on the contribution of individual pixels in an image to its final classification made by a neural network. This method involves a backward pass through the network to calculate the gradients of the loss function with respect to the input's pixels (Molnar 2020). Doing so reveals the impact of each pixel during the back-propagation step, providing insights into how much each pixel affects the final classification, particularly concerning a specific class of interest. The results from Saliency Maps can be interpreted as another image, either the same size as the input image or easily projectable onto it, highlighting the most important pixels that attribute the image to a specific class (Simonyan, Vedaldi, and Zisserman 2013).

#### 4.1.2 Concept Activation Vectors (CAVs)

Concept Activation Vectors (CAVs) (Kim et al. 2017) represents an interpretability technique that offers global explanations for neural networks based on user-defined concepts (Molnar 2020). To leverage CAVs, two datasets need to be gathered: one containing instances relevant to the desired concept and the other comprising unrelated images serving as a random reference. For a specific instance, a binary classifier is trained on these two datasets to classify between instances related to the concept of interest and unrelated ones. The CAV is then derived as the coefficient vector of this binary classifier. Testing with CAVs (TCAVs) allows averaging the concept-based contributions from the relevant dataset and comparing them to the contributions from the random dataset regarding the class of interest. Consequently, CAVs establish connections between high-level user-defined concepts and classes, both positively and negatively. This approach is particularly useful in the medical field, where medical specialists can conveniently relate the defined concepts with existing classes without delving into the intricacies of neural networks (Kim et al. 2017).

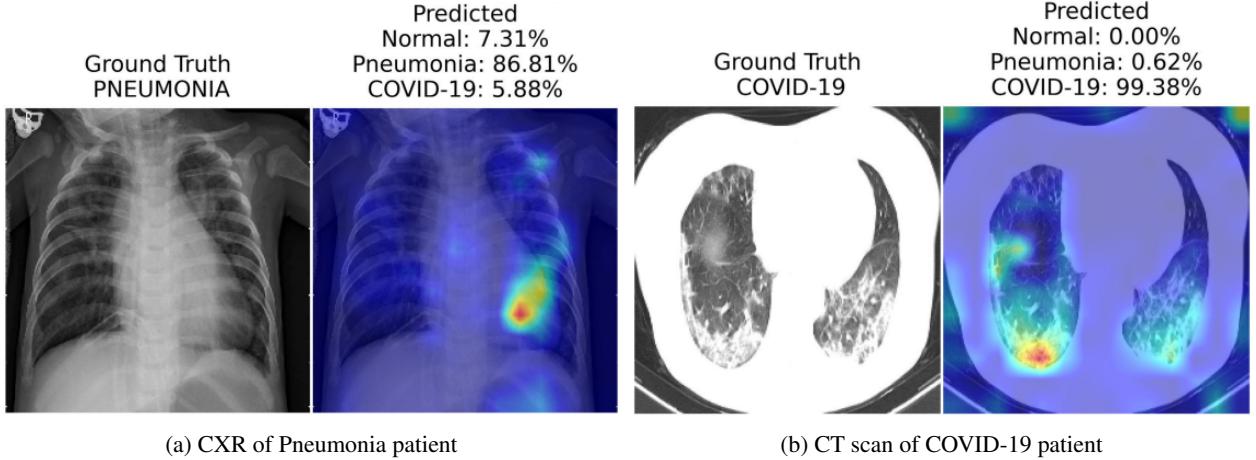


Figure 2: Visualisation of interpreting results of xViTCOS (Mondal, Bhattacharjee, Singla, and Prathosh 2021) using explainability method in (Chefer, Gur, and Wolf 2021a). The figures highlight the associated critical factors that explain the model’s decision-making.

#### 4.1.3 Deep Learning Important Features (DeepLift)

Deep Learning Important FeaTures, commonly known as DeepLift (Shrikumar, Greenside, and Kundaje 2017), is an explainability method capable of determining contribution scores by comparing the difference in neuron activation to a reference behaviour. By employing backpropagation, DeepLift quantifies the contribution of each input feature when decomposing the output prediction. By comparing the output difference between the original input and a reference input, DeepLift can assess how much an input deviates from the reference. One of the significant advantages of DeepLift is its ability to overcome issues related to gradient zeroing or discontinuities, making it less susceptible to misleading biases and capable of recognising dependencies that other methods may overlook. However, carefully considering the reference input and output is essential for achieving meaningful results using DeepLift (Shrikumar, Greenside, and Kundaje 2017).

#### 4.1.4 Layer-wise Relevance Propagation (LRP)

Layer-wise Relevance Propagation (LRP) (Bach et al. 2015) is an explainability technique that provides transparent insights into complex neural network models, even with different input modalities like text, images, and videos. LRP propagates the prediction backward through the model, ensuring that the neurons' received relevance is equally distributed among the lower layers. The proper set of parameters and LRP rules make achieving high-quality explanations for intricate models feasible.

#### 4.1.5 Guided Backpropagation

Guided Backpropagation (Springenberg, Dosovitskiy, Brox, and Riedmiller 2014) is an explanation method that combines ReLU and deconvolution, wherein at least one of these is applied with masked negative values. By introducing a guidance signal from the higher layer to the typical backpropagation process, Guided Backpropagation prevents the backward flow of negative gradients, corresponding to the neurons that decrease visualised activation of the higher layer unit. This technique is particularly effective without switching, allowing visualisation of a neural network's intermediate and last layers.

## 5 Vision Transformer for Medical Images

ViTs have proven to be effective in solving a wide range of vision problems, thanks to their capability to capture long-range relationships in data. Unlike CNNs, which rely on the inductive bias of locality within their convolutional layers, vanilla ViTs directly learn these relationships from the data. However, the success of ViTs has also brought challenges in interpreting their decision-making process, mainly due to their long-range reasoning capabilities. In this section, we will first review some applications of ViTs in medical domains, where they are used as black box methods. Subsequently, we will discuss other models that aim to interpret ViT's model output and provide explanations for their predictions.

### 5.1 Black Box Methods

TransMed (Dai, Gao, and Liu 2021) is a pioneering work that introduces the use of Vision Transformers (ViTs) for medical image classification. Their architecture, TransMed, combines the strengths of Convolutional Neural Networks (CNNs) for extracting low-level features and ViTs for encoding global context. TransMed focuses on classifying parotid tumours in multi-modal MRI medical images and employs a novel image fusion strategy to effectively capture mutual information from different modalities, yielding competitive results on their privately collected parotid tumour classification dataset.

Lu et al. (Lu et al. 2021) propose a two-stage framework for glioma sub-type classification in brain images. The framework performs contrastive pre-training and then uses a transformer-based sparse attention module for feature aggregation. Their approach demonstrates its effectiveness through ablation studies on the TCGA-NSCLC (Napel and Plevritis 2014) dataset. Gheflat and Rivaz (Gheflat and Rivaz 2021) systematically evaluates pure and hybrid pre-trained ViT models for breast cancer classification. Their experiments on two breast ultrasound datasets show that ViT-based models outperform CNNs in classifying images into benign, malignant, and normal categories.

Several other works employ hybrid Transformer-CNN architectures for medical image classification in different organs. For instance, Khan and Lee (Khan and Lee 2021) propose Gene-Transformer to predict lung cancer subtypes, showcasing its superiority over CNN baselines on the TCGA-NSCLC (Napel and Plevritis 2014) dataset. Chen, Li, Li, et al. (Chen, Li, Li, et al. 2021) presents a multi-scale GasHis-Transformer for diagnosing gastric cancer in the stomach, demonstrating strong generalisation ability across other histopathological imaging datasets. Jiang, Dong, Wang, and Jiang (Jiang, Dong, Wang, and Jiang 2021) propose a hybrid model combining convolutional and transformer layers for diagnosing acute lymphocytic leukemia, utilising a symmetric cross-entropy loss function.

### 5.2 Interpretable Vision Transformer

Interpretable vision models aim to reveal the most influential features contributing to a model’s decision. We can visualise the most influential region contributing to ViT’s predictions with methods such as saliency-based techniques and Grad-CAM. Thanks to their interpretability, these models are particularly valuable in building trust among physicians and patients, making them suitable for practical implementation in clinical settings. Table 1 provides a high-level overview of existing state-of-the-art interoperability methods that are specifically designed for transformer models. Naïve method that only visualises the last attentive block will often be uninformative. In addition, some interoperability methods might be class-agnostic, which means the visualisation remains the same for the prediction of all classes (e.g. rollout (Abnar and Zuidema 2020)). In contrast, some correlation methods can illustrate different interpretation results for different target classification results (e.g. transformer attribution (Chefer, Gur, and Wolf 2021a)).

ViT-based methods can be used for COVID-19 diagnosis (Park et al. 2021), where the low-level CXR features can be extracted from a pre-trained self-supervised backbone network. SimCLR (Chen, Kornblith, Norouzi, and Hinton 2020) is a popular backbone using contrastive-learning-based model training methods. The backbone network extracts abnormal CXR feature embeddings from the CheXpert dataset (Irvin et al. 2019). The ViT model then uses these embeddings for high-level COVID-19 diagnosis. Extensive experiments on three CXR test datasets from different hospitals show their approach’s superiority over CNN-based models. They also validate the generalisation ability of their method and use saliency map visualisations (Chefer, Gur, and Wolf 2021a) for interpretability. Similarly, COVID-ViT (Gao, Qian, and Gao 2021) is another ViT-based model for classifying COVID from non-COVID images in the MIA-COVID19 challenge (Kollias, Arsenos, Soukissian, and Kollias 2021). Their experiments on 3D CT lung images demonstrate the ViT-based approach’s superiority over the DenseNet baseline (Huang, Liu, Van Der Maaten, and Weinberger 2017) in terms of F1 score.

In another work, Mondal, Bhattacharjee, Singla, and Prathosh (Mondal, Bhattacharjee, Singla, and Prathosh 2021) introduce xViTCOS for COVID-19 screening from lungs CT and X-ray images (see Fig. 2). The xViTCOS model is first pre-trained on ImageNet to learn generic image representations, which is then further fine-tuned on a large chest radiographic dataset. Additionally, xViTCOS employs an explainability-driven saliency-based approach (Chefer, Gur, and Wolf 2021a) with clinically interpretable visualisations to highlight critical factors in the predictions. The model is experimentally evaluated on the COVID CT-2A dataset (Gunraj, Sabri, Koff, and Wong 2021) for Chest X-ray, which is effective in identifying abnormal cases.

Shome et al. (Shome et al. 2021) have introduced another ViT-based model for the diagnosis of COVID-19 infection at a large scale. They combined multiple open-source COVID-19 CXR datasets to accomplish this, forming a comprehensive multi-class and binary classification dataset. In order to enhance visual representation and model interpretability, they implemented Grad-CAM-based visualization (Selvaraju et al. 2017). The Transformer-based Multiple Instance Learning (TransMIL) architectures proposed by Shao *et al.* (Shao et al. 2021) aims to address whole slide brain tumour classification. Their approach involves embedding patches from whole slide images (WSI) into the feature space of a

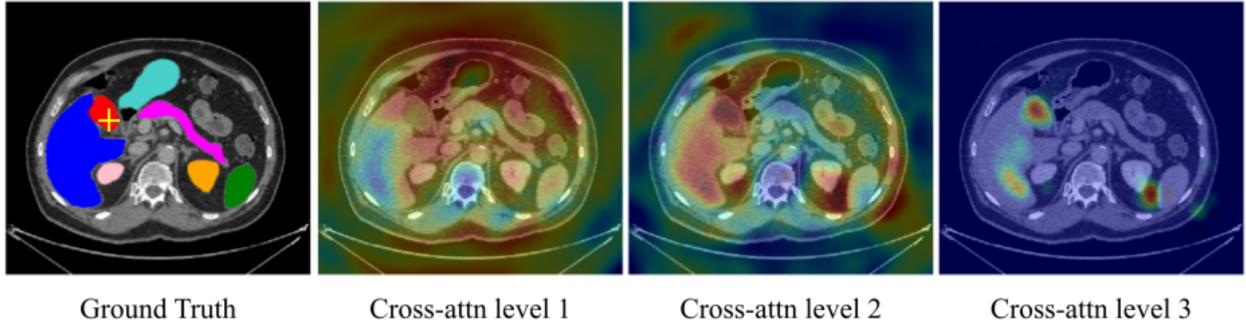


Figure 3: Cross-attention maps with U-Transformer (Petit et al. 2021) for the yellow-crossed pixel (left image). The attention maps at each level highlight the different regions contributing to the segmentation. Cross-attention Level 1 is an earlier layer focusing on a wide image region. In contrast, Cross-attention Level 3, which is closer to the model output, corresponds to high-resolution feature maps and focuses on more specific regions that explain its predictions.

ResNet-50 model. Subsequently, the sequence of embedded features undergoes a series of processing steps in their proposed pipeline, including squaring the sequence, correlation modelling, conditional position encoding using the Pyramid Position Encoding Generator (PPEG) module, local information fusion, feature aggregation, and mapping from the transformer space to the label space. This innovative approach holds promise for accurate brain tumour classification, as illustrated in their work (Shao et al. 2021). The self-attention module in transformers can leverage global interactions between encoder features, while cross-attention in the skip connections allows a fine spatial recovery. For example, Fig. 3 highlights the attention level across the whole image for a segmentation task in a U-Net Transformer architecture (Petit et al. 2021; Huang, Xing, Gao, and Yang 2022).

In whole slide imaging (WSI) based pathology diagnosis, annotating individual instances can be expensive and laborious. Therefore, a label is assigned to a set of instances known as a "bag." This weakly supervised learning type is called Multiple Instance Learning (MIL) (Fung, Dundar, Krishnapuram, and Rao 2007), where a bag is labelled positive if at least one instance is positive or negative when all instances in a bag are negative. However, most current MIL methods assume that the instances in each bag are independent and identically distributed, overlooking any correlations among different instances.

To address this limitation, Shao et al. (Shao et al. 2021) proposes TransMIL, a novel approach that explores morphological and spatial information in weakly supervised WSI classification. Their method aggregates morphological information using two transformer-based modules and a position encoding layer. To encode spatial information, they introduce a pyramid position encoding generator. TransMIL achieves state-of-the-art performance on three computational pathology datasets: CAMELYON16 (breast) (Bejnordi et al. 2017), TCGA-NSCLC (lung) (Napel and Plevritis 2014), and TCGA-R (kidney). Their approach demonstrates superior performance and faster convergence than CNN-based state-of-the-art methods, making it a promising and interpretable solution for histopathology classification. Attention-based ViT can further derive instance probability for highlighting regions of interest. For example, AB-MIL (Zhang et al. 2022) uses the derivation of instance probability for feature distillation as shown in Fig. 4. The attentive method can also be used for interpreting the classification of retinal images (Playout, Duval, Boucher, and Cheriet 2022).

For the diagnosis of lung tumours, Zheng et al. (Zheng et al. 2021) proposes the graph transformer network (GTN), leveraging the graph-based representation of WSI. GTN consists of a graph convolutional layer (Kipf and Welling 2016), a transformer, and a pooling layer. Additionally, GTN utilises GraphCAM (Chefer, Gur, and Wolf 2021a) to identify regions highly associated with the class label. Thorough evaluations on the TCGA dataset (Napel and Plevritis 2014) demonstrate the effectiveness of GTN in accurately diagnosing lung tumours. This graph-based approach provides valuable insights into the spatial relationships among regions, enhancing the interpretability of the classification results.

## 6 Conclusion

In this review, we explored the advancements and applications of interpretability techniques in the context of deep learning algorithms applied to various domains, with a particular focus on the medical field. Interpretable machine learning models have become increasingly essential as complex models like Transformers and Vision Transformers (ViTs) gain popularity due to their impressive performance in various tasks.

Approach	Class Specific?	Metrics				Highlights and Summary
		Pixel Acc.	mAP	mF1	mIoU	
Raw Attention		67.87	80.24	29.44	46.37	Raw attention only consider the attention map of the last block of the transformer architecture
Rollout <sup>1</sup>		73.54	84.76	43.68	55.42	Rollout assume a linear Combination of tokens and quantify the influence of skip connections with identity mateix
GradCAM <sup>2</sup>	✓	65.91	71.60	19.42	41.30	Provides a class-specific explanation by adding weights to gradient based feature map
Partial LRP <sup>3</sup>		76.31	84.67	38.82	57.95	Considers the information flow within the network by identifying the most important heads in each encoder layer through relevance propagation
Transformer Attribution <sup>4</sup>	✓	76.30	85.28	41.85	58.34	Combines relevancy and attention-map gradient by regarding the gradient as a weight to the relevance for certain prediction task
Generic Attribution <sup>5</sup>	✓	79.68	85.99	40.10	61.92	Generic attribution extends the usage of Transformer attribution to co-attention and self-attention based models with a generic relevancy update rule
Token-wise Approx. <sup>6</sup>	✓	82.15	88.04	45.72	66.32	Uses head-wise and token-wise approximations to visualise tokens interaction in the pooled vector with noise-decreasing strategy

Table 1: Summary table on interoperability approaches for transformer models. *Class-specific* refers to whether the approach can attribute different attentive scores that are specific to the predicted class (in multi-class predictions). *Metrics* used to evaluate each methods are *Pixel Accuracy*, *mean Average Precision (mAP)*, *mean F1 score (mF1)*, and *mean Intersection over Union (mIoU)*.

<sup>1</sup>(Abnar and Zuidema 2020) <sup>2</sup>(Selvaraju et al. 2017) <sup>3</sup>(Voita et al. 2019) <sup>4</sup>(Chefer, Gur, and Wolf 2021a) <sup>5</sup>(Chefer, Gur, and Wolf 2021b) <sup>6</sup>(Chen, Li, Yu, et al. 2022)

We discussed several interpretability methods, such as Grad-CAM and Saliency Maps, which provide insights into the decision-making process of deep learning models. These methods allow users, including medical practitioners and researchers, to understand and trust the predictions made by these models. Moreover, they enable the identification of biases, contributing factors, and regions of importance, leading to more informed and accountable decision-making. Medical images play a crucial role in clinical diagnostics, offering valuable insights into various anatomical areas. Deep learning algorithms have shown exceptional capabilities in healthcare applications, including medical image analysis and patient risk prediction. However, interpretability is particularly important in medical image analysis as it empowers end-users, such as clinicians and patients, to understand and trust the model’s decisions. Interpretable machine learning models provide explanations behind their predictions, allowing users to assess and validate the output before making critical decisions. This transparency is essential for ensuring fairness, mitigating biases, and building trust in machine learning systems, especially in healthcare. By fostering transparency and accountability, interpretable ML in medical imaging has the potential to revolutionise patient care and enhance healthcare practices globally.

In the medical domain, interpretable deep learning models have shown promising results in various applications, such as COVID-19 diagnosis, brain tumour classification, breast cancer detection, and lung tumour subtyping. By visualising

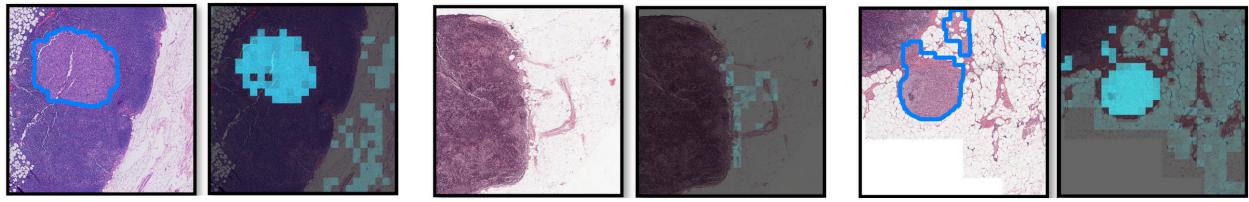


Figure 4: Visualise the probability derivation output from (Zhang et al. 2022) lung cancer region detection. Each pair of images contains (left) ground truth with the tumour regions delineated by blue lines and (right) the probability derivation output. Brighter cyan colours indicate higher probabilities of being tumours for the corresponding locations. We can see that most high cyan region localises the positive detection regions.

the learned features and attention scores, these models achieve high accuracy and provide valuable insights into disease detection and classification, ultimately improving patient care and treatment decisions.

## 7 Limitation and Future Directions

There are several limitations that ViTs might exhibit when applied in the medical imagery domain. While the global context understanding is one of the strengths of self-attentive ViTs, it can also become a limitation. In certain tasks where local features are crucial, ViTs might struggle to focus on specific localised patterns, potentially leading to suboptimal performance. Therefore, ViTs are often paired with convolutional layers to account for feature extraction in the local-scale (Xie, Zhang, Shen, and Xia 2021). Self-attentive ViTs also often require large amounts of training data to generalise well, which is a limitation in the medical domain as collecting large annotated datasets is challenging. In addition, self-attention mechanisms, especially when applied to large input images, can be computationally expensive. The quadratic complexity of self-attention hampers its scalability to high-resolution images, making it less efficient compared to convolutional neural networks (CNNs) for some tasks. Training large ViT models with medical images can often be a practical difficulty due to the computational resources that it required when paired with high-resolution medical images. As a result, small clinics without access to high-performing computational resources might need to rely on external resources to train or infer ViT models.

While interpretable machine learning has made significant progress, several exciting avenues exist for future research and development. For example, developing unified frameworks that **combine multiple interpretability techniques** can provide a more comprehensive understanding of model decisions. These frameworks should be scalable and adaptable to various deep learning architectures, enabling users to choose the most suitable methods for their specific applications. The uncertainty within the dataset should also be quantifiable. **Integrating uncertainty estimation** into interpretable models can enhance their reliability and robustness. Uncertainty quantification can be crucial, especially in critical medical decision-making scenarios, where a model's confidence can significantly impact patient outcomes. Fig. 5 illustrates an example of using uncertainty estimation for improving the medical image segmentation with a transformer-based model. In particular, the proposed model in (Wang et al. 2022) takes medical images as input and generates an uncertainty map representation in an unsupervised manner. Then, the uncertain region in the uncertainty map is used to reduce the possibility of noise sampling, and to encourage consistent network outputs. Such an approach can then predict classes with a greater degree of separation (see right of Fig. 5), which in turn improve the transparency for medical diagnosis with less miss-classification. A similar approach that addresses uncertainty within the dataset can often encourage models to produce grounded predictions. By addressing these future directions, we can enhance the trust, transparency, and effectiveness of deep learning models in medical applications, ultimately improving patient outcomes and healthcare practices.

## References

- Esteva, A., K. Chou, S. Yeung, N. Naik, A. Madani, A. Mottaghi, Y. Liu, E. Topol, J. Dean, and R. Socher (2021). “Deep learning-enabled medical computer vision”. In: *NPJ digital medicine* 4.1, p. 5.
- Shung, K. K., M. B. Smith, and B. M. Tsui (2012). *Principles of medical imaging*. Academic Press.
- Hu, B., B. Vasu, and A. Hoogs (2022). “X-MIR: EXplainable Medical Image Retrieval”. In: *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pp. 440–450.
- Lucieri, A., M. N. Bajwa, S. A. Braun, M. I. Malik, A. Dengel, and S. Ahmed (2022). *ExAID: A Multimodal Explanation Framework for Computer-Aided Diagnosis of Skin Lesions*.

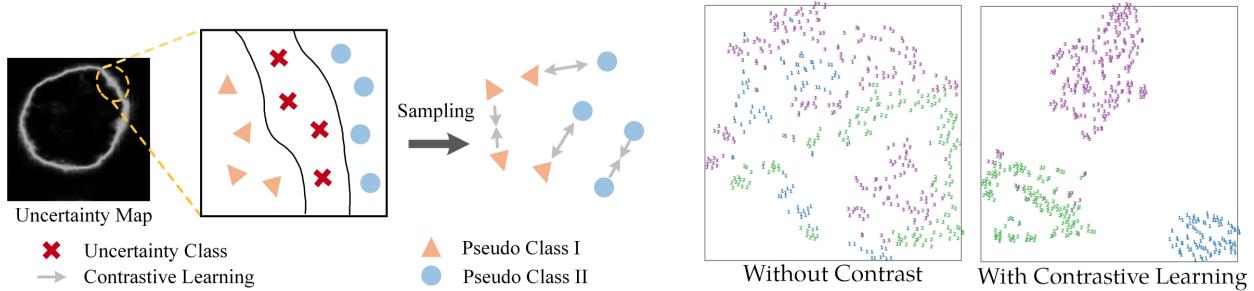


Figure 5: Visualising results of incorporating contrastive learning in using CNN-transformer decoder (Wang et al. 2022). (Left) Using uncertainty region as a guidance to implements contrastive learning in medical images in an unsupervised manner. (Right) Visualising the separation of predicted categories, with and without contrastive learning (dimensional reduction using t-SNE algorithm; colours of markers represent pixel categories).

- Stieler, F., F. Rabe, and B. Bauer (2021). “Towards Domain-Specific Explainable AI: Model Interpretation of a Skin Image Classifier using a Human Approach”. In: *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pp. 1802–1809.
- Lucieri, A., M. N. Bajwa, S. A. Braun, M. I. Malik, A. Dengel, and S. Ahmed (2020). “On interpretability of deep learning based skin lesion classifiers using concept activation vectors”. In: *2020 international joint conference on neural networks (IJCNN)*. IEEE, pp. 1–10.
- Lenis, D., D. Major, M. Wimmer, A. Berg, G. Sluiter, and K. Bühler (2020). “Domain aware medical image classifier interpretation by counterfactual impact analysis”. In: *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, pp. 315–325.
- Brunese, L., F. Mercaldo, A. Reginelli, and A. Santone (2020). “Explainable deep learning for pulmonary disease and coronavirus COVID-19 detection from X-rays”. In: *Computer Methods and Programs in Biomedicine* 196, p. 105608.
- Corizzo, R., Y. Dauphin, C. Bellinger, E. Zdravevski, and N. Japkowicz (2021). “Explainable image analysis for decision support in medical healthcare”. In: *2021 IEEE International Conference on Big Data (Big Data)*. IEEE, pp. 4667–4674.
- Mondal, A. K., A. Bhattacharjee, P. Singla, and A. Prathosh (2021). “xViTCOS: explainable vision transformer based COVID-19 screening using radiography”. In: *IEEE Journal of Translational Engineering in Health and Medicine* 10, pp. 1–10.
- Bang, J.-S., M.-H. Lee, S. Fazli, C. Guan, and S.-W. Lee (2021). “Spatio-Spectral Feature Representation for Motor Imagery Classification Using Convolutional Neural Networks”. In: *IEEE Transactions on Neural Networks and Learning Systems* PP, pp. 1–12.
- Li, J., H. Shi, and K.-S. Hwang (2021). “An explainable ensemble feedforward method with Gaussian convolutional filter”. In: *Knowledge-Based Systems* 225, p. 107103.
- Mohagheghi, S. and A. H. Foruzan (2022). “Developing an explainable deep learning boundary correction method by incorporating cascaded x-Dim models to improve segmentation defects in liver CT images”. In: *Computers in Biology and Medicine* 140, p. 105106.
- Hu, H., T. Lai, and F. Farid (2022). “Feasibility Study of Constructing a Screening Tool for Adolescent Diabetes Detection Applying Machine Learning Methods”. In: *Applications of Body Worn Sensors and Wearables*, Special Issue of *Sensors* 22.16, p. 6155.
- Yang, S., F. Zhu, X. Ling, Q. Liu, and P. Zhao (2021). “Intelligent Health Care: Applications of Deep Learning in Computational Medicine”. In: *Frontiers in Genetics* 12.
- Lai, T., Y. Shi, Z. Du, J. Wu, K. Fu, Y. Dou, and Z. Wang (2023). “Psy-LLM: Scaling up Global Mental Health Psychological Services with AI-based Large Language Models”. In: *arXiv preprint arXiv:2307.11991*.
- Dosovitskiy, A., L. Beyer, A. Kolesnikov, D. Weissenborn, X. Zhai, T. Unterthiner, M. Dehghani, M. Minderer, G. Heigold, S. Gelly, et al. (2020). “An image is worth 16x16 words: Transformers for image recognition at scale”. In: *arXiv preprint arXiv:2010.11929*.
- Ker, J., L. Wang, J. Rao, and T. Lim (2017). “Deep learning applications in medical image analysis”. In: *Ieee Access* 6, pp. 9375–9389.
- MacDonald, S., K. Steven, and M. Trzaskowski (2022). “Interpretable AI in healthcare: Enhancing fairness, safety, and trust”. In: *Artificial Intelligence in Medicine: Applications, Limitations and Future Directions*. Springer, pp. 241–258.

- Ghosh, A. and D. Kandasamy (2020). "Interpretable artificial intelligence: why and when". In: *American Journal of Roentgenology* 214.5, pp. 1137–1138.
- Arrieta, A. B., N. Díez-Rodríguez, J. Del Ser, A. Bennetot, S. Tabik, A. Barbado, S. Garcíá, S. Gil-López, D. Molina, R. Benjamins, et al. (2020). "Explainable Artificial Intelligence (XAI): Concepts, taxonomies, opportunities and challenges toward responsible AI". In: *Information fusion* 58, pp. 82–115.
- Ribeiro, M. T., S. Singh, and C. Guestrin (2016). "" Why should i trust you?" Explaining the predictions of any classifier". In: *Proceedings of the 22nd ACM SIGKDD international conference on knowledge discovery and data mining*, pp. 1135–1144.
- Selvaraju, R. R., M. Cogswell, A. Das, R. Vedantam, D. Parikh, and D. Batra (2017). "Grad-cam: Visual explanations from deep networks via gradient-based localization". In: *Proceedings of the IEEE international conference on computer vision*, pp. 618–626.
- Shin, D. (2020). "User perceptions of algorithmic decisions in the personalized AI system: Perceptual evaluation of fairness, accountability, transparency, and explainability". In: *Journal of Broadcasting & Electronic Media* 64.4, pp. 541–565.
- Balasubramaniam, N., M. Kauppinen, K. Hiekkanen, and S. Kujala (2022). "Transparency and explainability of AI systems: ethical guidelines in practice". In: *International Working Conference on Requirements Engineering: Foundation for Software Quality*. Springer, pp. 3–18.
- Lai, T., F. Farid, A. Bello, and F. Sabrina (2023). "Ensemble Learning based Anomaly Detection for IoT Cybersecurity via Bayesian Hyperparameters Sensitivity Analysis". In: *arXiv preprint arXiv:2307.10596*.
- Imai, T. (2019). "Legal regulation of autonomous driving technology: Current conditions and issues in Japan". In: *IATSS research* 43.4, pp. 263–267.
- Gilpin, L. H., D. Bau, B. Z. Yuan, A. Bajwa, M. Specter, and L. Kagal (2018). "Explaining explanations: An overview of interpretability of machine learning". In: *2018 IEEE 5th International Conference on data science and advanced analytics (DSAA)*. IEEE, pp. 80–89.
- Banerjee, A., C. Chakraborty, and M. Rathi Sr (2020). "Medical imaging, artificial intelligence, internet of things, wearable devices in terahertz healthcare technologies". In: *Terahertz biomedical and healthcare technologies*. Elsevier, pp. 145–165.
- Loh, H. W., C. P. Ooi, S. Seoni, P. D. Barua, F. Molinari, and U. R. Acharya (2022). "Application of explainable artificial intelligence for healthcare: A systematic review of the last decade (2011–2022)". In: *Computer Methods and Programs in Biomedicine*, p. 107161.
- Ahmad, M. A., A. Teredesai, and C. Eckert (2018). "Interpretable Machine Learning in Healthcare". In: *2018 IEEE International Conference on Healthcare Informatics (ICHI)*, pp. 447–447.
- Burrell, J. (2016). "How the machine ‘thinks’: Understanding opacity in machine learning algorithms". In: *Big Data & Society* 3.1, p. 2053951715622512. eprint: <https://doi.org/10.1177/2053951715622512>.
- Arnold, M. H. (2021). "Teasing out artificial intelligence in medicine: an ethical critique of artificial intelligence and machine learning in medicine". In: *Journal of bioethical inquiry* 18.1, pp. 121–139.
- Vaswani, A., N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin (2017). "Attention is all you need". In: *Advances in neural information processing systems* 30.
- Hendrycks, D. and K. Gimpel (2016). "Gaussian error linear units (gelus)". In: *arXiv preprint arXiv:1606.08415*.
- Lipton, Z. C. (2016). "The Mythos of Model Interpretability". In: *CoRR* abs/1606.03490. arXiv: 1606 . 03490.
- Freitas, A. A. (2014). "Comprehensible Classification Models: A Position Paper". In: *SIGKDD Explor. Newsl.* 15.1, pp. 1–10.
- Miller, T. (2017). "Explanation in Artificial Intelligence: Insights from the Social Sciences". In: *CoRR* abs/1706.07269. arXiv: 1706 . 07269.
- Simonyan, K., A. Vedaldi, and A. Zisserman (2013). "Deep Inside Convolutional Networks: Visualising Image Classification Models and Saliency Maps". In.
- Molnar, C. (2020). *Interpretable machine learning*. Lulu. com.
- Kim, B., M. Wattberg, J. Gilmer, C. Cai, J. Wexler, F. Viegas, and R. Sayres (2017). "Interpretability Beyond Feature Attribution: Quantitative Testing with Concept Activation Vectors (TCAV)". In.
- Shrikumar, A., P. Greenside, and A. Kundaje (2017). "Learning important features through propagating activation differences". In: *International conference on machine learning*. PMLR, pp. 3145–3153.
- Bach, S., A. Binder, G. Montavon, F. Klauschen, K.-R. Müller, and W. Samek (2015). "On Pixel-Wise Explanations for Non-Linear Classifier Decisions by Layer-Wise Relevance Propagation". In: *PLOS ONE* 10.7, pp. 1–46.
- Springenberg, J., A. Dosovitskiy, T. Brox, and M. Riedmiller (2014). "Striving for Simplicity: The All Convolutional Net". In.
- Chefer, H., S. Gur, and L. Wolf (2021a). "Transformer interpretability beyond attention visualization". In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 782–791.
- Dai, Y., Y. Gao, and F. Liu (2021). "Transmed: Transformers advance multi-modal medical image classification". In: *Diagnostics* 11.8, p. 1384.

- Lu, M., Y. Pan, D. Nie, F. Liu, F. Shi, Y. Xia, and D. Shen (2021). “SMILE: Sparse-Attention based Multiple Instance Contrastive Learning for Glioma Sub-Type Classification Using Pathological Images”. In: *MICCAI Workshop on Computational Pathology*. PMLR, pp. 159–169.
- Napel, S. and S. K. Plevritis (2014). “NSCLC radiogenomics: initial Stanford study of 26 cases”. In: *Cancer Imaging Arch.*
- Gheftati, B. and H. Rivaz (2021). “VISION TRANSFORMERS FOR CLASSIFICATION OF BREAST ULTRASOUND IMAGES”. In: *arXiv preprint arXiv:2110.14731*.
- Khan, A. and B. Lee (2021). “Gene Transformer: Transformers for the Gene Expression-based Classification of Lung Cancer Subtypes”. In: *arXiv preprint arXiv:2108.11833*.
- Chen, H., C. Li, X. Li, G. Wang, W. Hu, Y. Li, W. Liu, C. Sun, Y. Yao, Y. Teng, et al. (2021). “GasHis-Transformer: A Multi-scale Visual Transformer Approach for Gastric Histopathology Image Classification”. In: *arXiv preprint arXiv:2104.14528*.
- Jiang, Z., Z. Dong, L. Wang, and W. Jiang (2021). “Method for Diagnosis of Acute Lymphoblastic Leukemia Based on ViT-CNN Ensemble Model”. In: *Computational Intelligence and Neuroscience* 2021.
- Abnar, S. and W. Zuidema (2020). “Quantifying attention flow in transformers”. In: *arXiv preprint arXiv:2005.00928*.
- Park, S., G. Kim, Y. Oh, J. B. Seo, S. M. Lee, J. H. Kim, S. Moon, J.-K. Lim, and J. C. Ye (2021). “Vision Transformer for COVID-19 CXR Diagnosis using Chest X-ray Feature Corpus”. In: *arXiv preprint arXiv:2103.07055*.
- Chen, T., S. Kornblith, M. Norouzi, and G. Hinton (2020). “A simple framework for contrastive learning of visual representations”. In: *International conference on machine learning*. PMLR, pp. 1597–1607.
- Irvin, J., P. Rajpurkar, M. Ko, Y. Yu, S. Ciurea-Ilcus, C. Chute, H. Marklund, B. Haghgoo, R. Ball, K. Shpanskaya, et al. (2019). “CheXpert: A large chest radiograph dataset with uncertainty labels and expert comparison”. In: *Proceedings of the AAAI conference on artificial intelligence*. Vol. 33. 01, pp. 590–597.
- Gao, X., Y. Qian, and A. Gao (2021). “COVID-ViT: Classification of COVID-19 from CT chest images based on vision transformer models”. In: *arXiv preprint arXiv:2107.01682*.
- Kollias, D., A. Arsenos, L. Soukissian, and S. Kollias (2021). “MIA-COV19D: COVID-19 Detection through 3-D Chest CT Image Analysis”. In: *arXiv preprint arXiv:2106.07524*.
- Huang, G., Z. Liu, L. Van Der Maaten, and K. Q. Weinberger (2017). “Densely connected convolutional networks”. In: *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 4700–4708.
- Gunraj, H., A. Sabri, D. Koff, and A. Wong (2021). “COVID-Net CT-2: Enhanced Deep Neural Networks for Detection of COVID-19 from Chest CT Images Through Bigger, More Diverse Learning”. In: *arXiv preprint arXiv:2101.07433*.
- Petit, O., N. Thome, C. Rambour, L. Themyr, T. Collins, and L. Soler (2021). “U-net transformer: Self and cross attention for medical image segmentation”. In: *Machine Learning in Medical Imaging: 12th International Workshop, MLMI 2021, Held in Conjunction with MICCAI 2021, Strasbourg, France, September 27, 2021, Proceedings 12*. Springer, pp. 267–276.
- Voita, E., D. Talbot, F. Moiseev, R. Sennrich, and I. Titov (2019). “Analyzing Multi-Head Self-Attention: Specialized Heads Do the Heavy Lifting, the Rest Can Be Pruned”. In: *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics.
- Chefer, H., S. Gur, and L. Wolf (2021b). “Generic attention-model explainability for interpreting bi-modal and encoder-decoder transformers”. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 397–406.
- Chen, J., X. Li, L. Yu, D. Dou, and H. Xiong (2022). “Beyond Intuition: Rethinking Token Attributions inside Transformers”. In: *Transactions on Machine Learning Research*.
- Shome, D., T. Kar, S. N. Mohanty, P. Tiwari, K. Muhammad, A. Altameem, Y. Zhang, and A. K. J. Saudagar (2021). “COVID-Transformer: Interpretable COVID-19 Detection Using Vision Transformer for Healthcare”. In: *International Journal of Environmental Research and Public Health* 18.21, p. 11086.
- Shao, Z., H. Bian, Y. Chen, Y. Wang, J. Zhang, X. Ji, and Y. Zhang (2021). “TransMIL: Transformer based Correlated Multiple Instance Learning for Whole Slide Image Classification”. In: *arXiv preprint arXiv:2106.00908*.
- Huang, J., X. Xing, Z. Gao, and G. Yang (2022). “Swin deformable attention u-net transformer (sdaut) for explainable fast mri”. In: *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, pp. 538–548.
- Fung, G., M. Dundar, B. Krishnapuram, and R. B. Rao (2007). “Multiple instance learning for computer aided diagnosis”. In: *Advances in neural information processing systems* 19, p. 425.
- Bejnordi, B. E., M. Veta, P. J. Van Diest, B. Van Ginneken, N. Karssemeijer, G. Litjens, J. A. Van Der Laak, M. Hermsen, Q. F. Manson, M. Balkenhol, et al. (2017). “Diagnostic assessment of deep learning algorithms for detection of lymph node metastases in women with breast cancer”. In: *Jama* 318.22, pp. 2199–2210.
- Zhang, H., Y. Meng, Y. Zhao, Y. Qiao, X. Yang, S. E. Coupland, and Y. Zheng (2022). “DTFD-MIL: Double-tier feature distillation multiple instance learning for histopathology whole slide image classification”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 18802–18812.

- Playout, C., R. Duval, M. C. Boucher, and F. Cheriet (2022). “Focused attention in transformers for interpretable classification of retinal images”. In: *Medical Image Analysis* 82, p. 102608.
- Zheng, Y., R. Gindra, M. Betke, J. Beane, and V. B. Kolachalama (2021). “A deep learning based graph-transformer for whole slide image classification”. In: *medRxiv*.
- Kipf, T. N. and M. Welling (2016). “Semi-supervised classification with graph convolutional networks”. In: *arXiv preprint arXiv:1609.02907*.
- Xie, Y., J. Zhang, C. Shen, and Y. Xia (2021). “Cotr: Efficiently bridging cnn and transformer for 3d medical image segmentation”. In: *Medical Image Computing and Computer Assisted Intervention–MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part III 24*. Springer, pp. 171–180.
- Wang, T., J. Lu, Z. Lai, J. Wen, and H. Kong (2022). “Uncertainty-guided pixel contrastive learning for semi-supervised medical image segmentation”. In: *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI*, pp. 1444–1450.