


Figure 3.2 — ResidualMLP_Mask architecture (Stages 2 and 3)

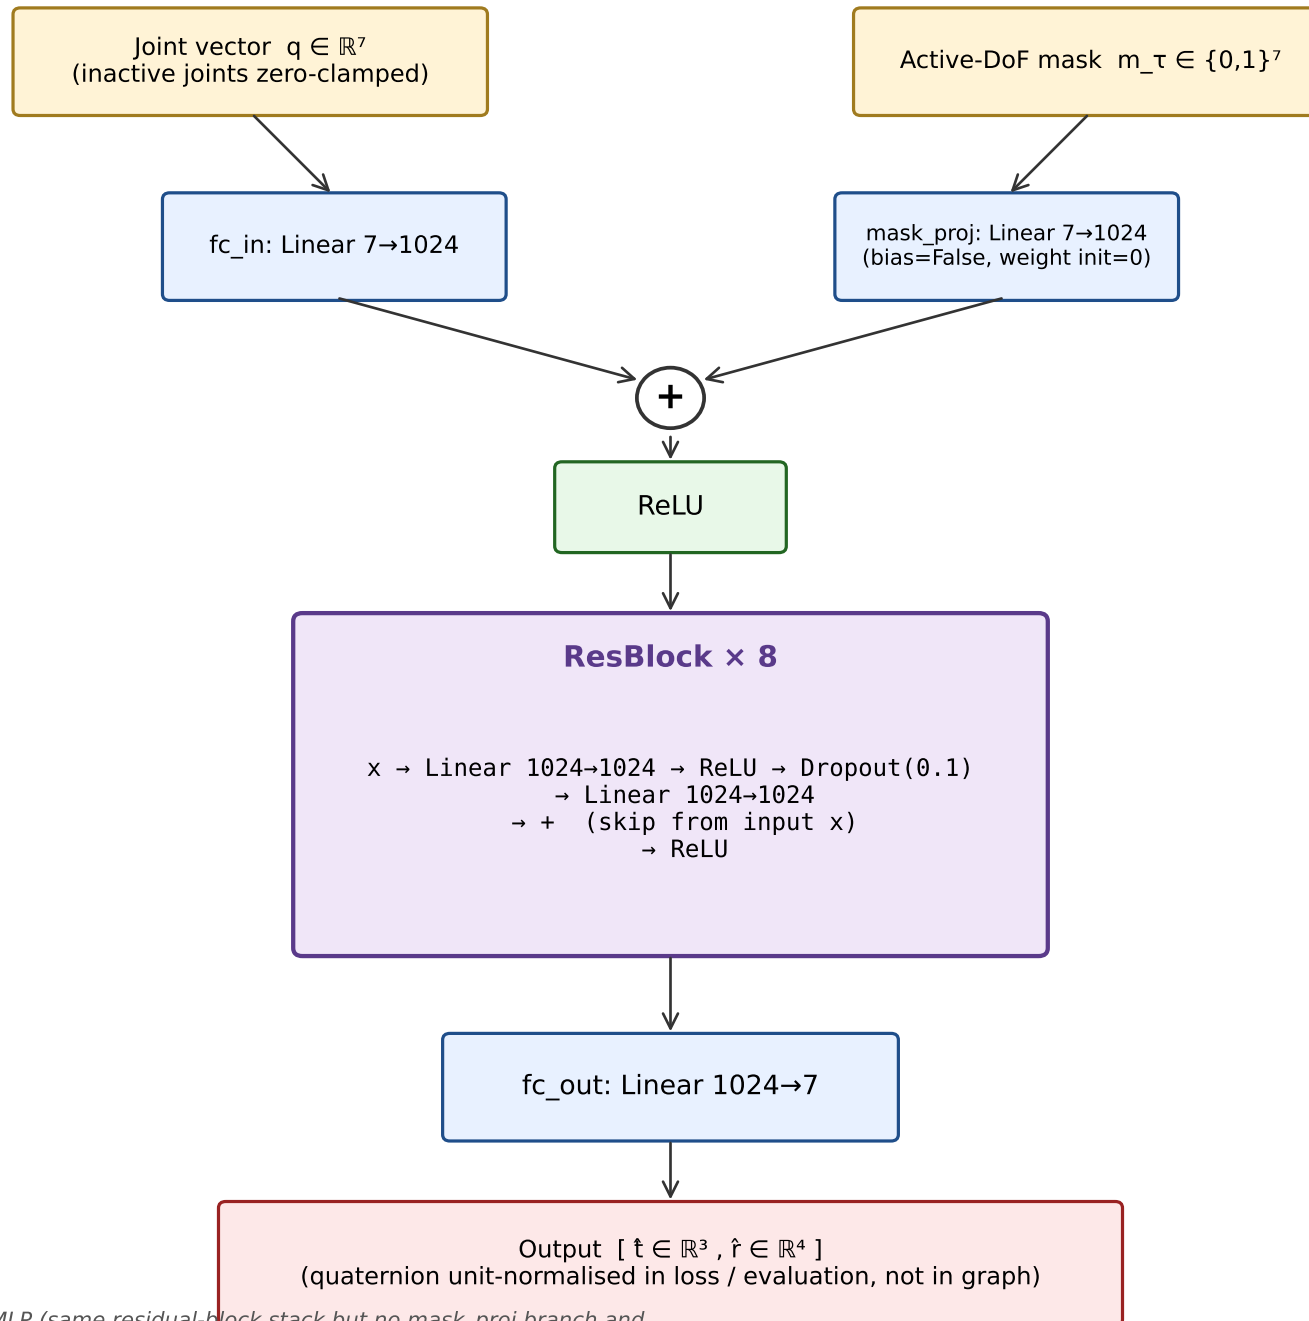

NOTE Stage 1 uses ResidualMLP (same residual-block stack but no mask_proj branch and no mask input). The Stage-1 ResBlock has identical layers but does NOT call dropout in forward.