

# Measuring Climate Trends using ROOT

MNXB01

Philip J. Fredholm

Lee Chun Hin

November 1, 2022

## Contents

Introduction	2
Theory	2
Method	3
Results	3
Discussion	6
References	7

# Introduction

In order to be able to draw conclusions about some physical phenomena, such as the climate of Earth, it is sometimes necessary to be able to process large amounts of data. In order to save a considerable amount of time doing so, it is often the case that such processing may be done with the help of a computer programming language. The purpose of the subject of this report has been to try to use the programming language C++ in order to process data from the SMHI OpenData initiative and draw conclusion about climate and weather trends from this data. In particular, attempts have been made in order to analyse the data and find the distribution of coldest and hottest day of each year, the first day of summer as well as to analyse the temperature of a given day of the year (August 23rd) over many years.

## Theory

In order to be able make the analysis of what day is the first day of summer, a definition of when summer starts must first be laid out. The definition chosen for this project was 5 consecutive days of an average temperature greater or equal than 10.0 °C.

In order to be able to read in the data to be analysed, a class called `readData`, in C++ code according to the C++17 standard, was created and used by placing a source file in a folder called `src` and a header file in a folder called `include` inside the folder called `PhilipCode` [1]. The class `readData` would take a file name for a file as the same folder as the final program and how many header lines of a text file with relevant (and properly formatted) data to read in. It would then have three getter-functions, one to get the first year of measurements, one to get the last year where the data had measurements, one to get the file name of the read in file and finally one to get the data that was read in. The read in data was stored in in a vector from the C++ standard library, which in turn contained one vector for each year that there had been measurements. Each vector for a year in turn contained twelve vectors, one for each year. Finally, each 'month-vector' contained 31 vectors, one for each possible day, within which (that is to say within the 'day-vectors') the average of the measured values for that day was stored. If no measurements were available for a given day, that 'day-vector' was left empty.

In order to actually find the warmest and coldest day of each year, as well as the start of summer, a file called `main.cpp` was placed in the folder `PhilipCode` and when compiled had access to the `dataReader` class by being compiled with a translation unit. This `main.cpp` file contained a function for finding either the hottest or coldest day of a given year by taking a pointer to a 'year-vector' of the type that was stored in the vector given by the getter function for the data of the `readData`-class. Similarly, there was also a function for finding the first day of summer, according to the definition presented earlier, by taking a pointer to a 'year-vector'. It should be noted that the way these functions operated was by creating a 'flattened' vector, which created a vector of as many elements as there were (nested) day vectors in the 'year-vector' given to the function as an argument. If a day had no measured values, it was still added to the 'flattened' vector and given a 'garbage' value, either extremely big or extremely small, as to not interfere with the logic used to find the desired day. It is important to note that since the 'year-vectors' month vectors always had 31 'day-vectors', the number of days in the flattened vector was always greater than 366, as even days which do not exist, such as a February 31st, were still added as a 'garbage' value. Finally, the `main.cpp` created output files storing the hottest and coldest days found of each year by the index of the hottest day in the flattened year vector. It also outputted

a datafile with the index of the first day (in the flattened year vector) of the first day to meet the previously stated requirement for the start of summer.

In order to plot the results, three ROOT macros, called `hot.C`, `summer.C` and `summer.C`, and placed in the `PhilipCode` folder, were used. These macros read in the relevant data file created from the `main.cpp` file and created histograms with 366 bins from one to 366. It then added the number of counts from the read in processed data to the relevant bins. Note that for the macro `cold.C`, there was instead 400 bins between -200 and 199, and all counts for days with day number greater than 180 were given to the bin which had day number of 365 less than the relevant day. Note also that these 'days' give the day out of a 'year' where each of the twelve months have 31 days. The macros then also saved the histograms as graphs and printed the mean value of the day from the read in data and printed it to the standard output.

## Method

## Results

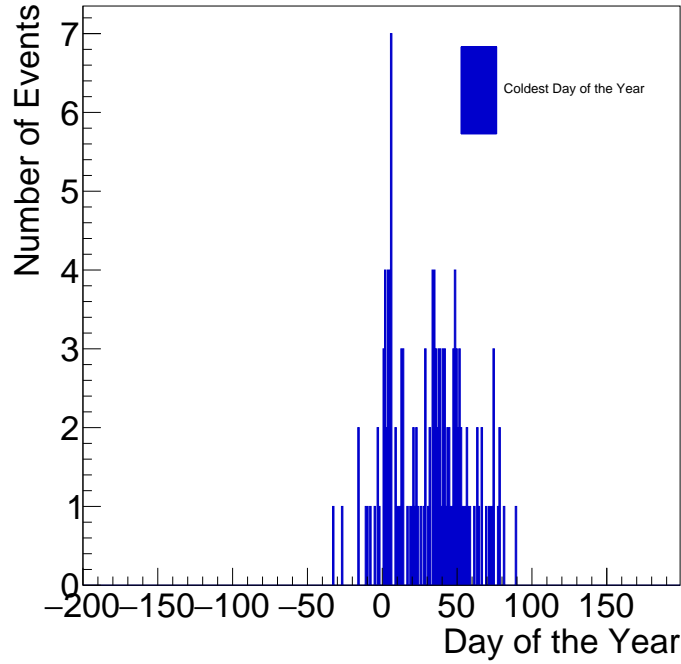


Figure 1: Shows the number of occurrences of a specific day being the coldest day of that year in Borås. Negative days indicate that the day was in the end of the previous year.

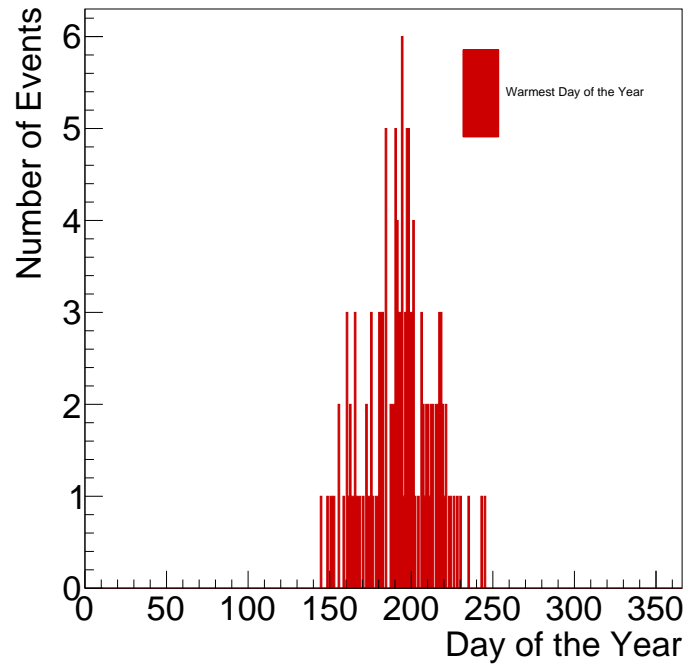


Figure 2: Shows the number of occurrences of a specific day being the warmest day of that year in Borås.

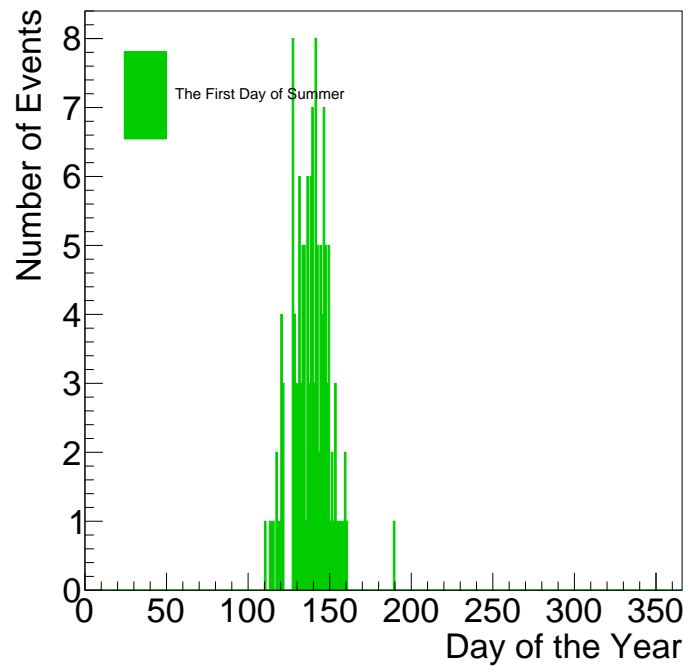


Figure 3: Shows the number of occurrences of a specific day being the first day of summer that year in Borås.

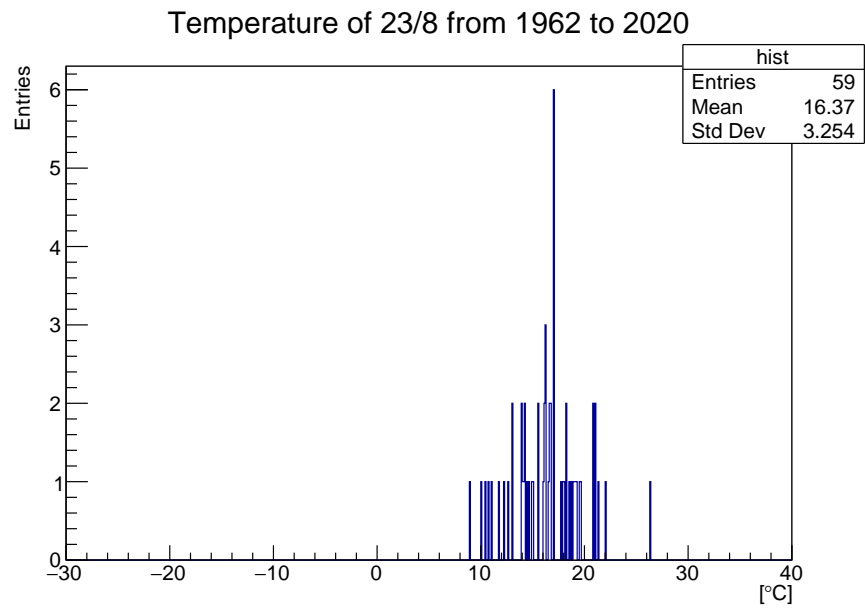


Figure 4: Temperature of Umeå Airport in 23/8 from 1962 to 2020.

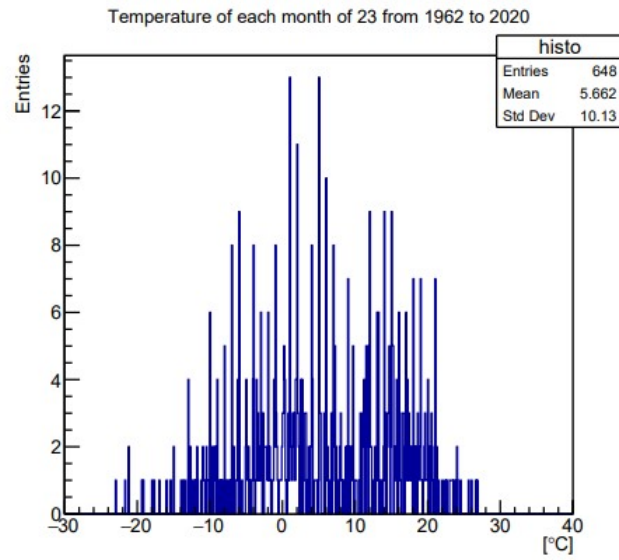


Figure 5: Temperature of Umeå Airport in each of the date of 23 since 1962 to 2020.

## Discussion

## References

- [1] The code in the folder "PhilipCode", available on a remote Git repository on GitHub at <https://github.com/fredholmP/MNXB01-FinalProject> .
- [2] The code in the folders INSERT CHRIS'S FOLDERS LOCATION HERE available on a remote Git repository on GitHub at <https://github.com/fredholmP/MNXB01-FinalProject> .
- [3] The data available from January 1st 1884 at 07.00 up until June 1st 2021 at 06.00 for the city Borås, provided by Lund Univeristy in association with the course MNXB01 during the autumn semester of 2022. At the time of writing, this data may be downloaded from the website <https://www.smhi.se/data/meteorologi/ladda-ner-meteorologiska-observationer> .
- [4] The data available from DAY TIME up until DAY TIME for the "Umeå Flygplats" measuring station, provided by Lund Univeristy in association with the course MNXB01 during the autumn semester of 2022. At the time of writing, this data may be downloaded from the website <https://www.smhi.se/data/meteorologi/ladda-ner-meteorologiska-observationer> .