

Class 9: Structural Bioinformatics 1

Chloe Do

1. The RCSB Protein Data Bank (PDB)

Protein structures by X-ray crystallography dominate this database. We are skipping Q1-Q3 because the website was too slow for us.

2. Visualizing the HIV-1 protease structure



Figure 1: HIV-Pr structure from 1hsg

Q4: Water molecules normally have 3 atoms. Why do we see just one atom per water molecule in this structure?

Because the hydrogen atoms are so small that with this high resolution, we cannot visualize them in the image.

Q5: There is a critical “conserved” water molecule in the binding site. Can you identify this water molecule? What residue number does this water molecule have?

The water is located between the ligand and binding site. HOH 308

Q6: Generate and save a figure clearly showing the two distinct chains of HIV-protease along with the ligand. You might also consider showing the catalytic residues ASP 25 in each chain (we recommend “Ball & Stick” for these side-chains). Add this figure to your Quarto document.

Discussion Topic: Can you think of a way in which indinavir, or even larger ligands and substrates, could enter the binding site?

One way that indinavir or even larger ligands and substrates could enter the binding site is to make the polymers more flexible so that it could allow them to enter. We can also break bonds to make the protein smaller that could allows them to enter.

3. Introduction to Bio3D in R

Bio3D is an R package for structural bioinformatics. To use it we need to call it up with the `library()` function

```
library(bio3d)
```

To read a PDB file we can use `read.pdb()`

```
pdb <- read.pdb("1hsg")
```

Note: Accessing on-line PDB file

```
pdb
```

```
Call: read.pdb(file = "1hsg")
```

```
Total Models#: 1
```

```
Total Atoms#: 1686, XYZs#: 5058 Chains#: 2 (values: A B)
```

```
Protein Atoms#: 1514 (residues/Calpha atoms#: 198)
```

```
Nucleic acid Atoms#: 0 (residues/phosphate atoms#: 0)
```

```
Non-protein/nucleic Atoms#: 172 (residues: 128)
```

```
Non-protein/nucleic resid values: [ HOH (127), MK1 (1) ]
```

```
Protein sequence:
```

```
PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGIGGFIKVRQYD
QILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFPQITLWQRPLVTIKIGGQLKE
ALLDTGADDTVLEEMSLPGRWKPKMIGGIGGFIKVRQYDQILIEICGHKAIGTVLVGPTP
VNIIGRNLLTQIGCTLNF
```

```
+ attr: atom, xyz, seqres, helix, sheet,
      calpha, remark, call
```

The ATOM records of a PDB file are stored in `pdb$atom`

```
head(pdb$atom)
```

	type	eleno	elety	alt	resid	chain	resno	insert	x	y	z	o	b
1	ATOM	1	N	<NA>	PRO	A	1	<NA>	29.361	39.686	5.862	1	38.10
2	ATOM	2	CA	<NA>	PRO	A	1	<NA>	30.307	38.663	5.319	1	40.62
3	ATOM	3	C	<NA>	PRO	A	1	<NA>	29.760	38.071	4.022	1	42.64
4	ATOM	4	O	<NA>	PRO	A	1	<NA>	28.600	38.302	3.676	1	43.40
5	ATOM	5	CB	<NA>	PRO	A	1	<NA>	30.508	37.541	6.342	1	37.87
6	ATOM	6	CG	<NA>	PRO	A	1	<NA>	29.296	37.591	7.162	1	38.40
	segid elesy charge												
1	<NA>		N	<NA>									
2	<NA>		C	<NA>									
3	<NA>		C	<NA>									
4	<NA>		O	<NA>									
5	<NA>		C	<NA>									
6	<NA>		C	<NA>									

Q7: How many amino acid residues are there in this pdb object?

198

Q8: Name one of the two non-protein residues?

MK1

Q9: How many protein chains are in this structure?

2

4. Comparative structure analysis of Adenylate Kinase

```
# Install packages in the R console NOT your Rmd/Quarto file

#install.packages("ggrepel")
#install.packages("devtools")
#install.packages("BiocManager")

#BiocManager::install("msa")
#devtools::install_bitbucket("Grantlab/bio3d-view")
```

Q10. Which of the packages above is found only on BioConductor and not CRAN?

msa

Q11. Which of the above packages is not found on BioConductor or CRAN?:

bio3d-view

Q12. True or False? Functions from the devtools package can be used to install packages from GitHub and BitBucket?

TRUE

Compare analysis of Adenylate kinase (ADK)

We will start our analysis with a single PDB id (code from the PDB database): 1AKE

First we get its primary sequence:

```
aa <- get.seq("1ake_a")
```

```
Warning in get.seq("lake_a"): Removing existing file: seqs.fasta
```

```
Fetching... Please wait. Done.
```

```
aa
```

```
      1      .      .      .      .      .      60
pdb|1AKE|A  MRIILLGAPGAGKGTQAQFIMEKYGIPQISTGDMLRAAVKSGSELGKQAKDIMDAGKLV
      1      .      .      .      .      .      60

      61      .      .      .      .      .      120
pdb|1AKE|A  DELVIALVKERIAQEDCRNGFLLDGFRTIPQADAMKEAGINVDYVLEFDVPDELIVDRI
      61      .      .      .      .      .      120

     121      .      .      .      .      .      180
pdb|1AKE|A  VGRRVHAPSGRVYHVKNPPKVEGKDDVTGEELTRKDDQEETVRKRLVEYHQMTAPLIG
     121      .      .      .      .      .      180

     181      .      .      .      214
pdb|1AKE|A  YYSKEAEAGNTKYAKVDGTPVAEVRADLEKILG
     181      .      .      .      214
```

```
Call:
```

```
  read.fasta(file = outfile)
```

```
Class:
```

```
  fasta
```

```
Alignment dimensions:
```

```
  1 sequence rows; 214 position columns (214 non-gap, 0 gap)
```

```
+ attr: id, ali, call
```

Q13. How many amino acids are in this sequence, i.e. how long is this sequence?

214

```
# Blast or hmmer search
```


```
b <- blast.pdb(aa)
```

Searching ... please wait (updates every 5 seconds) RID = NGEXRXRH013
 .
 Reporting 98 hits

```
# Plot a summary of search results
hits <- plot(b)
```

```
* Possible cutoff values: 197 -3
    Yielding Nhits: 16 98
```

```
* Chosen cutoff value of: 197
    Yielding Nhits: 16
```

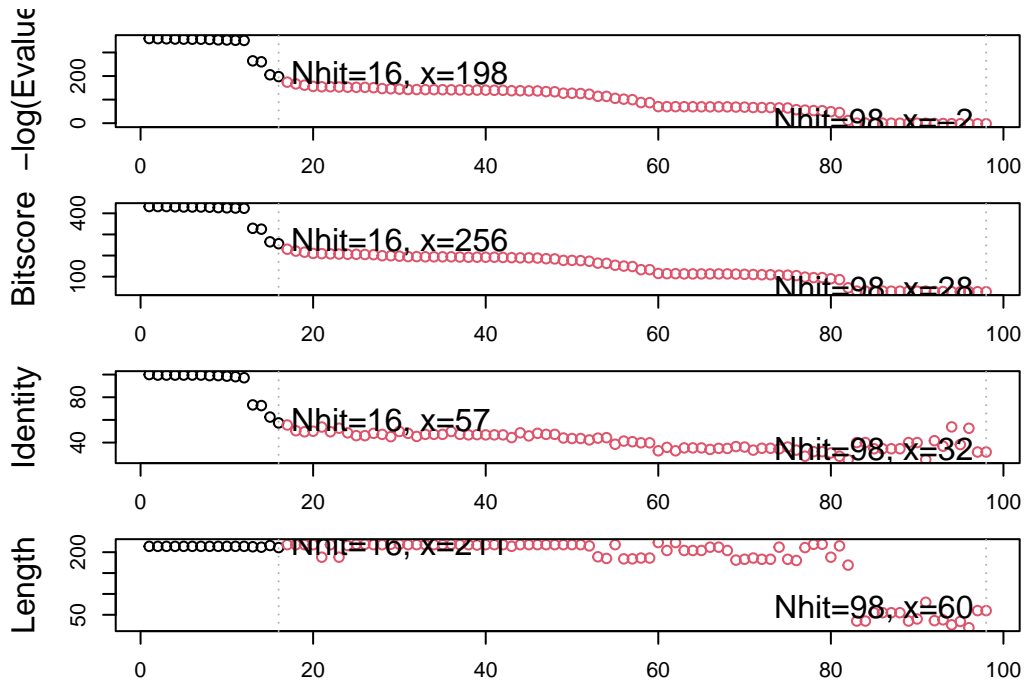

```
# List out some 'top hits'
head(hits$pd.b.id)
```

```
[1] "1AKE_A" "4X8M_A" "6S36_A" "6RZE_A" "4X8H_A" "3HPR_A"
```

Use these ADK structures for analysis:

```
hits <- NULL
hits$pdb.id <- c('1AKE_A', '6S36_A', '6RZE_A', '3HPR_A', '1E4V_A', '5EJE_A', '1E4Y_A', '3X2S_A', '1E4Z_A')
```

Download all these PDB files from the online database...

```
# Download related PDB files
files <- get.pdb(hits$pdb.id, path="pdbs", split=TRUE, gzip=TRUE)
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
1AKE.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
6S36.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
6RZE.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
3HPR.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
1E4V.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
5EJE.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
1E4Y.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
3X2S.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
6HAP.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
6HAM.pdb.gz exists. Skipping download
```

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
4K46.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
3GMT.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE): pdbs/
4PZL.pdb.gz exists. Skipping download

	0%
=====	8%
=====	15%
=====	23%
=====	31%
=====	38%
=====	46%
=====	54%
=====	62%
=====	69%
=====	77%
=====	85%
=====	92%
=====	100%

```
# Align related PDBs  
pdbs <- pdbaln(files, fit = TRUE)#, exefile="msa")
```


Reading PDB files:

pdb/split_chain/1AKE_A.pdb
pdb/split_chain/6S36_A.pdb
pdb/split_chain/6RZE_A.pdb
pdb/split_chain/3HPR_A.pdb
pdb/split_chain/1E4V_A.pdb
pdb/split_chain/5EJE_A.pdb
pdb/split_chain/1E4Y_A.pdb
pdb/split_chain/3X2S_A.pdb
pdb/split_chain/6HAP_A.pdb
pdb/split_chain/6HAM_A.pdb
pdb/split_chain/4K46_A.pdb
pdb/split_chain/3GMT_A.pdb
pdb/split_chain/4PZL_A.pdb

 PDB has ALT records, taking A only, rm.alt=TRUE
. PDB has ALT records, taking A only, rm.alt=TRUE
. PDB has ALT records, taking A only, rm.alt=TRUE
. PDB has ALT records, taking A only, rm.alt=TRUE
.. PDB has ALT records, taking A only, rm.alt=TRUE
.... PDB has ALT records, taking A only, rm.alt=TRUE
. PDB has ALT records, taking A only, rm.alt=TRUE
...

Extracting sequences

pdb/seq: 1 name: pdb/split_chain/1AKE_A.pdb
 PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 2 name: pdb/split_chain/6S36_A.pdb
 PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 3 name: pdb/split_chain/6RZE_A.pdb
 PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 4 name: pdb/split_chain/3HPR_A.pdb
 PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 5 name: pdb/split_chain/1E4V_A.pdb
pdb/seq: 6 name: pdb/split_chain/5EJE_A.pdb
 PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 7 name: pdb/split_chain/1E4Y_A.pdb
pdb/seq: 8 name: pdb/split_chain/3X2S_A.pdb
pdb/seq: 9 name: pdb/split_chain/6HAP_A.pdb
pdb/seq: 10 name: pdb/split_chain/6HAM_A.pdb
 PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 11 name: pdb/split_chain/4K46_A.pdb
 PDB has ALT records, taking A only, rm.alt=TRUE

pdb/seq: 12 name: pdbs/split_chain/3GMT_A.pdb
 pdb/seq: 13 name: pdbs/split_chain/4PZL_A.pdb

pdbs

	1	.	.	.	40
[Truncated_Name:1] 1AKE_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:2] 6S36_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:3] 6RZE_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:4] 3HPR_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:5] 1E4V_A.pdb	-----	MRIILLGAPVAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:6] 5EJE_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:7] 1E4Y_A.pdb	-----	MRIILLGALVAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:8] 3X2S_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:9] 6HAP_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:10] 6HAM_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMEKYGIPQIS			
[Truncated_Name:11] 4K46_A.pdb	-----	MRIILLGAPGAGKGTQAQFIMAKFGIPQIS			
[Truncated_Name:12] 3GMT_A.pdb	-----	MRLILLGAPGAGKGTQANFIKEKFGIPQIS			
[Truncated_Name:13] 4PZL_A.pdb		TENLYFQSNAMRIILLGAPGAGKGTQAKIIEQKYNIAHIS			
		~*** ***** * *~* **			
	1	.	.	.	40
	41	.	.	.	80
[Truncated_Name:1] 1AKE_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDAGKLVDELVIALVKE			
[Truncated_Name:2] 6S36_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDAGKLVDELVIALVKE			
[Truncated_Name:3] 6RZE_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDAGKLVDELVIALVKE			
[Truncated_Name:4] 3HPR_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDAGKLVDELVIALVKE			
[Truncated_Name:5] 1E4V_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDAGKLVDELVIALVKE			
[Truncated_Name:6] 5EJE_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDACKLVDELVIALVKE			
[Truncated_Name:7] 1E4Y_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDAGKLVDELVIALVKE			
[Truncated_Name:8] 3X2S_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDCGKLVDELVIALVKE			
[Truncated_Name:9] 6HAP_A.pdb		TGDMLRAAVKSGSELGKQAKDIMDAGKLVDELVIALVRE			
[Truncated_Name:10] 6HAM_A.pdb		TGDMLRAAIIKSGSELGKQAKDIMDAGKLVDEIIIIALVKE			
[Truncated_Name:11] 4K46_A.pdb		TGDMLRAAIIKAGTELGKQAKSVIDAGQLVSDDIILGLVKE			
[Truncated_Name:12] 3GMT_A.pdb		TGDMLRAAVKAGTPLGVEAKTYMDEGKLVPSLIIGLVKE			
[Truncated_Name:13] 4PZL_A.pdb		TGDMIRETIKSGSALGQELKKVLDAGELVSDEFIIVKIVKD			
		****~* ~* *~** * ~* ** * ^^ ~*^^			
	41	.	.	.	80
	81	.	.	.	120
[Truncated_Name:1] 1AKE_A.pdb		RIAQEDCRNGFLLDGFPRTIPQADAMKEAGINVDYVLEFD			

[Truncated_Name:2] 6S36_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:3] 6RZE_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:4] 3HPR_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:5] 1E4V_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:6] 5EJE_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:7] 1E4Y_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:8] 3X2S_A.pdb	RIAQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:9] 6HAP_A.pdb	RICQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:10] 6HAM_A.pdb	RICQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:11] 4K46_A.pdb	RIAQDDCAKGFLDGFPR TIPQADGLKEVGVVVDYVIEFD
[Truncated_Name:12] 3GMT_A.pdb	RLKEADCANGYLF DGFPR TIAQADAMKEAGVAIDYVLEID
[Truncated_Name:13] 4PZL_A.pdb	RISKNDCNNGFLLDGVPR TIPQAQELDKLGVNIDYIVEVD
	*^ * *~* ** ***** ** ^ *^ ~**~* *
	81 . . . 120
	121 . . . 160
[Truncated_Name:1] 1AKE_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:2] 6S36_A.pdb	VPDELIVDKIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:3] 6RZE_A.pdb	VPDELIVDAIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:4] 3HPR_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDGTG
[Truncated_Name:5] 1E4V_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:6] 5EJE_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:7] 1E4Y_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:8] 3X2S_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:9] 6HAP_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:10] 6HAM_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:11] 4K46_A.pdb	VADSVIVERMAGRR AHLASGR TYHNVPKVEGKDDVTG
[Truncated_Name:12] 3GMT_A.pdb	VPFSEIIERMSGRR THPASGR TYHV KFNPPKVEGKDDVTG
[Truncated_Name:13] 4PZL_A.pdb	VADNLLIERITGRRIHPASGR TYHTKFNPPKVADKDDVTG
	* ^^^ ^ *** * *** ** ^***** *** **
	121 . . . 160
	161 . . . 200
[Truncated_Name:1] 1AKE_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:2] 6S36_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:3] 6RZE_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:4] 3HPR_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:5] 1E4V_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:6] 5EJE_A.pdb	EELTTRKDDQEECVRKRLVEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:7] 1E4Y_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:8] 3X2S_A.pdb	EELTTRKDDQEETVRKRLCEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:9] 6HAP_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN
[Truncated_Name:10] 6HAM_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN

```

[Truncated_Name:11]4K46_A.pdb    EDLVIREDDKEETVLARLGVYHNQTAPLIAYYGKEAEAGN
[Truncated_Name:12]3GMT_A.pdb    EPLVQRDDDDKEETVKKRLDVYEAQTKPLITYYGDWARRGA
[Truncated_Name:13]4PZL_A.pdb    EPLITRTDDNEDTVKQRLSVYHAQTAKLIDFYRNFSSNTT
                                * * * ** *~ * ** * * ** ^*
                                161      .      .      .      200

                                201      .      .      227
[Truncated_Name:1]1AKE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:2]6S36_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:3]6RZE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:4]3HPR_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:5]1E4V_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:6]5EJE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:7]1E4Y_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:8]3X2S_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:9]6HAP_A.pdb      T--KYAKVDGTKPVCEVRADLEKILG-
[Truncated_Name:10]6HAM_A.pdb      T--KYAKVDGTKPVCEVRADLEKILG-
[Truncated_Name:11]4K46_A.pdb      T--QYLKFDGTKA VA EVSAE LEKALA-
[Truncated_Name:12]3GMT_A.pdb      E-----NGLKAPA-----YRKISG-
[Truncated_Name:13]4PZL_A.pdb      KIPKYIKINGDQAVEKVSQDIFDQLNK
                                *
                                201      .      .      227

```

Call:

```
pdbaln(files = files, fit = TRUE)
```

Class:

```
pdbs, fasta
```

Alignment dimensions:

```
13 sequence rows; 227 position columns (204 non-gap, 23 gap)
```

```
+ attr: xyz, resno, b, chain, id, ali, resid, sse, call
```

```

# Vector containing PDB codes for figure axis
#ids <- basename.pdb(pdb$id)

# Draw schematic alignment
#par(mar=c(1,1,1,1))
#plot(pdb, labels=ids)





```

Annotate collected PDB structures

```
#anno <- pdb.annotate(ids)
#unique(anno$source)
```

Jump to PCA

```
# Perform PCA
pc.xray <- pca(pdbbs)
plot(pc.xray)
```

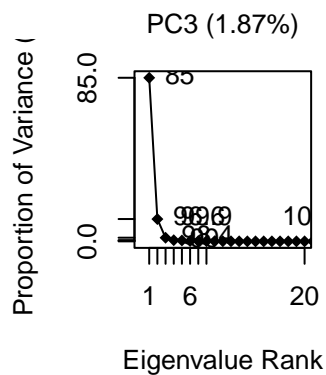

```
# Calculate RMSD
rd <- rmsd(pdbbs)
```

Warning in rmsd(pdbbs): No indices provided, using the 204 non NA positions