

M1 — Evidence Note - Chloe & Sabri


Project: CSCE-500-Project — Mini Shop (Option B, E-commerce) **Public URL:**

<https://csce-500-project.onrender.com> **Repository:**

<https://github.com/chloemich04/CSCE-500-Project> **Team:** Sabri, Chloe

This is a CSCE 553 class baseline, not a production system. All users and data are fake.

1. UI screenshot (logged in)

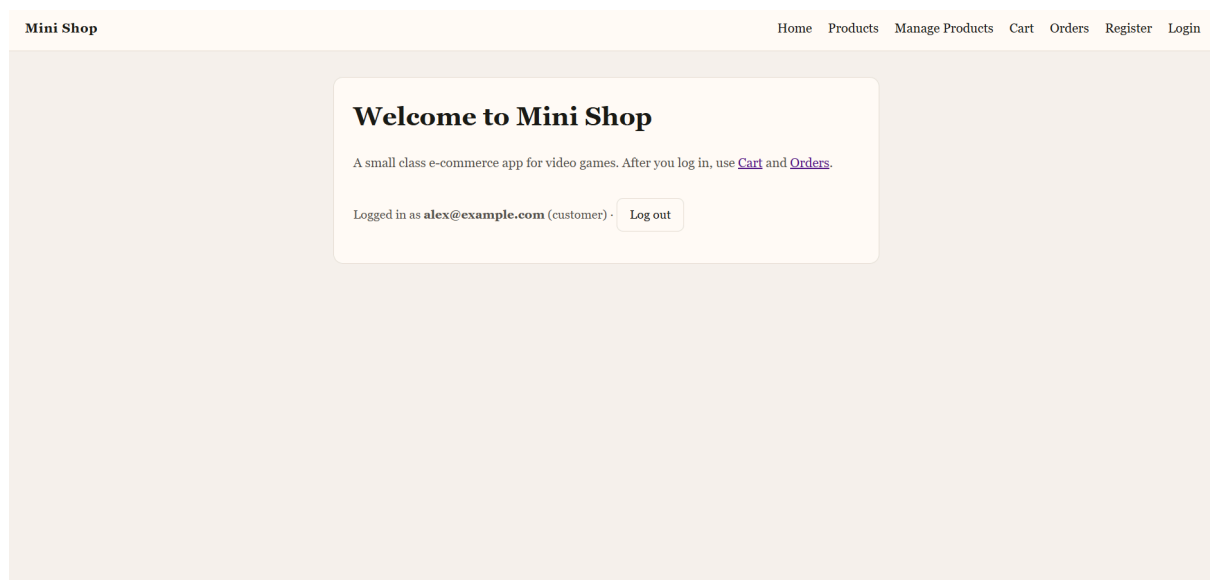

Screenshot: home / cart page while logged in as alex@example.com

2. curl output against the hosted URL

All commands run against <https://csce-500-project.onrender.com> (not localhost).

Health check

```
PS C:\Users\Sabri\CSCE-500-Project> curl.exe -sS  
https://csce-500-project.onrender.com/health
```

```
{"status":"ok"}
```

Login (returns a JWT)

```
PS C:\Users\Sabri\CSCE-500-Project> $login = @{ email = "alex@example.com"; password = "ClassDemo123!" } | ConvertTo-Json
>> $token = (Invoke-RestMethod -Uri "https://csce-500-project.onrender.com/api/auth/login" -Method POST -ContentType "application/json" -Body $login).access_token

>> $token
```

```
eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiI2liwiZW1haWwiOiJhbGV4QGV4YW1wbGUuY29tliwiYWNjb3VudF90eXBlljoiY3VzdG9tZXliLCJleHAiOiJlE3ODgzNjM2MTJ9.uAk_-LUNlcA7ZfU2rhyr_LBEpH3ikTbiGO3ClpnyNDQ
```

Write — add a product to the cart

```
PS C:\Users\Sabri\CSCE-500-Project> $cart = @{ product_id = 1; quantity = 2 } | ConvertTo-Json
>> Invoke-RestMethod -Uri "https://csce-500-project.onrender.com/api/cart" -Method POST -ContentType "application/json" -Body $cart -Headers @{ Authorization = "Bearer $token" }
```

cart_id items	total
-----	-----
3 {@{id=3; product_id=1; name=test; price=1,0; quantity=2; line_total=2,0}}	2,0

Read — view the cart

```
PS C:\Users\Sabri\CSCE-500-Project> Invoke-RestMethod -Uri "https://csce-500-project.onrender.com/api/cart" -Headers @{ Authorization = "Bearer $token" }
```

cart_id items	total
-----	-----
3 {@{id=3; product_id=1; name=test; price=1,0; quantity=2; line_total=2,0}}	2,0

3. Notes

- Email/password authentication works through the API; login returns a JWT sent as **Authorization: Bearer <token>** on protected routes.

- At least three demo users exist in the deployed system (alex@, blair@, casey@ — password `ClassDemo123!`).
- Data persists in Supabase PostgreSQL; the browser never talks to the database directly.
- The app is on Render's free tier; the first request after ~15 min idle may take up to a minute (cold start). The curls above were captured after the service was awake.