IBM Developer
SKILLS NETWORK

Winning Space Race with Data Science

Chiara Marcozzi
11-11-2026



Outline

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

Executive Summary

Summary of Methodologies

Data Collection
- Retrieved SpaceX launch data using the SpaceX API and Wikipedia.

Data Cleaning and Preparation
- Cleaned and formatted the datasets.
- Created a binary classification label to identify successful Falcon 9 first-stage landings.
- Performed SQL queries to extract and analyse relevant data.
- Conducted exploratory data analysis (EDA).

Feature Engineering and Data Preprocessing
- Engineered new features to improve model input.
- Handled missing values and standardized numerical features.
- Prepared datasets for machine learning model training and evaluation.

Data Visualization and Interactive Dashboards
- Mapped launch sites and geographical patterns using Folium.
- Analysed launch success rates through interactive visualizations.
- Developed an interactive dashboard using Plotly Dash.

Machine Learning Model Development and Evaluation
- Implemented Logistic Regression, Support Vector Machine (SVM), Decision Tree, and K-Nearest Neighbors (KNN) classifiers.
- Optimized model hyperparameters using GridSearchCV.
- Evaluated model performance using held-out test data and accuracy metrics.

Summary of Results

Data Insights
- Identified key factors associated with first-stage landing success.
- Explored relationships between launch site, payload mass, and landing outcomes.
- Visualized geographical distributions and launch success patterns.

Model Performance
- Logistic Regression, Support Vector Machine, Decision Tree, and KNN achieved a test accuracy of 83.33%.

Key Findings and Conclusions
- Launch site and payload mass were among the factors associated with landing success.
- The developed classification models demonstrated the potential to predict Falcon 9 first-stage landing outcomes before launch.
- These predictions could support preliminary launch planning and cost-related decision-making by estimating the likelihood of successful booster recovery.

Introduction

Project background and context

The objective of this capstone project is to develop predictive models to determine whether the Falcon 9 first stage will land successfully. SpaceX offers launch services at considerably lower costs than many competing providers, largely due to its ability to recover and reuse rocket first stages. Understanding and predicting landing outcomes can therefore help estimate launch costs and provide valuable insights for companies evaluating competing bids against SpaceX.

Question we want to answer:

- What factors are associated with the successful landing of the Falcon 9 first stage?
- How can machine learning models be used to predict the landing outcome of the Falcon 9 first stage?
- Which machine learning model delivers the best predictive performance for landing success?

Section 1

Methodology



Methodology

Executive Summary

Data Collection Methodology:

Data was collected from the SpaceX API and Wikipedia webpage, providing detailed information on Falcon 9 launches, including launch dates, launch sites, payload masses, rocket configurations, and mission outcomes.

Perform Data Wrangling:

Cleaned and preprocessed the dataset by handling missing values, correcting inconsistencies, and standardizing data formats. Selected relevant variables, created the landing success classification label, and engineered additional features to support subsequent analysis.

Perform Exploratory Data Analysis (EDA) Using Visualization and SQL

Explored relationships between launch characteristics and landing success using data visualization techniques with Matplotlib and Seaborn.

Performed SQL queries to extract, filter, aggregate, and analyse launch data, addressing specific research questions and identifying relevant patterns.

Methodology

Executive Summary

Perform Interactive Visual Analytics Using Folium and Plotly Dash

Created interactive maps using Folium to visualize launch site locations and geographical patterns in landing success.

Developed an interactive Plotly Dash application incorporating dropdown menus and sliders to explore launch success rates and payload mass distributions across different launch sites.


Perform Predictive Analysis Using Classification Models

Developed and evaluated multiple classification models, including Logistic Regression, Support Vector Machines (SVM), K-Nearest Neighbors (KNN), and Decision Trees.

Applied GridSearchCV for hyperparameter optimization and model selection.

Assessed model performance using test-set accuracy and compared the predictive capabilities of the different algorithms to identify the best-performing model for first-stage landing success prediction.

Data Collection

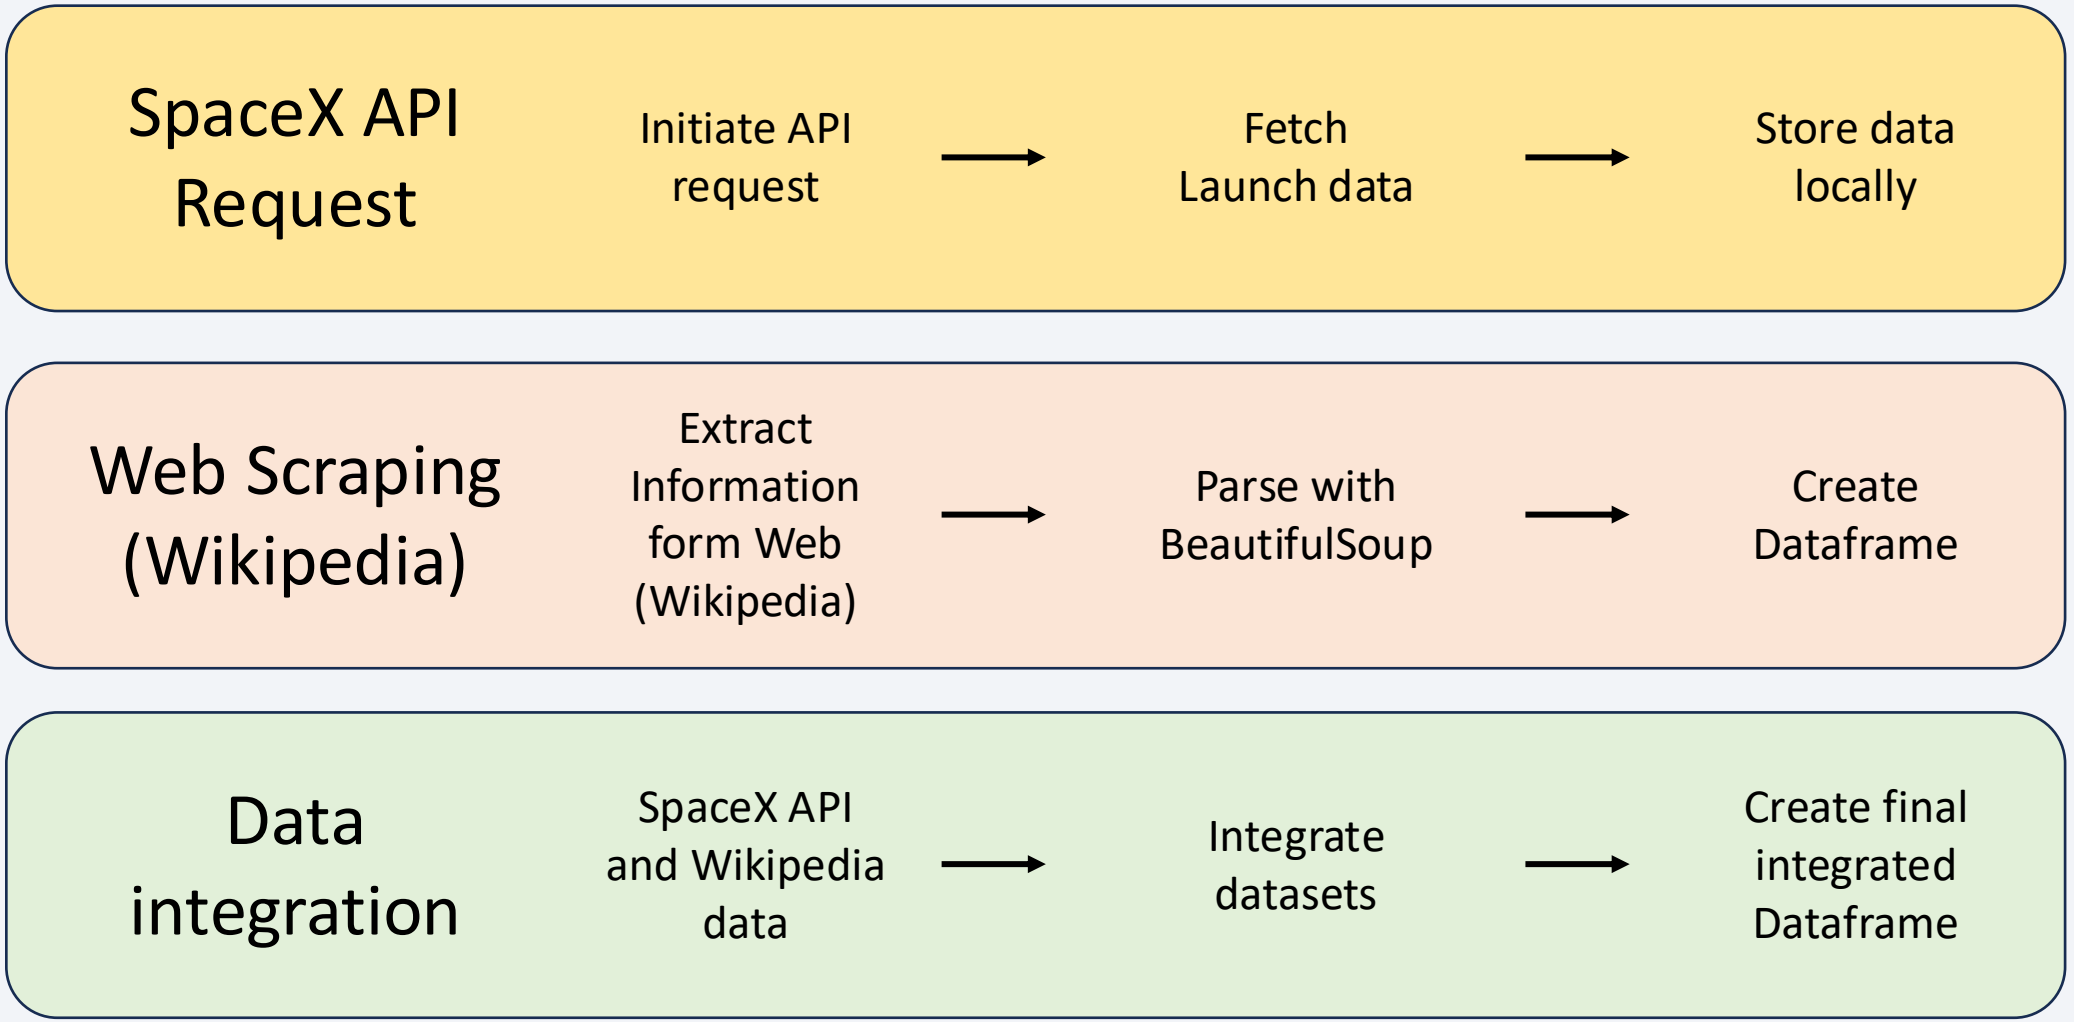

Data Collection – SpaceX API

Step 1: *Initiate API Request*

- Use Python's requests library to connect to the SpaceX API and retrieve launch data.

Step 2: *Decode JSON and Extract Relevant Information*


- Convert the JSON response into a Pandas DataFrame using pd.json_normalize(response.json()).
- Create Python dictionary to retrieve relevant information, including launch date, launch site, and launch outcome.

Step 3: *Data Wrangling*

- Filter the dataset to include the relevant launches.
- Assess missing values and impute missing payload mass values where necessary.

Step 4: *Save Data Locally*

- Export the cleaned dataset to a local CSV file for further analysis.

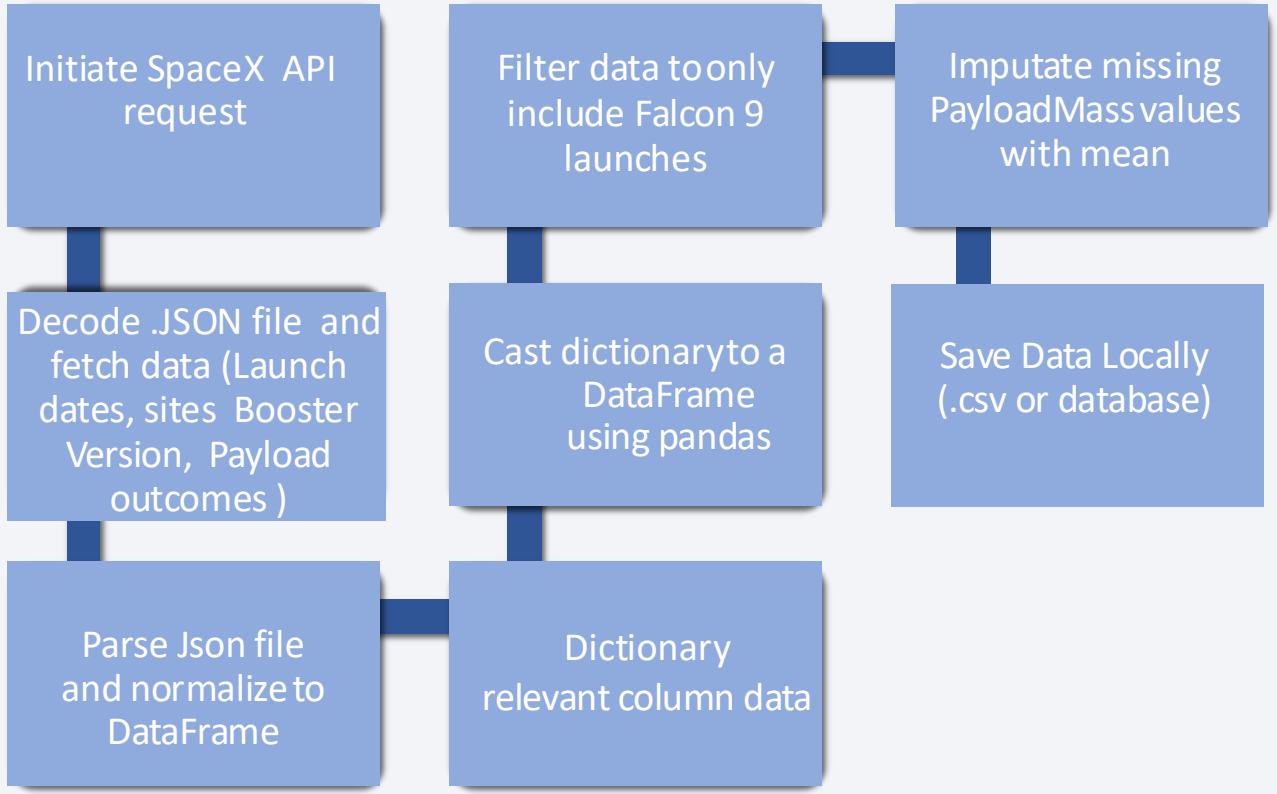

GitHub URL: https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/blob/main/1.1%20Hands-on%20Lab%20Complete%20the%20Data%20Collection%20API%20Lab.ipynb

Data Collection - Scraping


Step 1: *Data Cleaning*
Identify and fill or remove missing values in the dataset.
Use appropriate imputation techniques or drop rows/columns with excessive missing data.

Step 2: *Data Transformation*
convert landing outcomes into Training Labels with 1 meaning the booster successfully landed, and 0 means it was unsuccessful.

Value Mapping:

True ASDS, True RTLS, & True Ocean – set to -> 1

None None, False ASDS, None ASDS, False Ocean, False RTLS – set to -> 0

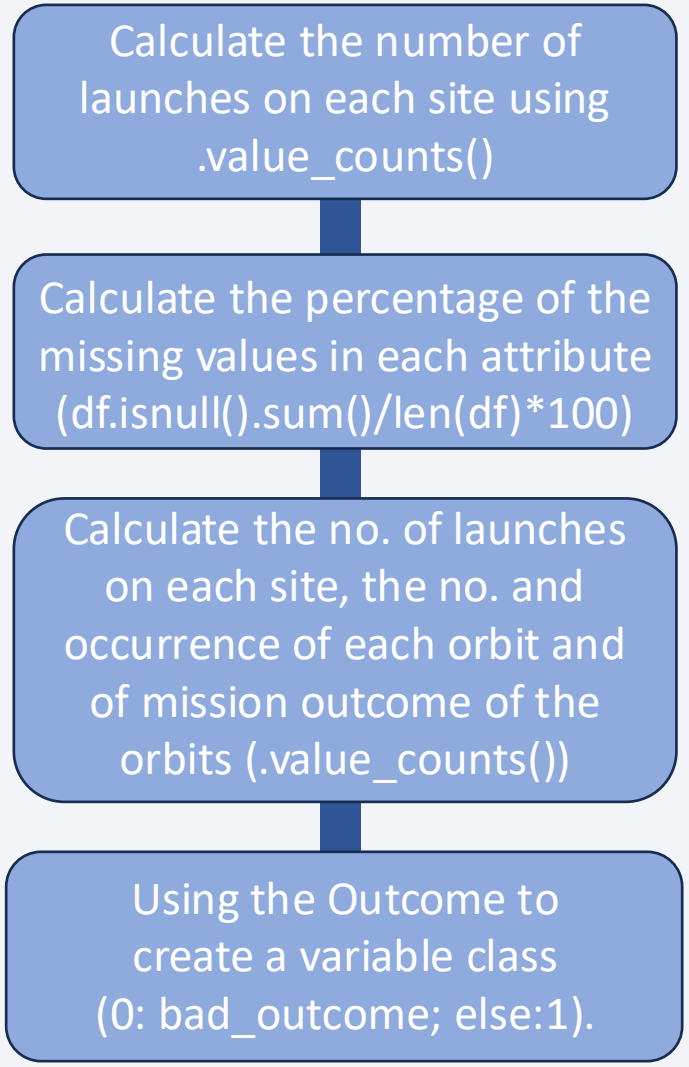

GitHub URL:
https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/blob/main/1.2jupyter-labs-webscraping.ipynb

Data Wrangling

Data wrangling involves cleaning, transforming, and organizing raw data into a structured and consistent format suitable for exploratory data analysis (EDA) and machine learning.

Step 1: Data Cleaning

- Identified missing values across the dataset and assessed their distribution to evaluate data completeness.


Step 2: Data Transformation

- Extracted relevant information from existing variables and engineered new features to support subsequent analysis.
- Scaled numerical features to ensure consistency and prepare the dataset for machine learning algorithms.

Step 3 Data Preprocessing and Label Creation

- Created a binary training label (class) based on landing outcomes, assigning 1 to successful landings and 0 to unsuccessful landings. Values: True ASDS, True RTLS, & True Ocean – set to -> 1 None None, False ASDS, None ASDS, False Ocean, False RTLS – set to -> 0
- Converted categorical landing outcomes into numerical labels to make the dataset suitable for supervised machine learning models.

Data Wrangling (Flowchart)

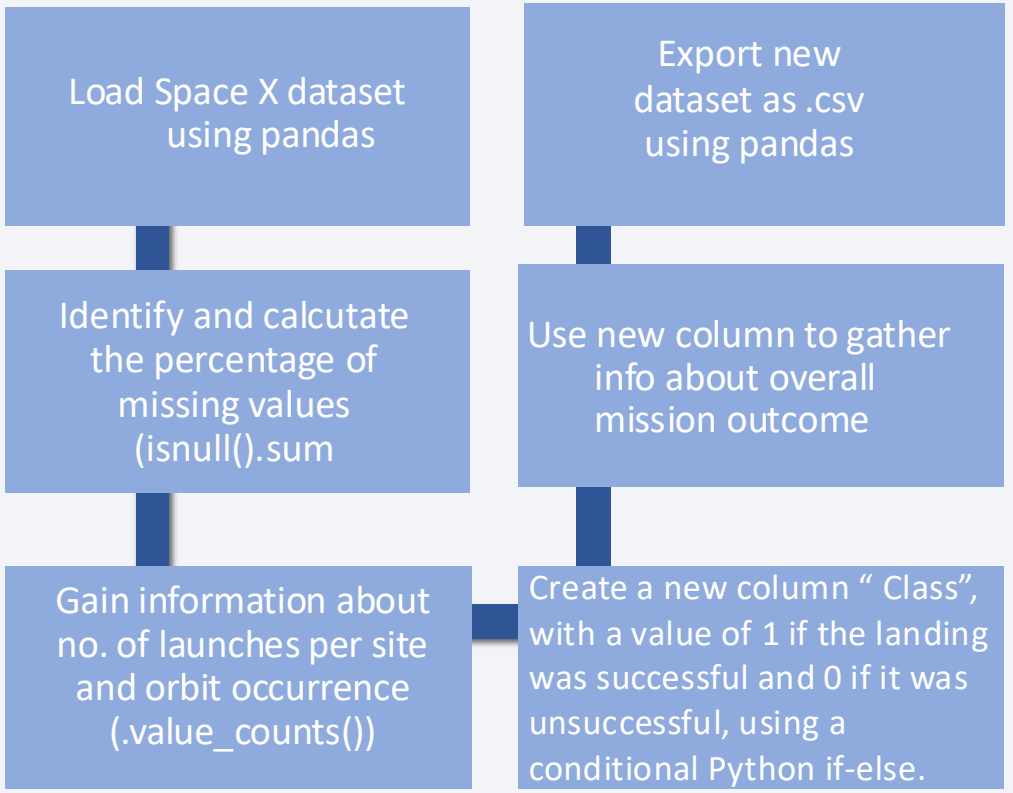

GitHub URL: https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/blob/main/1.3labs-jupyter-spacex-Data%20wrangling.ipynb

EDA with Data Visualization

Exploratory Data Analysis (EDA) involves visually exploring dataset characteristics. EDA was performed on Flight Number, Payload Mass, Launch Site, Orbit, Class and Year.

Charts plotted exploited:

- Scatter plot
  - Aim: to explore relationships between 2 variables, such as payload mass vs success.
  - Reason: to Identify correlations and dependencies.
- Line Chart
  - Aim: to track trends over time, such as success rate of Falcon 9 launches over the years.
  - Reason: Visual representation of patterns helping to understand performance trends over time.
- Bar plot
  - Aim: Compare categorical variables such as launch outcome across launch sites
  - Reason: Direct comparison of frequencies or proportions of positive launch outcomes per site.

GitHub URL: https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/blob/main/2.2edadataviz.ipynb

EDA with SQL

EDA using SQL helps identify key characteristics, patterns, and relationships within the dataset, providing a foundation for subsequent data visualization, feature engineering, and predictive modelling.

- Loaded the dataset into an SQLite database.
- Used SQL queries through Python integration to explore and retrieve relevant information.
- Examined the dataset to better understand its structure, variables, and distributions.
- Queried launch site names, mission outcomes, customer payload masses, booster versions, and landing outcomes to identify relevant patterns and trends for further analysis.

GitHub URL: https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/blob/main/EDA_SQL_jupyter-labs-eda-sql-coursera_sqllite%20(1).ipynb

Build an Interactive Map with Folium

Using Folium to create interactive maps helps visualize launch site locations geographically, explore spatial patterns, and better understand how location may relate to launch outcomes.

Map Objects Created:

1. Markers

Added markers to identify the geographical locations of SpaceX launch sites.

Provided an interactive overview of the different launch facilities.

2. Circles

Added circular overlays around selected launch sites.

Highlighted surrounding geographical areas and visualized proximity.

3. Lines

Added lines connecting launch sites with other relevant geographical locations.

Illustrated spatial relationships and geographical connections between points of interest.

Purpose of Adding Map Objects:

- Markers: Pinpoint launch facilities and geographical site.
- Circles: Highlight surrounding areas and provide spatial context.
- Lines: Visualize geographical connections and facilitate the interpretation of spatial relationships.

GitHub URL: https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/blob/main/3.1lab_jupyter_launch_site_location.ipynb

Build a Dashboard with Plotly Dash

Purpose of the Dashboard

The dashboard was designed to provide an interactive visualization of SpaceX launch data, allowing users to explore launch success rates, investigate the relationship between payload mass and landing outcomes, and compare performance across different launch sites.

GitHub URL: https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/blob/main/3.2%20Build%20an%20Interactive%20Dashboard%20with%20Ploty%20Dash.py

Build a Dashboard with Plotly Dash

.

Plots/Graphs Added

1. Success Pie Chart

- Displayed the distribution of successful and unsuccessful launches.
- Provided a visual overview of the overall launch success rate, essential for stakeholders to understand overall performance

2. Payload Mass vs. Launch Success Scatter Plot

- Allowed users to dynamically adjust the payload mass range and explore correlated launch outcomes.
- Support decision-making processes and identification of operational strategies.

Interactions Added

1. Launch Site Dropdown

- Enabled users to select individual launch sites for analysis.
- Allowed focused exploration and comparison of launch outcomes across different geographical locations.

2. Payload Mass Range Slider

- Allowed users to dynamically adjust the payload mass range.
- Enabled exploration of launch outcomes across different payload mass intervals.

Predictive Analysis (Classification)

1. Data Preprocessing

- Standardized features to ensure variables contribute equally to model training.
- Split the dataset into training and test sets for model development and validation.

2. Model Selection

- Explored classification algorithms: Regression, Support Vector Machines (SVM), Decision Trees, and K-Nearest Neighbors (KNN).
- Selected models suitable for predicting binary classification outcomes.

3. Hyperparameter Tuning

- Used GridSearchCV with cross-validation to identify optimal model parameters.
- Tuned key hyperparameters.

4. Model Evaluation

- Evaluated model performance using cross-validation.
- Applied performance metrics including accuracy, precision, recall, and F1-score.


5. Model Optimization

- Compared model performance and iteratively refined hyperparameters.
- Aimed to improve predictive accuracy while minimizing overfitting.

6. Best Model Selection

- Identified the best-performing model based on test-set accuracy.
- Compared training and test performance to assess generalizability and model reliability.


Predictive Analysis (Flowchart)

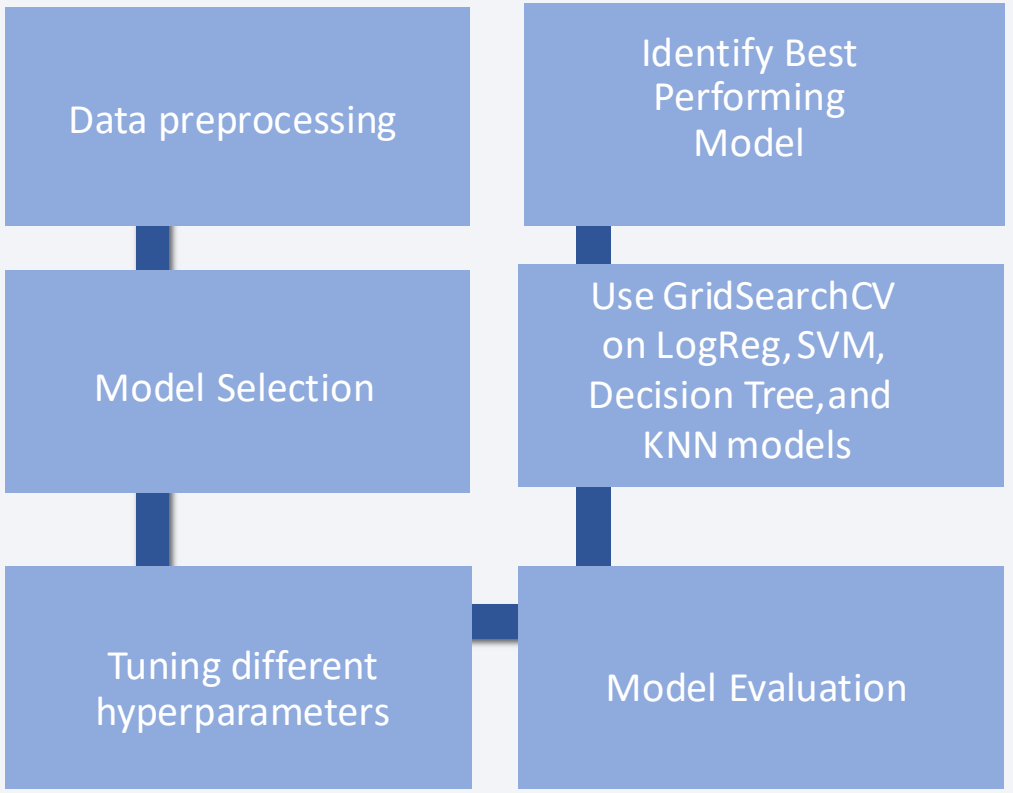


GitHub URL: https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/blob/main/4.1_SpaceX_Machine%20Learning%20Prediction_Part_5.ipynb

Results

Exploratory data analysis results

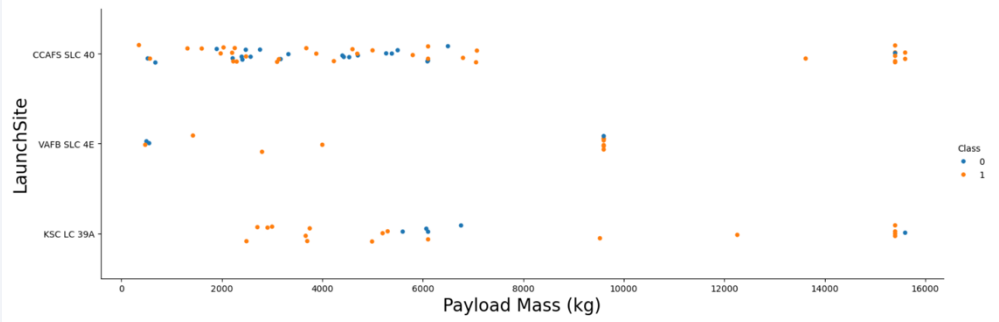


Interactive analytics demo in screenshots

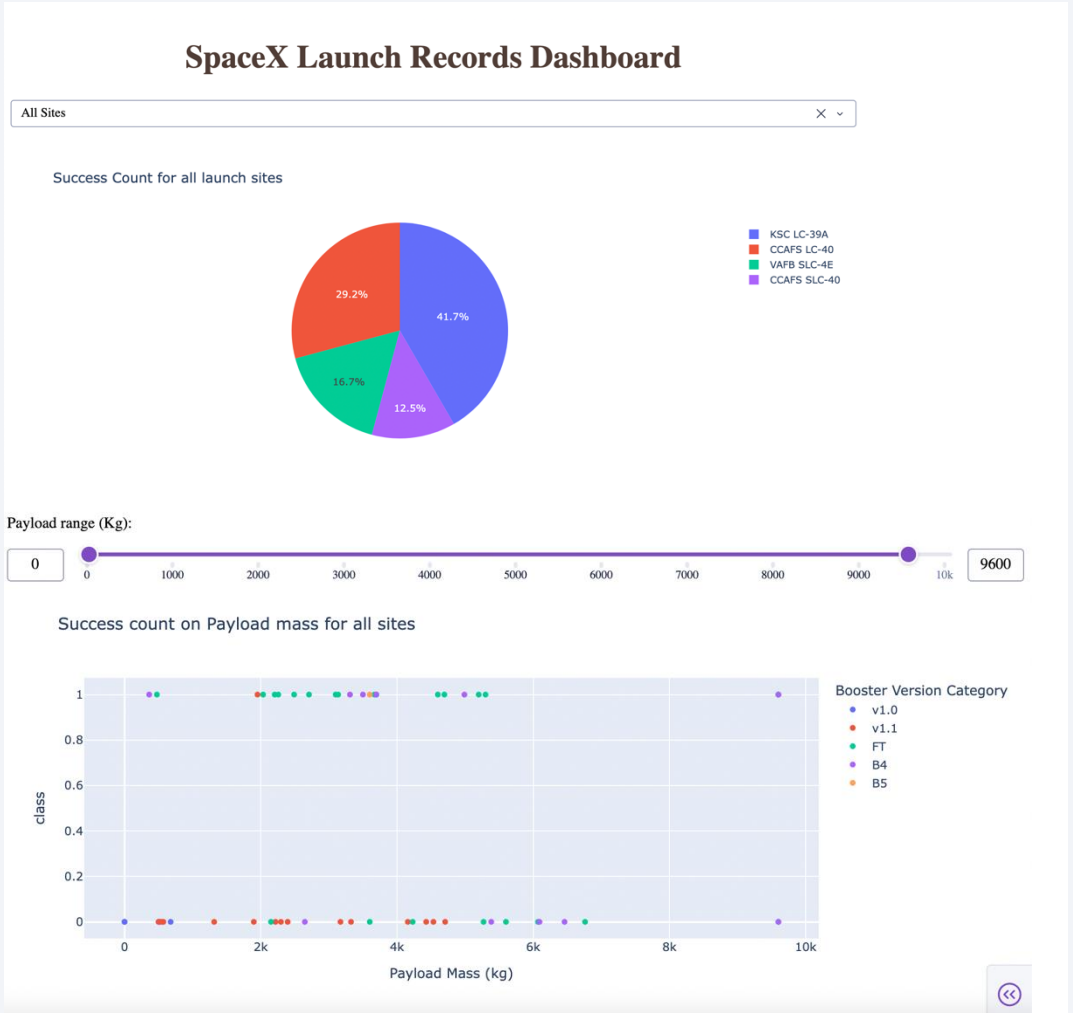


Predictive analysis results

Model	Accuracy	TestAccuracy
LogReg	0.84643	0.83333
SVM	0.84821	0.83333
Tree	0.875	0.83333
KNN	0.84821	0.83333

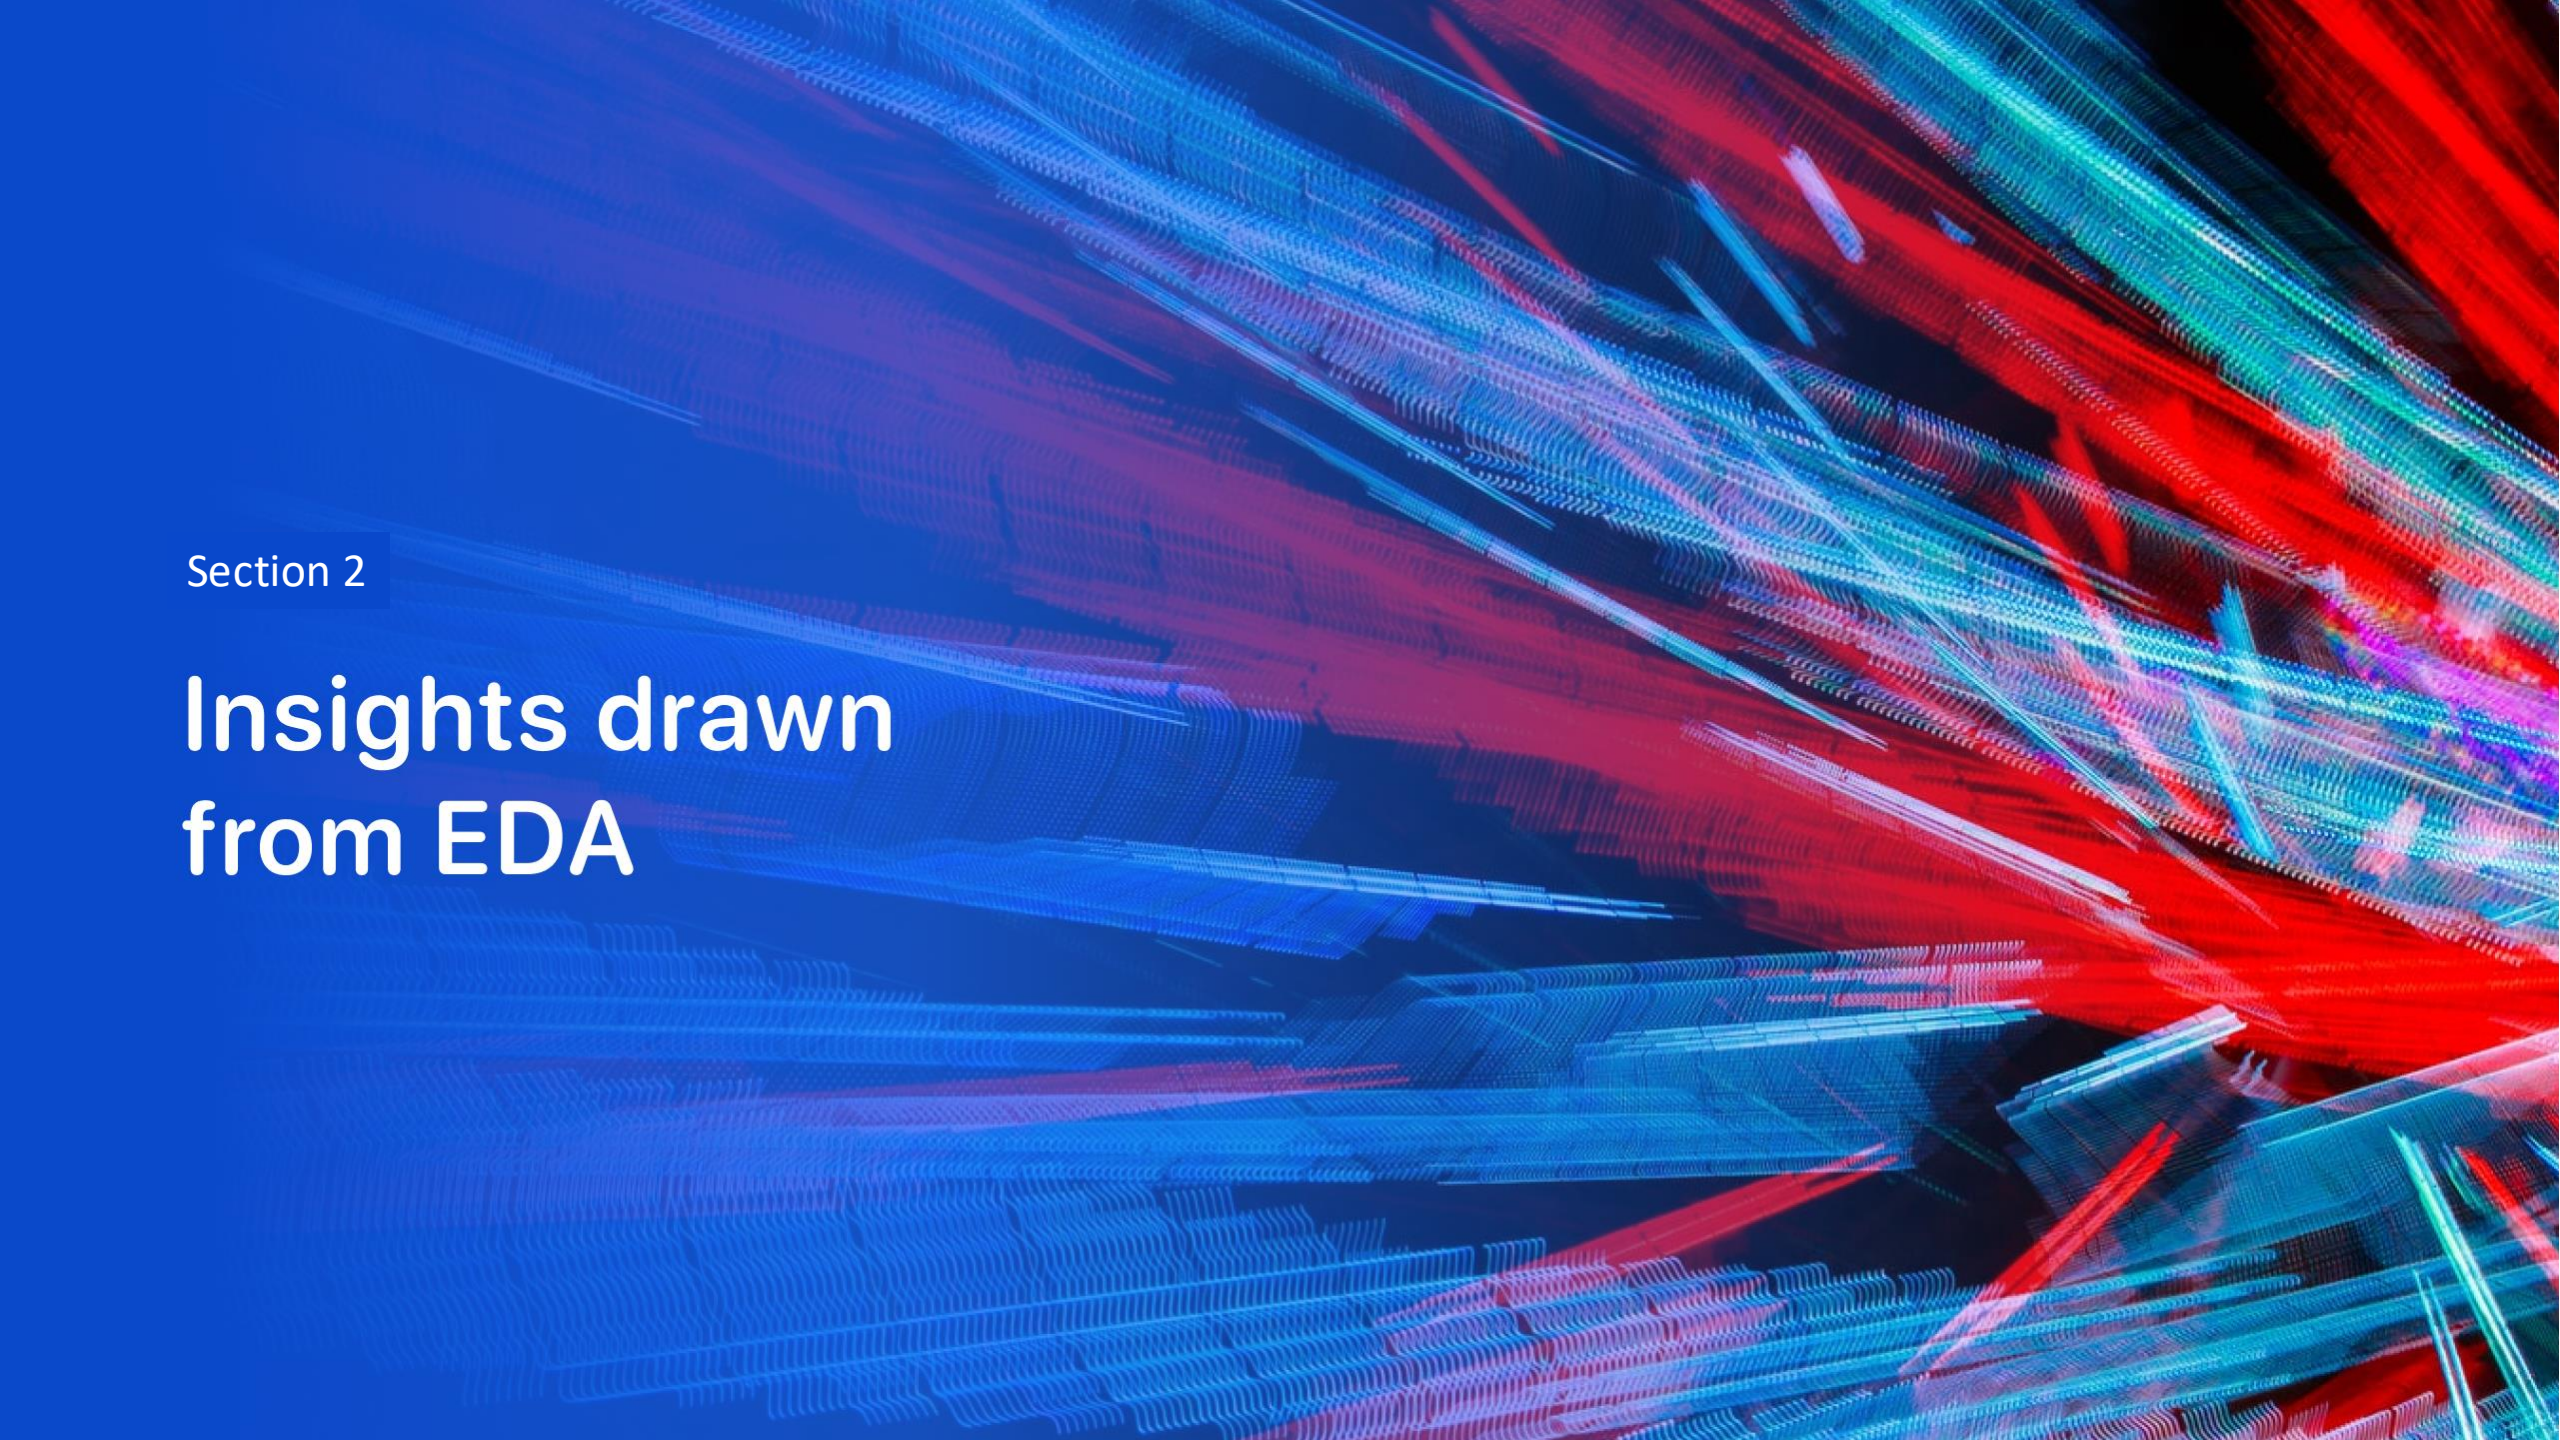

Section 2
Insights drawn from EDA

Flight Number vs. Launch Site

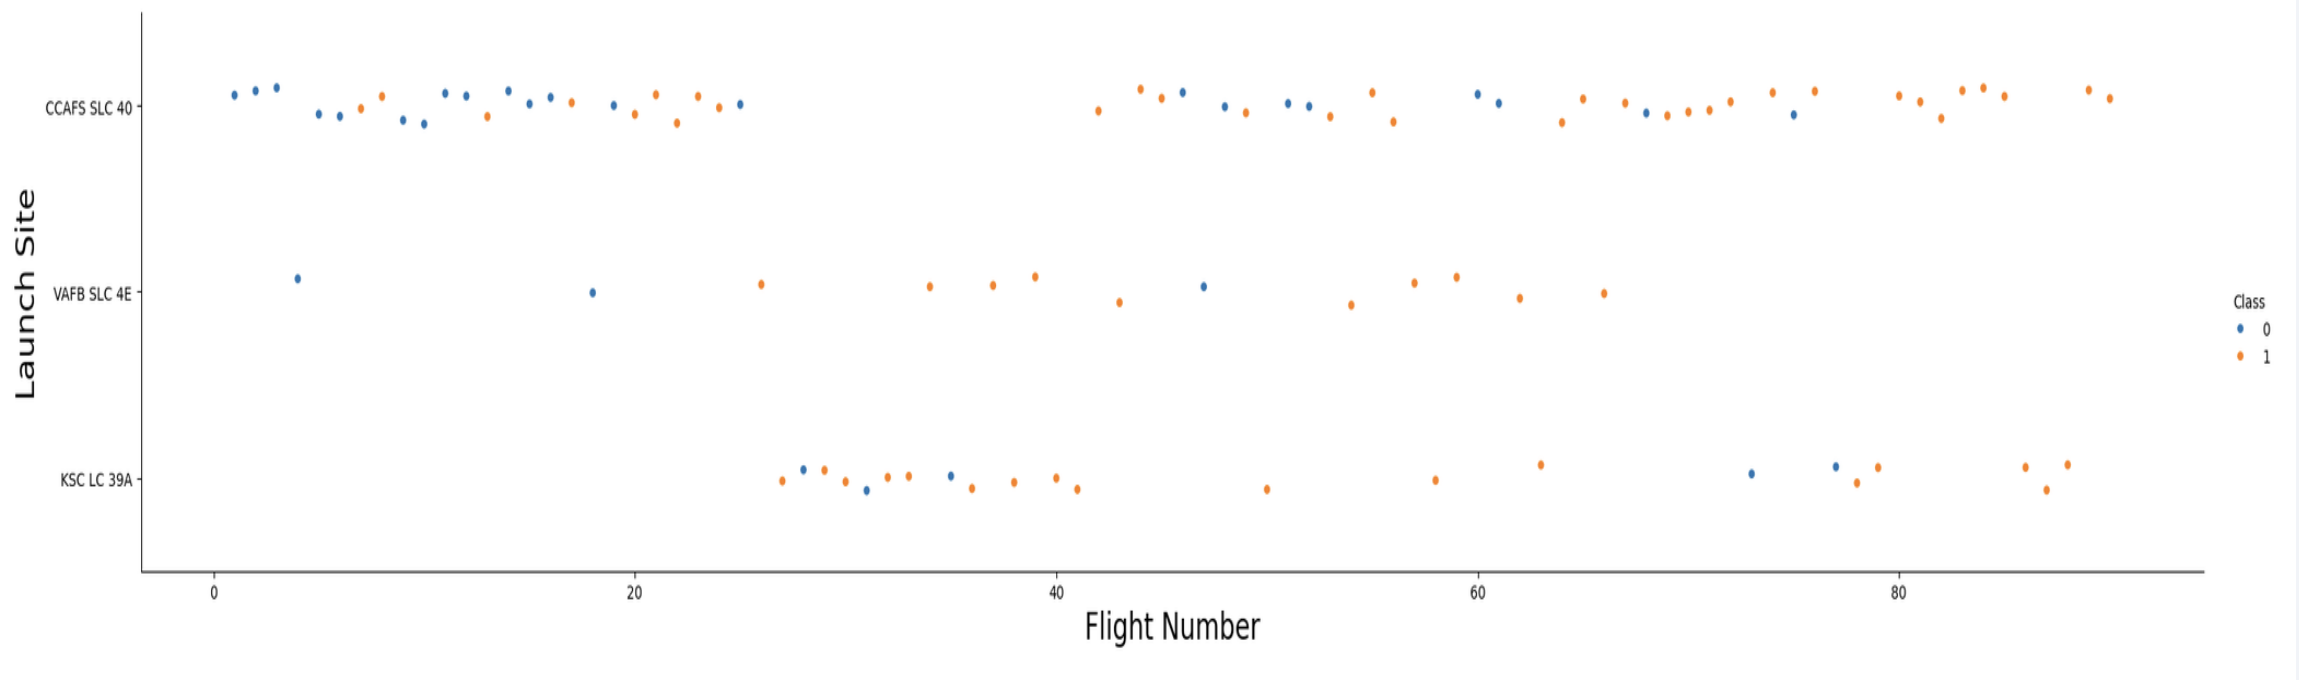


As the flight number increases, launch success rates generally improve across all launch sites. At VAFB SLC-4E, nearly all launches after flight number 20 are successful, with only one exception. At the other launch sites, all launches after flight number 80 are successful.

Payload vs. Launch Site

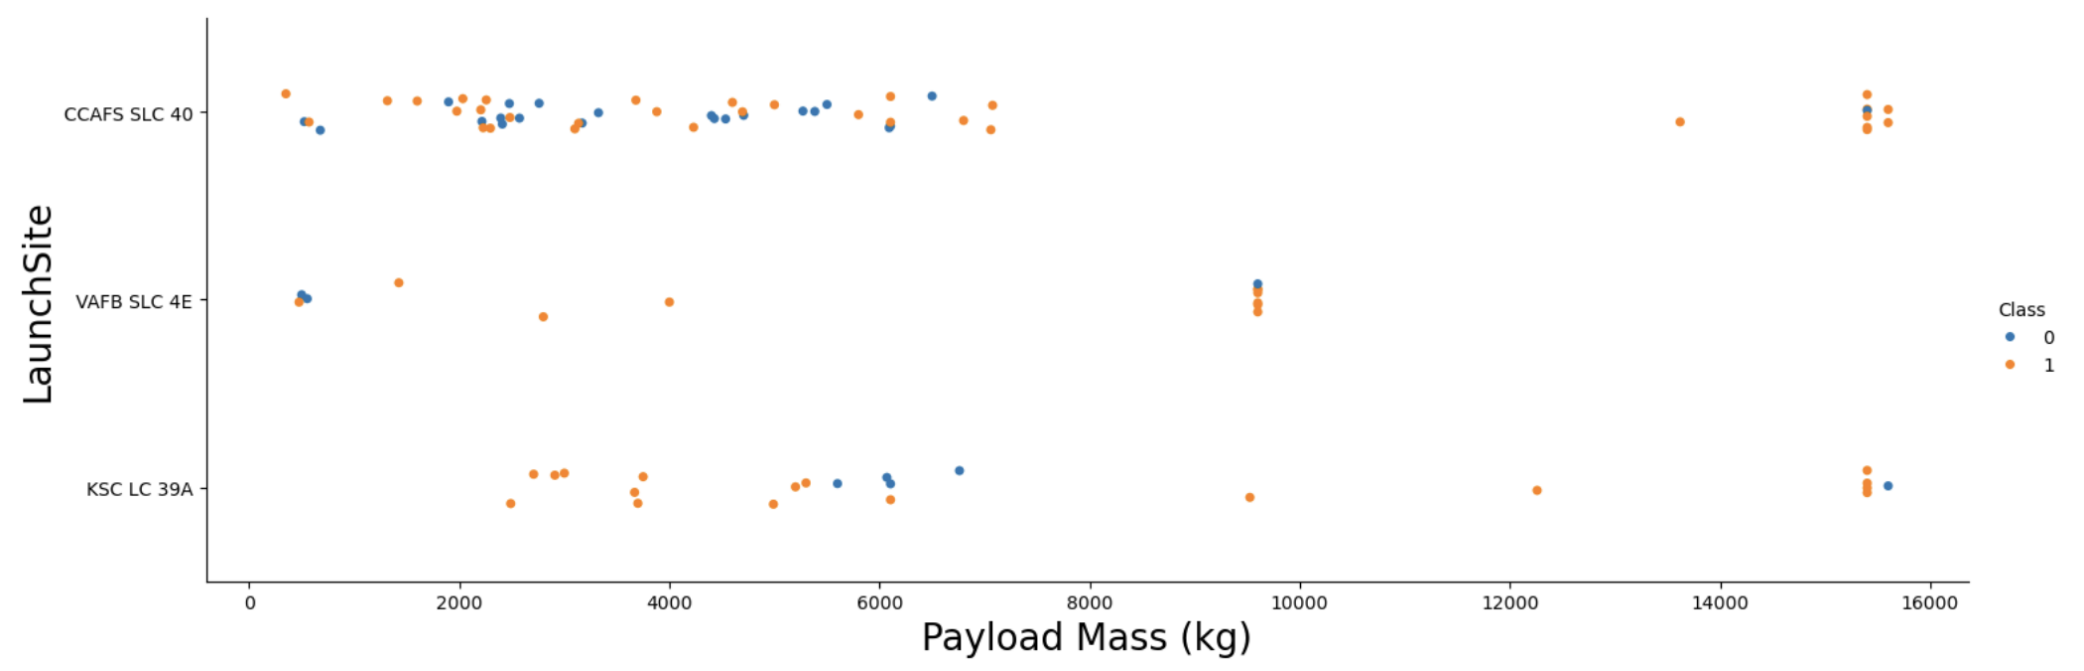


The Payload Mass vs. Launch Site scatter plot shows that VAFB-SLC 4E has no recorded launches carrying heavy payloads (greater than 10,000 kg).

Success Rate vs. Orbit Type

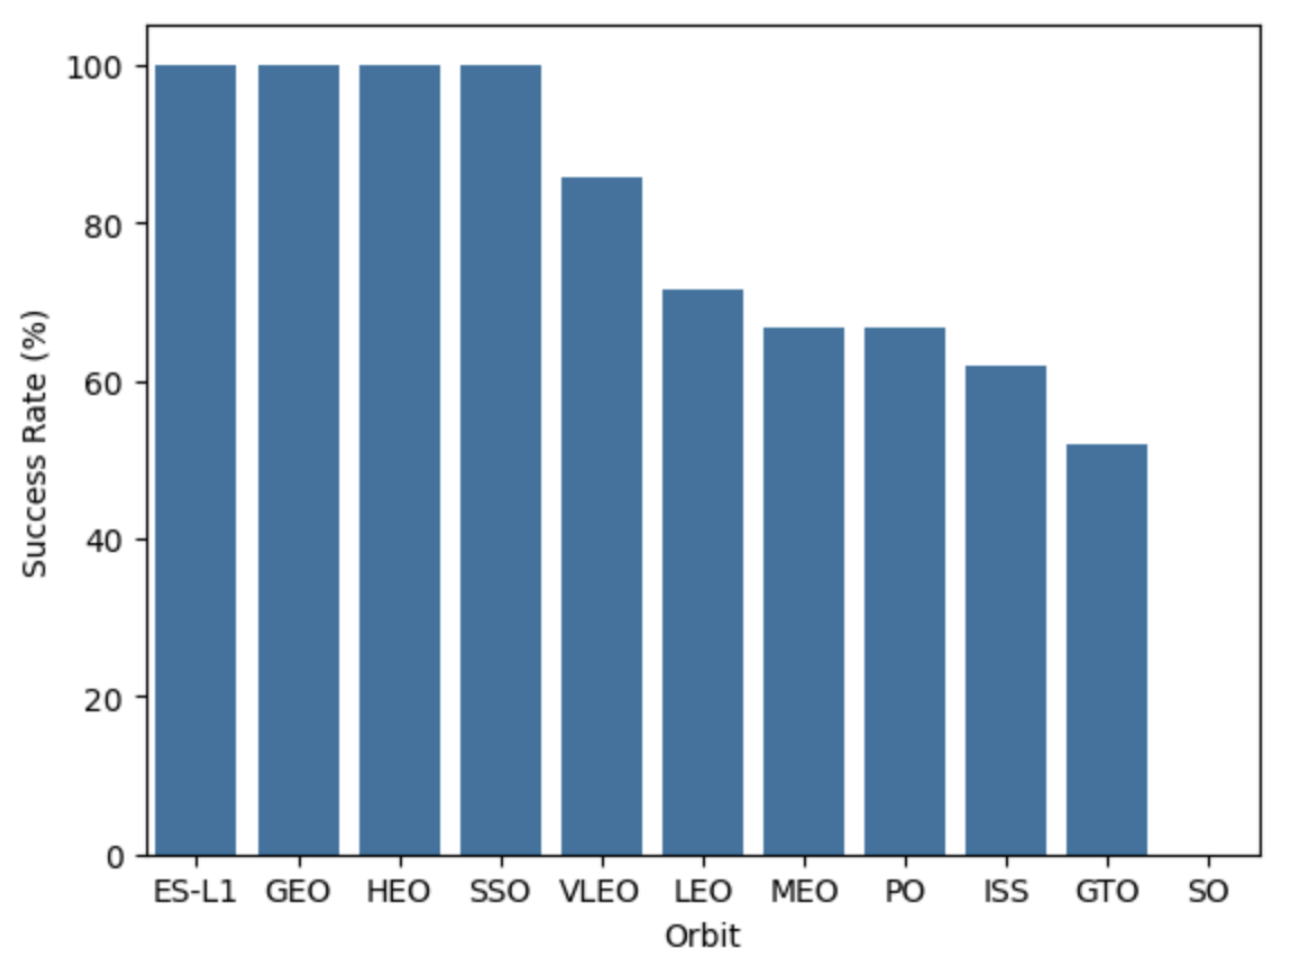


- Analysing the success rate by orbit, we can observe that ES-L1, GEO, HEO, and SSO have a 100% success rate, while SO has a 0% success rate.
- The remaining orbits (VLEO, LEO, MEO, PO, ISS, and GTO) show success rates ranging between 50% and 85%, indicating variations in launch reliability depending on the orbit.

Flight Number vs. Orbit Type

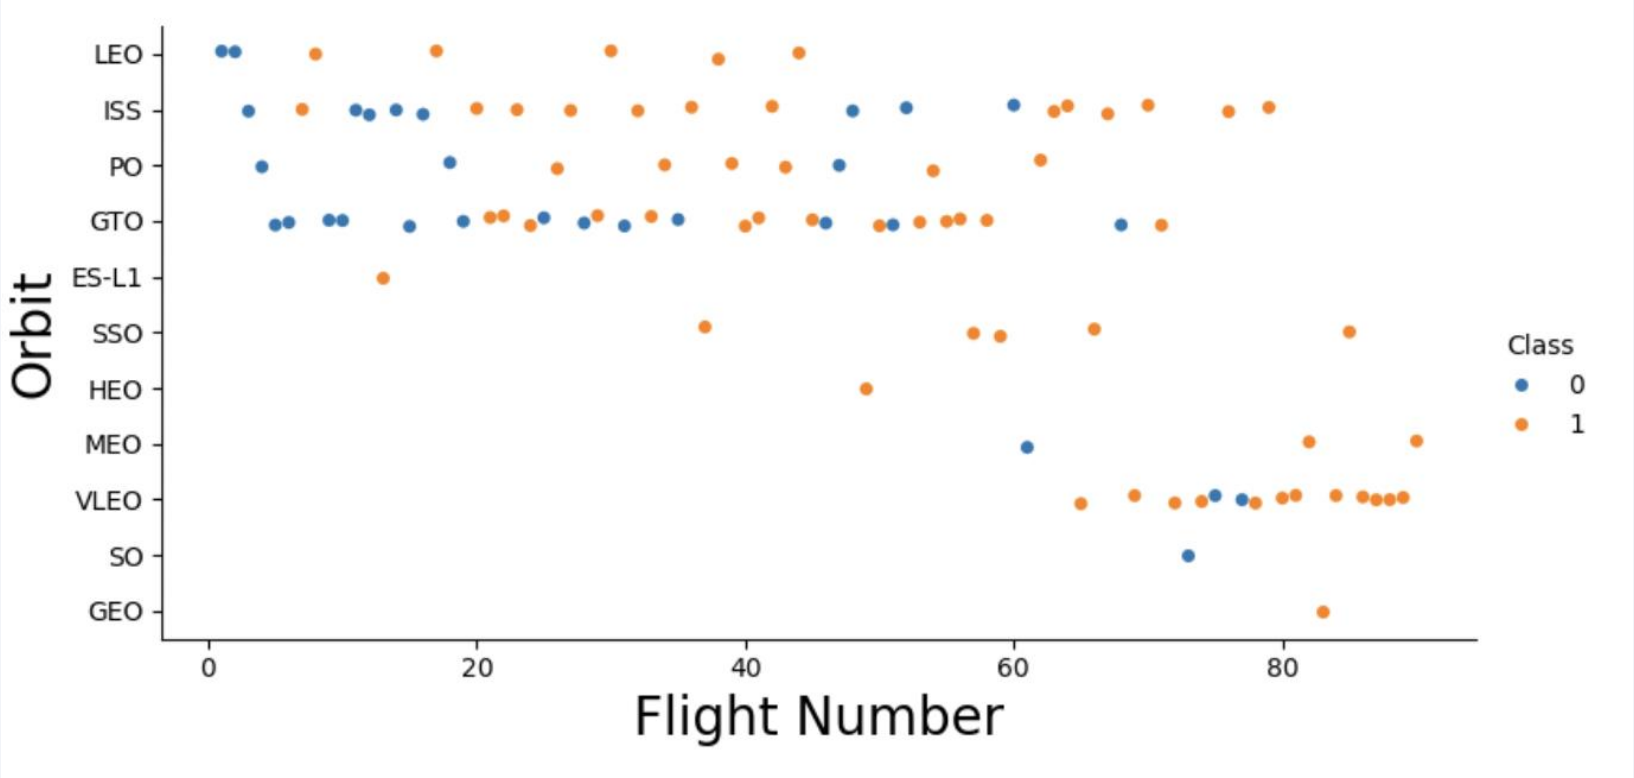


In the LEO orbit, launch success appears to improve as the flight number increases. In contrast, the GTO orbit shows no clear correlation between flight number and launch success.

Payload vs. Orbit Type

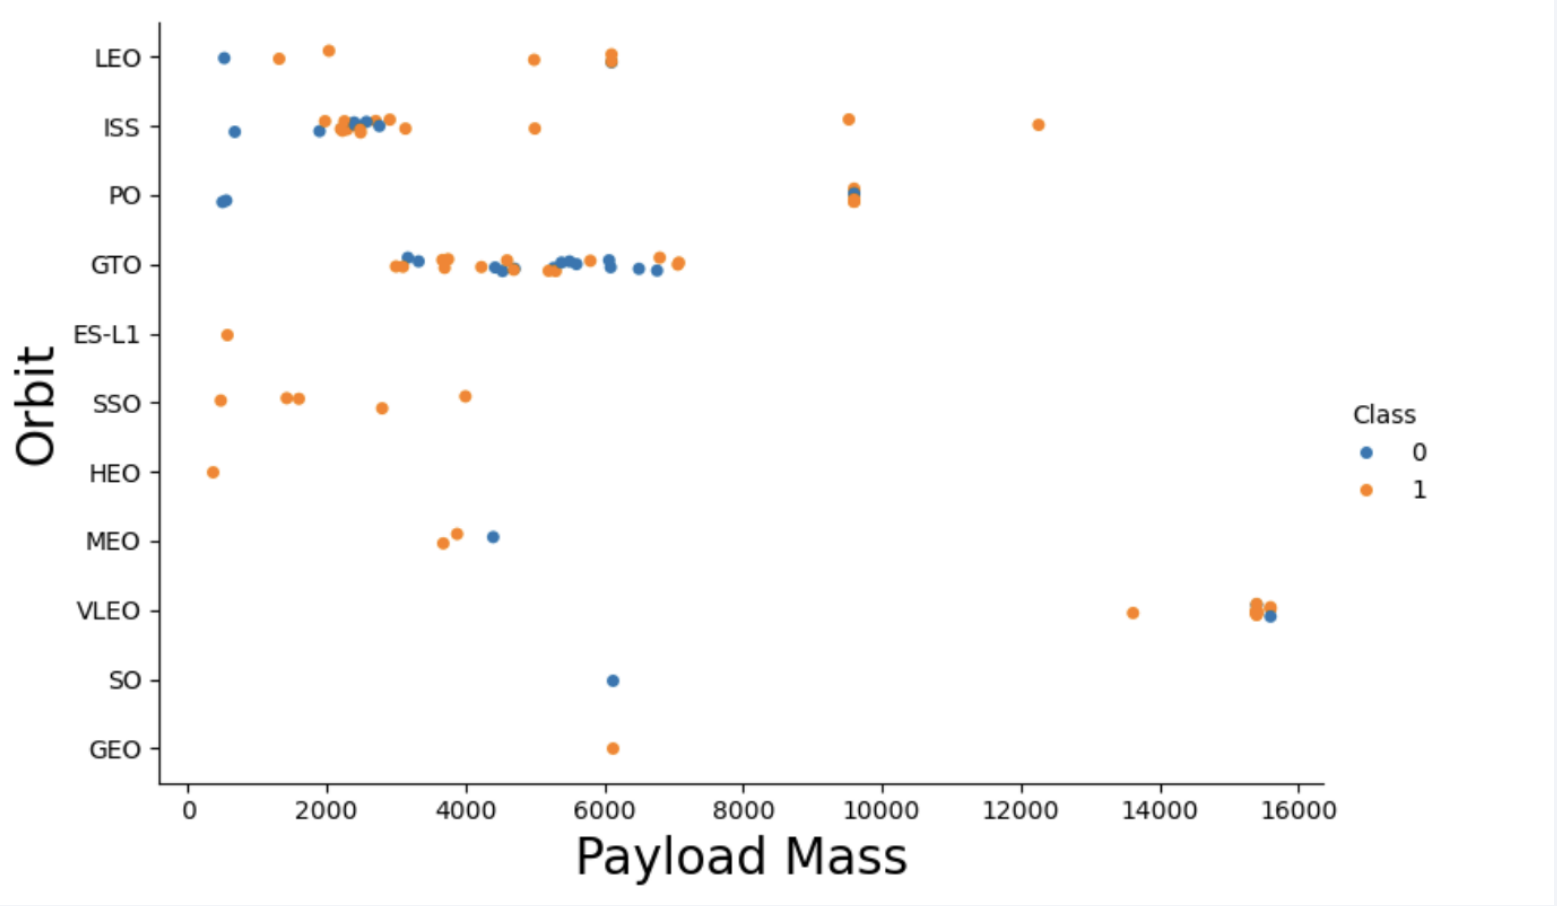

For heavy payloads, successful landing outcomes are more frequent in PO, LEO, and ISS orbits. In contrast, GTO missions show a more mixed distribution, with both successful and unsuccessful landings, making it difficult to identify a clear pattern.

Launch Success Yearly Trend

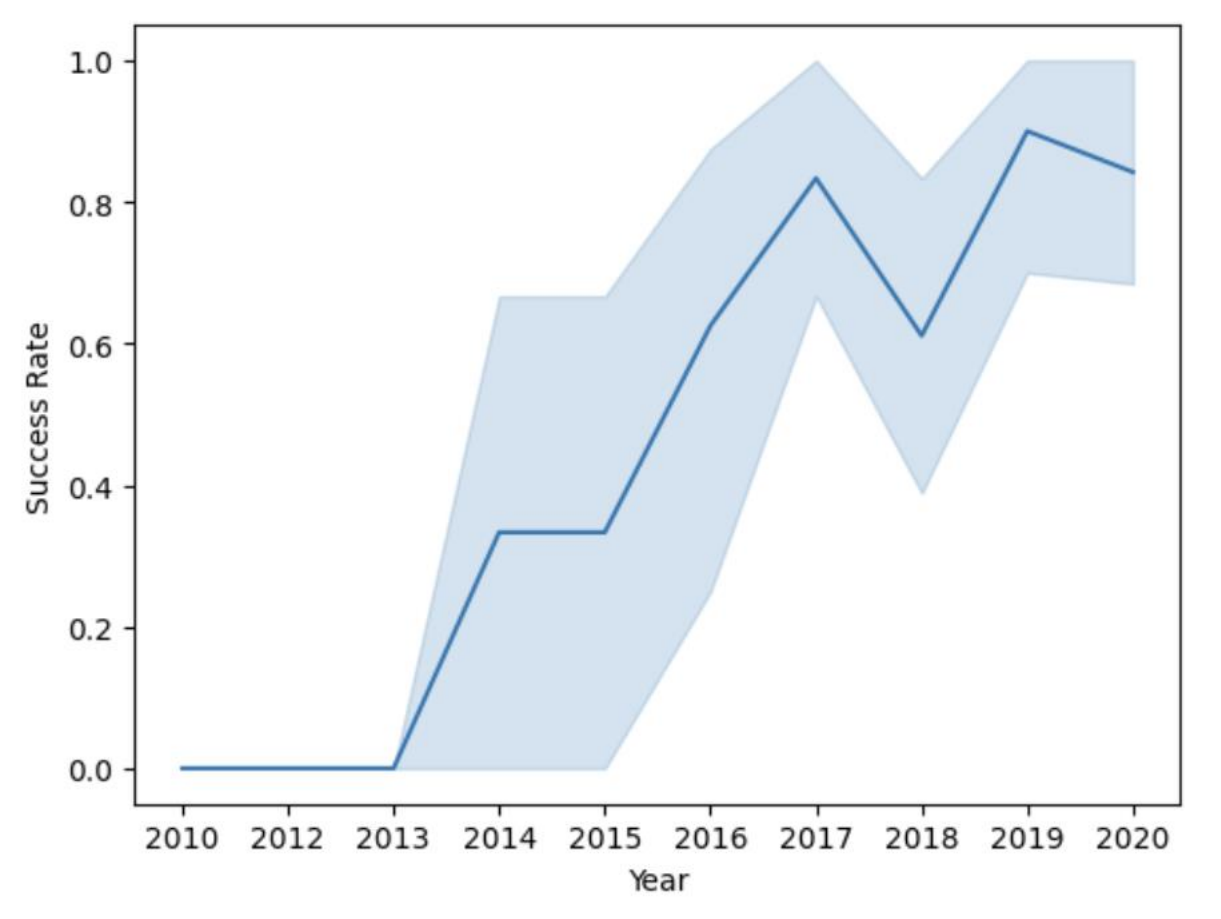

The launch success rate shows a steady upward trend from 2013 to 2020, indicating a continuous improvement in overall launch reliability over time.

All Launch Site Names

”Select distinct” allows to select only the unique different sites from the Launch_Site list

Task 1

Display the names of the unique launch sites in the space mission

```
%sql select distinct Launch_Site from SPACEXTBL
```

```
 * sqlite:///my_data1.db
Done.
```

Launch_Site
CCAFS LC-40
VAFB SLC-4E
KSC LC-39A
CCAFS SLC-40

Launch Site Names Begin with 'CCA'

This table shows the top 5 results from Launch_Site where the launch site starts specifically with ‘CCA’ using like and limit

Task 2

Display 5 records where launch sites begin with the string 'CCA'

```
%sql select * from SPACEXTBL where Launch_Site like 'CCA%' limit 5
```

```
 * sqlite:///my_data1.db
Done.
```

Date	Time (UTC)	Booster_Version	Launch_Site	Payload	PAYLOAD_MASS__KG_	Orbit	Customer	Mission_Outcome	Landing_Outcome
2010-06-04	18:45:00	F9 v1.0 B0003	CCAFS LC-40	Dragon Spacecraft Qualification Unit	0	LEO	SpaceX	Success	Failure (parachute)
2010-12-08	15:43:00	F9 v1.0 B0004	CCAFS LC-40	Dragon demo flight C1, two CubeSats, barrel of Brouere cheese	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2012-05-22	7:44:00	F9 v1.0 B0005	CCAFS LC-40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
2012-10-08	0:35:00	F9 v1.0 B0006	CCAFS LC-40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
2013-03-01	15:10:00	F9 v1.0 B0007	CCAFS LC-40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt

Total Payload Mass

Using SUM, the total payload mass carried by boosters launched by NASA (CRS)

Task 3

Display the total payload mass carried by boosters launched by NASA (CRS)

```
%sql select SUM("PAYLOAD_MASS__KG_") from SPACEXTBL where Customer = 'NASA (CRS)'
```

```
 * sqlite:///my_data1.db
Done.
```

SUM("PAYLOAD_MASS__KG_")
45596

Average Payload Mass by F9 v1.1

Using avg, the average payload mass carried by booster version F9 v1.1 was calculated

Task 4

Display average payload mass carried by booster version F9 v1.1

```
%sql select avg(payload_mass__kg_) from SPACEXTBL WHERE booster_version = 'F9 v1.1'
```

```
 * sqlite:///my_data1.db
Done.
```

avg(payload_mass__kg_)
2928.4

First Successful Ground Landing Date

First successful landing outcome on ground pag was on 22-12-2015, found using min function

Task 5

List the date when the first succesful landing outcome in ground pad was acheived.

Hint:Use min function

```
%sql select min(DATE) from SPACEXTBL WHERE landing_outcome = 'Success (ground pad)'
```

```
 * sqlite:///my_data1.db
Done.
```

min(DATE)
2015-12-22

Successful Drone Ship Landing with Payload between 4000 and 6000

List the names of boosters which have successfully landed on drone ship and had payload mass greater than 4000 but less than 6000

Task 6

List the names of the boosters which have success in drone ship and have payload mass greater than 4000 but less than 6000

```
%sql select Booster_Version from SPACEXTBL where Landing_Outcome = 'Success (drone ship)' and PAYLOAD_MASS__KG_ between 4000 and 6000
```

```
 * sqlite:///my_data1.db
Done.
```

Booster_Version
F9 FT B1022
F9 FT B1026
F9 FT B1021.2
F9 FT B1031.2

Total Number of Successful and Failure Mission Outcomes

Using COUNT and GROUP BY functions to calculate the total number of successful and failure mission outcomes

List the total number of successful and failure mission outcomes

```
%sql select mission_outcome, count(*) AS Total from SPACEXTBL GROUP BY mission_outcome
```

```
 * sqlite:///my_data1.db
Done.
```

Mission_Outcome	Total
Failure (in flight)	1
Success	98
Success	1
Success (payload status unclear)	1

Boosters Carried Maximum Payload

Using a Subquery to list all Booster versions that have carried the max payload mass

Task 8

List all the booster_versions that have carried the maximum payload mass, using a subquery with a suitable aggregate function.

```
%sql select booster_version, payload_mass__kg_ from SPACEXTBL where payload_mass__kg_ = (select max(payload_mass__kg_) from SPACEXTBL)
```

```
 * sqlite:///my_data1.db
Done.
```

Booster_Version	PAYLOAD_MASS__KG_
F9 B5 B1048.4	15600
F9 B5 B1049.4	15600
F9 B5 B1051.3	15600
F9 B5 B1056.4	15600
F9 B5 B1048.5	15600
F9 B5 B1051.4	15600
F9 B5 B1049.5	15600
F9 B5 B1060.2	15600
F9 B5 B1058.3	15600
F9 B5 B1051.6	15600
F9 B5 B1060.3	15600
F9 B5 B1049.7	15600

2015 Launch Records

List of the failed landing_outcomes in drone ship, their booster versions, and launch site names for in year 2015 using substr

[56]:
```
%%sql
select
case
when substr(Date, 6, 2) = '01' then 'January'
when substr(Date, 6, 2) = '02' then 'February'
when substr(Date, 6, 2) = '03' then 'March'
when substr(Date, 6, 2) = '04' then 'April'
when substr(Date, 6, 2) = '05' then 'May'
when substr(Date, 6, 2) = '06' then 'June'
when substr(Date, 6, 2) = '07' then 'July'
when substr(Date, 6, 2) = '08' then 'August'
when substr(Date, 6, 2) = '09' then 'September'
when substr(Date, 6, 2) = '10' then 'October'
when substr(Date, 6, 2) = '11' then 'November'
when substr(Date, 6, 2) = '12' then 'December'
end as "Month", "Booster_Version", "Launch_Site", "Landing_Outcome"
from SPACEXTBL
where Landing_Outcome = 'Failure (drone ship)'
and substr(Date, 0, 5) = '2015';
```

```
 * sqlite:///my_data1.db
Done.
```

[56]:

Month	Booster_Version	Launch_Site	Landing_Outcome
January	F9 v1.1 B1012	CCAFS LC-40	Failure (drone ship)
April	F9 v1.1 B1015	CCAFS LC-40	Failure (drone ship)

Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

Ranked the count of landing outcomes (such as Failure (drone ship) or Success (ground pad)) between the date 2010-06-04 and 2017-03-20, in descending order using order by count () desc

Task 10

Rank the count of landing outcomes (such as Failure (drone ship) or Success (ground pad)) between the date 2010-06-04 and 2017-03-20, in descending order.

[20]:
```
%sql select count(landing_outcome), landing_outcome from SPACEXTBL \
where DATE between '2010-06-04' and '2017-03-20' group by landing_outcome \
order by count(landing_outcome) desc
```

```
 * sqlite:///my_data1.db
Done.
```

[20]:

count(landing_outcome)	Landing_Outcome
10	No attempt
5	Success (drone ship)
5	Failure (drone ship)
3	Success (ground pad)
3	Controlled (ocean)
2	Uncontrolled (ocean)
2	Failure (parachute)
1	Precluded (drone ship)


Section 3
Launch Sites
Proximities Analysis


Mark all launch sites on a map

Analysis of Launch Site Locations indicated on map:

1. Are all launch sites in proximity to the Equator?
   - No, not all launch sites are located close to the Equator.
   - VAFB SLC-4E is further from the Equator than the Florida launch sites.


2. Are all launch sites in close proximity to the coast?
- Yes, all launch sites are located relatively close to the coast.
- CCAFS LC-40 and SLC-40 and KSC LC-39A are situated along the Florida coast.
- VAFB SLC-4E is also located near the Pacific coast in California.

.

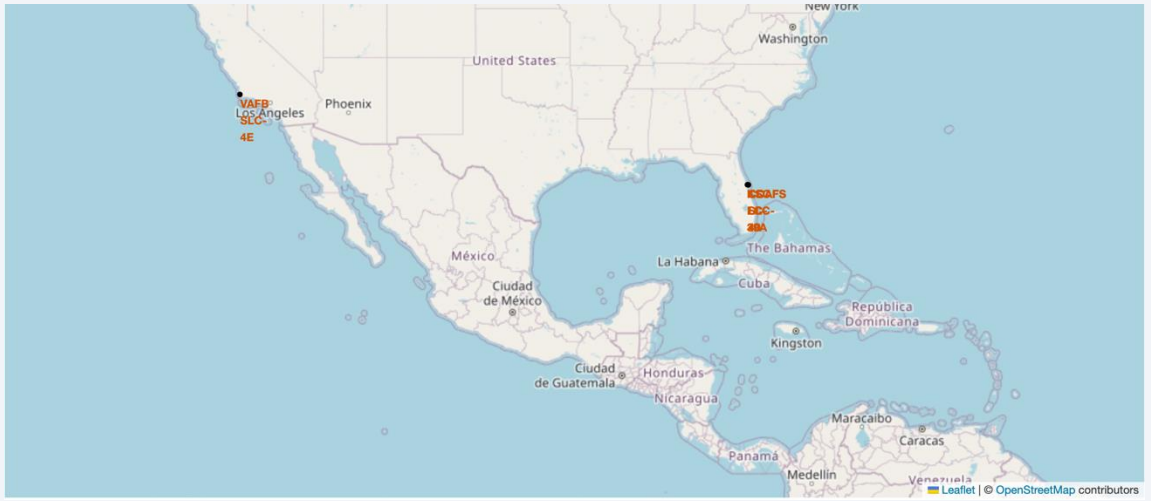


Mark the launch outcome for each site on map


- The clustered interactive map makes it easier to explore SpaceX launch locations, identify geographical patterns, and compare launch outcomes.
- Green markers represent successful launches, while red markers indicate failures, providing a quick visual overview of performance at each site.
- For example, CCAFS LC-40 has 19 unsuccessful and 7 successful launches out of 26.

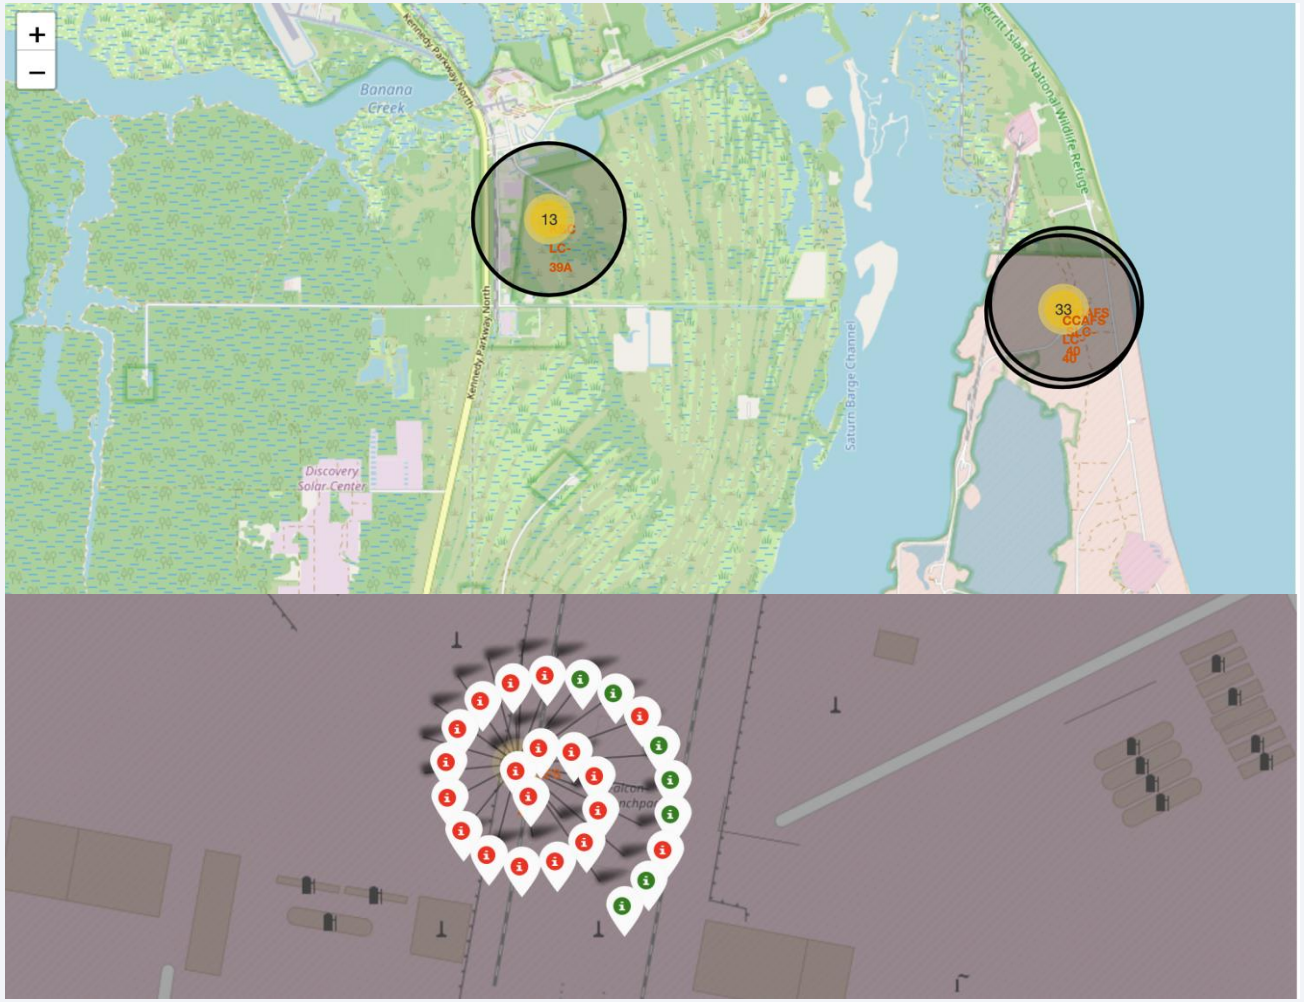

Distance between launch site and coastline

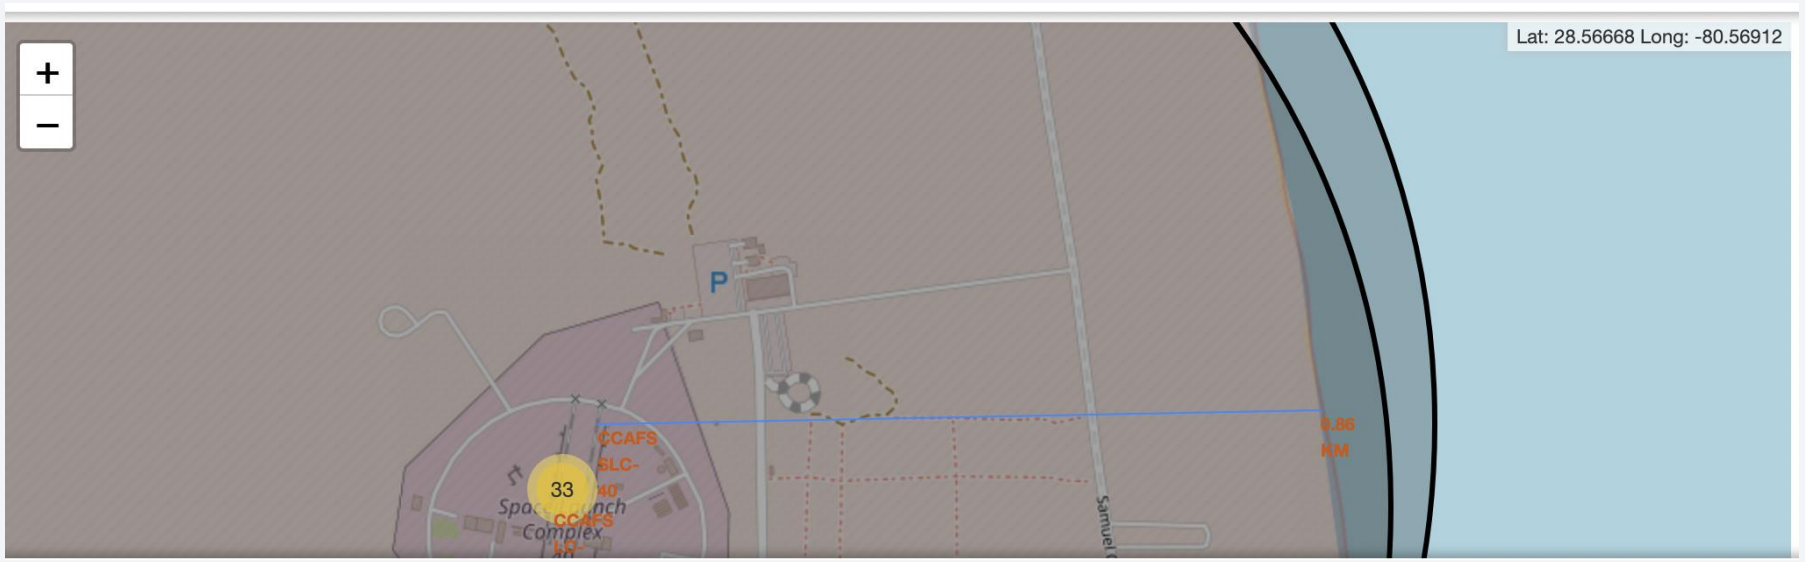


The map shows that CCAFS SLC-40 is 0.86 km from the nearest coastline, with the line added via PolyLine illustrating the distance and highlighting its coastal proximity.

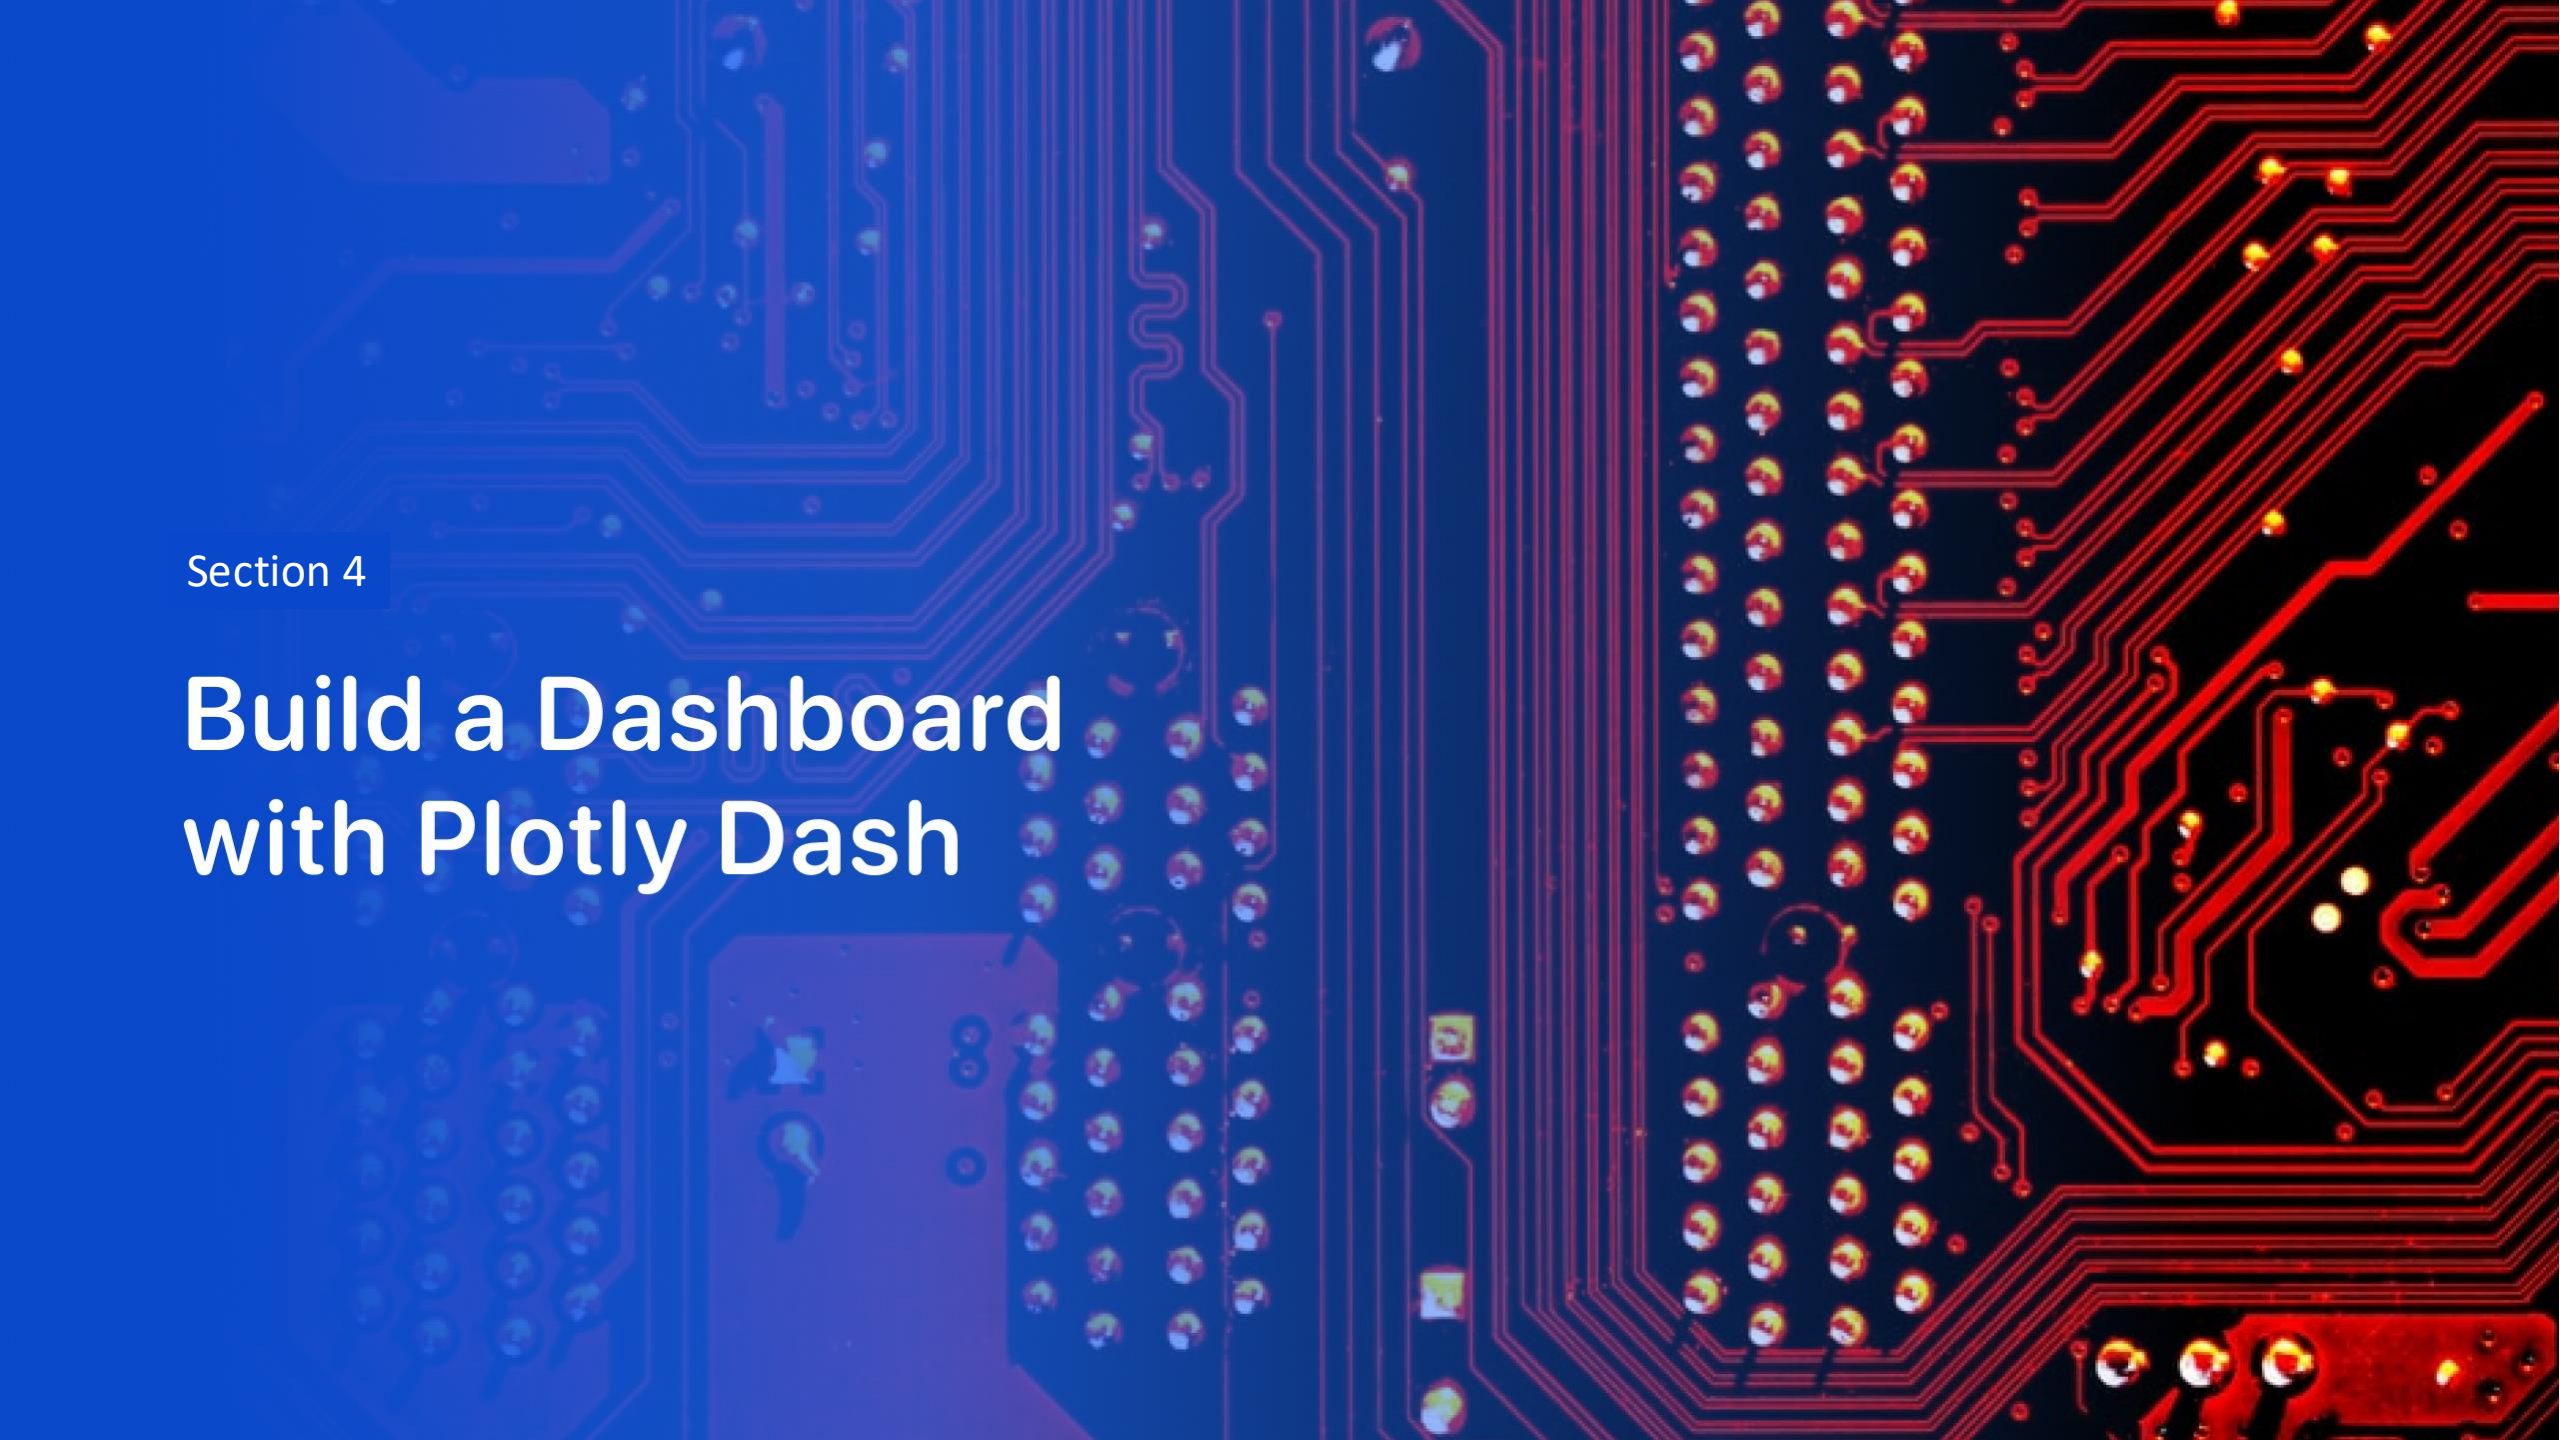

Section 4
Build a Dashboard with Plotly Dash

Launch success for all launch sites

- Dropdown menu: Allows users to select all launch sites or a specific launch site for analysis.
- Success rate pie chart: Displays the distribution of successful launches across all launch sites.

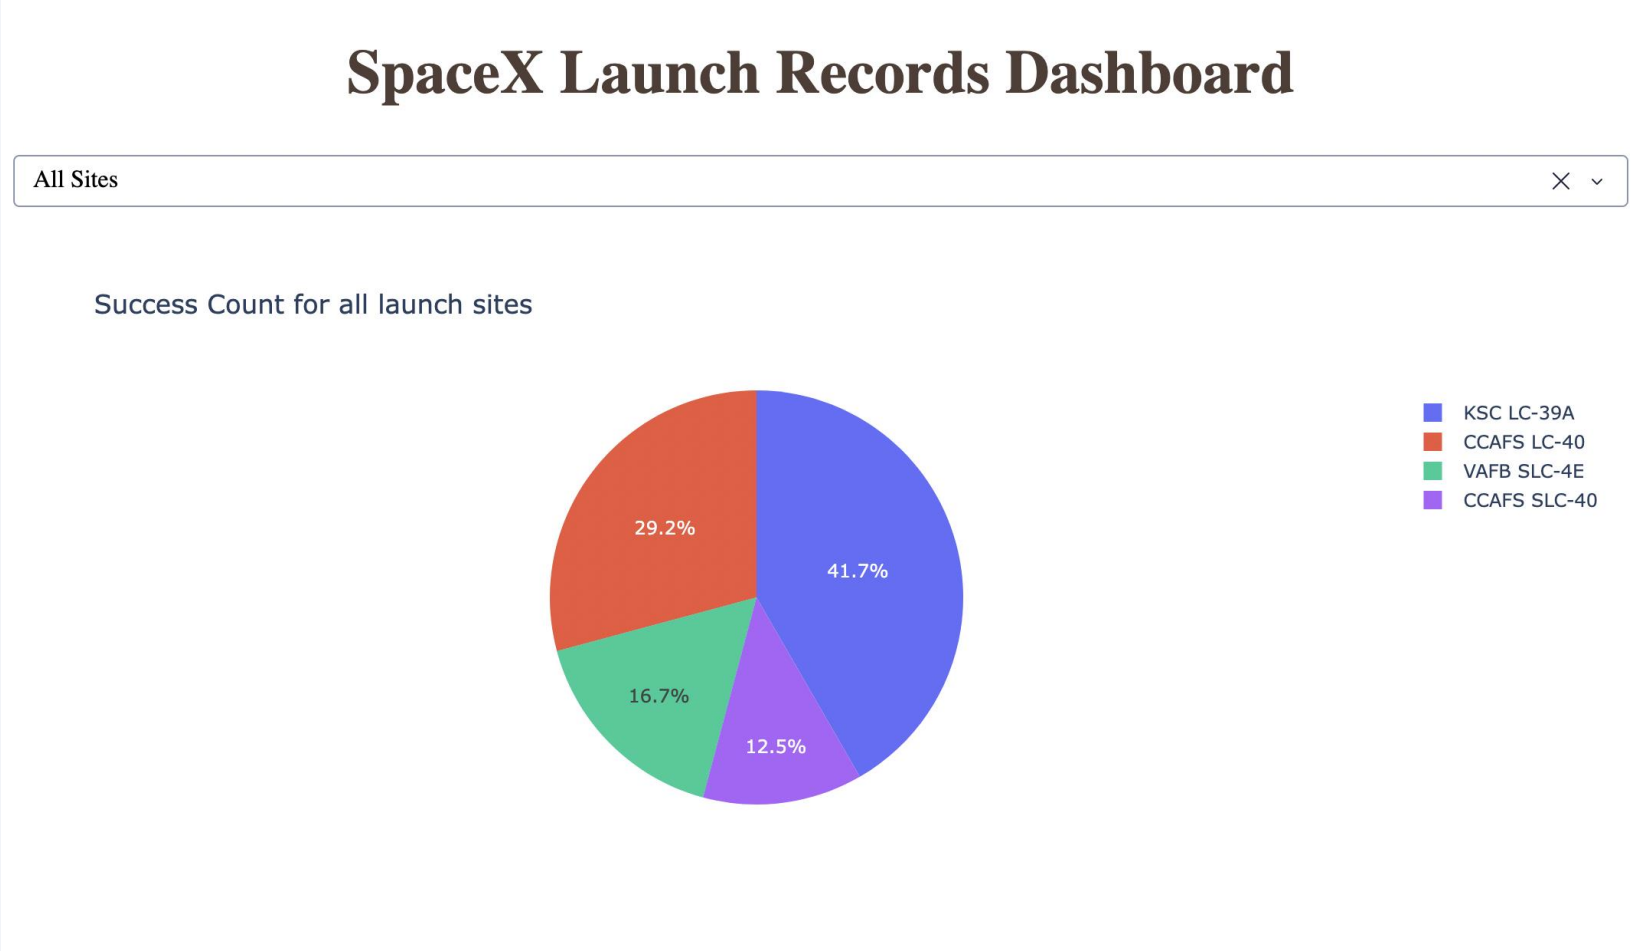

Launch site with highest launch success ratio: KSL LC-39A

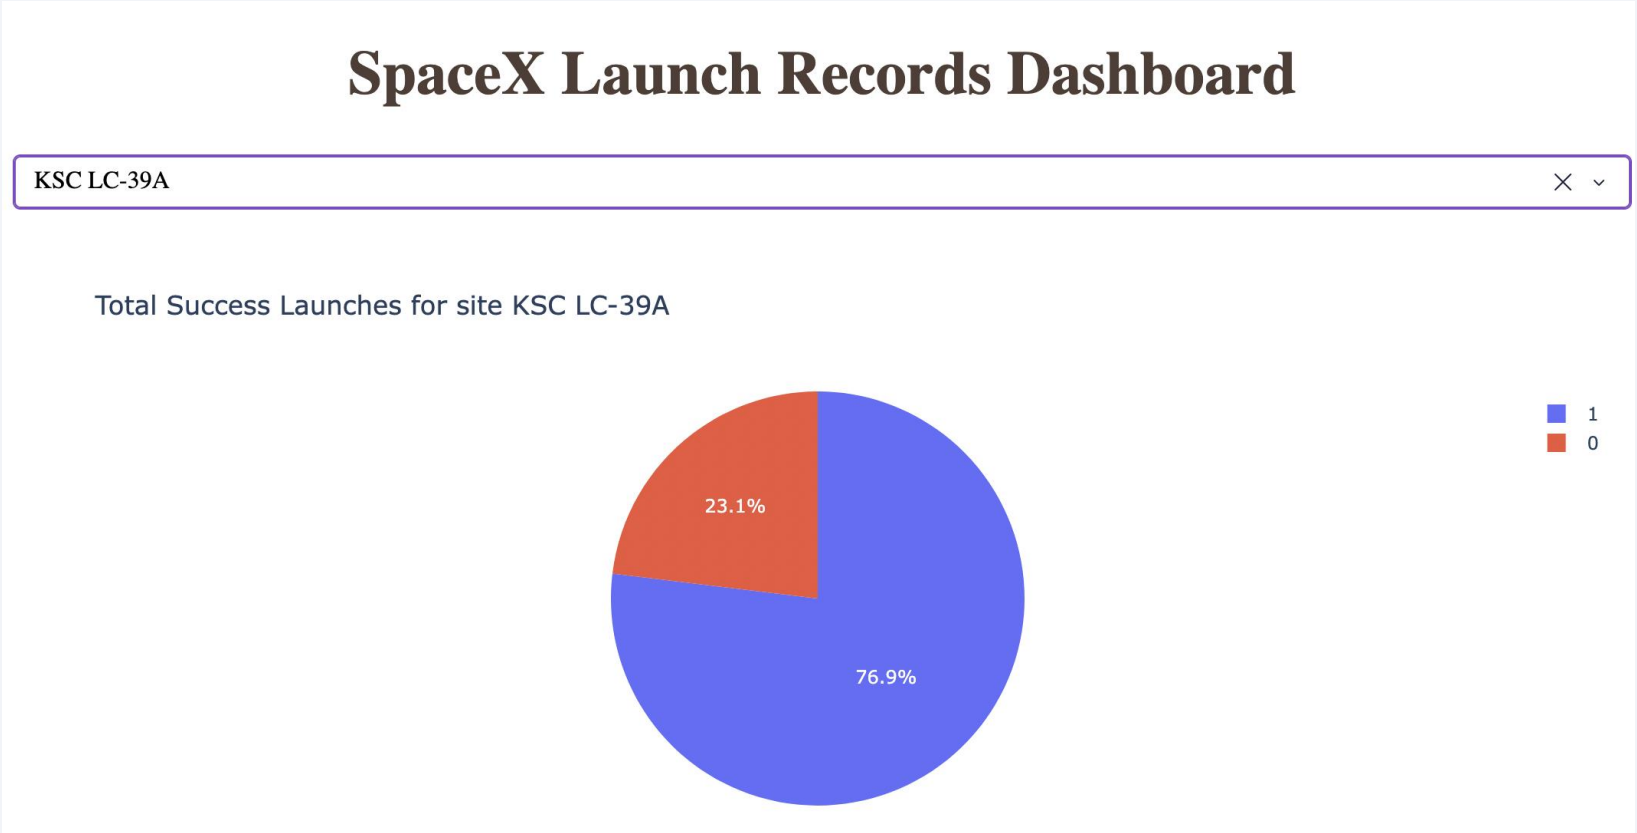

Key Findings – KSC LC-39A

- Successful launches (Class 1): 76.9%.
- Unsuccessful launches (Class 0): 23.1%.
- The high success rate highlights the reliability and effectiveness of KSC LC-39A as a launch site.

Payload Mass vs. Success vs. Booster Category

Booster Version Performance:

- Booster version “FT” is the most frequently used and demonstrates a high success rate across different payload masses.
- Booster version “v1.0” has fewer launches, making it difficult to draw definitive conclusions about its performance.
- Overall, there is no clear evidence that higher payload masses are associated with lower launch success rates across booster versions.



Section 5

Predictive Analysis (Classification)



Classification Accuracy

- All models had virtually the same accuracy on the test set at 83.33% accuracy. It should be noted that test size is small at only sample size of 18.
- This can cause large variance in accuracy results, such as those in Decision Tree Classifier model in repeated runs.
- We likely need more data to determine the best model.


Model	Accuracy	TestAccuracy
LogReg	0.84643	0.83333
SVM	0.84821	0.83333
Tree	0.875	0.83333
KNN	0.84821	0.83333



Confusion Matrix

- All models achieved the same test accuracy => same confusion matrix.
- The models correctly predicted 12 successful landings (true positives).
- They correctly predicted 3 unsuccessful landings (true negatives).
- They incorrectly predicted 3 successful landings when the actual outcome was unsuccessful (false positives).

The models tend to overpredict successful landings, suggesting they may have difficulty identifying unsuccessful launches.

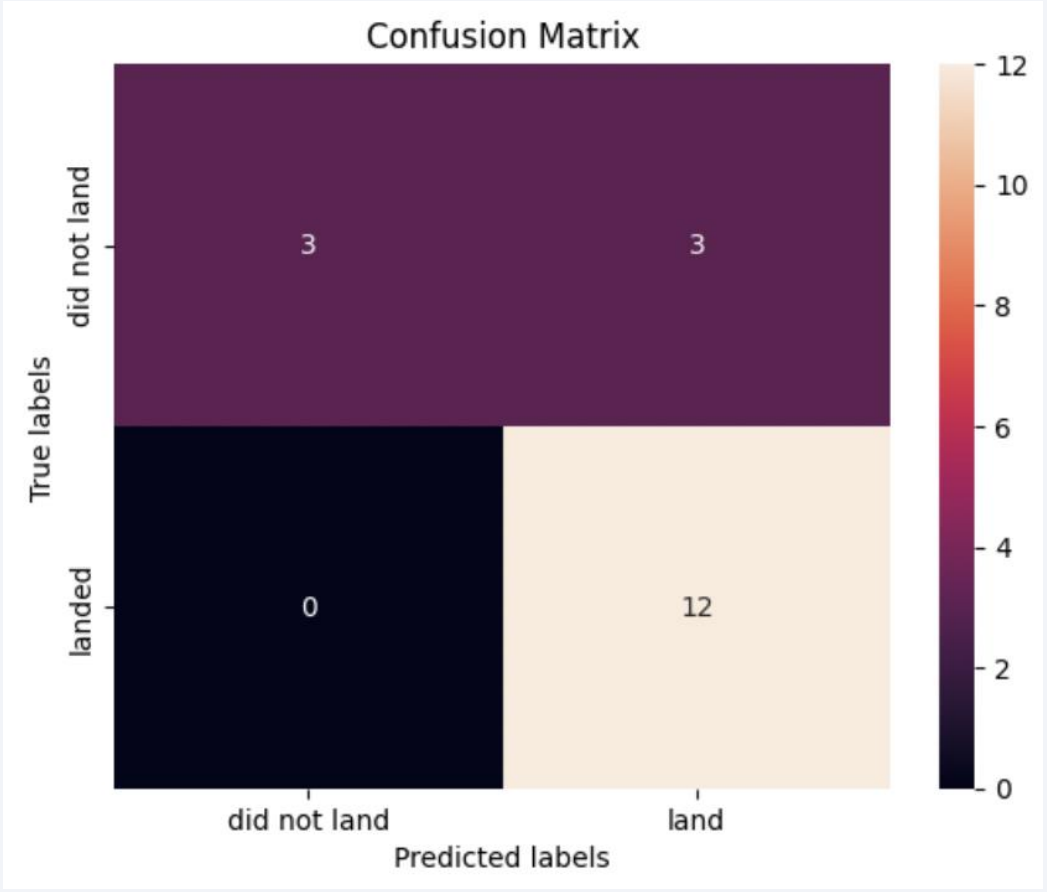

Conclusions

- CCAFS LC-40 has a lower launch success rate (approximately 60%) compared with KSC LC-39A and VAFB SLC-4E, which both achieve approximately 77%.
- Launch success rates generally increase with flight number across all three launch sites, suggesting improvements in launch reliability over time. At VAFB SLC-4E, nearly all launches after flight number 20 were successful, with only one exception. At KSC LC-39A and CCAFS LC-40, all launches after flight number 80 were successful.
- No clear relationship was identified between higher payload masses and lower launch success rates. This suggests that other factors, such as launch site conditions and booster versions, may have a greater influence on launch outcomes.
- The ES-L1, GEO, HEO, and SSO orbits achieved 100% success rates, while SO had a 0% success rate. The remaining orbits (VLEO, LEO, MEO, PO, ISS, and GTO) showed success rates ranging from approximately 50% to 85%, highlighting variations in launch reliability across target orbits.
- For heavier payloads, successful launches were more frequent in PO, LEO, and ISS orbits. In contrast, GTO missions showed a more mixed distribution of successful and unsuccessful outcomes, making it difficult to establish a clear relationship between payload mass and launch success.
- Interactive visualizations created using Folium and Plotly Dash provided valuable insights into the geographical and operational patterns of SpaceX launches. These tools allowed users to explore trends, compare launch sites, and investigate factors associated with launch success.

Conclusions

The exploratory data analysis, predictive modeling, and interactive visualizations helped identify key factors associated with SpaceX launch success. By combining statistical analysis, machine learning models, and interactive dashboards, this project provided a comprehensive overview of launch performance and operational trends.

Overall, the findings offer a useful framework for understanding the factors influencing launch outcomes and can support further analysis and decision-making in the aerospace industry, particularly in the development and assessment of reusable rocket technology.

Appendix

- **GitHub repository url:** https://github.com/chmarcozzi/Coursera---Applied-Data-Science-Capstone/tree/main

- **Coursera course:** Applied Data Science Capstone https://www.coursera.org/learn/applied-data-science-capstone/home/

Thank you!

