

Donors choose data analysis using Random Forests & Gradient Boosting

Little History about Data Set

Founded in 2000 by a high school teacher in the Bronx, DonorsChoose.org empowers public school teachers from across the country to request much-needed materials and experiences for their students. At any given time, there are thousands of classroom requests that can be brought to life with a gift of any amount.

Answers to What and Why Questions on Data Set

DonorsChoose.org receives hundreds of thousands of project proposals each year for classroom projects in need of funding. Right now, a large number of volunteers is needed to manually screen each submission before it's approved to be posted on the DonorsChoose.org website.

Next year, DonorsChoose.org expects to receive close to 500,000 project proposals. As a result, there are three main problems they need to solve:

- How to scale current manual processes and resources to screen 500,000 projects so that they can be posted as quickly and as efficiently as possible
- How to increase the consistency of project vetting across different volunteers to improve the experience for teachers
- How to focus volunteer time on the applications that need the most assistance

The goal of the competition is to predict whether or not a DonorsChoose.org project proposal submitted by a teacher will be approved, using the text of project descriptions as well as additional metadata about the project, teacher, and school. DonorsChoose.org can then use this information to identify projects most likely to need further review before approval.

About the DonorsChoose Data Set

The `train.csv` data set provided by DonorsChoose contains the following features:

Feature	Description
<code>project_id</code>	A unique identifier for the proposed project. Example: p036502
<code>project_title</code>	Title of the project. Examples: <ul style="list-style-type: none">• Art Will Make You Happy!• First Grade Fun
<code>project_grade_category</code>	Grade level of students for which the project is targeted. One of the following enumerated values: <ul style="list-style-type: none">• Grades PreK-2• Grades 3-5• Grades 6-8• Grades 9-12
<code>project_subject_categories</code>	One or more (comma-separated) subject categories for the project from the following enumerated list of values: <ul style="list-style-type: none">• Applied Learning• Care & Hunger• Health & Sports• History & Civics• Literacy & Language• Math & Science• Music & The Arts• Special Needs• Warmth Examples:

Feature	Description
	<ul style="list-style-type: none"> • Music & The Arts • Literacy & Language, Math & Science
<code>school_state</code>	State where school is located (Two-letter U.S. postal code). Example: WY
<code>project_subject_subcategories</code>	One or more (comma-separated) subject subcategories for the project. Examples: <ul style="list-style-type: none"> • Literacy • Literature & Writing, Social Sciences
<code>project_resource_summary</code>	An explanation of the resources needed for the project. Example: <ul style="list-style-type: none"> • My students need hands on literacy materials to manage sensory needs!
<code>project_essay_1</code>	First application essay*
<code>project_essay_2</code>	Second application essay*
<code>project_essay_3</code>	Third application essay*
<code>project_essay_4</code>	Fourth application essay*
<code>project_submitted_datetime</code>	Datetime when project application was submitted. Example: 2016-04-28 12:43:56.245
<code>teacher_id</code>	A unique identifier for the teacher of the proposed project. Example: bdf8baa8fedef6bfeec7ae4ff1c15c56
<code>teacher_prefix</code>	Teacher's title. One of the following enumerated values: <ul style="list-style-type: none"> • nan • Dr. • Mr. • Mrs. • Ms. • Teacher.
<code>teacher_number_of_previously_posted_projects</code>	Number of project applications previously submitted by the same teacher. Example: 2

* See the section **Notes on the Essay Data** for more details about these features.

Additionally, the `resources.csv` data set provides more data about the resources required for each project. Each line in this file represents a resource required by a project:

Feature	Description
<code>id</code>	A <code>project_id</code> value from the <code>train.csv</code> file. Example: p036502
<code>description</code>	Description of the resource. Example: Tenor Saxophone Reeds, Box of 25
<code>quantity</code>	Quantity of the resource required. Example: 3
<code>price</code>	Price of the resource required. Example: 9.95

Note: Many projects require multiple resources. The `id` value corresponds to a `project_id` in `train.csv`, so you use it as a key to retrieve all resources needed for a project:

The data set contains the following label (the value you will attempt to predict):

Label	Description
<code>project_is_approved</code>	A binary flag indicating whether DonorsChoose approved the project. A value of 0 indicates the project was not approved, and a value of 1 indicates the project was approved.

Notes on the Essay Data

Prior to May 17, 2016, the prompts for the essays were as follows:

- `__project_essay_1__`: "Introduce us to your classroom"
- `__project_essay_2__`: "Tell us more about your students"
- `__project_essay_3__`: "Describe how your students will use the materials you're requesting"
- `__project_essay_4__`: "Close by sharing why your project will make a difference"

Starting on May 17, 2016, the number of essays was reduced from 4 to 2, and the prompts for the first 2 essays were changed to the following:

- `__project_essay_1__`: "Describe your students: What makes your students special? Specific details about their background, your neighborhood, and your school are all helpful."
- `__project_essay_2__`: "About your project: How will these materials make a difference in your students' learning and improve their school lives?"

For all projects with `project_submitted_datetime` of 2016-05-17 and later, the values of `project_essay_3` and `project_essay_4` will be NaN.

Importing required libraries

In [0]:

```
# numpy for easy numerical computations
import numpy as np
# pandas for dataframes and filterings
import pandas as pd
# sqlite3 library for performing operations on sqlite file
import sqlite3
# matplotlib for plotting graphs
import matplotlib.pyplot as plt
# seaborn library for easy plotting
import seaborn as sbrn
# warnings library for specific settings
import warnings
# regularlanguage for regex operations
import re
# For loading precomputed models
import pickle
# For loading natural language processing tool-kit
import nltk
# For calculating mathematical terms
import math
# For plotting 3-D Plot
import plotly.offline as offline
import plotly.graph_objs as go
offline.init_notebook_mode()

# For loading files from google drive
from google.colab import drive
# For working with files in google drive
drive.mount('/content/drive')
# tqdm for tracking progress of loops
from tqdm import tqdm_notebook as tqdm
# For creating dictionary of words
from collections import Counter
# For creating BagOfWords Model
from sklearn.feature_extraction.text import CountVectorizer
# For creating TfidfModel
from sklearn.feature_extraction.text import TfidfVectorizer
# For standardizing values
from sklearn.preprocessing import StandardScaler
# For merging sparse matrices along row direction
from scipy.sparse import hstack
# For merging sparse matrices along column direction
from scipy.sparse import vstack
# For converting dataframes into sparse matrix
from scipy.sparse import csr_matrix
# For calculating TSNE values
from sklearn.manifold import TSNE
# For calculating the accuracy score on cross validate data
from sklearn.metrics import accuracy_score
# For performing the k-fold cross validation
from sklearn.model_selection import cross_val_score
# For splitting the data set into test and train data
```

```

from sklearn import model_selection
# For using decision tree classifier
from sklearn import tree
# For generating word cloud
from wordcloud import WordCloud
# For using random forest classifier
from sklearn.ensemble import RandomForestClassifier
# For using gradient boosting classifier
import xgboost as xgb
# For plotting decision tree
import graphviz
# For using svm classifier - hinge loss function of sgd
from sklearn import linear_model
# For creating samples for making dataset balanced
from sklearn.utils import resample
# For shuffling the dataframes
from sklearn.utils import shuffle
# For calculating roc_curve parameters
from sklearn.metrics import roc_curve
# For calculating auc value
from sklearn.metrics import auc
# For displaying results in table format
from prettytable import PrettyTable
# For generating confusion matrix
from sklearn.metrics import confusion_matrix
# For using gridsearch cv to find best parameter
from sklearn.model_selection import GridSearchCV
# For using randomized search cross validation
from sklearn.model_selection import RandomizedSearchCV
# For performing min-max standardization to features
from sklearn.preprocessing import MinMaxScaler
# For calculating sentiment score of the text
from nltk.sentiment.vader import SentimentIntensityAnalyzer
nltk.download('vader_lexicon')

warnings.filterwarnings('ignore')

```

Go to this URL in a browser: https://accounts.google.com/o/oauth2/auth?client_id=947318989803-6bn6qk8qdqgf4n4g3pfee6491hc0brc4i.apps.googleusercontent.com&redirect_uri=urn%3Aietf%3Awg%3Aoauth%3A2.0%3Bscope=email%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fdocs.test%20https%3A%2F%2Fwww.googleapis.com%2Fdrive%20https%3A%2F%2Fwww.googleapis.com%2Fphotos.readonly%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fpeopleapi.readonly&response_type=code

Enter your authorization code:

Mounted at /content/drive



/usr/local/lib/python3.6/dist-packages/nltk/twitter/__init__.py:20: UserWarning:

The twython library has not been installed. Some functionality from the twitter package will not be available.

[nltk_data] Downloading package vader_lexicon to /root/nltk_data...

Reading and Storing Data

In [0]:

```

projectsData = pd.read_csv('drive/My Drive/train_data.csv');
resourcesData = pd.read_csv('drive/My Drive/resources.csv');

```

In [0]:

```

projectsData.head(3)

```

Out[0]:

Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime	pro
------------	----	------------	----------------	--------------	----------------------------	-----

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime	pro
0	160221	p253737	c90749f5d961ff158d4b4d1e7dc665fc	Mrs.	IN	2016-12-05 13:43:57	Gra
1	140945	p258326	897464ce9ddc600bcd1151f324dd63a	Mr.	FL	2016-10-25 09:22:10	Gra
2	21895	p182444	3465aaf82da834c0582ebd0ef8040ca0	Ms.	AZ	2016-08-31 12:03:56	Gra

In [0]:

```
projectsData.tail(3)
```

Out[0]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime
109245	143653	p155633	cdbfd04aa041dc6739e9e576b1fb1478	Mrs.	NJ	2016-08-25 17:11:32
109246	164599	p206114	6d5675dbfafa1371f0e2f6f1b716fe2d	Mrs.	NY	2016-07-29 17:53:15
109247	128381	p191189	ca25d5573f2bd2660f7850a886395927	Ms.	VA	2016-06-29 09:17:01

In [0]:

```
resourcesData.head(3)
```

Out[0]:

	id	description	quantity	price
0	p233245	LC652 - Lakeshore Double-Space Mobile Drying Rack	1	149.00
1	p069063	Bouncy Bands for Desks (Blue support pipes)	3	14.95
2	p069063	Cory Stories: A Kid's Book About Living With Adhd	1	8.45

In [0]:

```
resourcesData.tail(3)
```

Out[0]:

	id	description	quantity	price
1541269	p031981	Black Electrical Tape (GIANT 3 PACK) Each Roll...	6	8.99

1541270	p031981	Flormoon DC Motor Mini Electric Motor 0.5A	description	quantity	price
1541271	p031981	WAYLLSHINE 6PCS 2 x 1.5V AAA Battery Spring Cl...		2	7.39

Helper functions and classes

In [0]:

```
def equalsBorder(numberOfEqualSigns):
    """
    This function prints passed number of equal signs
    """
    print("="* numberOfEqualSigns);
```

In [0]:

```
# Citation link: https://stackoverflow.com/questions/8924173/how-do-i-print-bold-text-in-python
class color:
    PURPLE = '\033[95m'
    CYAN = '\033[96m'
    DARKCYAN = '\033[36m'
    BLUE = '\033[94m'
    GREEN = '\033[92m'
    YELLOW = '\033[93m'
    RED = '\033[91m'
    BOLD = '\033[1m'
    UNDERLINE = '\033[4m'
    END = '\033[0m'
```

In [0]:

```
def printStyle(text, style):
    "This function prints text with the style passed to it"
    print(style + text + color.END);
```

Shapes of projects data and resources data

In [0]:

```
printStyle("Number of data points in projects data: {}".format(projectsData.shape[0]), color.BOLD)
;
printStyle("Number of attributes in projects data:{}".format(projectsData.shape[1]), color.BOLD);
equalsBorder(60);
printStyle("Number of data points in resources data: {}".format(resourcesData.shape[0]),
color.BOLD);
printStyle("Number of attributes in resources data: {}".format(resourcesData.shape[1]), color.BOLD)
;
```

Number of data points in projects data: 109248

Number of attributes in projects data:17

Number of data points in resources data: 1541272

Number of attributes in resources data: 4

In [0]:

```
# remove special characters from list of strings python:
https://stackoverflow.com/a/47301924/4084039

# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from-a-string
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-in-python
def cleanCategories(subjectCategories):
    cleanedCategories = []
    for subjectCategory in tqdm(subjectCategories):
        tempCategory = ""
        for category in subjectCategory.split(","):
            if 'The' in category.split(): # this will split each of the catogory based on space "Me
```

```
th & Science"=> "Math","&", "Science"
    category = category.replace('The','') # if we have the words "The" we are going to
replace it with ''(i.e removing 'The')
    category = category.replace(' ','') # we are placing all the ' '(space) with ''(empty)
ex:"Math & Science"=>"Math&Science"
    tempCategory += category.strip()+" "# abc ".strip() will return "abc", remove the
trailing spaces
    tempCategory = tempCategory.replace('&','_')
    cleanedCategories.append(tempCategory)
return cleanedCategories
```

In [0]:

```
# projectDataWithCleanedCategories = pd.DataFrame(projectsData);
subjectCategories = list(projectsData.project_subject_categories);
cleanedCategories = cleanCategories(subjectCategories);
printStyle("Sample categories: ", color.BOLD);
equalsBorder(60);
print(subjectCategories[0:5]);
equalsBorder(60);
printStyle("Sample cleaned categories: ", color.BOLD);
equalsBorder(60);
print(cleanedCategories[0:5]);
projectsData['cleaned_categories'] = cleanedCategories;
projectsData.head(5)
```

Sample categories:

```
['Literacy & Language', 'History & Civics', 'Health & Sports', 'Health & Sports', 'Literacy & Language', 'Math & Science', 'Math & Science']
```

Sample cleaned categories:

```
['Literacy_Language ', 'History_Civics', 'Health_Sports ', 'Health_Sports ', 'Literacy_Language', 'Math_Science ', 'Math_Science ']
```

Out[0]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime	pro
0	160221	p253737	c90749f5d961ff158d4b4d1e7dc665fc	Mrs.	IN	2016-12-05 13:43:57	Gra
1	140945	p258326	897464ce9ddc600bcd1151f324dd63a	Mr.	FL	2016-10-25 09:22:10	Gra
2	21895	p182444	3465aaf82da834c0582ebd0ef8040ca0	Ms.	AZ	2016-08-31 12:03:56	Gra
3	45	p246581	f3cb9bffbba169bef1a77b243e620b60	Mrs.	KY	2016-10-06 21:16:17	Gra
4	172407	p104768	be1f7507a41f8479dc06f047086a39ec	Mrs.	TX	2016-07-11 01:10:09	Gra

In [0]:

```
# count of all the words in corpus python: https://stackoverflow.com/a/22898595/4084039
```

```
# count of all the words in corpus python: https://stackoverflow.com/a/22898595/4084039
categoriesCounter = Counter()
for subjectCategory in projectsData.cleaned_categories.values:
    categoriesCounter.update(subjectCategory.split());
categoriesCounter
```

Out[0]:

```
Counter({'AppliedLearning': 12135,
        'Care_Hunger': 1388,
        'Health_Sports': 14223,
        'History_Civics': 5914,
        'Literacy_Language': 52239,
        'Math_Science': 41421,
        'Music_Arts': 10293,
        'SpecialNeeds': 13642,
        'Warmth': 1388})
```

In [0]:

```
# count of all the words in corpus python: https://stackoverflow.com/a/22898595/4084039
categoriesDictionary = dict(categoriesCounter);
sortedCategoriesDictionary = dict(sorted(categoriesDictionary.items(), key = lambda keyValuePair: keyValuePair[1]));
sortedCategoriesData = pd.DataFrame.from_dict(sortedCategoriesDictionary, orient='index');
sortedCategoriesData.columns = ['subject_categories'];
printStyle("Number of projects by Subject Categories: ", color.BOLD);
equalsBorder(60);
sortedCategoriesData
```

Number of projects by Subject Categories:

Out[0]:

	subject_categories
Warmth	1388
Care_Hunger	1388
History_Civics	5914
Music_Arts	10293
AppliedLearning	12135
SpecialNeeds	13642
Health_Sports	14223
Math_Science	41421
Literacy_Language	52239

In [0]:

```
subjectSubCategories = projectsData.project_subject_subcategories;
cleanedSubCategories = cleanCategories(subjectSubCategories);
printStyle("Sample subject sub categories: ", color.BOLD);
equalsBorder(70);
print(subjectSubCategories[0:5]);
equalsBorder(70);
printStyle("Sample cleaned subject sub categories: ", color.BOLD);
equalsBorder(70);
print(cleanedSubCategories[0:5]);
projectsData['cleaned_sub_categories'] = cleanedSubCategories;
```

Sample subject sub categories:

```
=====
0          ESL, Literacy
1  Civics & Government, Team Sports
2    Health & Wellness, Team Sports
3          Literacy, Mathematics
4          Mathematics
```


Name: project_subject_subcategories, dtype: object

Sample cleaned subject sub categories:

['ESL Literacy ', 'Civics_Government TeamSports ', 'Health_Wellness TeamSports ', 'Literacy Mathematics ', 'Mathematics ']

In [0]:

```
# count of all the words in corpus python: https://stackoverflow.com/a/22898595/4084039
subjectsSubCategoriesCounter = Counter();
for subCategory in projectsData.cleaned_sub_categories:
    subjectsSubCategoriesCounter.update(subCategory.split());
subjectsSubCategoriesCounter
```

Out[0]:

```
Counter({'AppliedSciences': 10816,
        'Care_Hunger': 1388,
        'CharacterEducation': 2065,
        'Civics_Government': 815,
        'College_CareerPrep': 2568,
        'CommunityService': 441,
        'ESL': 4367,
        'EarlyDevelopment': 4254,
        'Economics': 269,
        'EnvironmentalScience': 5591,
        'Extracurricular': 810,
        'FinancialLiteracy': 568,
        'ForeignLanguages': 890,
        'Gym_Fitness': 4509,
        'Health_LifeScience': 4235,
        'Health_Wellness': 10234,
        'History_Geography': 3171,
        'Literacy': 33700,
        'Literature_Writing': 22179,
        'Mathematics': 28074,
        'Music': 3145,
        'NutritionEducation': 1355,
        'Other': 2372,
        'ParentInvolvement': 677,
        'PerformingArts': 1961,
        'SocialSciences': 1920,
        'SpecialNeeds': 13642,
        'TeamSports': 2192,
        'VisualArts': 6278,
        'Warmth': 1388})
```

In [0]:

```
# dict sort by value python: https://stackoverflow.com/a/613218/4084039
dictionarySubCategories = dict(subjectsSubCategoriesCounter);
sortedDictionarySubCategories = dict(sorted(dictionarySubCategories.items(), key = lambda keyValue:
keyValue[1]));
sortedSubCategoriesData = pd.DataFrame.from_dict(sortedDictionarySubCategories, orient = 'index');
sortedSubCategoriesData.columns = ['subject_sub_categories']
printStyle("Number of projects sorted by subject sub categories: ", color.BOLD);
equalsBorder(70);
sortedSubCategoriesData
```

Number of projects sorted by subject sub categories:

Out[0]:

	subject_sub_categories
Economics	269
CommunityService	441
FinancialLiteracy	568
ParentInvolvement	677

Extracurricular	subject_sub_categories
Civics_Government	815
ForeignLanguages	890
NutritionEducation	1355
Warmth	1388
Care_Hunger	1388
SocialSciences	1920
PerformingArts	1961
CharacterEducation	2065
TeamSports	2192
Other	2372
College_CareerPrep	2568
Music	3145
History_Geography	3171
Health_LifeScience	4235
EarlyDevelopment	4254
ESL	4367
Gym_Fitness	4509
EnvironmentalScience	5591
VisualArts	6278
Health_Wellness	10234
AppliedSciences	10816
SpecialNeeds	13642
Literature_Writing	22179
Mathematics	28074
Literacy	33700

In [0]:

```
projectsData['project_essay'] = projectsData['project_essay_1'].map(str) + projectsData['project_essay_2'].map(str) + \
                                projectsData['project_essay_3'].map(str) + projectsData['project_essay_4'].map(str);
projectsData.head(5)
```

Out[0]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime	pro
0	160221	p253737	c90749f5d961ff158d4b4d1e7dc665fc	Mrs.	IN	2016-12-05 13:43:57	Gra
1	140945	p258326	897464ce9ddc600bcd1151f324dd63a	Mr.	FL	2016-10-25 09:22:10	Gra
2	21895	p182444	3465aaf82da834c0582ebd0ef8040ca0	Ms.	AZ	2016-08-31 12:03:56	Gra

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime	pro
	0						
3	45	p246581	f3cb9bffbba169bef1a77b243e620b60	Mrs.	KY	2016-10-06 21:16:17	Gra
4	172407	p104768	be1f7507a41f8479dc06f047086a39ec	Mrs.	TX	2016-07-11 01:10:09	Gra

In [0]:

```
priceAndQuantityData = resourcesData.groupby('id').agg({'price': 'sum', 'quantity': 'sum'}).reset_index();
priceAndQuantityData.head(5)
```

Out[0]:

	id	price	quantity
0	p000001	459.56	7
1	p000002	515.89	21
2	p000003	298.97	4
3	p000004	1113.69	98
4	p000005	485.99	8

In [0]:

```
projectsData.shape
```

Out[0]:

(109248, 20)

In [0]:

```
projectsData = pd.merge(projectsData, priceAndQuantityData, on = 'id', how = 'left');
print(projectsData.shape);
projectsData.head(3)
```

(109248, 22)

Out[0]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime	pro
0	160221	p253737	c90749f5d961ff158d4b4d1e7dc665fc	Mrs.	IN	2016-12-05 13:43:57	Gra
1	140945	p258326	897464ce9ddc600bced1151f324dd63a	Mr.	FL	2016-10-25 09:22:10	Gra
2	21895	p182444	3465aaf82da834c0582ebd0ef8040ca0	Ms.	AZ	2016-08-31 12:03:56	Gra

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime	proje
	0						

In [0]:

```
projectsData[projectsData['id'] == 'p253737']
```

Out[0]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetime	proje
0	160221	p253737	c90749f5d961ff158d4b4d1e7dc665fc	Mrs.	IN	2016-12-05 13:43:57	Grade

In [0]:

```
priceAndQuantityData[priceAndQuantityData['id'] == 'p253737']
```

Out[0]:

	id	price	quantity
253736	p253737	154.6	23

Preprocessing data

In [0]:

```
# https://gist.github.com/sebleier/554280
# we are removing the words from the stop words list: 'no', 'nor', 'not'
# All stopwords that are needed to be removed in the text
stopWords= set(['br', 'the', 'i', 'me', 'my', 'myself', 'we', 'our', 'ours', 'ourselves', 'you', "y
ou're", "you've", \
    "you'll", "you'd", 'your', 'yours', 'yourself', 'yourselves', 'he', 'him', 'his',
'himself', \
    'she', "she's", 'her', 'hers', 'herself', 'it', "it's", 'its', 'itself', 'they', 'them',
'their', \
    'theirs', 'themselves', 'what', 'which', 'who', 'whom', 'this', 'that', "that'll",
'these', 'those', \
    'am', 'is', 'are', 'was', 'were', 'be', 'been', 'being', 'have', 'has', 'had', 'having',
'do', 'does', \
    'did', 'doing', 'a', 'an', 'the', 'and', 'but', 'if', 'or', 'because', 'as', 'until', '
while', 'of', \
    'at', 'by', 'for', 'with', 'about', 'against', 'between', 'into', 'through', 'during',
'before', 'after', \
    'above', 'below', 'to', 'from', 'up', 'down', 'in', 'out', 'on', 'off', 'over', 'under'
, 'again', 'further', \
    'then', 'once', 'here', 'there', 'when', 'where', 'why', 'how', 'all', 'any', 'both', 'e
ach', 'few', 'more', \
    'most', 'other', 'some', 'such', 'only', 'own', 'same', 'so', 'than', 'too', 'very', \
    's', 't', 'can', 'will', 'just', 'don', "don't", 'should', "should've", 'now', 'd', 'll'
, 'm', 'o', 're', \
    've', 'y', 'ain', 'aren', "aren't", 'couldn', "couldn't", 'didn', "didn't", 'doesn', "dc
esn't", 'hadn', \
    "hadn't", 'hasn', "hasn't", 'haven', "haven't", 'isn', "isn't", 'ma', 'mightn',
"mightn't", 'mustn', \
    "mustn't", 'needn', "needn't", 'shan', "shan't", 'shouldn', "shouldn't", 'wasn',
"wasn't", 'weren', "weren't", \
    'won', "won't", 'wouldn', "wouldn't"]);
def preProcessingWithAndWithoutStopWords(texts):
    """
    This function takes list of texts and returns preprocessed list of texts one with
    stop words and one without stopwords.
    """
```

```

"""
# Variable for storing preprocessed text with stop words
preProcessedTextsWithStopWords = [];
# Variable for storing preprocessed text without stop words
preProcessedTextsWithoutStopWords = [];

# Looping over list of texts for performing pre processing
for text in tqdm(texts, total = len(texts)):
    # Removing all links in the text
    text = re.sub(r"http\S+", "", text);

    # Removing all html tags in the text
    text = re.sub(r"<\w+>", "", text);
    text = re.sub(r"<\w+>", "", text);

    # https://stackoverflow.com/a/47091490/4084039
    # Replacing all below words with adverbs
    text = re.sub(r"won't", "will not", text)
    text = re.sub(r"can't", "can not", text)
    text = re.sub(r"n't", " not", text)
    text = re.sub(r'\re', " are", text)
    text = re.sub(r'\s', " is", text)
    text = re.sub(r'\d', " would", text)
    text = re.sub(r'\ll', " will", text)
    text = re.sub(r'\t', " not", text)
    text = re.sub(r'\ve', " have", text)
    text = re.sub(r'\m', " am", text)

    # Removing backslash symbols in text
    text = text.replace('\\r', ' ');
    text = text.replace('\\n', ' ');
    text = text.replace('\\\"', ' ');

    # Removing all special characters of text
    text = re.sub(r"[^a-zA-Z0-9]+", " ", text);

    # Converting whole review text into lower case
    text = text.lower();

    # adding this preprocessed text without stopwords to list
    preProcessedTextsWithStopWords.append(text);

    # removing stop words from text
    textWithoutStopWords = ' '.join([word for word in text.split() if word not in stopWords]);
    # adding this preprocessed text without stopwords to list
    preProcessedTextsWithoutStopWords.append(textWithoutStopWords);

return [preProcessedTextsWithStopWords, preProcessedTextsWithoutStopWords];

```

In [0]:

```

texts = [projectsData['project_essay'].values[0]]
preProcessedTextsWithStopWords, preProcessedTextsWithoutStopWords =
preProcessingWithAndWithoutStopWords(texts);
print("Example project essay without pre-processing: ");
equalsBorder(70);
print(texts);
equalsBorder(70);
print("Example project essay with stop words and pre-processing: ");
equalsBorder(70);
print(preProcessedTextsWithStopWords);
equalsBorder(70);
print("Example project essay without stop words and pre-processing: ");
equalsBorder(70);
print(preProcessedTextsWithoutStopWords);

```

Example project essay without pre-processing:

```

=====
['My students are English learners that are working on English as their second or third languages.
We are a melting pot of refugees, immigrants, and native-born Americans bringing the gift of langu
age to our school. \r\n\r\n We have over 24 languages represented in our English Learner
program with students at every level of mastery. We also have over 40 countries represented with
the families within our school. Each student brings a wealth of knowledge and experiences to us t
hat open our eyes to new cultures, beliefs, and respect.\"The limits of your language are the lim
its of your world.\"-Ludwig Wittgenstein Our English learner's have a strong support system at

```

home that begs for more resources. Many times our parents are learning to read and speak English along side of their children. Sometimes this creates barriers for parents to be able to help their child learn phonetics, letter recognition, and other reading skills.\\r\\n\\r\\nBy providing these dvd\\'s and players, students are able to continue their mastery of the English language even if no one at home is able to assist. All families with students within the Level 1 proficiency status, will be a offered to be a part of this program. These educational videos will be specially chosen by the English Learner Teacher and will be sent home regularly to watch. The videos are to help the child develop early reading skills.\\r\\n\\r\\nParents that do not have access to a dvd player will have the opportunity to check out a dvd player to use for the year. The plan is to use these videos and educational dvd\\'s for the years to come for other EL students.\\r\\n\\nannan']

Example project essay with stop words and pre-processing:

['my students are english learners that are working on english as their second or third languages we are a melting pot of refugees immigrants and native born americans bringing the gift of language to our school we have over 24 languages represented in our english learner program with students at every level of mastery we also have over 40 countries represented with the families within our school each student brings a wealth of knowledge and experiences to us that open our eyes to new cultures beliefs and respect the limits of your language are the limits of your world ludwig wittgenstein our english learner is have a strong support system at home that begs for more resources many times our parents are learning to read and speak english along side of their children sometimes this creates barriers for parents to be able to help their child learn phonetics letter recognition and other reading skills by providing these dvd is and players students are able to continue their mastery of the english language even if no one at home is able to assist all families with students within the level 1 proficiency status will be a offered to be a part of this program these educational videos will be specially chosen by the english learner teacher and will be sent home regularly to watch the videos are to help the child develop early reading skills parents that do not have access to a dvd player will have the opportunity to check out a dvd player to use for the year the plan is to use these videos and educational dvd is for the years to come for other el students nannan']

Example project essay without stop words and pre-processing:

['students english learners working english second third languages melting pot refugees immigrants native born americans bringing gift language school 24 languages represented english learner program students every level mastery also 40 countries represented families within school student brings wealth knowledge experiences us open eyes new cultures beliefs respect limits language limits world ludwig wittgenstein english learner strong support system home begs resources many times parents learning read speak english along side children sometimes creates barriers parents able help child learn phonetics letter recognition reading skills providing dvd players students able continue mastery english language even no one home able assist families students within level 1 proficiency status offered part program educational videos specially chosen english learner teacher sent home regularly watch videos help child develop early reading skills parents not access dvd player opportunity check dvd player use year plan use videos educational dvd years come el students nannan']

In [0]:

```
projectEssays = projectsData['project_essay'];
preProcessedEssaysWithStopWords, preProcessedEssaysWithoutStopWords =
preProcessingWithAndWithoutStopWords(projectEssays);
```

In [0]:

```
preProcessedEssaysWithoutStopWords[0:3]
```

Out[0]:

['students english learners working english second third languages melting pot refugees immigrants native born americans bringing gift language school 24 languages represented english learner program students every level mastery also 40 countries represented families within school student brings wealth knowledge experiences us open eyes new cultures beliefs respect limits language limits world ludwig wittgenstein english learner strong support system home begs resources many times parents learning read speak english along side children sometimes creates barriers parents able help child learn phonetics letter recognition reading skills providing dvd players students able continue mastery english language even no one home able assist families students within level 1 proficiency status offered part program educational videos specially chosen english learner teacher sent home regularly watch videos help child develop early reading skills parents not access dvd player opportunity check dvd player use year plan use videos educational dvd years come el students nannan',
'students arrive school eager learn polite generous strive best know education succeed life help improve lives school focuses families low incomes tries give student education deserve not much students use materials given best projector need school crucial academic improvement students technology continues grow many resources internet teachers use growth students however school limited re

sources particularly technology without disadvantage one things could really help classrooms projector projector not crucial instruction also growth students projector show presentations documentaries photos historical land sites math problems much projector make teaching learning easier also targeting different types learners classrooms auditory visual kinesthetic etc nannan', 'true champions not always ones win guts mia hamm quote best describes students cholla middle school approach playing sports especially girls boys soccer teams teams made 7th 8th grade students not opportunity play organized sport due family financial difficulties teach title one middle school urban neighborhood 74 students qualify free reduced lunch many come activity sport opportunity poor homes students love participate sports learn new skills apart team atmosphere school lacks funding meet students needs concerned lack exposure not prepare participating sports teams high school end school year goal provide students opportunity learn variety soccer skills positive qualities person actively participates team students campus come school knowing face uphill battle comes participating organized sports players would thrive field confidence appropriate soccer equipment play soccer best abilities students experience helpful person part team teaches positive supportive encouraging others students using soccer equipment practice games daily basis learn practice necessary skills develop strong soccer team experience create opportunity students learn part team positive contribution teammates students get opportunity learn practice variety soccer skills use skills game access type experience nearly impossible without soccer equipment students players utilize practice games nannan']

In [0]:

```
projectTitles = projectsData['project_title'];
preProcessedProjectTitlesWithStopWords, preProcessedProjectTitlesWithoutStopWords =
preProcessingWithAndWithoutStopWords(projectTitles);
preProcessedProjectTitlesWithoutStopWords[0:5]
```

Out[0]:

```
['educational support english learners home',
 'wanted projector hungry learners',
 'soccer equipment awesome middle school students',
 'techie kindergarteners',
 'interactive math tools']
```

In [0]:

```
projectsData['preprocessed_titles'] = preProcessedProjectTitlesWithoutStopWords;
projectsData['preprocessed_essays'] = preProcessedEssaysWithoutStopWords;
projectsData.shape
```

Out[0]:

(109248, 24)

Preparing data for classification and modelling

In [0]:

```
pd.DataFrame(projectsData.columns, columns = ['All features in projects data'])
```

Out[0]:

	All features in projects data
0	Unnamed: 0
1	id
2	teacher_id
3	teacher_prefix
4	school_state
5	project_submitted_datetime
6	project_grade_category
7	project_subject_categories
8	project_subject_subcategories

9	project_title	All features in projects data
10	project_essay_1	
11	project_essay_2	
12	project_essay_3	
13	project_essay_4	
14	project_resource_summary	
15	teacher_number_of_previously_posted_projects	
16	project_is_approved	
17	cleaned_categories	
18	cleaned_sub_categories	
19	project_essay	
20	price	
21	quantity	
22	preprocessed_titles	
23	preprocessed_essays	

Useful features:

Here we will consider only below features for classification and we can ignore the other features

Categorical data:

1. **school_state** - categorical data
2. **project_grade_category** - categorical data
3. **cleaned_categories** - categorical data
4. **cleaned_sub_categories** - categorical data
5. **teacher_prefix** - categorical data

Text data:

1. **project_resource_summary** - text data
2. **project_title** - text data
3. **project_resource_summary** - text data

Numerical data:

1. **teacher_number_of_previously_posted_projects** - numerical data
2. **price** - numerical data
3. **quantity** - numerical data

Classification & Modelling using random forests & Gradient Boosting

Splitting Data(Only training and test)

In [0]:

```
projectsData = projectsData.dropna(subset = ['teacher_prefix']);
projectsData.shape
```

Out[0]:

(109245, 24)

In [0]:

```
classesData = projectsData['project_is_approved']
print(classesData.shape)
```

(109245,)

In [0]:

```
trainingData, testData, classesTraining, classesTest = model_selection.train_test_split(projectsData,
classesData, test_size = 0.3, random_state = 44, stratify = classesData);
trainingData, crossValidateData, classesTraining, classesCrossValidate =
model_selection.train_test_split(trainingData, classesTraining, test_size = 0.3, random_state = 0,
stratify = classesTraining);
```

In [0]:

```
print("Shapes of splitted data: ");
equalsBorder(70);

print("testData shape: ", testData.shape);
print("classesTest: ", classesTest.shape);
print("trainingData shape: ", trainingData.shape);
print("classesTraining shape: ", classesTraining.shape);
```

Shapes of splitted data:

```
=====
testData shape: (32774, 24)
classesTest: (32774,)
trainingData shape: (53529, 24)
classesTraining shape: (53529,)
```

In [0]:

```
print("Number of negative points: ", trainingData[trainingData['project_is_approved'] == 0].shape)
;
print("Number of positive points: ", trainingData[trainingData['project_is_approved'] == 1].shape)
;
```

```
Number of negative points: (8105, 24)
Number of positive points: (45424, 24)
```

In [0]:

```
vectorizedFeatureNames = [];
```

Vectorizing categorical data

1. Vectorizing cleaned_categories(project_subject_categories cleaned) - Response Encoding

In [0]:

```
# Categorizing subjects categories feature using response encoding
subjectsCategoriesResponseData = [dict(), dict()];
for index, dataPoint in trainingData.iterrows():
    subjectCategory = dataPoint['cleaned_categories'];
    classValue = dataPoint['project_is_approved'];
    if(subjectCategory in subjectsCategoriesResponseData[classValue]):
        subjectsCategoriesResponseData[classValue][subjectCategory] += 1;
    else:
        subjectsCategoriesResponseData[classValue][subjectCategory] = 1;
allSubjectCategories = set(list(subjectsCategoriesResponseData[0].keys()) +
list(subjectsCategoriesResponseData[1].keys()));
for subjectCategory in allSubjectCategories:
    if(subjectCategory not in subjectsCategoriesResponseData[0]):
        subjectsCategoriesResponseData[0][subjectCategory] = 0;
    if(subjectCategory not in subjectsCategoriesResponseData[1]):
```

```

subjectsCategoriesResponseData[1][subjectCategory] = 0;
def subjectsCategoriesTransform(subjectCategories):
    transformedData = pd.DataFrame(columns = ['SubjectsCategories0', 'SubjectsCategories1']);
    numRows = len(subjectCategories);
    for index, subjectCategory in enumerate(tqdm(subjectCategories)):
        if subjectCategory in allSubjectCategories:
            class0Value = subjectsCategoriesResponseData[0][subjectCategory];
            class1Value = subjectsCategoriesResponseData[1][subjectCategory];
            totalValue = class0Value + class1Value;
            class0Value = class0Value / totalValue;
            class1Value = class1Value / totalValue;
            transformedData.loc[index] = [class0Value, class1Value];
        else:
            transformedData.loc[index] = [0.5, 0.5];
    return csr_matrix(transformedData);
categoriesVector = subjectsCategoriesTransform(trainingData['cleaned_categories'].values);

```

In [0]:

```

print("Features used in vectorizing subject categories: ");
equalsBorder(70);
print(list(allSubjectCategories));
equalsBorder(70);
print("Shape of cleaned_categories matrix after vectorization(response encoding): ",
categoriesVector.shape);
equalsBorder(70);
print("Sample vectors of categories: ");
equalsBorder(70);
print(categoriesVector[0:4])

```

Features used in vectorizing subject categories:

```

=====
['AppliedLearning History_Civics ', 'AppliedLearning ', 'Math_Science History_Civics ',
'Math_Science ', 'Warmth Care_Hunger ', 'AppliedLearning Math_Science ', 'AppliedLearning
SpecialNeeds ', 'Health_Sports Music_Arts ', 'SpecialNeeds Warmth Care_Hunger ',
'Literacy_Language Music_Arts ', 'Math_Science Literacy_Language ', 'Literacy_Language
Math_Science ', 'History_Civics AppliedLearning ', 'Music_Arts SpecialNeeds ', 'Literacy_Language
', 'History_Civics Warmth Care_Hunger ', 'Literacy_Language Warmth Care_Hunger ', 'Music_Arts Heal
th_Sports ', 'Math_Science AppliedLearning ', 'Health_Sports Literacy_Language ',
'Literacy_Language AppliedLearning ', 'Music_Arts AppliedLearning ', 'Music_Arts History_Civics ',
'Literacy_Language History_Civics ', 'Literacy_Language Health_Sports ', 'Health_Sports
History_Civics ', 'History_Civics ', 'History_Civics SpecialNeeds ', 'SpecialNeeds Music_Arts ', 'H
ealth_Sports AppliedLearning ', 'Math_Science Health_Sports ', 'SpecialNeeds ', 'SpecialNeeds Heal
h_Sports ', 'History_Civics Math_Science ', 'AppliedLearning Warmth Care_Hunger ', 'Health_Sports
Warmth Care_Hunger ', 'History_Civics Literacy_Language ', 'Literacy_Language SpecialNeeds ',
'AppliedLearning Health_Sports ', 'History_Civics Health_Sports ', 'AppliedLearning
Literacy_Language ', 'Music_Arts ', 'Math_Science SpecialNeeds ', 'History_Civics Music_Arts ',
'Health_Sports ', 'Math_Science Warmth Care_Hunger ', 'Health_Sports SpecialNeeds ', 'Math_Science
Music_Arts ', 'Health_Sports Math_Science ', 'AppliedLearning Music_Arts ']
=====

```

Shape of cleaned_categories matrix after vectorization(response encoding): (53529, 2)

Sample vectors of categories:

```

=====
(0, 0) 0.08643815201192251
(0, 1) 0.9135618479880775
(1, 0) 0.13056175914791274
(1, 1) 0.8694382408520873
(2, 0) 0.17997148966500356
(2, 1) 0.8200285103349965
(3, 0) 0.17997148966500356
(3, 1) 0.8200285103349965

```

2. Vectorizing cleaned_sub_categories(project_subject_sub_categories cleaned) - One Hot Encoding

In [0]:

```

# Categorizing subjects sub_categories feature using response encoding
subjectsSubCategoriesResponseData = [dict(), dict()];
for index, dataPoint in trainingData.iterrows():
    subjectSubCategory = dataPoint['cleaned sub_categories'];

```

```

classValue = dataPoint['project_is_approved'];
if(subjectSubCategory in subjectsSubCategoriesResponseData[classValue]):
    subjectsSubCategoriesResponseData[classValue][subjectSubCategory] += 1;
else:
    subjectsSubCategoriesResponseData[classValue][subjectSubCategory] = 1;
allSubjectSubCategories = set(list(subjectsSubCategoriesResponseData[0].keys()) +
list(subjectsSubCategoriesResponseData[1].keys()));
for subjectSubCategory in allSubjectSubCategories:
    if(subjectSubCategory not in subjectsSubCategoriesResponseData[0]):
        subjectsSubCategoriesResponseData[0][subjectSubCategory] = 0;
    if(subjectSubCategory not in subjectsSubCategoriesResponseData[1]):
        subjectsSubCategoriesResponseData[1][subjectSubCategory] = 0;
def subjectsSubCategoriesTransform(subjectSubCategories):
    transformedData = pd.DataFrame(columns = ['SubjectsSubCategories0', 'SubjectsSubCategories1']);
    numRows = len(subjectSubCategories);
    for index, subjectSubCategory in enumerate(tqdm(subjectSubCategories)):
        if subjectSubCategory in allSubjectSubCategories:
            class0Value = subjectsSubCategoriesResponseData[0][subjectSubCategory];
            class1Value = subjectsSubCategoriesResponseData[1][subjectSubCategory];
            totalValue = class0Value + class1Value;
            class0Value = class0Value / totalValue;
            class1Value = class1Value / totalValue;
            transformedData.loc[index] = [class0Value, class1Value];
        else:
            transformedData.loc[index] = [0.5, 0.5];
    return csr_matrix(transformedData);
subCategoriesVectors =
subjectsSubCategoriesTransform(trainingData['cleaned_sub_categories'].values);

```

In [0]:

```

print("Features used in vectorizing subject sub categories: ");
equalsBorder(70);
print(list(allSubjectSubCategories));
equalsBorder(70);
print("Shape of cleaned_sub_categories matrix after vectorization(response encoding): ",
subCategoriesVectors.shape);
equalsBorder(70);
print("Sample vectors of sub categories: ");
equalsBorder(70);
print(subCategoriesVectors[0:4])

```

Features used in vectorizing subject sub categories:

```

=====
['Extracurricular ForeignLanguages ', 'Health_LifeScience Health_Wellness ', 'Health_LifeScience V
isualArts ', 'History_Geography Music ', 'ParentInvolvement SpecialNeeds ', 'CommunityService
Literature_Writing ', 'Civics_Government Literacy ', 'Gym_Fitness Health_LifeScience ', 'Other
SocialSciences ', 'CommunityService Other ', 'College_CareerPrep EarlyDevelopment ',
'College_CareerPrep FinancialLiteracy ', 'AppliedSciences CommunityService ', 'FinancialLiteracy V
isualArts ', 'ESL VisualArts ', 'Health_Wellness ', 'CharacterEducation EarlyDevelopment ', 'Music
Other ', 'AppliedSciences ESL ', 'Other VisualArts ', 'Health_Wellness Other ',
'CharacterEducation Health_Wellness ', 'Other ', 'CommunityService NutritionEducation ',
'EarlyDevelopment FinancialLiteracy ', 'Other PerformingArts ', 'Extracurricular TeamSports ', 'He
alth_LifeScience TeamSports ', 'CommunityService SpecialNeeds ', 'CharacterEducation Mathematics ',
'Extracurricular Health_LifeScience ', 'NutritionEducation Warmth Care_Hunger ', 'Gym_Fitness He
alth_Wellness ', 'EarlyDevelopment Literacy ', 'AppliedSciences Civics_Government ',
'NutritionEducation SocialSciences ', 'History_Geography SocialSciences ', 'CommunityService
Health_Wellness ', 'NutritionEducation SpecialNeeds ', 'CommunityService SocialSciences ',
'FinancialLiteracy Other ', 'ForeignLanguages History_Geography ', 'Mathematics TeamSports ',
'College_CareerPrep VisualArts ', 'Health_LifeScience Music ', 'Literature_Writing VisualArts ',
'CharacterEducation History_Geography ', 'AppliedSciences SpecialNeeds ', 'ESL Gym_Fitness ',
'College_CareerPrep History_Geography ', 'Civics_Government SpecialNeeds ', 'EarlyDevelopment
Music ', 'Economics Health_LifeScience ', 'Health_LifeScience Literacy ', 'Literacy TeamSports ',
'Gym_Fitness SocialSciences ', 'College_CareerPrep Economics ', 'CharacterEducation Music ',
'ForeignLanguages VisualArts ', 'Economics Literacy ', 'Health_Wellness PerformingArts ',
'ParentInvolvement Warmth Care_Hunger ', 'Gym_Fitness ', 'Extracurricular ParentInvolvement ', 'Gy
m_Fitness SpecialNeeds ', 'College_CareerPrep Literacy ', 'Economics EnvironmentalScience ',
'Civics_Government ', 'CommunityService EnvironmentalScience ', 'Gym_Fitness PerformingArts ',
'CharacterEducation College_CareerPrep ', 'EarlyDevelopment Warmth Care_Hunger ',
'CharacterEducation Extracurricular ', 'ESL NutritionEducation ', 'EarlyDevelopment PerformingArts
', 'Other ParentInvolvement ', 'Civics_Government VisualArts ', 'CommunityService Extracurricular
', 'Extracurricular Other ', 'CharacterEducation Health_LifeScience ', 'College_CareerPrep Music ',
'Music PerformingArts ', 'SpecialNeeds ', 'Literacy VisualArts ', 'EarlyDevelopment
SocialSciences ', 'ParentInvolvement SocialSciences ', 'Gym_Fitness Other ', 'AppliedSciences

```

NutritionEducation ', 'History_Geography PerformingArts ', 'Literacy NutritionEducation ',
'EnvironmentalScience History_Geography ', 'Health_LifeScience NutritionEducation ',
'CharacterEducation Gym_Fitness ', 'CharacterEducation EnvironmentalScience ',
'EnvironmentalScience Warmth Care_Hunger ', 'SpecialNeeds Warmth Care_Hunger ', 'TeamSports
VisualArts ', 'CommunityService Economics ', 'FinancialLiteracy Health_LifeScience ',
'CommunityService ParentInvolvement ', 'Mathematics Music ', 'College_CareerPrep SocialSciences ',
'ESL History_Geography ', 'Health_Wellness Warmth Care_Hunger ', 'NutritionEducation TeamSports ',
'Health_LifeScience Other ', 'Health_Wellness History_Geography ', 'Economics ', 'CommunityService
VisualArts ', 'NutritionEducation ', 'Literature_Writing ParentInvolvement ',
'EnvironmentalScience Mathematics ', 'Health_LifeScience Literature_Writing ',
'EnvironmentalScience SocialSciences ', 'AppliedSciences Music ', 'ESL ', 'Civics_Government
Literature_Writing ', 'CharacterEducation CommunityService ', 'College_CareerPrep Other ',
'Mathematics VisualArts ', 'ESL PerformingArts ', 'ESL Health_LifeScience ', 'FinancialLiteracy
Literature_Writing ', 'ESL Music ', 'EarlyDevelopment Extracurricular ', 'EarlyDevelopment
History_Geography ', 'ForeignLanguages Mathematics ', 'EnvironmentalScience ParentInvolvement ',
Economics SocialSciences ', 'Health_LifeScience Warmth Care_Hunger ', 'Economics VisualArts ', 'Li
terature_Writing Warmth Care_Hunger ', 'AppliedSciences Literature_Writing ', 'AppliedSciences For
eignLanguages ', 'EnvironmentalScience ForeignLanguages ', 'Mathematics ', 'Gym_Fitness
Mathematics ', 'College_CareerPrep ParentInvolvement ', 'Literature_Writing SocialSciences ',
'CharacterEducation Other ', 'Literature_Writing Mathematics ', 'EnvironmentalScience Other ',
'ESL Literature_Writing ', 'CharacterEducation ESL ', 'Civics_Government College_CareerPrep ',
'Gym_Fitness Music ', 'Gym_Fitness TeamSports ', 'Literature_Writing ', 'Health_LifeScience
History_Geography ', 'AppliedSciences CharacterEducation ', 'ESL Mathematics ', 'ESL
Health_Wellness ', 'Extracurricular Literature_Writing ', 'SocialSciences SpecialNeeds ',
'EarlyDevelopment ParentInvolvement ', 'NutritionEducation Other ', 'EarlyDevelopment VisualArts '
, 'Literacy PerformingArts ', 'PerformingArts SocialSciences ', 'Health_Wellness SocialSciences ',
'Extracurricular Mathematics ', 'Other SpecialNeeds ', 'AppliedSciences FinancialLiteracy ',
'Literacy Music ', 'Civics_Government SocialSciences ', 'ESL ParentInvolvement ',
'College_CareerPrep Gym_Fitness ', 'Civics_Government NutritionEducation ', 'Extracurricular ',
'CharacterEducation Economics ', 'Extracurricular History_Geography ', 'EarlyDevelopment
TeamSports ', 'CommunityService ', 'AppliedSciences TeamSports ', 'SocialSciences ',
'ForeignLanguages Literature_Writing ', 'Mathematics ParentInvolvement ', 'CharacterEducation
TeamSports ', 'AppliedSciences VisualArts ', 'College_CareerPrep SpecialNeeds ',
'EnvironmentalScience Music ', 'CharacterEducation FinancialLiteracy ', 'Music ParentInvolvement '
, 'CharacterEducation SpecialNeeds ', 'Economics FinancialLiteracy ', 'AppliedSciences
Health_Wellness ', 'Health_Wellness Music ', 'Civics_Government Mathematics ', 'AppliedSciences He
alth_LifeScience ', 'EarlyDevelopment Other ', 'AppliedSciences History_Geography ', 'Gym_Fitness
History_Geography ', 'Mathematics Other ', 'AppliedSciences Economics ', 'Health_LifeScience
ParentInvolvement ', 'Extracurricular PerformingArts ', 'Health_Wellness SpecialNeeds ',
'FinancialLiteracy History_Geography ', 'Extracurricular Music ', 'EnvironmentalScience ',
'Civics_Government ParentInvolvement ', 'EarlyDevelopment ', 'Civics_Government Economics ', 'ESL
FinancialLiteracy ', 'EnvironmentalScience FinancialLiteracy ', 'EarlyDevelopment Gym_Fitness ',
CommunityService History_Geography ', 'EnvironmentalScience PerformingArts ', 'CharacterEducation
ForeignLanguages ', 'College_CareerPrep Health_Wellness ', 'Health_Wellness Literacy ',
'History_Geography Mathematics ', 'CharacterEducation Literature_Writing ', 'ForeignLanguages
Other ', 'Health_LifeScience PerformingArts ', 'College_CareerPrep Literature_Writing ',
'Literature_Writing Music ', 'College_CareerPrep ForeignLanguages ', 'Literature_Writing Other ',
'Gym_Fitness ParentInvolvement ', 'Civics_Government TeamSports ', 'Extracurricular SpecialNeeds '
, 'SpecialNeeds VisualArts ', 'CharacterEducation NutritionEducation ', 'EarlyDevelopment
EnvironmentalScience ', 'EarlyDevelopment NutritionEducation ', 'CharacterEducation VisualArts ',
'VisualArts ', 'Music SpecialNeeds ', 'Health_LifeScience SocialSciences ', 'College_CareerPrep ES
L ', 'ParentInvolvement PerformingArts ', 'CharacterEducation ParentInvolvement ',
'College_CareerPrep TeamSports ', 'EnvironmentalScience NutritionEducation ', 'Mathematics
SocialSciences ', 'CharacterEducation Civics_Government ', 'College_CareerPrep PerformingArts ',
College_CareerPrep EnvironmentalScience ', 'Civics_Government Health_LifeScience ',
'SocialSciences TeamSports ', 'Extracurricular Literacy ', 'AppliedSciences Extracurricular ', 'Fo
reignLanguages ', 'Literature_Writing SpecialNeeds ', 'ParentInvolvement TeamSports ',
'Mathematics PerformingArts ', 'PerformingArts TeamSports ', 'EarlyDevelopment Mathematics ',
'EarlyDevelopment SpecialNeeds ', 'Extracurricular SocialSciences ', 'AppliedSciences ',
'Health_LifeScience Mathematics ', 'CommunityService EarlyDevelopment ', 'EarlyDevelopment
Health_Wellness ', 'Gym_Fitness Literature_Writing ', 'College_CareerPrep Mathematics ', 'Literacy
, 'Health_Wellness Mathematics ', 'Civics_Government FinancialLiteracy ', 'AppliedSciences
Literacy ', 'AppliedSciences SocialSciences ', 'NutritionEducation VisualArts ', 'Literacy Other '
, 'AppliedSciences College_CareerPrep ', 'EarlyDevelopment ForeignLanguages ', 'CommunityService H
ealth_LifeScience ', 'Literacy Literature_Writing ', 'Mathematics Warmth Care_Hunger ',
'ForeignLanguages Health_LifeScience ', 'Literature_Writing PerformingArts ', 'PerformingArts
VisualArts ', 'SocialSciences VisualArts ', 'College_CareerPrep Extracurricular ',
'FinancialLiteracy SpecialNeeds ', 'EnvironmentalScience VisualArts ', 'CharacterEducation
SocialSciences ', 'History_Geography TeamSports ', 'Music SocialSciences ', 'ESL ForeignLanguages
, 'EnvironmentalScience Extracurricular ', 'CommunityService Literacy ', 'College_CareerPrep Comm
unityService ', 'ForeignLanguages Health_Wellness ', 'Health_Wellness NutritionEducation ',
'Civics_Government ESL ', 'Mathematics NutritionEducation ', 'ESL Other ', 'EnvironmentalScience H
ealth_Wellness ', 'FinancialLiteracy PerformingArts ', 'Health_Wellness VisualArts ',
'FinancialLiteracy ', 'ForeignLanguages SocialSciences ', 'AppliedSciences EnvironmentalScience ',
'AppliedSciences ParentInvolvement ', 'College_CareerPrep Health_LifeScience ', 'ParentInvolvement
, 'CommunityService ESL ', 'Gym_Fitness Literacy ', 'Literacy SpecialNeeds ', 'Extracurricular Nu
tritionEducation ', 'Warmth Care_Hunger ', 'Other TeamSports ', 'Economics Other ', 'Music

```
TeamSports ', 'Literacy ParentInvolvement ', 'ESL TeamSports ', 'Economics History_Geography ',
'Civics_Government PerformingArts ', 'College_CareerPrep ', 'Music ', 'Gym_Fitness
NutritionEducation ', 'FinancialLiteracy Literacy ', 'AppliedSciences PerformingArts ',
'PerformingArts SpecialNeeds ', 'FinancialLiteracy Health_Wellness ', 'Music VisualArts ',
'Literacy Mathematics ', 'AppliedSciences EarlyDevelopment ', 'Literacy Warmth Care_Hunger ', 'Cha
racterEducation ', 'College_CareerPrep NutritionEducation ', 'Civics_Government CommunityService '
, 'History_Geography Literacy ', 'FinancialLiteracy Mathematics ', 'EnvironmentalScience
SpecialNeeds ', 'Health_LifeScience ', 'AppliedSciences Mathematics ', 'ESL EnvironmentalScience '
, 'Health_Wellness ParentInvolvement ', 'History_Geography ', 'Health_LifeScience SpecialNeeds ',
'TeamSports ', 'Health_Wellness TeamSports ', 'Civics_Government EnvironmentalScience ',
'AppliedSciences Other ', 'CommunityService Mathematics ', 'AppliedSciences Gym_Fitness ',
'History_Geography SpecialNeeds ', 'Literature_Writing TeamSports ', 'History_Geography
Literature_Writing ', 'ESL SpecialNeeds ', 'EarlyDevelopment Health_LifeScience ', 'ESL Literacy '
, 'Economics NutritionEducation ', 'EnvironmentalScience Literature_Writing ', 'Health_Wellness
Literature_Writing ', 'EnvironmentalScience Health_LifeScience ', 'History_Geography VisualArts ',
'History_Geography Warmth Care_Hunger ', 'ESL SocialSciences ', 'ESL EarlyDevelopment ',
'Extracurricular VisualArts ', 'Economics Literature_Writing ', 'CharacterEducation Literacy ',
'Mathematics SpecialNeeds ', 'Gym_Fitness VisualArts ', 'Civics_Government History_Geography ',
'ParentInvolvement VisualArts ', 'ForeignLanguages Literacy ', 'PerformingArts ',
'EarlyDevelopment Economics ', 'SpecialNeeds TeamSports ', 'EnvironmentalScience Literacy ',
'Literacy SocialSciences ', 'History_Geography ParentInvolvement ', 'Extracurricular
Health_Wellness ', 'CharacterEducation PerformingArts ', 'Economics Mathematics ',
'EarlyDevelopment Literature_Writing ', 'AppliedSciences Warmth Care_Hunger ', 'ForeignLanguages M
usic ', 'History_Geography Other ', 'EnvironmentalScience Gym_Fitness ', 'ForeignLanguages
SpecialNeeds ']
```

```
=====
Shape of cleaned_sub_categories matrix after vectorization(response encoding): (53529, 2)
```

```
=====
Sample vectors of sub categories:
```

```
=====
(0, 0) 0.08643815201192251
(0, 1) 0.9135618479880775
(1, 0) 0.11433521004763968
(1, 1) 0.8856647899523603
(2, 0) 0.17973733583489682
(2, 1) 0.8202626641651032
(3, 0) 0.17973733583489682
(3, 1) 0.8202626641651032
```

3. Vectorizing teacher_prefix - One Hot Encoding

In [0]:

```
def giveCounter(data):
    counter = Counter();
    for dataValue in data:
        counter.update(str(dataValue).split());
    return counter
```

In [0]:

```
giveCounter(trainingData['teacher_prefix'].values)
```

Out[0]:

```
Counter({'Dr.': 9, 'Mr.': 5268, 'Mrs.': 28095, 'Ms.': 19006, 'Teacher': 1151})
```

In [0]:

```
# Categorizing teacher prefixes feature using response encoding
teacherPrefixResponseData = [dict(), dict()];
for index, dataPoint in trainingData.iterrows():
    teacherPrefix = dataPoint['teacher_prefix'];
    classValue = dataPoint['project_is_approved'];
    if(teacherPrefix in teacherPrefixResponseData[classValue]):
        teacherPrefixResponseData[classValue][teacherPrefix] += 1;
    else:
        teacherPrefixResponseData[classValue][teacherPrefix] = 1;

allTeacherPrefixes = set(list(teacherPrefixResponseData[0].keys()) +
list(teacherPrefixResponseData[1].keys()));

for teacherPrefix in allTeacherPrefixes:
```

```

for teacherPrefix in allTeacherPrefixes:
    if(teacherPrefix not in teacherPrefixResponseData[0]):
        teacherPrefixResponseData[0][teacherPrefix] = 0;
    if(teacherPrefix not in teacherPrefixResponseData[1]):
        teacherPrefixResponseData[1][teacherPrefix] = 0;

def teacherPrefixTransform(teacherPrefixes):
    transformedData = pd.DataFrame(columns = ['teacherPrefixes0', 'teacherPrefixes1']);
    numRows = len(teacherPrefixes);
    for index, teacherPrefix in enumerate(tqdm(teacherPrefixes)):
        if teacherPrefix in allTeacherPrefixes:
            class0Value = teacherPrefixResponseData[0][teacherPrefix];
            class1Value = teacherPrefixResponseData[1][teacherPrefix];
            totalValue = class0Value + class1Value;
            class0Value = class0Value / totalValue;
            class1Value = class1Value / totalValue;
            transformedData.loc[index] = [class0Value, class1Value];
        else:
            transformedData.loc[index] = [0.5, 0.5];
    return csr_matrix(transformedData);
teacherPrefixVectors = teacherPrefixTransform(trainingData['teacher_prefix'].values);

```

In [0]:

```

print("Features used in vectorizing teacher prefixes: ");
equalsBorder(70);
print(list(allTeacherPrefixes));
equalsBorder(70);
print("Shape of teacher prefixes matrix after vectorization(response encoding): ",
teacherPrefixVectors.shape);
equalsBorder(70);
print("Sample vectors of teacher prefixes: ");
equalsBorder(70);
print(teacherPrefixVectors[0:4]);

```

Features used in vectorizing teacher prefixes:

```

=====
['Ms.', 'Dr.', 'Mrs.', 'Teacher', 'Mr.']
=====

```

Shape of teacher prefixes matrix after vectorization(response encoding): (53529, 2)

Sample vectors of teacher prefixes:

```

=====
(0, 0) 0.15484583815637168
(0, 1) 0.8451541618436283
(1, 0) 0.15484583815637168
(1, 1) 0.8451541618436283
(2, 0) 0.15484583815637168
(2, 1) 0.8451541618436283
(3, 0) 0.19548218940052128
(3, 1) 0.8045178105994787

```

4. Vectorizing school_state - One Hot Encoding

In [0]:

```

# Categorizing school state feature using response encoding
schoolStateResponseData = [dict(), dict()];
for index, dataPoint in trainingData.iterrows():
    schoolState = dataPoint['school_state'];
    classValue = dataPoint['project_is_approved'];
    if(schoolState in schoolStateResponseData[classValue]):
        schoolStateResponseData[classValue][schoolState] += 1;
    else:
        schoolStateResponseData[classValue][schoolState] = 1;

allSchoolStates = set(list(schoolStateResponseData[0].keys()) + list(schoolStateResponseData[1].keys()));

for schoolState in allSchoolStates:
    if(schoolState not in schoolStateResponseData[0]):
        schoolStateResponseData[0][schoolState] = 0;
    if(schoolState not in schoolStateResponseData[1]):

```

```

if (schoolState not in schoolStateResponseData[1]):
    schoolStateResponseData[1][schoolState] = 0;

def schoolStateTransform(schoolStates):
    transformedData = pd.DataFrame(columns = ['SchoolStates0', 'SchoolStates1']);
    numRows = len(schoolStates);
    for index, schoolState in enumerate(tqdm(schoolStates)):
        if schoolState in allSchoolStates:
            class0Value = schoolStateResponseData[0][schoolState];
            class1Value = schoolStateResponseData[1][schoolState];
            totalValue = class0Value + class1Value;
            class0Value = class0Value / totalValue;
            class1Value = class1Value / totalValue;
            transformedData.loc[index] = [class0Value, class1Value];
        else:
            transformedData.loc[index] = [0.5, 0.5];
    return csr_matrix(transformedData);
schoolStateVectors = schoolStateTransform(trainingData['school_state'].values);

```

In [0]:

```

print("Features used in vectorizing school states: ");
equalsBorder(70);
print(list(allSchoolStates));
equalsBorder(70);
print("Shape of school states matrix after vectorization(response encoding): ", schoolStateVectors
.shape);
equalsBorder(70);
print("Sample vectors of school states: ");
equalsBorder(70);
print(schoolStateVectors[0:4]);

```

Features used in vectorizing school states:

```

=====
['NE', 'WV', 'NY', 'TN', 'OR', 'MT', 'MD', 'AZ', 'SC', 'IN', 'IL', 'IA', 'OK', 'ND', 'MO', 'HI', 'I
E', 'TX', 'AR', 'NM', 'GA', 'DC', 'AL', 'OH', 'CT', 'NJ', 'NC', 'KY', 'ME', 'MS', 'CO', 'WA', 'LA',
'SD', 'MA', 'RI', 'KS', 'WI', 'MN', 'VA', 'NV', 'WY', 'UT', 'AK', 'CA', 'MI', 'NH', 'ID', 'FL', 'PA
', 'VT']

```

Shape of school states matrix after vectorization(response encoding): (53529, 2)

Sample vectors of school states:

```

=====
(0, 0) 0.16321243523316062
(0, 1) 0.8367875647668394
(1, 0) 0.09770114942528736
(1, 1) 0.9022988505747126
(2, 0) 0.17916553040632668
(2, 1) 0.8208344695936733
(3, 0) 0.17110266159695817
(3, 1) 0.8288973384030418

```

5. Vectorizing project_grade_category - One Hot Encoding

In [0]:

```

giveCounter(trainingData['project_grade_category'])

```

Out[0]:

```

Counter({'3-5': 18284,
        '6-8': 8161,
        '9-12': 5424,
        'Grades': 53529,
        'PreK-2': 21660})

```

In [0]:

```

cleanedGrades = []
for grade in trainingData['project_grade_category'].values:
    grade = grade.replace(' ', '');

```

```

grade = grade.replace('-', 'to');
cleanedGrades.append(grade);
cleanedGrades[0:4]

```

Out [0]:

```
['Grades3to5', 'Grades3to5', 'Grades6to8', 'Grades6to8']
```

In [0]:

```

trainingData['project_grade_category'] = cleanedGrades
trainingData.head(4)

```

Out [0]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_submitted_datetim
48858	140830	p259363	4800dff2ebf45d898fd462acb9a5cfe4	Ms.	FL	2016-11-17 21:11:22
37065	172594	p069087	c66949c3fbb4a283d7e2b3f384f2ab54	Ms.	DE	2016-10-11 16:08:15
38285	116819	p140400	e600536514113db6349fbe7bbc16ca4b	Ms.	TX	2016-07-06 12:45:17
102612	48244	p174203	21fe8971971fbaca9e39d2013939dc8c	Teacher	WV	2017-01-03 13:01:49

In [0]:

```

# Categorizing project grade feature using response encoding
projectGradeResponseData = [dict(), dict()];
for index, dataPoint in trainingData.iterrows():
    projectGrade = dataPoint['project_grade_category'];
    classValue = dataPoint['project_is_approved'];
    if(schoolState in projectGradeResponseData[classValue]):
        projectGradeResponseData[classValue][projectGrade] += 1;
    else:
        projectGradeResponseData[classValue][projectGrade] = 1;

allProjectGrades = set(list(projectGradeResponseData[0].keys()) + list(projectGradeResponseData[1].keys()));

for projectGrade in allProjectGrades:
    if(projectGrade not in projectGradeResponseData[0]):
        projectGradeResponseData[0][projectGrade] = 0;
    if(projectGrade not in projectGradeResponseData[1]):
        projectGradeResponseData[1][projectGrade] = 0;

def projectGradeTransform(projectGrades):
    transformedData = pd.DataFrame(columns = ['ProjectGrades0', 'ProjectGrades1']);
    numRows = len(projectGrades);
    for index, projectGrade in enumerate(tqdm(projectGrades)):
        if projectGrade in allProjectGrades:
            class0Value = projectGradeResponseData[0][projectGrade];
            class1Value = projectGradeResponseData[1][projectGrade];
            totalValue = class0Value + class1Value;
            class0Value = class0Value / totalValue;
            class1Value = class1Value / totalValue;

```



```

class0Value, class1Value, class2Value,
transformedData.loc[index] = [class0Value, class1Value];
else:
    transformedData.loc[index] = [0.5, 0.5];
return csr_matrix(transformedData);
projectGradeVectors = projectGradeTransform(trainingData['project_grade_category'].values);

```

In [0]:

```

print("Features used in vectorizing project grades: ");
equalsBorder(70);
print(list(allProjectGrades));
equalsBorder(70);
print("Shape of project grades matrix after vectorization(response encoding): ",
projectGradeVectors.shape);
equalsBorder(70);
print("Sample vectors of project grades: ");
equalsBorder(70);
print(projectGradeVectors[0:4]);

```

```

Features used in vectorizing project grades:
=====
['Grades3to5', 'Grades9to12', 'Grades6to8', 'GradesPreKto2']
=====
Shape of project grades matrix after vectorization(response encoding): (53529, 2)
=====
Sample vectors of project grades:
=====
(0, 0) 0.5
(0, 1) 0.5
(1, 0) 0.5
(1, 1) 0.5
(2, 0) 0.5
(2, 1) 0.5
(3, 0) 0.5
(3, 1) 0.5

```

Vectorizing Text Data

In [0]:

```

preProcessedEssaysWithStopWords, preProcessedEssaysWithoutStopWords =
preProcessingWithAndWithoutStopWords(trainingData['project_essay']);
preProcessedProjectTitlesWithStopWords, preProcessedProjectTitlesWithoutStopWords =
preProcessingWithAndWithoutStopWords(trainingData['project_title']);

```

In [0]:

```

bagOfWordsVectorizedFeatures = [];

```

Bag of Words

1. Vectorizing project_essay

In [0]:

```

# Initializing countvectorizer for bag of words vectorization of preprocessed project essays
bowEssayVectorizer = CountVectorizer(min_df = 10, max_features = 5000);
# Transforming the preprocessed essays to bag of words vectors
bowEssayModel = bowEssayVectorizer.fit_transform(preProcessedEssaysWithoutStopWords);

```

In [0]:

```

print("Some of the Features used in vectorizing preprocessed essays: ").

```

```

print('Some of the features used in vectorizing preprocessed essays: ',
equalsBorder(70);
print(bowEssayVectorizer.get_feature_names() [-40:]);
equalsBorder(70);
print("Shape of preprocessed essay matrix after vectorization: ", bowEssayModel.shape);
equalsBorder(70);
print("Sample bag-of-words vector of preprocessed essay: ");
equalsBorder(70);
print(bowEssayModel[0])

```

Some of the Features used in vectorizing preprocessed essays:

```

=====
['worries', 'worry', 'worrying', 'worst', 'worth', 'worthwhile', 'worthy', 'would', 'wow', 'write',
, 'writer', 'writers', 'writing', 'writings', 'written', 'wrong', 'wrote', 'xylophones', 'yard', '
year', 'yearbook', 'yearly', 'yearn', 'yearning', 'years', 'yes', 'yesterday', 'yet', 'yoga', 'yor
k', 'young', 'younger', 'youngest', 'youth', 'youtube', 'zero', 'zest', 'zip', 'zone', 'zoo']
=====

```

Shape of preprocessed essay matrix after vectorization: (53529, 5000)

Sample bag-of-words vector of preprocessed essay:

```

=====
(0, 2747) 2
(0, 4365) 10
(0, 3100) 9
(0, 2036) 1
(0, 395) 1
(0, 3220) 1
(0, 3960) 6
(0, 4907) 1
(0, 2641) 1
(0, 1676) 2
(0, 615) 1
(0, 2979) 1
(0, 4456) 1
(0, 2686) 1
(0, 3890) 1
(0, 4967) 8
(0, 2754) 1
(0, 4479) 1
(0, 3580) 2
(0, 3821) 2
(0, 3045) 2
(0, 4390) 1
(0, 1989) 1
(0, 250) 1
(0, 3066) 1
: :
(0, 3256) 1
(0, 571) 1
(0, 437) 1
(0, 4191) 1
(0, 4873) 1
(0, 4112) 1
(0, 2266) 1
(0, 2738) 1
(0, 3819) 1
(0, 433) 1
(0, 553) 1
(0, 434) 2
(0, 4752) 1
(0, 4016) 1
(0, 900) 1
(0, 3393) 1
(0, 438) 1
(0, 4003) 1
(0, 2542) 1
(0, 3519) 1
(0, 2547) 1
(0, 2795) 1
(0, 3991) 1
(0, 4388) 1
(0, 3022) 1

```

2. Vectorizing project_title

In [0]:

```
# Initializing countvectorizer for bag of words vectorization of preprocessed project titles
bowTitleVectorizer = CountVectorizer(min_df = 10);
# Transforming the preprocessed project titles to bag of words vectors
bowTitleModel = bowTitleVectorizer.fit_transform(preProcessedProjectTitlesWithoutStopWords);
```

In [0]:

```
print("Some of the Features used in vectorizing preprocessed titles: ");
equalsBorder(70);
print(bowTitleVectorizer.get_feature_names() [-40:]);
equalsBorder(70);
print("Shape of preprocessed title matrix after vectorization: ", bowTitleModel.shape);
equalsBorder(70);
print("Sample bag-of-words vector of preprocessed title: ");
equalsBorder(70);
print(bowTitleModel[0])
```

Some of the Features used in vectorizing preprocessed titles:

```
=====
['wish', 'within', 'without', 'wizards', 'wo', 'wobble', 'wobbles', 'wobbling', 'wobbly',
'wonder', 'wonderful', 'wonders', 'word', 'words', 'work', 'workers', 'working', 'workout',
'works', 'workshop', 'world', 'worlds', 'worms', 'worth', 'would', 'wow', 'wrestling', 'write', 'w
riter', 'writers', 'writing', 'written', 'ye', 'year', 'yearbook', 'yes', 'yoga', 'young',
'youth', 'zone']
=====
```

Shape of preprocessed title matrix after vectorization: (53529, 2105)

Sample bag-of-words vector of preprocessed title:

```
=====
(0, 127) 1
=====
```

Tf-Idf Vectorization

1. Vectorizing project_essay

In [0]:

```
# Intializing tfidf vectorizer for tf-idf vectorization of preprocessed project essays
tfIdfEssayVectorizer = TfidfVectorizer(min_df = 10, max_features = 5000);
# Transforming the preprocessed project essays to tf-idf vectors
tfIdfEssayModel = tfIdfEssayVectorizer.fit_transform(preProcessedEssaysWithoutStopWords);
```

In [0]:

```
print("Some of the Features used in tf-idf vectorizing preprocessed essays: ");
equalsBorder(70);
print(tfIdfEssayVectorizer.get_feature_names() [-40:]);
equalsBorder(70);
print("Shape of preprocessed title matrix after tf-idf vectorization: ", tfIdfEssayModel.shape);
equalsBorder(70);
print("Sample Tf-Idf vector of preprocessed essay: ");
equalsBorder(70);
print(tfIdfEssayModel[0])
```

Some of the Features used in tf-idf vectorizing preprocessed essays:

```
=====
['worries', 'worry', 'worrying', 'worst', 'worth', 'worthwhile', 'worthy', 'would', 'wow', 'write',
'writer', 'writers', 'writing', 'writings', 'written', 'wrong', 'wrote', 'xylophones', 'yard', '
year', 'yearbook', 'yearly', 'yearn', 'yearning', 'years', 'yes', 'yesterday', 'yet', 'yoga', 'yor
k', 'young', 'younger', 'youngest', 'youth', 'youtube', 'zero', 'zest', 'zip', 'zone', 'zoo']
=====
```

Shape of preprocessed title matrix after tf-idf vectorization: (53529, 5000)

Sample Tf-Idf vector of preprocessed essay:

```
=====
(0, 3022) 0.018094205612536794
(0, 4388) 0.054207619003056214
(0, 3991) 0.12495528339505618
=====
```

```
(0, 2795) 0.05826650257254188
(0, 2547) 0.07602232720617802
(0, 3519) 0.11547298391896377
(0, 2542) 0.04910401209544946
(0, 4003) 0.08690283700318722
(0, 438) 0.08767512357315305
(0, 3393) 0.09389789515024273
(0, 900) 0.06949010829630545
(0, 4016) 0.09458467882329553
(0, 4752) 0.03083134772248111
(0, 434) 0.20173224818799645
(0, 553) 0.11575612507065738
(0, 433) 0.09290351365633924
(0, 3819) 0.07714195112279197
(0, 2738) 0.06274668181708029
(0, 2266) 0.09193907009115258
(0, 4112) 0.07852645809939311
(0, 4873) 0.09240222208320098
(0, 4191) 0.05924344370687216
(0, 437) 0.08939357156701812
(0, 571) 0.05447374482975269
(0, 3256) 0.13110922135539982
: :
(0, 3066) 0.034823913503280624
(0, 250) 0.04846896890299715
(0, 1989) 0.052488080232627465
(0, 4390) 0.04865171440825632
(0, 3045) 0.05770816524873697
(0, 3821) 0.0946756617112588
(0, 3580) 0.07578658579302004
(0, 4479) 0.0426445957954258
(0, 2754) 0.03197297735421936
(0, 4967) 0.2819748929618572
(0, 3890) 0.053934797345609964
(0, 2686) 0.08047228671532597
(0, 4456) 0.10886145404533437
(0, 2979) 0.06356358894328347
(0, 615) 0.06940477956922898
(0, 1676) 0.08905604423804019
(0, 2641) 0.0252857123904684
(0, 4907) 0.07757726633148239
(0, 3960) 0.12064159210540859
(0, 3220) 0.05647317289665949
(0, 395) 0.0657736372792621
(0, 2036) 0.037438676737201124
(0, 3100) 0.22655991977583992
(0, 4365) 0.17450267413635387
(0, 2747) 0.11752449186442786
```

2. Vectorizing project_title

In [0]:

```
# Intializing tfidf vectorizer for tf-idf vectorization of preprocessed project titles
tfIdfTitleVectorizer = TfidfVectorizer(min_df = 10);
# Transforming the preprocessed project titles to tf-idf vectors
tfIdfTitleModel = tfIdfTitleVectorizer.fit_transform(preProcessedProjectTitlesWithoutStopWords);
```

In [0]:

```
print("Some of the Features used in tf-idf vectorizing preprocessed titles: ");
equalsBorder(70);
print(tfIdfTitleVectorizer.get_feature_names() [-40:]);
equalsBorder(70);
print("Shape of preprocessed title matrix after tf-idf vectorization: ", tfIdfTitleModel.shape);
equalsBorder(70);
print("Sample Tf-Idf vector of preprocessed title: ");
equalsBorder(70);
print(tfIdfTitleModel[0])
```

Some of the Features used in tf-idf vectorizing preprocessed titles:

```
=====
['wish', 'within', 'without', 'wizards', 'wo', 'wobble', 'wobbles', 'wobbling', 'wobbly',
 . . . . .]
```

```
'wonder', 'wonderful', 'wonders', 'word', 'words', 'work', 'workers', 'working', 'workout',  
'works', 'workshop', 'world', 'worlds', 'worms', 'worth', 'would', 'wow', 'wrestling', 'write', 'w  
riter', 'writers', 'writing', 'written', 'ye', 'year', 'yearbook', 'yes', 'yoga', 'young',  
'youth', 'zone']
```

```
=====
```

Shape of preprocessed title matrix after tf-idf vectorization: (53529, 2105)

```
=====
```

Sample Tf-Idf vector of preprocessed title:

```
=====
```

```
(0, 127) 1.0
```

Average Word2Vector Vectorization

In [0]:

```
# stronging variables into pickle files python: http://www.jessicayung.com/how-to-use-pickle-to-sa  
ve-and-load-variables-in-python/  
# We should have glove_vectors file for creating below model  
with open('drive/My Drive/glove_vectors', 'rb') as f:  
    gloveModel = pickle.load(f)  
    gloveWords = set(gloveModel.keys())
```

In [0]:

```
print("Glove vector of sample word: ");  
equalsBorder(70);  
print(gloveModel['technology']);  
equalsBorder(70);  
print("Shape of glove vector: ", gloveModel['technology'].shape);
```

Glove vector of sample word:

```
=====
```

[-0.26078	-0.36898	-0.022831	0.21666	0.16672	-0.20268
-3.1219	0.33057	0.71512	0.28874	0.074368	-0.033203
0.23783	0.21052	0.076562	0.13007	-0.31706	-0.45888
-0.45463	-0.13191	0.49761	0.072704	0.16811	0.18846
-0.16688	-0.21973	0.08575	-0.19577	-0.2101	-0.32436
-0.56336	0.077996	-0.22758	-0.66569	0.14824	0.038945
0.50881	-0.1352	0.49966	-0.4401	-0.022335	-0.22744
0.22086	0.21865	0.36647	0.30495	-0.16565	0.038759
0.28108	-0.2167	0.12453	0.65401	0.34584	-0.2557
-0.046363	-0.31111	-0.020936	-0.17122	-0.77114	0.29289
-0.14625	0.39541	-0.078938	0.051127	0.15076	0.085126
0.183	-0.06755	0.26312	0.0087276	0.0066415	0.37033
0.03496	-0.12627	-0.052626	-0.34897	0.14672	0.14799
-0.21821	-0.042785	0.2661	-1.1105	0.31789	0.27278
0.054468	-0.27458	0.42732	-0.44101	-0.19302	-0.32948
0.61501	-0.22301	-0.36354	-0.34983	-0.16125	-0.17195
-3.363	0.45146	-0.13753	0.31107	0.2061	0.33063
0.45879	0.24256	0.042342	0.074837	-0.12869	0.12066
0.42843	-0.4704	-0.18937	0.32685	0.26079	0.20518
-0.18432	-0.47658	0.69193	0.18731	-0.12516	0.35447
-0.1969	-0.58981	-0.88914	0.5176	0.13177	-0.078557
0.032963	-0.19411	0.15109	0.10547	-0.1113	-0.61533
0.0948	-0.3393	-0.20071	-0.30197	0.29531	0.28017
0.16049	0.25294	-0.44266	-0.39412	0.13486	0.25178
-0.044114	1.1519	0.32234	-0.34323	-0.10713	-0.15616
0.031206	0.46636	-0.52761	-0.39296	-0.068424	-0.04072
0.41508	-0.34564	0.71001	-0.364	0.2996	0.032281
0.34035	0.23452	0.78342	0.48045	-0.1609	0.40102
-0.071795	-0.16531	0.082153	0.52065	0.24194	0.17113
0.33552	-0.15725	-0.38984	0.59337	-0.19388	-0.39864
-0.47901	1.0835	0.24473	0.41309	0.64952	0.46846
0.024386	-0.72087	-0.095061	0.10095	-0.025229	0.29435
-0.57696	0.53166	-0.0058338	-0.3304	0.19661	-0.085206
0.34225	0.56262	0.19924	-0.027111	-0.44567	0.17266
0.20887	-0.40702	0.63954	0.50708	-0.31862	-0.39602
-0.1714	-0.040006	-0.45077	-0.32482	-0.0316	0.54908
-0.1121	0.12951	-0.33577	-0.52768	-0.44592	-0.45388
0.66145	0.33023	-1.9089	0.5318	0.21626	-0.13152
0.48258	0.68028	-0.84115	-0.51165	0.40017	0.17233
-0.033749	0.045275	0.37398	-0.18252	0.19877	0.1511
0.029803	0.16657	-0.12987	-0.50489	0.55311	-0.22504
0.12885	0.78458	0.26483	0.87472	0.831885	0.52852

```
=====
```

```

0.13085    -0.78459    0.36481    -0.27472    0.031805   0.53052
-0.20078    0.46392    -0.63554    0.040289   -0.19142   -0.0097011
0.068084   -0.10602    0.25567    0.096125   -0.10046    0.15016
-0.26733   -0.26494    0.057888   0.062678   -0.11596    0.28115
0.25375    -0.17954    0.20615    0.24189    0.062696    0.27719
-0.42601   -0.28619   -0.44697   -0.082253   -0.73415   -0.20675
-0.60289   -0.06728    0.15666   -0.042614    0.41368   -0.17367
-0.54012    0.23883    0.23075    0.13608   -0.058634   -0.089705
0.18469    0.023634    0.16178    0.23384    0.24267    0.091846 ]

```

Shape of glove vector: (300,)

In [0]:

```

def getWord2VecVectors(texts):
    word2VecTextsVectors = [];
    for preProcessedText in tqdm(texts):
        word2VecTextVector = np.zeros(300);
        numberOfWordsInText = 0;
        for word in preProcessedText.split():
            if word in gloveWords:
                word2VecTextVector += gloveModel[word];
                numberOfWordsInText += 1;
        if numberOfWordsInText != 0:
            word2VecTextVector = word2VecTextVector / numberOfWordsInText;
        word2VecTextsVectors.append(word2VecTextVector);
    return word2VecTextsVectors;

```

1. Vectorizing project_essay

In [0]:

```
word2VecEssaysVectors = getWord2VecVectors(preProcessedEssaysWithoutStopWords);
```

In [0]:

```

print("Shape of Word2Vec vectorization matrix of essays: {},{}".format(len(word2VecEssaysVectors),
len(word2VecEssaysVectors[0])));
equalsBorder(70);
print("Sample essay: ");
equalsBorder(70);
print(preProcessedEssaysWithoutStopWords[0]);
equalsBorder(70);
print("Word2Vec vector of sample essay: ");
equalsBorder(70);
print(word2VecEssaysVectors[0]);

```

Shape of Word2Vec vectorization matrix of essays: 53529,300

Sample essay:

lot students not get lot attention outside school willing learn excited school students bright motivated talent light room would love teacher provide resources need successful future students always excited new activities would not able home would like provide opportunities school would not able experience home half school students receive free reduced cost lunches happens weekends children not school not anything eat home would go without school noticing unusual trend among students free lunch program growing number conserving food fridays students hoarding food almost like animals eating half sticking rest pants book bag would something eat weekend simply not resources house students looking resource would not go without backpack blessing program sends home food students weekends not go without backpacks use send food home students lately food comes home plastic bags not seem like students would able keep need private backpacks key making program secret success nannan

Word2Vec vector of sample essay:

```

[ 2.64178445e-02  4.11585247e-02 -3.65931370e-02 -9.86259253e-02
 3.11363322e-02  5.02330031e-02 -3.25032849e+00 -1.60717418e-02
-1.68263788e-02 -1.77343297e-01  1.33223413e-01  5.28117959e-03
 1.59214204e-01 -2.12204749e-01 -5.74203253e-02  1.89232041e-02
-2.24438164e-02  3.28739110e-03  6.52792692e-02 -2.35127493e-02
 1.46092384e-02 -4.35153082e-03  6.25173671e-03  7.00009370e-02
 5.82225000e-02  2.51790562e-02  2.10284828e-02  6.84260548e-02

```

```

-3.62033000e-02 -3.31760362e-02 2.19294629e-02 -6.64360346e-02
-5.10377130e-02 -7.60905137e-02 -3.03812705e-01 -3.52655733e-02
1.00956477e-01 7.93720548e-02 -8.16208219e-04 1.16886685e-02
-1.35053868e-01 1.35777671e-03 3.14055322e-02 -5.49302336e-02
-5.48055443e-02 9.25238364e-02 7.57590685e-03 -1.99200192e-01
-1.35755001e-02 -1.79084225e-02 9.40091836e-02 -7.65994315e-02
-2.32081438e-02 -1.35397847e-01 -7.34642952e-02 7.52849845e-02
1.73943973e-02 3.69102322e-02 1.15603771e-01 -7.41144671e-02
7.18730671e-02 8.92285342e-03 -5.35301267e-02 8.50206007e-02
-1.14478162e-01 -7.81226199e-02 7.75593959e-02 -8.83025685e-03
-6.17028445e-01 1.31430232e-01 2.25251849e-02 -5.03001932e-02
1.37625762e-01 -1.45350101e-01 -1.70897788e-01 1.14343000e-02
3.23514332e-02 -1.13768785e-01 -2.07520726e-02 -1.19485522e-01
8.33332089e-02 1.14648185e-02 7.34454027e-03 2.78517171e-02
4.67122192e-02 -3.24567178e-01 -2.21318082e-02 2.97744034e-02
-1.19149077e-01 2.65314651e-02 1.04533288e-01 -3.14441703e-02
1.83888242e-01 -1.52575132e-02 1.75732736e-02 3.17310185e-02
-5.71921740e-02 1.44338822e-02 -3.77974966e-02 -3.96341448e-01
-2.14370268e+00 -4.19776882e-02 3.38579945e-02 4.76397658e-02
-1.21946686e-01 1.98988534e-02 1.45189086e-01 -5.49774260e-02
2.34929137e-02 4.58554856e-02 2.23384144e-02 -2.11502348e-01
5.69698240e-02 3.41814151e-02 -3.51186575e-02 -4.40401651e-02
8.71213425e-02 1.98191901e-01 1.43586726e-02 5.17909416e-02
-2.03039199e-01 9.66194178e-03 1.18659580e-01 -1.90723002e-02
1.03781212e-01 3.74463956e-02 1.37180137e-03 -1.07355573e-01
-3.38622466e-03 1.58037500e-02 1.36346394e-01 -9.83904521e-02
7.56157849e-03 1.29017001e-01 3.32813973e-02 -6.19366507e-03
-3.35707123e-02 -3.98648014e-02 5.69754603e-02 -1.02293933e-01
1.47271221e-01 -3.11733095e-02 8.77894904e-02 3.94942363e-01
2.74282082e-02 -2.3563938e-02 -5.66339726e-02 -2.08486096e-02
-7.31347616e-02 -5.1548315e-02 6.85621651e-02 -3.94897493e-02
1.70319799e-01 2.18439705e-03 -1.24370685e-03 6.26751445e-02
7.12478562e-02 -3.48474726e-02 1.01263157e-01 -1.60795267e-03
-2.47651171e-02 -6.37218695e-02 -4.31363233e-02 1.85468192e-02
-3.70014363e-02 -1.10632411e-02 -9.40172411e-02 -5.45686849e-03
-8.92796116e-02 -1.66452205e-02 1.16005548e-02 3.55625911e-02
5.52277995e-02 -4.39432658e-02 -4.23908868e-02 -3.22058596e-02
-6.77250342e-02 -7.18981062e-02 -6.90683040e-02 6.30475644e-02
5.11858073e-02 4.94661712e-02 -1.61644806e-01 -7.79537038e-02
2.70485658e-02 2.88038810e-01 4.62749110e-02 3.77251257e-02
-9.81174548e-02 -1.00831295e-01 -6.59818693e-02 -2.92114616e-02
1.31811366e-01 2.80260274e-05 2.94397031e-02 -1.20445534e-02
-2.80758384e-02 -6.21983836e-02 3.16266137e-02 -1.28044112e-01
-5.81397521e-02 4.49531027e-03 7.58185616e-03 -4.29943610e-03
1.38576618e-01 1.67571096e-03 -8.27000068e-02 6.70286667e-02
-9.58940281e-02 2.90674801e-02 9.62612795e-02 -1.69816938e-01
2.17541666e-01 -3.39641068e-02 9.34559404e-02 4.81947546e-02
-1.17510205e-03 -1.43365913e-01 -5.08283989e-02 3.29708153e-02
-1.23135701e-01 -8.79702740e-02 -4.43972041e-02 -5.46582226e-02
-1.09578452e-01 8.89863014e-05 -7.50223749e-02 -9.88918493e-02
-2.39510208e+00 6.54201329e-02 3.05463164e-02 7.55921712e-02
-1.37815116e-02 -1.07346432e-01 7.64600774e-02 1.12853164e-02
-9.88566466e-02 -7.83722048e-02 -1.36292599e-01 1.17159290e-01
1.21745427e-01 -1.00550464e-01 9.31926130e-02 1.38560681e-01
-1.22690287e-01 -3.05568329e-02 -2.60020263e-01 1.80501185e-01
-5.81790267e-02 2.38550760e-02 -1.36753425e-03 -6.47717221e-02
8.77596781e-02 3.52596301e-02 -1.09310096e-02 -3.05815349e-02
1.32019466e-01 -8.18688678e-02 1.08905774e-01 1.47775548e-03
1.59440881e-01 -7.67154795e-03 8.75721027e-02 -3.26705301e-02
-4.50245603e-02 -1.51143247e-02 6.56053185e-02 -4.27600719e-02
6.04811575e-02 1.47913947e-02 -1.47595157e-01 8.22455822e-03
4.36072377e-02 1.00413420e-01 -2.81824658e-03 -7.47502019e-02
-1.52511845e-01 1.40392000e-02 -6.99392968e-02 -8.65833082e-02
1.14588835e-01 -2.05179071e-02 -2.51619041e-02 7.10258636e-02
3.27740903e-01 -8.62650644e-02 -2.64754248e-02 4.36036233e-02
-2.24391747e-02 1.79602370e-01 3.05130630e-02 1.28489692e-01
5.49444507e-02 -7.92351644e-02 -1.11680753e-02 -1.31574692e-02
-1.13593021e-01 -9.27983856e-02 2.94359925e-02 4.27592764e-02
-7.66843014e-02 1.03615236e-01 1.00204215e-01 -3.80285137e-02]

```

2. Vectorizing project_title

In [0]:

```
word2VecTitlesVectors = getWord2VecVectors(preProcessedProjectTitlesWithoutStopWords);
```

In [0]:

```
print("Shape of Word2Vec vectorization matrix of project titles: {},  
{}, {}".format(len(word2VecTitlesVectors), len(word2VecTitlesVectors[0])),  
equalsBorder(70);  
print("Sample title: ");  
equalsBorder(70);  
print(preProcessedProjectTitlesWithoutStopWords[0]);  
equalsBorder(70);  
print("Word2Vec vector of sample title: ");  
equalsBorder(70);  
print(word2VecTitlesVectors[0]);
```

Shape of Word2Vec vectorization matrix of project titles: 53529, 300

Sample title:

backpack blessing

Word2Vec vector of sample title:

```
[ 0.321755 -0.032325  0.20554  -0.600965 -0.07439  -0.001725  
-1.5139   -0.013643 -0.381111 -0.34155   0.301139 -0.32066  
 0.2462865 -0.415415  0.08197   0.0296465  0.26638   0.3739  
 0.1336645  0.26477   0.507595  0.1300295  0.1349275  0.357985  
 0.0574315  0.0829305 -0.25652  0.660165  0.150822  0.444865  
-0.3268345 -0.0447   0.06186   0.25688   0.44128  -0.075689  
-0.23253   -0.187925  0.410855 -0.12419  0.02233  -0.045325  
-0.1647205  0.2246   0.32102  -0.12459  0.133932 -0.21097  
-0.057329  -0.033065  0.017981  0.012177  0.382856 -0.0979925  
 0.199735  -0.265595 -0.017795 -0.146825  0.115415 -0.570505  
-0.180215  -0.3856425 -0.286265 -0.22614  -0.296295  0.365795  
-0.0152215  0.143773  0.41466   0.252065  0.010353  0.08573  
-0.140455  0.14587572 -0.124965  0.140665  0.08035   0.27449  
 0.219185  0.060825 -0.1167135  0.376505 -0.03019  0.296875  
-0.133196  -0.19192  0.109945  0.211763  0.44041  -0.1450485  
-0.15437   0.169675  0.095897 -0.0569235  0.304295 -0.171975  
-1.1615   -0.35454  0.0778515 -0.008015  0.279975 -0.11542  
 0.52091   -0.226875  0.44208  -0.164374 -0.15921  0.11959  
-0.061678  -0.25898  -0.1430615 -0.20686  -0.032085  0.03297  
 0.232025  0.296785 -0.35757   0.171727  0.21386  -0.631595  
 0.30527   0.224278 -0.025359 -0.08231955 -0.253935  0.2451645  
 0.124955  -0.245494  0.161938  0.04664  -0.188875 -0.443275  
-0.092984  -0.126575  0.010865 -0.01447065  0.0382655  0.104584  
 0.418712  0.232405 -0.1713015  0.073615  0.55051  -0.47407  
-0.359055  0.169825  0.21163  -0.1005415  0.64908  0.13708  
 0.094981  0.52086  -0.164547 -0.09116225  0.173089  0.038771  
-0.41934   0.1254365  0.561255  0.112135 -0.59007  -0.027535  
-0.377775  0.2140365 -0.33847   0.28952  -0.1682125  0.097907  
 0.24157145 -0.310265  0.273239 -0.12434325 -0.362965  0.243995  
 0.053355  0.13819  0.535475  0.36646  -0.349505  0.1521995  
-0.01774435 -0.361915 -0.0814385 -0.109861  0.3147  -0.199745  
-0.03939  -0.46605  -0.264485 -0.2457385  0.1240665 -0.01222  
 0.082725  0.299539  0.322355 -0.192285 -0.062955  0.1146  
 0.22345  0.1059585  0.2958455  0.211755  0.184275  0.278205  
-0.01611  -0.227675 -0.09526  -0.2508515  0.20571  -0.4398585  
-0.0940565 -0.11471  0.125921  0.42353  -0.030515  0.363465  
-0.1392805 -0.1267485 -0.1880414 -0.069784  0.3439  0.32631  
 0.37406  0.17519  -1.6642  -0.51405  -0.480135  0.01252  
-0.118549  0.2967225 -0.049375 -0.30497  -0.54004  -0.17487  
 0.070924  0.28063  -0.090985 -0.362275  0.258784  0.27267  
 0.22494201  0.094035 -0.3873275  0.569105 -0.497435  0.211685  
-0.14664  -0.13349271  0.125245  0.1574925 -0.0122695 -0.0566175  
 0.2816425  0.07031  0.2059138  0.17325  0.1300675  0.298584  
-0.24331  -0.104145 -0.082855 -0.007065 -0.286076  0.00182  
-0.10138  0.502835  0.032735  0.026995  0.04304  0.15826999  
 0.0966835 -0.04445  -0.716135 -0.072346 -0.019113 -0.117785  
 0.006371  0.0346615  0.06374325 -0.01002  0.222354  0.183061  
 0.095995  0.25149  0.3785875 -0.21892  -0.0871865  0.631515  
-0.157546  0.02034  -0.122824  0.22827  0.161612 -0.239607  
 0.10694  0.3348141 -0.286185 -0.01752  0.1474715  0.295965 ]
```


Tf-Idf Weighted Word2Vec Vectorization

1. Vectorizing project_essay

In [0]:

```
# Initializing tfidf vectorizer
tfidfEssayTempVectorizer = TfidfVectorizer();
# Vectorizing preprocessed essays using tfidf vectorizer initialized above
tfidfEssayTempVectorizer.fit(preProcessedEssaysWithoutStopWords);
# Saving dictionary in which each word is key and it's idf is value
tfidfEssayDictionary = dict(zip(tfidfEssayTempVectorizer.get_feature_names(),
list(tfidfEssayTempVectorizer.idf_)));
# Creating set of all unique words used by tfidf vectorizer
tfidfEssayWords = set(tfidfEssayTempVectorizer.get_feature_names());
```

In [0]:

```
# Creating list to save tf-idf weighted vectors of essays
tfidfWeightedWord2VecEssaysVectors = [];
# Iterating over each essay
for essay in tqdm(preProcessedEssaysWithoutStopWords):
    # Sum of tf-idf values of all words in a particular essay
    cumulativeSumTfidfWeightOfEssay = 0;
    # Tf-Idf weighted word2vec vector of a particular essay
    tfidfWeightedWord2VecEssayVector = np.zeros(300);
    # Splitting essay into list of words
    splittedEssay = essay.split();
    # Iterating over each word
    for word in splittedEssay:
        # Checking if word is in glove words and set of words used by tfidf essay vectorizer
        if (word in gloveWords) and (word in tfidfEssayWords):
            # Tf-Idf value of particular word in essay
            tfidfValueWord = tfidfEssayDictionary[word] * (essay.count(word) / len(splittedEssay));
            # Making tf-idf weighted word2vec
            tfidfWeightedWord2VecEssayVector += tfidfValueWord * gloveModel[word];
            # Summing tf-idf weight of word to cumulative sum
            cumulativeSumTfidfWeightOfEssay += tfidfValueWord;
    if cumulativeSumTfidfWeightOfEssay != 0:
        # Taking average of sum of vectors with tf-idf cumulative sum
        tfidfWeightedWord2VecEssayVector = tfidfWeightedWord2VecEssayVector /
cumulativeSumTfidfWeightOfEssay;
    # Appending the above calculated tf-idf weighted vector of particular essay to list of vectors
of essays
    tfidfWeightedWord2VecEssaysVectors.append(tfidfWeightedWord2VecEssayVector);
```

In [0]:

```
print("Shape of Tf-Idf weighted Word2Vec vectorization matrix of project essays: {}, {}".format(len(
tfidfWeightedWord2VecEssaysVectors), len(tfidfWeightedWord2VecEssaysVectors[0])));
equalsBorder(70);
print("Sample Essay: ");
equalsBorder(70);
print(preProcessedEssaysWithoutStopWords[0]);
equalsBorder(70);
print("Tf-Idf Weighted Word2Vec vector of sample essay: ");
equalsBorder(70);
print(tfidfWeightedWord2VecEssaysVectors[0]);
```

Shape of Tf-Idf weighted Word2Vec vectorization matrix of project essays: 53529, 300

Sample Essay:

lot students not get lot attention outside school willing learn excited school students bright motivated talent light room would love teacher provide resources need successful future students always excited new activities would not able home would like provide opportunities school would not able experience home half school students receive free reduced cost lunches happens weekends children not school not anything eat home would go without school noticing unusual trend among students free lunch program growing number conserving food fridays students hoarding food almost like animals eating half sticking rest pants book bag would something eat weekend simply not resources house students looking resource would not go without backpack blessing program sends home food students

dents weekends not go without backpacks use send food home students lately food comes home plastic bags not seem like students would able keep need private backpacks key making program secret succe ss nannan

Tf-Idf Weighted Word2Vec vector of sample essay:

```
[ 2.87245642e-02  5.93005468e-02 -3.47539398e-02 -9.59522805e-02
  6.21683562e-02  2.94011995e-02 -3.29206558e+00 -2.70379313e-02
 -9.98258490e-03 -2.11481777e-01  1.74833111e-01 -2.64674200e-02
  1.38102913e-01 -2.57853328e-01 -3.45596278e-02  2.49728349e-02
 -3.64500658e-02 -7.74601448e-03  1.16697602e-01 -4.51907447e-02
  4.01455362e-03 -1.51334738e-02 -1.14713435e-02  6.76244571e-02
 -1.26209135e-01 -6.61193603e-02  9.81270735e-03 -1.11629936e-01
 -6.96764704e-02 -9.43370295e-02 -3.21979779e-01 -3.68805680e-02
  1.34004952e-01  7.42488439e-02  5.06548918e-03  4.27971940e-02
 -1.70615628e-01 -2.32722297e-02  7.13160199e-02 -8.05238140e-02
 -2.06444227e-02  1.06968579e-01  1.40058832e-02 -1.93621463e-01
 -3.33402649e-02 -1.63772601e-02  1.02684860e-01 -9.26284587e-02
 -4.99248651e-02 -1.79388542e-01 -9.89649311e-02  9.34402336e-02
  4.01817391e-02  8.00903962e-02  1.35060096e-01 -1.06200578e-01
  3.94260823e-02  2.84382871e-02 -8.17757845e-02  4.24312431e-02
 -1.44865602e-01 -1.08732161e-01  9.58575118e-02  8.33713632e-04
 -4.98348000e-02  1.30196379e-01  4.20994901e-02 -4.74041001e-02
  1.31569393e-01 -1.79163736e-01 -2.21257268e-01  6.76405771e-02
  1.11530369e-01 -1.11315628e-01 -1.20334173e-02 -8.26322282e-02
  9.21714455e-02 -2.72817436e-02  5.86181784e-03  6.26320975e-02
  7.03948184e-02 -3.65113223e-01 -4.23990497e-03  5.06695934e-02
 -9.51023697e-02  1.82768053e-02  6.23771643e-02  3.78987446e-03
  2.11626499e-01 -1.21834526e-02  3.95358905e-03  4.16094599e-02
 -1.12238328e-01 -8.75880552e-03 -4.40750428e-02 -4.68836401e-01
 -2.14798796e+00 -9.58387216e-02  1.58611556e-02  3.79662990e-02
 -1.34192575e-01  2.65678967e-02  1.33542277e-01 -5.95021504e-02
 -1.08778771e-02  5.65156016e-02  2.80905194e-02 -2.40965845e-01
  8.97111220e-02  2.20681417e-02 -1.01242265e-02 -6.27890902e-02
  1.17872649e-01  1.90343999e-01  5.35585750e-03  4.80991907e-02
 -2.02271180e-01 -1.53763132e-02  9.82291571e-02 -5.51687285e-02
  1.21823704e-01  1.62688027e-02 -2.84852560e-02 -1.43344497e-01
 -2.60353593e-02  1.56416484e-02  1.83609256e-01 -1.03059313e-01
 -7.37123794e-03  1.52935230e-01  1.52920445e-02 -2.53192116e-02
 -4.58220424e-02 -2.25816885e-02  7.32616353e-02 -1.02588559e-01
  1.64419803e-01 -5.73094685e-02  1.12104411e-01  4.30298683e-01
 -4.99231372e-03 -1.95134573e-02 -8.47117741e-02 -4.88257787e-02
 -3.95367850e-02 -5.84603001e-02  1.36311961e-01 -3.11409143e-02
  2.32064150e-01 -2.10744757e-02  5.49507648e-03  1.01063012e-01
  5.17837899e-02 -3.16628819e-02  9.18126473e-02 -9.33139686e-03
 -2.39186665e-02 -9.44940271e-02 -5.86675589e-02  5.53351272e-02
 -3.18912718e-02 -2.50482240e-02 -1.21320867e-01 -6.46038072e-03
 -1.16816969e-01 -3.82792208e-02  3.41745543e-02  2.97571189e-02
  5.13189714e-02 -2.17698348e-02 -7.36774060e-03 -6.41784664e-02
 -8.71120123e-02 -2.37978682e-02 -9.46445169e-02  7.76271515e-02
  7.15078267e-02  6.64144482e-02 -1.70544822e-01 -1.02757267e-01
  1.59219133e-02  3.12091063e-01  4.56132120e-02  7.23347086e-02
 -1.14819378e-01 -1.33555272e-01 -4.27948869e-02 -3.79465247e-02
  1.43638534e-01  3.66869516e-02  7.17301764e-02  8.60961120e-03
  2.63249328e-02 -8.69078190e-02  2.80793660e-02 -1.55152424e-01
 -6.19196796e-02  1.25976026e-02  4.17518112e-02 -1.76960292e-02
  1.10058965e-01 -9.96881980e-03 -8.36898789e-02  6.09153523e-02
 -1.07768771e-01  4.99643839e-02  1.08617031e-01 -1.77549052e-01
  2.72630437e-01 -4.97003514e-02  1.44976733e-01  6.65341880e-02
 -4.08312127e-02 -1.48960142e-01 -2.12999733e-02  5.30607857e-02
 -1.41022826e-01 -1.19398705e-01 -9.47219132e-02 -7.00181708e-02
 -1.40425935e-01  1.33524606e-02 -6.16619247e-02 -1.16965329e-01
 -2.54929662e+00  1.30487222e-01  4.23568409e-02  7.18932061e-02
  6.59392918e-03 -1.27994346e-01  1.22783294e-01  9.08005539e-03
 -1.21135195e-01 -1.14201642e-01 -1.35879901e-01  1.55846388e-01
  1.21247221e-01 -1.25806635e-01  1.10094720e-01  1.37293357e-01
 -1.82538263e-01 -4.60953629e-02 -3.16675537e-01  1.86584922e-01
 -4.71928061e-02  1.37149262e-03  4.65403904e-02 -4.78853014e-02
  1.65289634e-01  3.34052618e-02 -1.27130835e-02 -5.30255235e-02
  1.45479295e-01 -7.79300767e-02  1.20848360e-01  6.42753827e-03
  1.74801950e-01 -5.44340707e-03  1.04012342e-01  1.29326309e-02
 -3.30780628e-02 -4.04972259e-02  8.62701524e-02 -5.48549731e-02
  7.68602062e-02  3.49803496e-02 -1.37250679e-01 -1.30360463e-02
  3.67492519e-02  9.26716364e-02  9.27717202e-03 -9.76967787e-02
 -1.26998933e-01  6.30327649e-03 -8.00194244e-02 -1.29442389e-01
  1.17833277e-01 -2.27582978e-02 -3.90298603e-02  8.63480666e-02
  3.81650028e-01 -9.90373356e-02 -9.41248427e-03  3.05024181e-02
```

```
-3.69208838e-02  1.87680136e-01  6.35882712e-02  1.66003515e-01
 7.86419548e-02 -1.41743237e-01 -1.70778827e-02 -3.58563801e-03
-1.43739901e-01 -9.59063040e-02  5.62382404e-02  4.63013780e-02
-1.32824081e-01  6.33643179e-02  8.64734451e-02 -7.89997752e-02]
```

2. Vectorizing project_title

In [0]:

```
# Initializing tfidf vectorizer
tfIdfTitleTempVectorizer = TfidfVectorizer();
# Vectorizing preprocessed titles using tfidf vectorizer initialized above
tfIdfTitleTempVectorizer.fit(preProcessedProjectTitlesWithoutStopWords);
# Saving dictionary in which each word is key and it's idf is value
tfIdfTitleDictionary = dict(zip(tfIdfTitleTempVectorizer.get_feature_names(),
list(tfIdfTitleTempVectorizer.idf_)));
# Creating set of all unique words used by tfidf vectorizer
tfIdfTitleWords = set(tfIdfTitleTempVectorizer.get_feature_names());
```

In [0]:

```
# Creating list to save tf-idf weighted vectors of project titles
tfIdfWeightedWord2VecTitlesVectors = [];
# Iterating over each title
for title in tqdm(preProcessedProjectTitlesWithoutStopWords):
    # Sum of tf-idf values of all words in a particular project title
    cumulativeSumTfIdfWeightOfTitle = 0;
    # Tf-Idf weighted word2vec vector of a particular project title
    tfIdfWeightedWord2VecTitleVector = np.zeros(300);
    # Splitting title into list of words
    splittedTitle = title.split();
    # Iterating over each word
    for word in splittedTitle:
        # Checking if word is in glove words and set of words used by tfidf title vectorizer
        if (word in gloveWords) and (word in tfIdfTitleWords):
            # Tf-Idf value of particular word in title
            tfIdfValueWord = tfIdfTitleDictionary[word] * (title.count(word) / len(splittedTitle));
            # Making tf-idf weighted word2vec
            tfIdfWeightedWord2VecTitleVector += tfIdfValueWord * gloveModel[word];
            # Summing tf-idf weight of word to cumulative sum
            cumulativeSumTfIdfWeightOfTitle += tfIdfValueWord;
    if cumulativeSumTfIdfWeightOfTitle != 0:
        # Taking average of sum of vectors with tf-idf cumulative sum
        tfIdfWeightedWord2VecTitleVector = tfIdfWeightedWord2VecTitleVector /
cumulativeSumTfIdfWeightOfTitle;
    # Appending the above calculated tf-idf weighted vector of particular title to list of vectors
    of project titles
    tfIdfWeightedWord2VecTitlesVectors.append(tfIdfWeightedWord2VecTitleVector);
```

In [0]:

```
print("Shape of Tf-Idf weighted Word2Vec vectorization matrix of project titles: {}, {}".format(len(
tfIdfWeightedWord2VecTitlesVectors), len(tfIdfWeightedWord2VecTitlesVectors[0])));
equalsBorder(70);
print("Sample Title: ");
equalsBorder(70);
print(preProcessedProjectTitlesWithoutStopWords[0]);
equalsBorder(70);
print("Tf-Idf Weighted Word2Vec vector of sample title: ");
equalsBorder(70);
print(tfIdfWeightedWord2VecTitlesVectors[0]);
```

Shape of Tf-Idf weighted Word2Vec vectorization matrix of project titles: 53529, 300

Sample Title:

backpack blessing

Tf-Idf Weighted Word2Vec vector of sample title:

```
[ 2.50718268e-01 -6.78771436e-02  1.64945903e-01 -5.58781892e-01
```

-1.57515554e-01	2.84074698e-02	-1.56501858e+00	-4.22254254e-03
-3.41084483e-01	-3.32777248e-01	2.55680825e-01	-2.95874949e-01
2.25708247e-01	-4.39503940e-01	5.08571015e-02	1.84672039e-02
2.55236361e-01	3.44834899e-01	1.38834573e-01	3.15915601e-01
5.32437032e-01	1.48715861e-01	1.56665232e-01	3.55325683e-01
6.66728486e-02	9.02252070e-02	-3.47335076e-01	6.22555660e-01
1.37913942e-01	4.43856374e-01	-3.54948602e-01	-7.44582738e-02
3.72923004e-02	2.64479057e-01	4.40914616e-01	-9.30019969e-02
-1.93378643e-01	-1.85749729e-01	3.86529911e-01	-1.54445244e-01
5.08288135e-02	-1.67128115e-02	-1.34640371e-01	2.18770297e-01
2.99576279e-01	-1.26725913e-01	1.40386499e-01	-1.98682038e-01
-6.87065553e-02	-9.17226300e-03	3.15835235e-02	3.27877211e-03
4.33418161e-01	-9.36751477e-02	1.96288520e-01	-2.55749005e-01
-4.04188778e-02	-1.47697341e-01	8.79870802e-02	-5.55966575e-01
-1.87377593e-01	-3.47990571e-01	-2.25839691e-01	-2.28737637e-01
-3.14018496e-01	3.47589807e-01	-1.99603955e-02	1.32415887e-01
3.92148322e-01	3.01179839e-01	-1.44116413e-03	2.55003065e-02
-1.13843615e-01	1.62940030e-01	-9.58499673e-02	1.75641457e-01
4.44894531e-02	3.34517616e-01	2.23573726e-01	2.09669591e-02
-1.38230827e-01	3.14182276e-01	1.39392796e-02	2.99018550e-01
-1.06636426e-01	-1.98486347e-01	1.09708264e-01	1.94496293e-01
4.37369437e-01	-1.27378284e-01	-1.95090983e-01	1.67646588e-01
1.17409216e-01	-3.85125286e-02	2.66088826e-01	-1.25151157e-01
-1.15904452e+00	-3.29949978e-01	8.06757105e-02	-2.63858496e-02
2.81811909e-01	-8.10127669e-02	4.79992814e-01	-2.37925237e-01
4.36551063e-01	-1.42739245e-01	-1.55492712e-01	9.22778048e-02
-7.80429946e-02	-2.65688506e-01	-1.34687205e-01	-2.03062821e-01
-5.76484017e-02	8.40439342e-02	2.39624644e-01	3.00834188e-01
-4.08343168e-01	1.88109735e-01	2.06361982e-01	-5.26725546e-01
2.37827782e-01	2.43582518e-01	-3.75119693e-02	-9.15987235e-02
-2.36942273e-01	2.23008162e-01	9.47543878e-02	-2.78141983e-01
1.44470978e-01	6.71825961e-02	-2.25829938e-01	-4.42259325e-01
-9.64811171e-02	-8.60566823e-02	3.38448633e-02	-1.34619833e-02
3.78416658e-02	9.48201281e-02	3.77327451e-01	1.91940726e-01
-1.54066338e-01	1.72852129e-01	5.25229154e-01	-4.92920784e-01
-3.62215987e-01	1.31570656e-01	2.15440102e-01	-1.15106183e-01
6.65436536e-01	6.55034152e-02	7.58460152e-02	5.03762122e-01
-1.87303403e-01	-1.02304450e-01	1.64157523e-01	5.23324031e-02
-4.17247557e-01	1.50395842e-01	5.07546421e-01	1.43624444e-01
-5.60996675e-01	-9.58589581e-02	-3.62334275e-01	1.91390476e-01
-2.85882834e-01	2.73338520e-01	-1.85801180e-01	9.64251369e-02
2.71069907e-01	-3.18112542e-01	3.10476612e-01	-1.08959888e-01
-3.77610338e-01	1.63393654e-01	9.30309361e-02	1.88936146e-01
5.05577504e-01	3.36466752e-01	-3.55833435e-01	1.44847107e-01
-1.63448864e-02	3.44096339e-01	-6.95357192e-02	-1.16209878e-01
2.50130338e-01	-2.10051544e-01	-8.30869276e-02	-3.95269977e-01
-2.53037657e-01	-2.66153212e-01	1.07149140e-01	-2.23996582e-02
1.04421906e-01	3.30889340e-01	3.33225482e-01	-1.93075100e-01
-9.28748184e-02	8.47771084e-02	2.33794727e-01	1.03872930e-01
2.66970199e-01	2.14155846e-01	1.40288467e-01	2.13091961e-01
3.29361091e-02	-2.38449142e-01	-1.20361090e-01	-2.26201736e-01
1.45426262e-01	-3.92460557e-01	-1.07245998e-01	-7.23676972e-02
1.21710385e-01	3.99271291e-01	-4.83653823e-02	3.47299381e-01
-1.24747421e-01	-1.34015245e-01	-2.09049080e-01	-8.06792714e-02
3.60883916e-01	3.85525781e-01	4.01688235e-01	1.83923981e-01
-1.62675690e+00	-5.48632289e-01	-5.00732228e-01	3.87101946e-02
-9.59443901e-02	2.63396441e-01	-8.27959300e-02	-3.01627496e-01
-5.69708984e-01	-1.79504861e-01	5.46924706e-02	2.87831951e-01
-1.31865178e-01	-3.73026820e-01	2.37307852e-01	2.63623504e-01
2.51425690e-01	1.28955064e-01	-4.39622417e-01	5.98709953e-01
-4.66598783e-01	1.71386383e-01	-1.54879361e-01	-1.17900158e-01
1.23747629e-01	1.73257782e-01	-1.50236882e-02	-7.00700514e-02
2.40360223e-01	4.93256529e-02	2.29341430e-01	1.81227365e-01
1.54288907e-01	3.27128163e-01	-3.10973094e-01	-1.40373869e-01
-4.16329354e-02	-5.30723088e-02	-3.13105522e-01	2.65651049e-02
-1.33789955e-01	5.34451330e-01	7.46314398e-02	5.97685768e-02
4.24122671e-02	1.76879927e-01	9.52905158e-02	-4.41763729e-02
-7.29418664e-01	-8.33021296e-02	-2.38480772e-02	-1.17907774e-01
1.83122578e-02	2.75773296e-02	5.67602065e-02	-3.46816892e-02
2.42759841e-01	1.59731730e-01	4.38607459e-02	2.65120838e-01
4.12089202e-01	-1.67067127e-01	-1.02280462e-01	6.06591902e-01
-1.70615720e-01	-2.78167328e-02	-1.39511379e-01	2.40869302e-01
1.84620413e-01	-2.58601470e-01	1.52109039e-01	2.95207375e-01
-3.02271903e-01	2.18182243e-04	1.20692872e-01	2.79213121e-01]

Method for vectorizing unknown essays using our training data tf-idf weighted model

In [0]:

```
def getAvgTfIdfEssayVectors(arrayOfTexts):
    # Creating list to save tf-idf weighted vectors of essays
    tfIdfWeightedWord2VecEssaysVectors = [];
    # Iterating over each essay
    for essay in tqdm(arrayOfTexts):
        # Sum of tf-idf values of all words in a particular essay
        cumulativeSumTfIdfWeightOfEssay = 0;
        # Tf-Idf weighted word2vec vector of a particular essay
        tfIdfWeightedWord2VecEssayVector = np.zeros(300);
        # Splitting essay into list of words
        splittedEssay = essay.split();
        # Iterating over each word
        for word in splittedEssay:
            # Checking if word is in glove words and set of words used by tfIdf essay vectorizer
            if (word in gloveWords) and (word in tfIdfEssayWords):
                # Tf-Idf value of particular word in essay
                tfIdfValueWord = tfIdfEssayDictionary[word] * (essay.count(word) /
len(splittedEssay));
                # Making tf-idf weighted word2vec
                tfIdfWeightedWord2VecEssayVector += tfIdfValueWord * gloveModel[word];
                # Summing tf-idf weight of word to cumulative sum
                cumulativeSumTfIdfWeightOfEssay += tfIdfValueWord;
        if cumulativeSumTfIdfWeightOfEssay != 0:
            # Taking average of sum of vectors with tf-idf cumulative sum
            tfIdfWeightedWord2VecEssayVector = tfIdfWeightedWord2VecEssayVector /
cumulativeSumTfIdfWeightOfEssay;
        # Appending the above calculated tf-idf weighted vector of particular essay to list of
        # vectors of essays
        tfIdfWeightedWord2VecEssaysVectors.append(tfIdfWeightedWord2VecEssayVector);
    return tfIdfWeightedWord2VecEssaysVectors;
```

Method for vectorizing unknown titles using our training data tf-idf weighted model

In [0]:

```
def getAvgTfIdfTitleVectors(arrayOfTexts):
    # Creating list to save tf-idf weighted vectors of project titles
    tfIdfWeightedWord2VecTitlesVectors = [];
    # Iterating over each title
    for title in tqdm(arrayOfTexts):
        # Sum of tf-idf values of all words in a particular project title
        cumulativeSumTfIdfWeightOfTitle = 0;
        # Tf-Idf weighted word2vec vector of a particular project title
        tfIdfWeightedWord2VecTitleVector = np.zeros(300);
        # Splitting title into list of words
        splittedTitle = title.split();
        # Iterating over each word
        for word in splittedTitle:
            # Checking if word is in glove words and set of words used by tfIdf title vectorizer
            if (word in gloveWords) and (word in tfIdfTitleWords):
                # Tf-Idf value of particular word in title
                tfIdfValueWord = tfIdfTitleDictionary[word] * (title.count(word) /
len(splittedTitle));
                # Making tf-idf weighted word2vec
                tfIdfWeightedWord2VecTitleVector += tfIdfValueWord * gloveModel[word];
                # Summing tf-idf weight of word to cumulative sum
                cumulativeSumTfIdfWeightOfTitle += tfIdfValueWord;
        if cumulativeSumTfIdfWeightOfTitle != 0:
            # Taking average of sum of vectors with tf-idf cumulative sum
            tfIdfWeightedWord2VecTitleVector = tfIdfWeightedWord2VecTitleVector /
cumulativeSumTfIdfWeightOfTitle;
        # Appending the above calculated tf-idf weighted vector of particular title to list of
        # vectors of project titles
        tfIdfWeightedWord2VecTitlesVectors.append(tfIdfWeightedWord2VecTitleVector);
    return tfIdfWeightedWord2VecTitlesVectors;
```

Vectorizing numerical features

1. Vectorizing price

In [0]:

```
# Standardizing the price data using StandardScaler(Uses mean and std for standardization)
priceScaler = MinMaxScaler();
priceScaler.fit(trainingData['price'].values.reshape(-1, 1));
priceStandardized = priceScaler.transform(trainingData['price'].values.reshape(-1, 1));
```

In [0]:

```
print("Shape of standardized matrix of prices: ", priceStandardized.shape);
equalsBorder(70);
print("Sample original prices: ");
equalsBorder(70);
print(trainingData['price'].values[0:5]);
print("Sample standardized prices: ");
equalsBorder(70);
print(priceStandardized[0:5]);
```

Shape of standardized matrix of prices: (53529, 1)

Sample original prices:

[112.78 104.35 84.39 94.73 11.02]

Sample standardized prices:

[0.01121089]
[0.01036775]
[0.00837141]
[0.00940559]
[0.00103317]

2. Vectorizing quantity

In [0]:

```
# Standardizing the quantity data using StandardScaler(Uses mean and std for standardization)
quantityScaler = MinMaxScaler();
quantityScaler.fit(trainingData['quantity'].values.reshape(-1, 1));
quantityStandardized = quantityScaler.transform(trainingData['quantity'].values.reshape(-1, 1));
```

In [0]:

```
print("Shape of standardized matrix of quantities: ", quantityStandardized.shape);
equalsBorder(70);
print("Sample original quantities: ");
equalsBorder(70);
print(trainingData['quantity'].values[0:5]);
print("Sample standardized quantities: ");
equalsBorder(70);
print(quantityStandardized[0:5]);
```

Shape of standardized matrix of quantities: (53529, 1)

Sample original quantities:

[21 8 88 80 30]

Sample standardized quantities:

[0.02478315]
[0.0086741]
[0.10780669]
[0.09789343]
[0.03593556]

3. Vectorizing teacher_number_of_previously_posted_projects

In [0]:

```
# Standardizing the teacher_number_of_previously_posted_projects data using StandardScaler(Uses mean and std for standardization)
previouslyPostedScaler = MinMaxScaler();
previouslyPostedScaler.fit(trainingData['teacher_number_of_previously_posted_projects'].values.reshape(-1, 1));
previouslyPostedStandardized =
previouslyPostedScaler.transform(trainingData['teacher_number_of_previously_posted_projects'].values.reshape(-1, 1));
```

In [0]:

```
print("Shape of standardized matrix of teacher_number_of_previously_posted_projects: ",
previouslyPostedStandardized.shape);
equalsBorder(70);
print("Sample original quantities: ");
equalsBorder(70);
print(trainingData['teacher_number_of_previously_posted_projects'].values[0:5]);
print("Sample standardized teacher_number_of_previously_posted_projects: ");
equalsBorder(70);
print(previouslyPostedStandardized[0:5]);
```

Shape of standardized matrix of teacher_number_of_previously_posted_projects: (53529, 1)

Sample original quantities:

[35 1 1 2 1]

Sample standardized teacher_number_of_previously_posted_projects:

```
[0.08009153]
[0.00228833]
[0.00228833]
[0.00457666]
[0.00228833]
```

In [0]:

```
numberOfPoints = previouslyPostedStandardized.shape[0];
# Categorical data
categoriesVectorsSub = categoriesVector[0:numberOfPoints];
subCategoriesVectorsSub = subCategoriesVectors[0:numberOfPoints];
teacherPrefixVectorsSub = teacherPrefixVectors[0:numberOfPoints];
schoolStateVectorsSub = schoolStateVectors[0:numberOfPoints];
projectGradeVectorsSub = projectGradeVectors[0:numberOfPoints];

# Text data
bowEssayModelSub = bowEssayModel[0:numberOfPoints];
bowTitleModelSub = bowTitleModel[0:numberOfPoints];
tfIdfEssayModelSub = tfIdfEssayModel[0:numberOfPoints];
tfIdfTitleModelSub = tfIdfTitleModel[0:numberOfPoints];

# Numerical data
priceStandardizedSub = priceStandardized[0:numberOfPoints];
quantityStandardizedSub = quantityStandardized[0:numberOfPoints];
previouslyPostedStandardizedSub = previouslyPostedStandardized[0:numberOfPoints];

# Classes
classesTrainingSub = classesTraining;
```

In [8]:

```
randomForestsAndGbdResultsDataFrame = pd.DataFrame(columns = ['Vectorizer', 'Model', 'Max Depth', 'N Estimators', 'AUC']);
randomForestsAndGbdResultsDataFrame
```

Out[8]:

Vectorizer	Model	Max Depth	N Estimators	AUC
------------	-------	-----------	--------------	-----

Preparing cross validate data for analysis

In [0]:

```
# Test data categorical features transformation
categoriesTransformedCrossValidateData =
subjectsCategoriesTransform(crossValidateData['cleaned_categories']);
subCategoriesTransformedCrossValidateData = subjectsSubCategoriesTransform(crossValidateData['cleaned_sub_categories']);
teacherPrefixTransformedCrossValidateData =
teacherPrefixTransform(crossValidateData['teacher_prefix']);
schoolStateTransformedCrossValidateData = schoolStateTransform(crossValidateData['school_state']);
projectGradeTransformedCrossValidateData =
projectGradeTransform(crossValidateData['project_grade_category']);

# Test data text features transformation
preProcessedEssaysTemp = preProcessingWithAndWithoutStopWords(crossValidateData['project_essay'])[1];
preProcessedTitlesTemp = preProcessingWithAndWithoutStopWords(crossValidateData['project_title'])[1];
bowEssayTransformedCrossValidateData = bowEssayVectorizer.transform(preProcessedEssaysTemp);
bowTitleTransformedCrossValidateData = bowTitleVectorizer.transform(preProcessedTitlesTemp);
tfIdfEssayTransformedCrossValidateData = tfIdfEssayVectorizer.transform(preProcessedEssaysTemp);
tfIdfTitleTransformedCrossValidateData = tfIdfTitleVectorizer.transform(preProcessedTitlesTemp);
avgWord2VecEssayTransformedCrossValidateData = getWord2VecVectors(preProcessedEssaysTemp);
avgWord2VecTitleTransformedCrossValidateData = getWord2VecVectors(preProcessedTitlesTemp);
tfIdfWeightedWord2VecEssayTransformedCrossValidateData =
getAvgTfIdfEssayVectors(preProcessedEssaysTemp);
tfIdfWeightedWord2VecTitleTransformedCrossValidateData =
getAvgTfIdfTitleVectors(preProcessedTitlesTemp);

# Test data numerical features transformation
priceTransformedCrossValidateData =
priceScaler.transform(crossValidateData['price'].values.reshape(-1, 1));
quantityTransformedCrossValidateData =
quantityScaler.transform(crossValidateData['quantity'].values.reshape(-1, 1));
previouslyPostedTransformedCrossValidateData = previouslyPostedScaler.transform(crossValidateData['teacher_number_of_previously_posted_projects'].values.reshape(-1, 1));
```

Preparing Test data for analysis

In [0]:

```
# Test data categorical features transformation
categoriesTransformedTestData = subjectsCategoriesTransform(testData['cleaned_categories']);
subCategoriesTransformedTestData =
subjectsSubCategoriesTransform(testData['cleaned_sub_categories']);
teacherPrefixTransformedTestData = teacherPrefixTransform(testData['teacher_prefix']);
schoolStateTransformedTestData = schoolStateTransform(testData['school_state']);
projectGradeTransformedTestData = projectGradeTransform(testData['project_grade_category']);

# Test data text features transformation
preProcessedEssaysTemp = preProcessingWithAndWithoutStopWords(testData['project_essay'])[1];
preProcessedTitlesTemp = preProcessingWithAndWithoutStopWords(testData['project_title'])[1];
bowEssayTransformedTestData = bowEssayVectorizer.transform(preProcessedEssaysTemp);
bowTitleTransformedTestData = bowTitleVectorizer.transform(preProcessedTitlesTemp);
tfIdfEssayTransformedTestData = tfIdfEssayVectorizer.transform(preProcessedEssaysTemp);
tfIdfTitleTransformedTestData = tfIdfTitleVectorizer.transform(preProcessedTitlesTemp);
avgWord2VecEssayTransformedTestData = getWord2VecVectors(preProcessedEssaysTemp);
avgWord2VecTitleTransformedTestData = getWord2VecVectors(preProcessedTitlesTemp);
```



```

        bowEssayTransformedData, \
        bowTitleTransformedCrossValidateData, \
        bowEssayTransformedCrossValidateData));
testMergedData = hstack((testMergedData, \
        bowTitleTransformedTestData, \
        bowEssayTransformedTestData));

rfClassifier = RandomForestClassifier(class_weight="balanced", n_jobs = 4, min_samples_split =
400);
tunedParameters = {'n_estimators': [10, 20, 30, 50, 80, 120], 'max_depth': [10, 50, 100, 200,
400, 500]};
classifier = GridSearchCV(rfClassifier, tunedParameters, cv = 5, scoring = 'roc_auc');
classifier.fit(trainingMergedData, classesTrainingSub);

testScoresDataFrame = pd.DataFrame(data =
np.hstack((classifier.cv_results_['param_n_estimators'].data[:, None],
classifier.cv_results_['param_max_depth'].data[:, None], classifier.cv_results_['mean_test_score']
[:, None], classifier.cv_results_['std_test_score'][:, None])), columns = ['n_estimators', 'max_dep
th', 'mts', 'stdts']);
testScoresDataFrame = testScoresDataFrame.astype(float);

crossValidateAucMeanValues = classifier.cv_results_['mean_test_score'];
crossValidateAucStdValues = classifier.cv_results_['std_test_score'];

tracel = go.Scatter3d(x = tunedParameters['n_estimators'], y = tunedParameters['max_depth'], z
= crossValidateAucMeanValues, name = 'Cross-Validate');
data = [tracel];

layout = go.Layout(scene = dict(
    xaxis = dict(title='n_estimators'),
    yaxis = dict(title='max_depth'),
    zaxis = dict(title='AUC')),)

fig = go.Figure(data=data, layout=layout)
figure_plotly_browser_state()
offline.iplot(fig, filename='3d-scatter-colorscale')

optimalHypParamValue = classifier.best_params_['n_estimators'];
optimalHypParam2Value = classifier.best_params_['max_depth'];
rfClassifier = RandomForestClassifier(class_weight = 'balanced', n_estimators = optimalHypParam
Value, max_depth = optimalHypParam2Value, n_jobs = 4, min_samples_split = 400);
rfClassifier.fit(trainingMergedData, classesTrainingSub);
predScoresTraining = rfClassifier.predict_proba(trainingMergedData);
fprTrain, tprTrain, thresholdTrain = roc_curve(classesTraining, predScoresTraining[:, 1]);
predScoresTest = rfClassifier.predict_proba(testMergedData);
fprTest, tprTest, thresholdTest = roc_curve(classesTest, predScoresTest[:, 1]);
predictionClassesTest = rfClassifier.predict(testMergedData);


equalsBorder(70);
plt.plot(fprTrain, tprTrain, label = "Train AUC = " + str(auc(fprTrain, tprTrain)));
plt.plot(fprTest, tprTest, label = "Test AUC = " + str(auc(fprTest, tprTest)));
plt.plot([0, 1], [0, 1], 'k-');
plt.xlabel("fpr values");
plt.ylabel("tpr values");
plt.grid();
plt.legend();
plt.show();

areaUnderRocValueTest = auc(fprTest, tprTest);

print("Results of analysis using {} vectorized text features merged with other features using
random forest classifier: ".format(technique));
equalsBorder(70);
print("Optimal n_estimators Value: ", optimalHypParamValue);
equalsBorder(40);
print("Optimal max_depth Value: ", optimalHypParam2Value);
equalsBorder(40);
print("AUC value of test data: ", str(areaUnderRocValueTest));
# Predicting classes of test data projects
predictionClassesTest = rfClassifier.predict(testMergedData);
equalsBorder(40);
# Printing confusion matrix
confusionMatrix = confusion_matrix(classesTest, predictionClassesTest);
# Creating dataframe for generated confusion matrix
confusionMatrixDataFrame = pd.DataFrame(data = confusionMatrix, index = ['Actual: NO', 'Actual:
YES'], columns = ['Predicted: NO', 'Predicted: YES']);
print("Confusion Matrix : ").

```

```
plt.figure(figsize=(10,10))
plt.imshow(confusionMatrixDataFrame, annot=True, fmt='d', cmap='Greens')
plt.show()
```

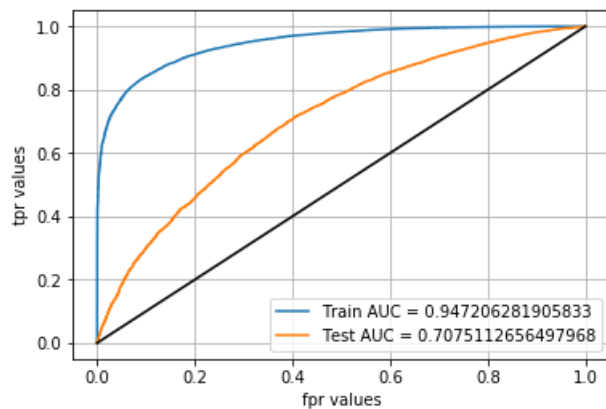


Results of analysis using Bag of words vectorized text features merged with other features using random forest classifier:

Optimal n_estimators Value: 120

Optimal max_depth Value: 100

AUC value of test data: 0.7075112656497968

Confusion Matrix :

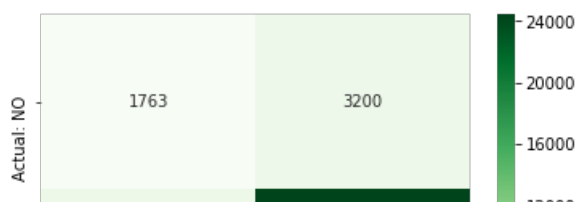



Cross-validation curve:



In [0]:

[illegible]

```

class EssayTransformedTestData));

rfClassifier = RandomForestClassifier(class_weight="balanced", n_jobs = 4, min_samples_split =
400);
tunedParameters = {'n_estimators': [10, 20, 30, 50, 80, 120], 'max_depth': [10, 50, 100, 200,
400, 500]};
classifier = GridSearchCV(rfClassifier, tunedParameters, cv = 5, scoring = 'roc_auc');
classifier.fit(trainingMergedData, classesTrainingSub);

testScoresDataFrame = pd.DataFrame(data =
np.hstack((classifier.cv_results_['param_n_estimators'].data[:, None],
classifier.cv_results_['param_max_depth'].data[:, None], classifier.cv_results_['mean_test_score']
[:, None], classifier.cv_results_['std_test_score'][:, None])), columns = ['n_estimators', 'max_dep
th', 'mts', 'stdts']);
testScoresDataFrame = testScoresDataFrame.astype(float);

crossValidateAucMeanValues = classifier.cv_results_['mean_test_score'];
crossValidateAucStdValues = classifier.cv_results_['std_test_score'];

trace1 = go.Scatter3d(x = tunedParameters['n_estimators'], y = tunedParameters['max_depth'], z
= crossValidateAucMeanValues, name = 'Cross-Validate');
data = [trace1];

layout = go.Layout(scene = dict(
    xaxis = dict(title='n_estimators'),
    yaxis = dict(title='max_depth'),
    zaxis = dict(title='AUC'),))

fig = go.Figure(data=data, layout=layout)
configure_plotly_browser_state()
offline.iplot(fig, filename='3d-scatter-colorscale')


optimalHypParamValue = classifier.best_params_['n_estimators'];
optimalHypParam2Value = classifier.best_params_['max_depth'];
rfClassifier = RandomForestClassifier(class_weight = 'balanced', n_estimators = optimalHypParam
Value, max_depth = optimalHypParam2Value, n_jobs = 4, min_samples_split = 400);
rfClassifier.fit(trainingMergedData, classesTrainingSub);
predScoresTraining = rfClassifier.predict_proba(trainingMergedData);
fprTrain, tprTrain, thresholdTrain = roc_curve(classesTraining, predScoresTraining[:, 1]);
predScoresTest = rfClassifier.predict_proba(testMergedData);
fprTest, tprTest, thresholdTest = roc_curve(classesTest, predScoresTest[:, 1]);
predictionClassesTest = rfClassifier.predict(testMergedData);

equalsBorder(70);
plt.plot(fprTrain, tprTrain, label = "Train AUC = " + str(auc(fprTrain, tprTrain)));
plt.plot(fprTest, tprTest, label = "Test AUC = " + str(auc(fprTest, tprTest)));
plt.plot([0, 1], [0, 1], 'k-');
plt.xlabel("fpr values");
plt.ylabel("tpr values");
plt.grid();
plt.legend();
plt.show();

areaUnderRocValueTest = auc(fprTest, tprTest);

print("Results of analysis using {} vectorized text features merged with other features using
random forest classifier: ".format(technique));
equalsBorder(70);
print("Optimal n_estimators Value: ", optimalHypParamValue);
equalsBorder(40);
print("Optimal max_depth Value: ", optimalHypParam2Value);
equalsBorder(40);
print("AUC value of test data: ", str(areaUnderRocValueTest));
# Predicting classes of test data projects
predictionClassesTest = rfClassifier.predict(testMergedData);
equalsBorder(40);
# Printing confusion matrix
confusionMatrix = confusion_matrix(classesTest, predictionClassesTest);
# Creating dataframe for generated confusion matrix
confusionMatrixDataFrame = pd.DataFrame(data = confusionMatrix, index = ['Actual: NO', 'Actual:
YES'], columns = ['Predicted: NO', 'Predicted: YES']);
print("Confusion Matrix : ");
equalsBorder(60);
sbrn.heatmap(confusionMatrixDataFrame, annot = True, fmt = 'd', cmap="Greens");
plt.show();

```

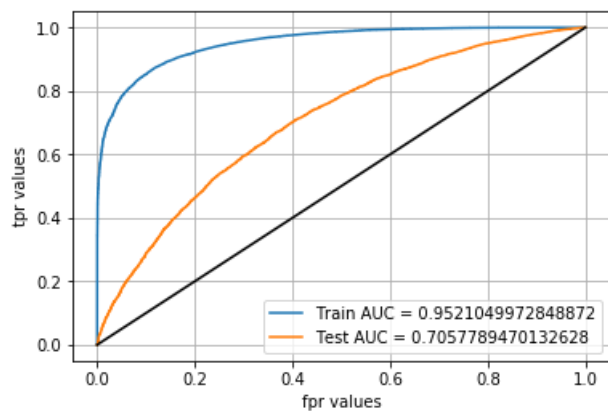


Results of analysis using Tf-Idf vectorized text features merged with other features using random forest classifier:

Optimal n_estimators Value: 120

Optimal max_depth Value: 50

AUC value of test data: 0.7057789470132628

Confusion Matrix :

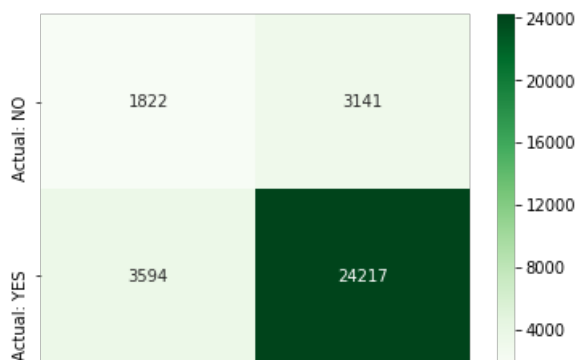

Predicted: NO


Predicted: YES

In [20]:

```
print("Cross-validation curve: ");
print("="*40);
display(Image(filename = "Random Forests - Tf-Idf.png", unconfined = True, width = '400px'));
```

Cross-validation curve:

=====

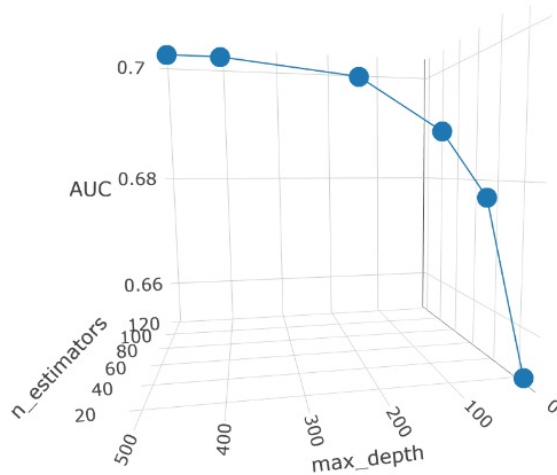

Classification using word2vec vectorized data by random forests

In [0]:

```
techniques = ['Average Word2Vec'];
for index, technique in enumerate(techniques):
    trainingMergedData = hstack((categoriesVectorsSub,\
                                subCategoriesVectorsSub,\
                                teacherPrefixVectorsSub,\
                                schoolStateVectorsSub,\
                                projectGradeVectorsSub,\
                                priceStandardizedSub,\
                                previouslyPostedStandardizedSub));
    crossValidateMergedData = hstack((categoriesTransformedCrossValidateData,\
                                     subCategoriesTransformedCrossValidateData,\
                                     teacherPrefixTransformedCrossValidateData,\
                                     schoolStateTransformedCrossValidateData,\
                                     projectGradeTransformedCrossValidateData,\
                                     priceTransformedCrossValidateData,\
                                     previouslyPostedTransformedCrossValidateData));
    testMergedData = hstack((categoriesTransformedTestData,\
                             subCategoriesTransformedTestData,\
                             teacherPrefixTransformedTestData,\
                             schoolStateTransformedTestData,\
                             projectGradeTransformedTestData,\
                             priceTransformedTestData,\
                             previouslyPostedTransformedTestData));

    if(index == 0):
        trainingMergedData = hstack((trainingMergedData,\
                                     word2VecTitlesVectors,\
                                     word2VecEssaysVectors));
        crossValidateMergedData = hstack((crossValidateMergedData,\
                                           avgWord2VecTitleTransformedCrossValidateData,\
                                           avgWord2VecEssayTransformedCrossValidateData));
        testMergedData = hstack((testMergedData,\
                                 avgWord2VecTitleTransformedTestData,\
                                 avgWord2VecEssayTransformedTestData));

    rfClassifier = RandomForestClassifier(class_weight="balanced", n_jobs = 4, min_samples_split =
400);
    tunedParameters = {'n_estimators': [10, 20, 30, 50, 80, 120], 'max_depth': [10, 50, 100, 200]};
```

```

classifier = GridSearchCV(rfClassifier, tunedParameters, cv = 5, scoring = 'roc_auc');
classifier.fit(trainingMergedData, classesTrainingSub);

testScoresDataFrame = pd.DataFrame(data =
np.hstack((classifier.cv_results_['param_n_estimators'].data[:, None],
classifier.cv_results_['param_max_depth'].data[:, None], classifier.cv_results_['mean_test_score']
[:, None], classifier.cv_results_['std_test_score'][:, None])), columns = ['n_estimators', 'max_dep
th', 'mts', 'stdts']);
testScoresDataFrame = testScoresDataFrame.astype(float);

crossValidateAucMeanValues = classifier.cv_results_['mean_test_score'];
crossValidateAucStdValues = classifier.cv_results_['std_test_score'];

trace1 = go.Scatter3d(x = tunedParameters['n_estimators'], y = tunedParameters['max_depth'], z
= crossValidateAucMeanValues, name = 'Cross-Validate');
data = [trace1];

layout = go.Layout(scene = dict(
    xaxis = dict(title='n_estimators'),
    yaxis = dict(title='max_depth'),
    zaxis = dict(title='AUC'),))

fig = go.Figure(data=data, layout=layout)
figure_plotly_browser_state()
offline.iplot(fig, filename='3d-scatter-colorscale')


optimalHypParamValue = classifier.best_params_['n_estimators'];
optimalHypParam2Value = classifier.best_params_['max_depth'];
rfClassifier = RandomForestClassifier(class_weight = 'balanced', n_estimators = optimalHypParam
Value, max_depth = optimalHypParam2Value, n_jobs = 4, min_samples_split = 400);
rfClassifier.fit(trainingMergedData, classesTrainingSub);
predScoresTraining = rfClassifier.predict_proba(trainingMergedData);
fprTrain, tprTrain, thresholdTrain = roc_curve(classesTraining, predScoresTraining[:, 1]);
predScoresTest = rfClassifier.predict_proba(testMergedData);
fprTest, tprTest, thresholdTest = roc_curve(classesTest, predScoresTest[:, 1]);
predictionClassesTest = rfClassifier.predict(testMergedData);

equalsBorder(70);
plt.plot(fprTrain, tprTrain, label = "Train AUC = " + str(auc(fprTrain, tprTrain)));
plt.plot(fprTest, tprTest, label = "Test AUC = " + str(auc(fprTest, tprTest)));
plt.plot([0, 1], [0, 1], 'k-');
plt.xlabel("fpr values");
plt.ylabel("tpr values");
plt.grid();
plt.legend();
plt.show();

areaUnderRocValueTest = auc(fprTest, tprTest);

print("Results of analysis using {} vectorized text features merged with other features using
random forest classifier: ".format(technique));
equalsBorder(70);
print("Optimal n_estimators Value: ", optimalHypParamValue);
equalsBorder(40);
print("Optimal max_depth Value: ", optimalHypParam2Value);
equalsBorder(40);
print("AUC value of test data: ", str(areaUnderRocValueTest));
# Predicting classes of test data projects
predictionClassesTest = rfClassifier.predict(testMergedData);
equalsBorder(40);
# Printing confusion matrix
confusionMatrix = confusion_matrix(classesTest, predictionClassesTest);
# Creating dataframe for generated confusion matrix
confusionMatrixDataFrame = pd.DataFrame(data = confusionMatrix, index = ['Actual: NO', 'Actual:
YES'], columns = ['Predicted: NO', 'Predicted: YES']);
print("Confusion Matrix : ");
equalsBorder(60);
sbrn.heatmap(confusionMatrixDataFrame, annot = True, fmt = 'd', cmap="Greens");
plt.show();

```

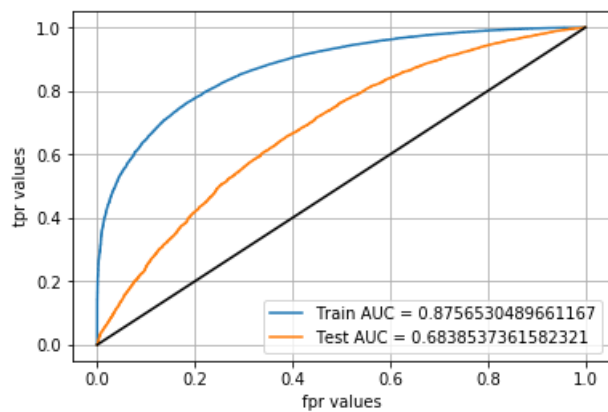
Results of analysis using Average Word2Vec vectorized text features merged with other features using random forest classifier:

Optimal n_estimators Value: 120

Optimal max_depth Value: 50

AUC value of test data: 0.6838537361582321


Confusion Matrix :

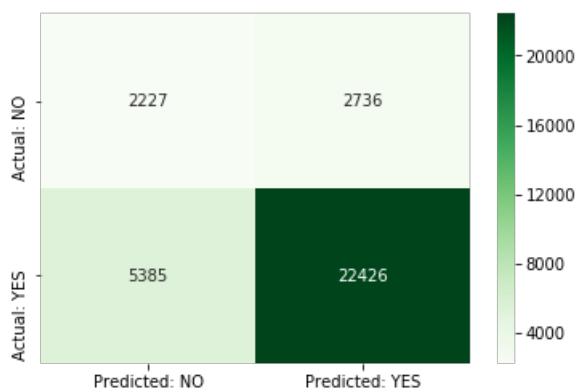

In [21]:

```
print("Cross-validation curve: ");
print("="*40);
display(Image(filename = "Random Forests - Average word2Vec.png", unconfined = True, width = '400px
'));
```

Cross-validation curve:

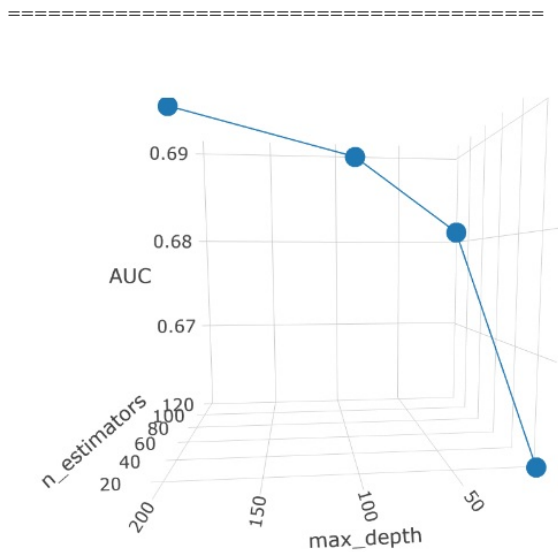

Classification using tf-idf weighted word2vec vectorized data by random forests

In [0]:

```
techniques = ['Tf-Idf Weighted Word2Vec'];
for index, technique in enumerate(techniques):
    trainingMergedData = hstack((categoriesVectorsSub,\
                                subCategoriesVectorsSub,\
                                teacherPrefixVectorsSub,\
                                schoolStateVectorsSub,\
                                projectGradeVectorsSub,\
                                priceStandardizedSub,\
                                previouslyPostedStandardizedSub));
    crossValidateMergedData = hstack((categoriesTransformedCrossValidateData,\
                                     subCategoriesTransformedCrossValidateData,\
                                     teacherPrefixTransformedCrossValidateData,\
                                     schoolStateTransformedCrossValidateData,\
                                     projectGradeTransformedCrossValidateData,\
                                     priceTransformedCrossValidateData,\
                                     previouslyPostedTransformedCrossValidateData));
    testMergedData = hstack((categoriesTransformedTestData,\
                             subCategoriesTransformedTestData,\
                             teacherPrefixTransformedTestData,\
                             schoolStateTransformedTestData,\
                             projectGradeTransformedTestData,\
                             priceTransformedTestData,\
                             previouslyPostedTransformedTestData));

    if(index == 0):
        trainingMergedData = hstack((trainingMergedData,\
                                     tfIdfWeightedWord2VecTitlesVectors,\
                                     tfIdfWeightedWord2VecEssaysVectors));
        crossValidateMergedData = hstack((crossValidateMergedData,\
                                           tfIdfWeightedWord2VecTitleTransformedCrossValidateData,\
                                           tfIdfWeightedWord2VecEssayTransformedCrossValidateData));
        testMergedData = hstack((testMergedData,\
                                 tfIdfWeightedWord2VecTitleTransformedTestData,\
                                 tfIdfWeightedWord2VecEssayTransformedTestData));

        rfClassifier = RandomForestClassifier(class_weight="balanced", n_jobs = 4, min_samples_split =
400);
        tunedParameters = {'n_estimators': [10, 20, 30, 50, 80, 120], 'max_depth': [10, 50, 100, 200,
400, 500]};
        classifier = GridSearchCV(rfClassifier, tunedParameters, cv = 5, scoring = 'roc_auc');
        classifier.fit(trainingMergedData, classesTrainingSub);

        testScoresDataFrame = pd.DataFrame(data =
```

```

np.hstack((classifier.cv_results_['param_n_estimators'].data[:, None],
classifier.cv_results_['param_max_depth'].data[:, None], classifier.cv_results_['mean_test_score']
[:, None], classifier.cv_results_['std_test_score'][:, None])), columns = ['n_estimators', 'max_dep
th', 'mts', 'stdts']);
testScoresDataFrame = testScoresDataFrame.astype(float);

crossValidateAucMeanValues = classifier.cv_results_['mean_test_score'];
crossValidateAucStdValues = classifier.cv_results_['std_test_score'];

tracel = go.Scatter3d(x = tunedParameters['n_estimators'], y = tunedParameters['max_depth'], z
= crossValidateAucMeanValues, name = 'Cross-Validate');
data = [tracel];

layout = go.Layout(scene = dict(
    xaxis = dict(title='n_estimators'),
    yaxis = dict(title='max_depth'),
    zaxis = dict(title='AUC'),))

fig = go.Figure(data=data, layout=layout)
configure_plotly_browser_state()
offline.iplot(fig, filename='3d-scatter-colorscale')


optimalHypParamValue = classifier.best_params_['n_estimators'];
optimalHypParam2Value = classifier.best_params_['max_depth'];
rfClassifier = RandomForestClassifier(class_weight = 'balanced', n_estimators = optimalHypParam
Value, max_depth = optimalHypParam2Value, n_jobs = 4, min_samples_split = 400);
rfClassifier.fit(trainingMergedData, classesTrainingSub);
predScoresTraining = rfClassifier.predict_proba(trainingMergedData);
fprTrain, tprTrain, thresholdTrain = roc_curve(classesTraining, predScoresTraining[:, 1]);
predScoresTest = rfClassifier.predict_proba(testMergedData);
fprTest, tprTest, thresholdTest = roc_curve(classesTest, predScoresTest[:, 1]);
predictionClassesTest = rfClassifier.predict(testMergedData);

equalsBorder(70);
plt.plot(fprTrain, tprTrain, label = "Train AUC = " + str(auc(fprTrain, tprTrain)));
plt.plot(fprTest, tprTest, label = "Test AUC = " + str(auc(fprTest, tprTest)));
plt.plot([0, 1], [0, 1], 'k-');
plt.xlabel("fpr values");
plt.ylabel("tpr values");
plt.grid();
plt.legend();
plt.show();

areaUnderRocValueTest = auc(fprTest, tprTest);

print("Results of analysis using {} vectorized text features merged with other features using
random forest classifier: ".format(technique));
equalsBorder(70);
print("Optimal n_estimators Value: ", optimalHypParamValue);
equalsBorder(40);
print("Optimal max_depth Value: ", optimalHypParam2Value);
equalsBorder(40);
print("AUC value of test data: ", str(areaUnderRocValueTest));
# Predicting classes of test data projects
predictionClassesTest = rfClassifier.predict(testMergedData);
equalsBorder(40);
# Printing confusion matrix
confusionMatrix = confusion_matrix(classesTest, predictionClassesTest);
# Creating dataframe for generated confusion matrix
confusionMatrixDataFrame = pd.DataFrame(data = confusionMatrix, index = ['Actual: NO', 'Actual:
YES'], columns = ['Predicted: NO', 'Predicted: YES']);
print("Confusion Matrix : ");
equalsBorder(60);
sbrn.heatmap(confusionMatrixDataFrame, annot = True, fmt = 'd', cmap="Greens");
plt.show();

```

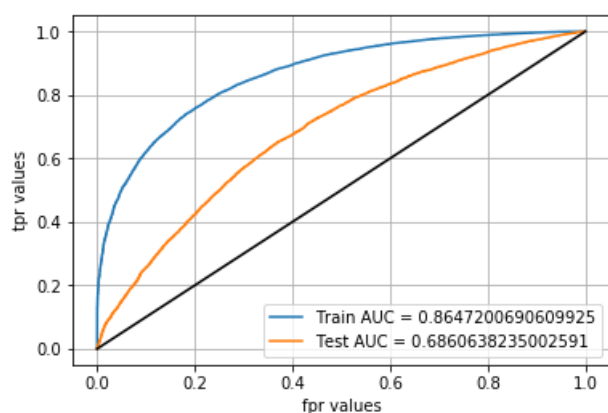


Results of analysis using Tf-Idf Weighted Word2Vec vectorized text features merged with other features using random forest classifier:

Optimal n_estimators Value: 120

Optimal max_depth Value: 200

AUC value of test data: 0.6860638235002591

Confusion Matrix :

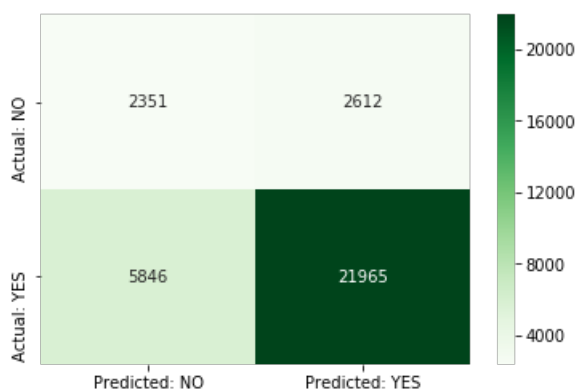


In [22]:

```
print("Cross-validation curve: ");
print("="*40);
display(Image(filename = "Random Forests - Tf-Idf Weighted Word2Vec.png", unconfined = True, width
= '400px'));
```

Cross-validation curve:

=====

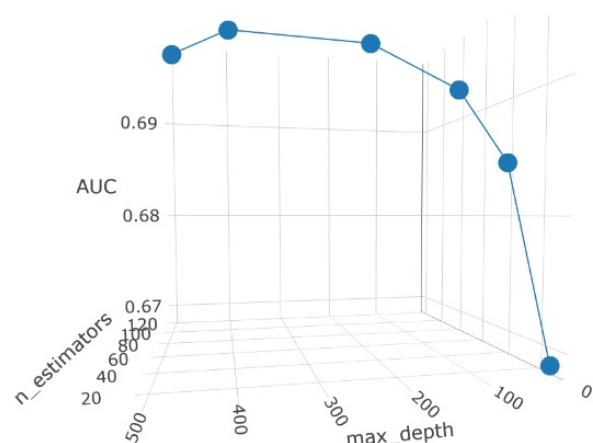

Classification using data vectorized by various models by gradient boosting classifier

Classification using bag of words vectorized data by gradient boosting classifier

In [0]:

```
techniques = ['Bag of words'];
for index, technique in enumerate(techniques):
    trainingMergedData = hstack((categoriesVectorsSub,\
                                subCategoriesVectorsSub,\
                                teacherPrefixVectorsSub,\
                                schoolStateVectorsSub,\
                                projectGradeVectorsSub,\
                                priceStandardizedSub,\
                                previouslyPostedStandardizedSub));
    crossValidateMergedData = hstack((categoriesTransformedCrossValidateData,\
                                     subCategoriesTransformedCrossValidateData,\
                                     teacherPrefixTransformedCrossValidateData,\
                                     schoolStateTransformedCrossValidateData,\
                                     projectGradeTransformedCrossValidateData,\
                                     priceTransformedCrossValidateData,\
                                     previouslyPostedTransformedCrossValidateData));
    testMergedData = hstack((categoriesTransformedTestData,\
                             subCategoriesTransformedTestData,\
                             teacherPrefixTransformedTestData,\
                             schoolStateTransformedTestData,\
                             projectGradeTransformedTestData,\
                             priceTransformedTestData,\
                             previouslyPostedTransformedTestData));

    if(index == 0):
        trainingMergedData = hstack((trainingMergedData,\
                                     bowTitleModelSub,\
                                     bowEssayModelSub));
        crossValidateMergedData = hstack((crossValidateMergedData,\
                                          bowTitleTransformedCrossValidateData,\
                                          bowEssayTransformedCrossValidateData));
        testMergedData = hstack((testMergedData,\
                                 bowTitleTransformedTestData,\
                                 bowEssayTransformedTestData));

    gbdClassifier = xgb.XGBClassifier(n_jobs = 6, min_samples_split = 400, reg_alpha = 1,
                                     reg_lambda = 0, subsample = 0.5, colsample_bytree = 0.5);
    tunedParameters = {'n_estimators': [10, 20, 50, 120], 'max_depth': [2, 4, 6, 10, 15]};
    classifier = GridSearchCV(gbdClassifier, tunedParameters, cv = 5, scoring = 'roc_auc');
    classifier.fit(trainingMergedData, classesTrainingSub);
```

```

testScoresDataFrame = pd.DataFrame(data =
np.hstack((classifier.cv_results_['param_n_estimators'].data[:, None],
classifier.cv_results_['param_max_depth'].data[:, None], classifier.cv_results_['mean_test_score']
[:, None], classifier.cv_results_['std_test_score'][:, None])), columns = ['n_estimators', 'max_dep
th', 'mts', 'stdts']);
testScoresDataFrame = testScoresDataFrame.astype(float);

crossValidateAucMeanValues = classifier.cv_results_['mean_test_score'];
crossValidateAucStdValues = classifier.cv_results_['std_test_score'];

tracel = go.Scatter3d(x = tunedParameters['n_estimators'], y = tunedParameters['max_depth'], z
= crossValidateAucMeanValues, name = 'Cross-Validate');
data = [tracel];

layout = go.Layout(scene = dict(
    xaxis = dict(title='n_estimators'),
    yaxis = dict(title='max_depth'),
    zaxis = dict(title='AUC'),))

fig = go.Figure(data=data, layout=layout)
configure_plotly_browser_state()
offline.iplot(fig, filename='3d-scatter-colorscale')

optimalHypParamValue = classifier.best_params_['n_estimators'];
optimalHypParam2Value = classifier.best_params_['max_depth'];
gbdtClassifier = xgb.XGBClassifier(n_estimators = optimalHypParamValue, max_depth = optimalHypP
aram2Value, n_jobs = 6, min_samples_split = 400, reg_alpha = 1, reg_lambda = 0, subsample = 0.5, co
lsample_bytree = 0.5);
gbdtClassifier.fit(trainingMergedData, classesTrainingSub);
predScoresTraining = gbdtClassifier.predict_proba(trainingMergedData);
fprTrain, tprTrain, thresholdTrain = roc_curve(classesTraining, predScoresTraining[:, 1]);
predScoresTest = gbdtClassifier.predict_proba(testMergedData);
fprTest, tprTest, thresholdTest = roc_curve(classesTest, predScoresTest[:, 1]);
predictionClassesTest = gbdtClassifier.predict(testMergedData);


equalsBorder(70);
plt.plot(fprTrain, tprTrain, label = "Train AUC = " + str(auc(fprTrain, tprTrain)));
plt.plot(fprTest, tprTest, label = "Test AUC = " + str(auc(fprTest, tprTest)));
plt.plot([0, 1], [0, 1], 'k-');
plt.xlabel("fpr values");
plt.ylabel("tpr values");
plt.grid();
plt.legend();
plt.show();

areaUnderRocValueTest = auc(fprTest, tprTest);

print("Results of analysis using {} vectorized text features merged with other features using
gradient boosting classifier: ".format(technique));
equalsBorder(70);
print("Optimal n_estimators Value: ", optimalHypParamValue);
equalsBorder(40);
print("Optimal max_depth Value: ", optimalHypParam2Value);
equalsBorder(40);
print("AUC value of test data: ", str(areaUnderRocValueTest));
# Predicting classes of test data projects
predictionClassesTest = gbdtClassifier.predict(testMergedData);
equalsBorder(40);
# Printing confusion matrix
confusionMatrix = confusion_matrix(classesTest, predictionClassesTest);
# Creating dataframe for generated confusion matrix
confusionMatrixDataFrame = pd.DataFrame(data = confusionMatrix, index = ['Actual: NO', 'Actual:
YES'], columns = ['Predicted: NO', 'Predicted: YES']);
print("Confusion Matrix : ");
equalsBorder(60);
sbrn.heatmap(confusionMatrixDataFrame, annot = True, fmt = 'd', cmap="Greens");
plt.show();

```

In [0]:

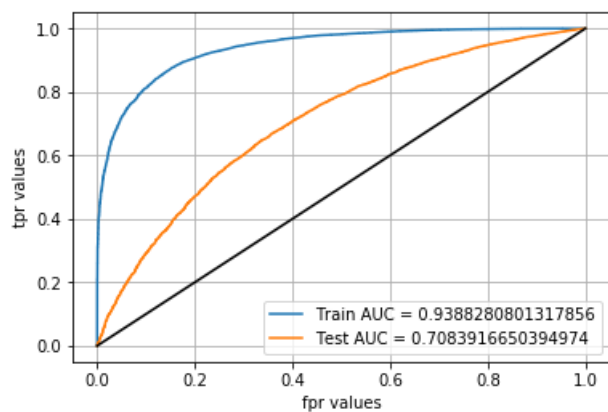


Results of analysis using Bag of words vectorized text features merged with other features using gradient boosting classifier:

Optimal n_estimators Value: 100

Optimal max_depth Value: 10

AUC value of test data: 0.7083916650394974


Confusion Matrix :

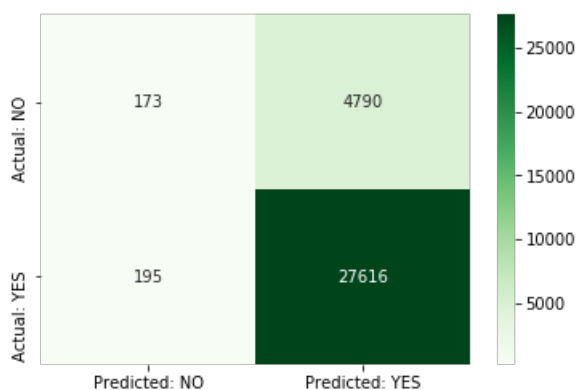

In [23]:

```
print("Cross-validation curve: ");
print("="*40);
display(Image(filename = "GBDT - Bag of words.png", unconfined = True, width = '400px'));
```

Cross-validation curve:

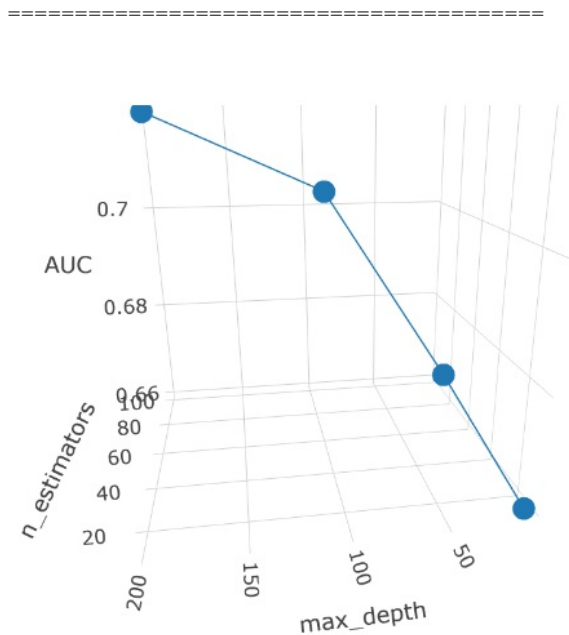

Classification using tf-idf vectorized data by gradient boosting classifier

In [0]:

```
techniques = ['Tf-Idf'];
for index, technique in enumerate(techniques):
    trainingMergedData = hstack((categoriesVectorsSub,\
                                subCategoriesVectorsSub,\
                                teacherPrefixVectorsSub,\
                                schoolStateVectorsSub,\
                                projectGradeVectorsSub,\
                                priceStandardizedSub,\
                                previouslyPostedStandardizedSub));
    crossValidateMergedData = hstack((categoriesTransformedCrossValidateData,\
                                     subCategoriesTransformedCrossValidateData,\
                                     teacherPrefixTransformedCrossValidateData,\
                                     schoolStateTransformedCrossValidateData,\
                                     projectGradeTransformedCrossValidateData,\
                                     priceTransformedCrossValidateData,\
                                     previouslyPostedTransformedCrossValidateData));
    testMergedData = hstack((categoriesTransformedTestData,\
                             subCategoriesTransformedTestData,\
                             teacherPrefixTransformedTestData,\
                             schoolStateTransformedTestData,\
                             projectGradeTransformedTestData,\
                             priceTransformedTestData,\
                             previouslyPostedTransformedTestData));

    if(index == 0):
        trainingMergedData = hstack((trainingMergedData,\
                                     tfIdfTitleModelSub,\
                                     tfIdfEssayModelSub));
        crossValidateMergedData = hstack((crossValidateMergedData,\
                                           tfIdfTitleTransformedCrossValidateData,\
                                           tfIdfEssayTransformedCrossValidateData));
        testMergedData = hstack((testMergedData,\
                                 tfIdfTitleTransformedTestData,\
                                 tfIdfEssayTransformedTestData));

    gbdtClassifier = xgb.XGBClassifier(n_jobs = 6, min_samples_split = 400, reg_alpha = 1,
                                       reg_lambda = 0.5, subsample = 0.5, colsample_bytree = 0.5);
```



```

reg_lambda = 0, subsample = 0.5, colsample_bytree = 0.5,
    tunedParameters = {'n_estimators': [10, 20, 50, 120], 'max_depth': [2, 4, 6, 10, 15]};
classifier = GridSearchCV(gbdtClassifier, tunedParameters, cv = 5, scoring = 'roc_auc');
classifier.fit(trainingMergedData, classesTrainingSub);

testScoresDataFrame = pd.DataFrame(data =
np.hstack((classifier.cv_results_['param_n_estimators'].data[:, None],
classifier.cv_results_['param_max_depth'].data[:, None], classifier.cv_results_['mean_test_score']
[:, None], classifier.cv_results_['std_test_score'][:, None])), columns = ['n_estimators', 'max_dep
th', 'mts', 'stdts']);
testScoresDataFrame = testScoresDataFrame.astype(float);

crossValidateAucMeanValues = classifier.cv_results_['mean_test_score'];
crossValidateAucStdValues = classifier.cv_results_['std_test_score'];

trace1 = go.Scatter3d(x = tunedParameters['n_estimators'], y = tunedParameters['max_depth'], z
= crossValidateAucMeanValues, name = 'Cross-Validate');
data = [trace1];

layout = go.Layout(scene = dict(
    xaxis = dict(title='n_estimators'),
    yaxis = dict(title='max_depth'),
    zaxis = dict(title='AUC'),))

fig = go.Figure(data=data, layout=layout)
configure_plotly_browser_state()
offline.iplot(fig, filename='3d-scatter-colorscale')


optimalHypParamValue = classifier.best_params_['n_estimators'];
optimalHypParam2Value = classifier.best_params_['max_depth'];
gbdtClassifier = xgb.XGBClassifier(n_estimators = optimalHypParamValue, max_depth = optimalHypP
aram2Value, n_jobs = 6, min_samples_split = 400, reg_alpha = 1, reg_lambda = 0, subsample = 0.5, co
lsample_bytree = 0.5);
gbdtClassifier.fit(trainingMergedData, classesTrainingSub);
predScoresTraining = gbdtClassifier.predict_proba(trainingMergedData);
fprTrain, tprTrain, thresholdTrain = roc_curve(classesTraining, predScoresTraining[:, 1]);
predScoresTest = gbdtClassifier.predict_proba(testMergedData);
fprTest, tprTest, thresholdTest = roc_curve(classesTest, predScoresTest[:, 1]);
predictionClassesTest = gbdtClassifier.predict(testMergedData);

equalsBorder(70);
plt.plot(fprTrain, tprTrain, label = "Train AUC = " + str(auc(fprTrain, tprTrain)));
plt.plot(fprTest, tprTest, label = "Test AUC = " + str(auc(fprTest, tprTest)));
plt.plot([0, 1], [0, 1], 'k-');
plt.xlabel("fpr values");
plt.ylabel("tpr values");
plt.grid();
plt.legend();
plt.show();

areaUnderRocValueTest = auc(fprTest, tprTest);

print("Results of analysis using {} vectorized text features merged with other features using
gradient boosting classifier: ".format(technique));
equalsBorder(70);
print("Optimal n_estimators Value: ", optimalHypParamValue);
equalsBorder(40);
print("Optimal max_depth Value: ", optimalHypParam2Value);
equalsBorder(40);
print("AUC value of test data: ", str(areaUnderRocValueTest));
# Predicting classes of test data projects
predictionClassesTest = gbdtClassifier.predict(testMergedData);
equalsBorder(40);
# Printing confusion matrix
confusionMatrix = confusion_matrix(classesTest, predictionClassesTest);
# Creating dataframe for generated confusion matrix
confusionMatrixDataFrame = pd.DataFrame(data = confusionMatrix, index = ['Actual: NO', 'Actual:
YES'], columns = ['Predicted: NO', 'Predicted: YES']);
print("Confusion Matrix : ");
equalsBorder(60);
sbrn.heatmap(confusionMatrixDataFrame, annot = True, fmt = 'd', cmap="Greens");
plt.show();

```

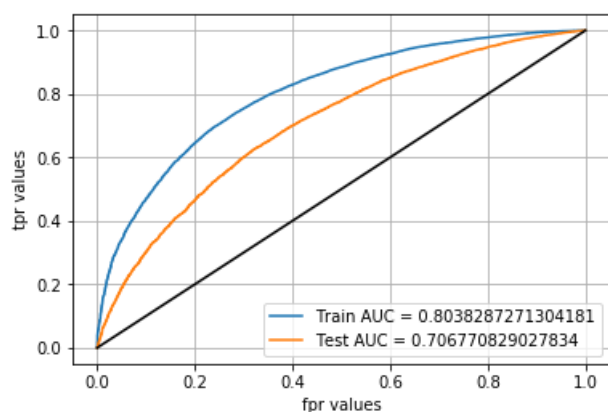


Results of analysis using Tf-Idf vectorized text features merged with other features using gradient boosting classifier:

Optimal n_estimators Value: 120

Optimal max_depth Value: 4

AUC value of test data: 0.706770829027834

Confusion Matrix :

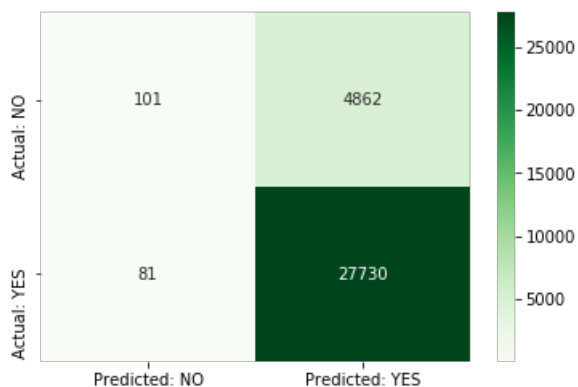


In [29]:

```
print("Cross-validation curve: ");
print("="*40);
display(Image(filename = "GBDT - Tf-Idf.png", unconfined = True, width = '400px'));
```

Cross-validation curve:

=====

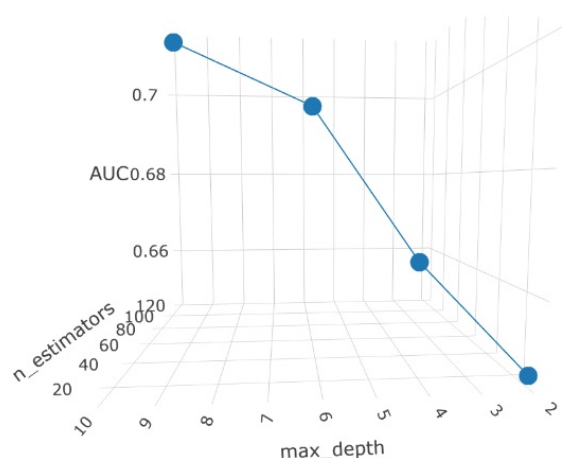

Classification using word2vec vectorized data by gradient boosting classifier

In [0]:

```
techniques = ['Average Word2Vec'];
for index, technique in enumerate(techniques):
    trainingMergedData = hstack((categoriesVectorsSub,\
                                subCategoriesVectorsSub,\
                                teacherPrefixVectorsSub,\
                                schoolStateVectorsSub,\
                                projectGradeVectorsSub,\
                                priceStandardizedSub,\
                                previouslyPostedStandardizedSub));

    crossValidateMergedData = hstack((categoriesTransformedCrossValidateData,\
                                     subCategoriesTransformedCrossValidateData,\
                                     teacherPrefixTransformedCrossValidateData,\
                                     schoolStateTransformedCrossValidateData,\
                                     projectGradeTransformedCrossValidateData,\
                                     priceTransformedCrossValidateData,\
                                     previouslyPostedTransformedCrossValidateData));

    testMergedData = hstack((categoriesTransformedTestData,\
                             subCategoriesTransformedTestData,\
                             teacherPrefixTransformedTestData,\
                             schoolStateTransformedTestData,\
                             projectGradeTransformedTestData,\
                             priceTransformedTestData,\
                             previouslyPostedTransformedTestData));

    if(index == 0):
        trainingMergedData = hstack((trainingMergedData,\
                                     word2VecTitlesVectors,\
                                     word2VecEssaysVectors));
        crossValidateMergedData = hstack((crossValidateMergedData,\
                                           avgWord2VecTitleTransformedCrossValidateData,\
                                           avgWord2VecEssayTransformedCrossValidateData));
        testMergedData = hstack((testMergedData,\
                                 avgWord2VecTitleTransformedTestData,\
                                 avgWord2VecEssayTransformedTestData));

    gbdClassifier = xgb.XGBClassifier(n_jobs = 6, min_samples_split = 400, reg_alpha = 1,
                                     reg_lambda = 0, subsample = 0.5, colsample_bytree = 0.5);
    tunedParameters = {'n_estimators': [10, 20, 80, 130], 'max_depth': [2, 4, 6, 10, 15]};
    classifier = GridSearchCV(gbdClassifier, tunedParameters, cv = 5, scoring = 'roc_auc');
    classifier.fit(trainingMergedData, classesTrainingSub);

testScoresDataFrame = pd.DataFrame(data =
```

```

np.hstack((classifier.cv_results_['param_n_estimators'].data[:, None],
classifier.cv_results_['param_max_depth'].data[:, None], classifier.cv_results_['mean_test_score']
[:, None], classifier.cv_results_['std_test_score'][:, None])), columns = ['n_estimators', 'max_dep
th', 'mts', 'stdts']);
testScoresDataFrame = testScoresDataFrame.astype(float);

crossValidateAucMeanValues = classifier.cv_results_['mean_test_score'];
crossValidateAucStdValues = classifier.cv_results_['std_test_score'];

tracel = go.Scatter3d(x = tunedParameters['n_estimators'], y = tunedParameters['max_depth'], z
= crossValidateAucMeanValues, name = 'Cross-Validate');
data = [tracel];

layout = go.Layout(scene = dict(
    xaxis = dict(title='n_estimators'),
    yaxis = dict(title='max_depth'),
    zaxis = dict(title='AUC'),))

fig = go.Figure(data=data, layout=layout)
configure_plotly_browser_state()
offline.iplot(fig, filename='3d-scatter-colorscale')


optimalHypParamValue = classifier.best_params_['n_estimators'];
optimalHypParam2Value = classifier.best_params_['max_depth'];
gbdtClassifier = xgb.XGBClassifier(n_estimators = optimalHypParamValue, max_depth = optimalHypP
aram2Value, n_jobs = 6, min_samples_split = 400, reg_alpha = 1, reg_lambda = 0, subsample = 0.5, co
lsample_bytree = 0.5);
gbdtClassifier.fit(trainingMergedData, classesTrainingSub);
predScoresTraining = gbdtClassifier.predict_proba(trainingMergedData);
fprTrain, tprTrain, thresholdTrain = roc_curve(classesTraining, predScoresTraining[:, 1]);
predScoresTest = gbdtClassifier.predict_proba(testMergedData);
fprTest, tprTest, thresholdTest = roc_curve(classesTest, predScoresTest[:, 1]);
predictionClassesTest = gbdtClassifier.predict(testMergedData);

equalsBorder(70);
plt.plot(fprTrain, tprTrain, label = "Train AUC = " + str(auc(fprTrain, tprTrain)));
plt.plot(fprTest, tprTest, label = "Test AUC = " + str(auc(fprTest, tprTest)));
plt.plot([0, 1], [0, 1], 'k-');
plt.xlabel("fpr values");
plt.ylabel("tpr values");
plt.grid();
plt.legend();
plt.show();

areaUnderRocValueTest = auc(fprTest, tprTest);

print("Results of analysis using {} vectorized text features merged with other features using
gradient boosting classifier: ".format(technique));
equalsBorder(70);
print("Optimal n_estimators Value: ", optimalHypParamValue);
equalsBorder(40);
print("Optimal max_depth Value: ", optimalHypParam2Value);
equalsBorder(40);
print("AUC value of test data: ", str(areaUnderRocValueTest));
# Predicting classes of test data projects
predictionClassesTest = gbdtClassifier.predict(testMergedData);
equalsBorder(40);
# Printing confusion matrix
confusionMatrix = confusion_matrix(classesTest, predictionClassesTest);
# Creating dataframe for generated confusion matrix
confusionMatrixDataFrame = pd.DataFrame(data = confusionMatrix, index = ['Actual: NO', 'Actual:
YES'], columns = ['Predicted: NO', 'Predicted: YES']);
print("Confusion Matrix : ");
equalsBorder(60);
sbrn.heatmap(confusionMatrixDataFrame, annot = True, fmt = 'd', cmap="Greens");
plt.show();

```

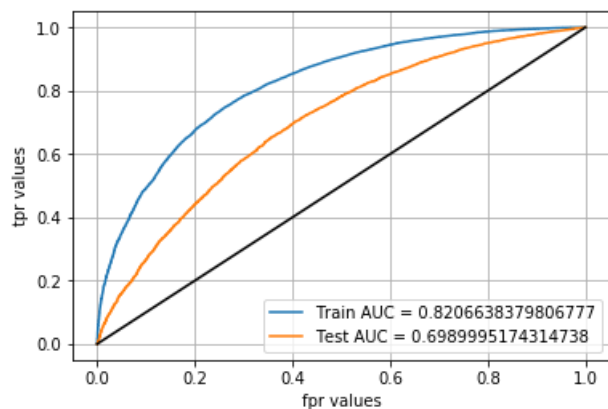

Results of analysis using Average Word2Vec vectorized text features merged with other features using gradient boosting classifier:

```
=====
```

Optimal n_estimators Value: 130

```
=====
```


Optimal max_depth Value: 4

```
=====
```

AUC value of test data: 0.6989995174314738

```
=====
```

Confusion Matrix :

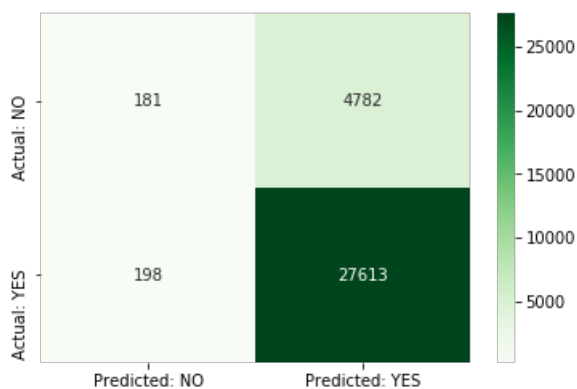


In [28]:

```
print("Cross-validation curve: ");
print("="*40);
display(Image(filename = "GBDT - Average Word2Vec.png", unconfined = True, width = '400px'));
```

Cross-validation curve:

=====

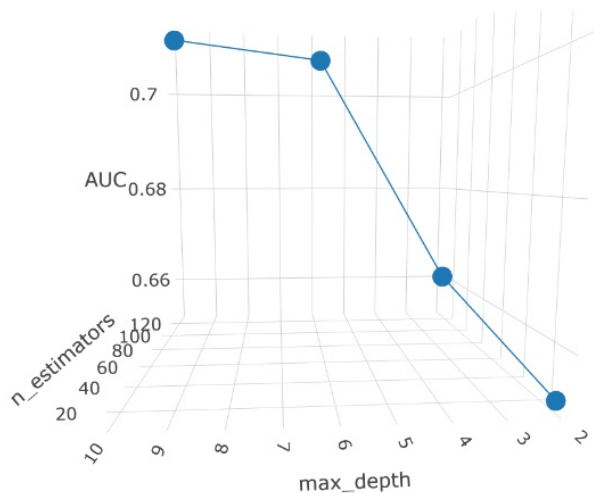

Classification using tf-idf weighted word2vec vectorized data by gradient boosting classifier

In [0]:

```
techniques = ['Tf-Idf Weighted Word2Vec'];
for index, technique in enumerate(techniques):
    trainingMergedData = hstack((categoriesVectorsSub,\
                                subCategoriesVectorsSub,\
                                teacherPrefixVectorsSub,\
                                schoolStateVectorsSub,\
                                projectGradeVectorsSub,\
                                priceStandardizedSub,\
                                previouslyPostedStandardizedSub));
    crossValidateMergedData = hstack((categoriesTransformedCrossValidateData,\
                                      subCategoriesTransformedCrossValidateData,\
                                      teacherPrefixTransformedCrossValidateData,\
                                      schoolStateTransformedCrossValidateData,\
                                      projectGradeTransformedCrossValidateData,\
                                      priceTransformedCrossValidateData,\
                                      previouslyPostedTransformedCrossValidateData));
    testMergedData = hstack((categoriesTransformedTestData,\
                             subCategoriesTransformedTestData,\
                             teacherPrefixTransformedTestData,\
                             schoolStateTransformedTestData,\
                             projectGradeTransformedTestData,\
                             priceTransformedTestData,\
                             previouslyPostedTransformedTestData));

    if(index == 0):
        trainingMergedData = hstack((trainingMergedData,\
                                      tfIdfWeightedWord2VecTitlesVectors,\
                                      tfIdfWeightedWord2VecEssaysVectors));
        crossValidateMergedData = hstack((crossValidateMergedData,\
                                          tfIdfWeightedWord2VecTitleTransformedCrossValidateData,\
                                          tfIdfWeightedWord2VecEssayTransformedCrossValidateData));
        testMergedData = hstack((testMergedData,\
                                  tfIdfWeightedWord2VecTitleTransformedTestData,\
                                  tfIdfWeightedWord2VecEssayTransformedTestData));

    gbdClassifier = xgb.XGBClassifier(n_jobs = 6, min_samples_split = 400, reg_alpha = 1,
                                     reg_lambda = 0, subsample = 0.5, colsample_bytree = 0.5);
    tunedParameters = {'n_estimators': [80, 100, 130], 'max_depth': [2, 4, 6, 10, 15]};
    classifier = GridSearchCV(gbdClassifier, tunedParameters, cv = 5, scoring = 'roc_auc');
    classifier.fit(trainingMergedData, classesTrainingSub);

    testScoresDataFrame = pd.DataFrame(data =
np.hstack((classifier.cv_results_['param_n_estimators'].data[:, None],
classifier.cv_results_['param_max_depth'].data[:, None], classifier.cv_results_['mean_test_score']
[:, None], classifier.cv_results_['std_test_score'][:, None])), columns = ['n_estimators', 'max_dep
th', 'mts', 'stdts']);
```

```

testScoresDataFrame = testScoresDataFrame.astype(float);

crossValidateAucMeanValues = classifier.cv_results_['mean_test_score'];
crossValidateAucStdValues = classifier.cv_results_['std_test_score'];

tracel = go.Scatter3d(x = tunedParameters['n_estimators'], y = tunedParameters['max_depth'], z
= crossValidateAucMeanValues, name = 'Cross-Validate');
data = [tracel];

layout = go.Layout(scene = dict(
    xaxis = dict(title='n_estimators'),
    yaxis = dict(title='max_depth'),
    zaxis = dict(title='AUC'),))

fig = go.Figure(data=data, layout=layout)
configure_plotly_browser_state()
offline.iplot(fig, filename='3d-scatter-colorscale')


optimalHypParamValue = classifier.best_params_['n_estimators'];
optimalHypParam2Value = classifier.best_params_['max_depth'];
gbdtClassifier = xgb.XGBClassifier(n_estimators = optimalHypParamValue, max_depth = optimalHypP
aram2Value, n_jobs = 6, min_samples_split = 400, reg_alpha = 1, reg_lambda = 0, subsample = 0.5, co
lsample_bytree = 0.5);
gbdtClassifier.fit(trainingMergedData, classesTrainingSub);
predScoresTraining = gbdtClassifier.predict_proba(trainingMergedData);
fprTrain, tprTrain, thresholdTrain = roc_curve(classesTraining, predScoresTraining[:, 1]);
predScoresTest = gbdtClassifier.predict_proba(testMergedData);
fprTest, tprTest, thresholdTest = roc_curve(classesTest, predScoresTest[:, 1]);
predictionClassesTest = gbdtClassifier.predict(testMergedData);

equalsBorder(70);
plt.plot(fprTrain, tprTrain, label = "Train AUC = " + str(auc(fprTrain, tprTrain)));
plt.plot(fprTest, tprTest, label = "Test AUC = " + str(auc(fprTest, tprTest)));
plt.plot([0, 1], [0, 1], 'k-');
plt.xlabel("fpr values");
plt.ylabel("tpr values");
plt.grid();
plt.legend();
plt.show();

areaUnderRocValueTest = auc(fprTest, tprTest);

print("Results of analysis using {} vectorized text features merged with other features using
gradient boosting classifier: ".format(technique));
equalsBorder(70);
print("Optimal n_estimators Value: ", optimalHypParamValue);
equalsBorder(40);
print("Optimal max_depth Value: ", optimalHypParam2Value);
equalsBorder(40);
print("AUC value of test data: ", str(areaUnderRocValueTest));
# Predicting classes of test data projects
predictionClassesTest = gbdtClassifier.predict(testMergedData);
equalsBorder(40);
# Printing confusion matrix
confusionMatrix = confusion_matrix(classesTest, predictionClassesTest);
# Creating dataframe for generated confusion matrix
confusionMatrixDataFrame = pd.DataFrame(data = confusionMatrix, index = ['Actual: NO', 'Actual:
YES'], columns = ['Predicted: NO', 'Predicted: YES']);
print("Confusion Matrix : ");
equalsBorder(60);
sbrn.heatmap(confusionMatrixDataFrame, annot = True, fmt = 'd', cmap="Greens");
plt.show();

```

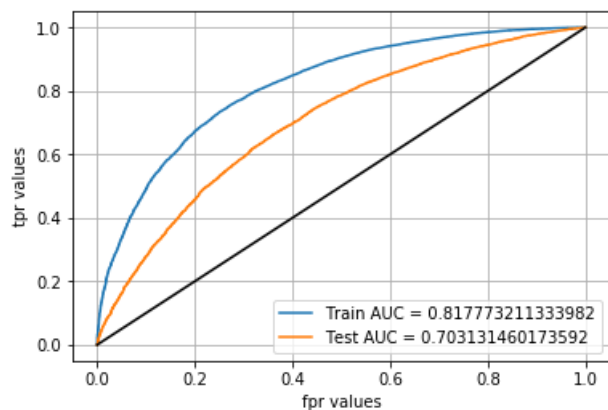


Results of analysis using Tf-Idf Weighted Word2Vec vectorized text features merged with other features using gradient boosting classifier:

```
=====
Optimal n_estimators Value: 130
```

```
=====
Optimal max_depth Value: 4
```

```
=====
AUC value of test data: 0.703131460173592
```

```
=====
Confusion Matrix :
```

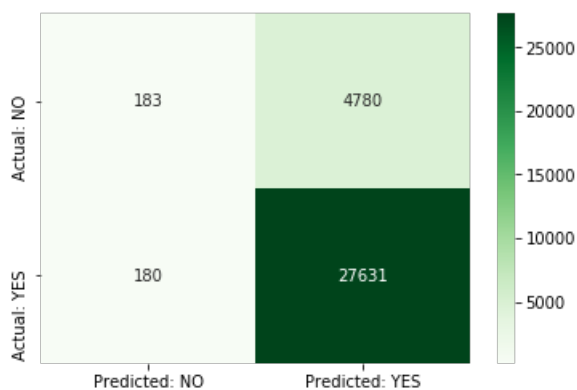


In [27]:

```
print("Cross-validation curve: ");
print("="*40);
display(Image(filename = "GBDT - Tf-Idf Weighted Word2Vec.png", unconfined = True, width = '400px'));
```

Cross-validation curve:

```
=====
```

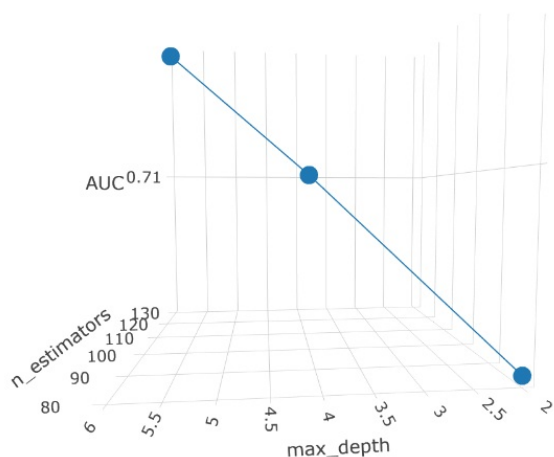Summary of results of above classification using random forests and gradient boosting classifier

In [9]:

```
techniques = ['Bag of words', 'Tf-Idf', 'Average Word2Vec', 'Tf-Idf Weighted Word2Vec', 'Bag of words', 'Tf-Idf', 'Average Word2Vec', 'Tf-Idf Weighted Word2Vec'];
aucValues = [0.7075, 0.7057, 0.6838, 0.6860, 0.7083, 0.7067, 0.6989, 0.7031]
models = ['Random Forests', 'Random Forests', 'Random Forests', 'Random Forests', 'Gradient Boosting - DT', 'Gradient Boosting - DT', 'Gradient Boosting - DT', 'Gradient Boosting - DT'];
nEstimatorsValues = [120, 120, 120, 120, 100, 120, 130, 130]
maxDepthValues = [100, 50, 50, 200, 5, 10, 4, 4]
for i, technique in enumerate(techniques):
    randomForestsAndGbdResultsDataFrame =
randomForestsAndGbdResultsDataFrame.append({'Vectorizer': technique, 'Model': models[i], 'Max Depth': maxDepthValues[i], 'N Estimators': nEstimatorsValues[i], 'AUC': aucValues[i]}, ignore_index = True);
randomForestsAndGbdResultsDataFrame
```

Out[9]:

	Vectorizer	Model	Max Depth	N Estimators	AUC
0	Bag of words	Random Forests	100	120	0.7075
1	Tf-Idf	Random Forests	50	120	0.7057
2	Average Word2Vec	Random Forests	50	120	0.6838
3	Tf-Idf Weighted Word2Vec	Random Forests	200	120	0.6860
4	Bag of words	Gradient Boosting - DT	5	100	0.7083
5	Tf-Idf	Gradient Boosting - DT	10	120	0.7067
6	Average Word2Vec	Gradient Boosting - DT	4	130	0.6989
7	Tf-Idf Weighted Word2Vec	Gradient Boosting - DT	4	130	0.7031

Conclusions of above analysis

1. The model trained using gradient boosting decision trees is somewhat giving biased results which is due to training with imbalanced data. The models may be much better than random forests if we use balanced data for training.
2. It seems like by seeing above results table the model build using random forests or gradient boosting and data containing bag of words vectorized text would be best compared to all other models .
3. The best depth and samples split value would be 100 for model with random forests and 5 for model with gradient boosting decision trees.
4. The n-estimators in all cases is the max value of the list of values given for cross-validation which means that we have the

bigger values might overfit the model and so our n-estimators values are considerably good.