


WEEK 04:NET512 PRACTICAL
SELINAH KGABANE KGWAHLA

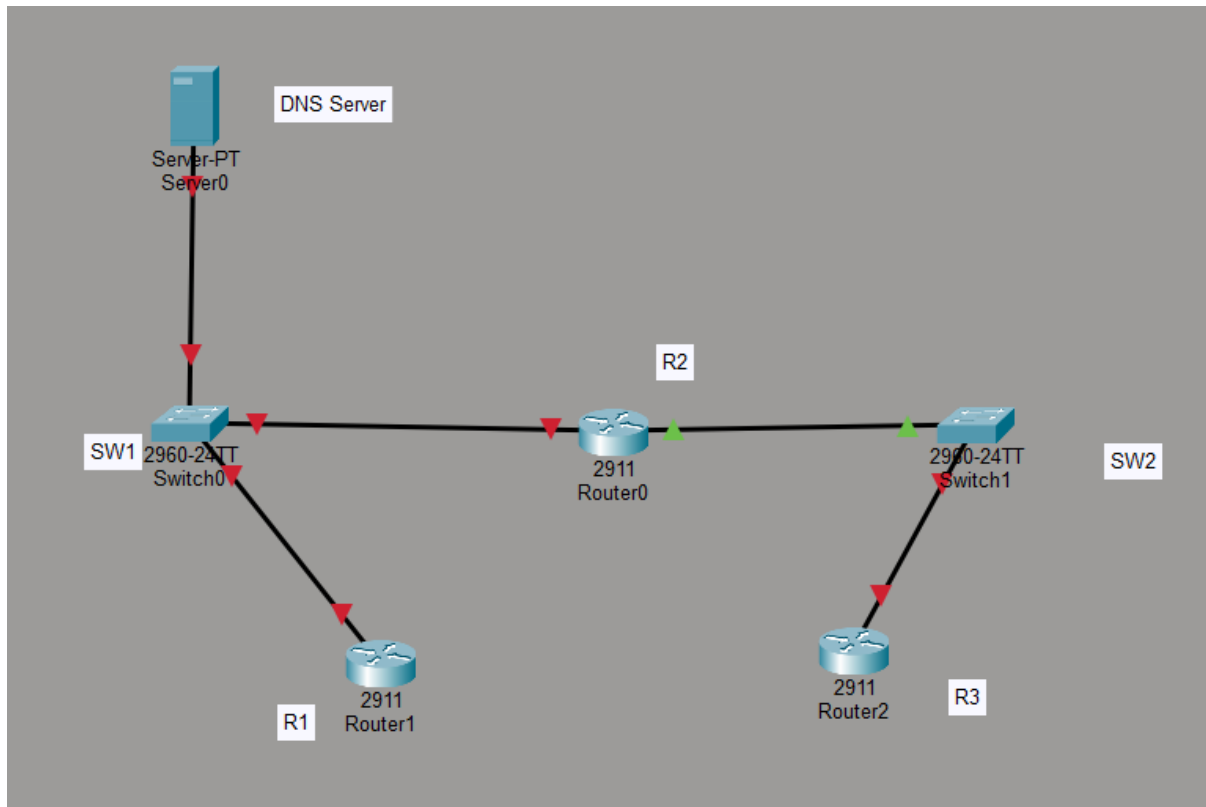

- The misconfigured parts in my week 04 practical were the turned off server that I had to turn on before working through it, changed configured interfaces, IP addresses and subnet masks in R1, wiped all configurations in R3, turned down completely in R2.

```
R1#write erase
Erasing the nvram filesystem will remove all configuration files! Continue? [confirm]
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
R1#

R1#ping 10.10.10.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

R2(config)#
R2(config)#interface gig0/0
R2(config-if)#shutdown
```

```

R1#show ip interface brief
Interface          IP-Address      OK? Method Status      Protocol
GigabitEthernet0/0  10.10.10.1      YES manual up          up
GigabitEthernet0/1  unassigned      YES unset  administratively down down
GigabitEthernet0/2  unassigned      YES unset  administratively down down
Vlan1               unassigned      YES unset  administratively down down
R1# config t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#
R1(config)#interface gig0/0
R1(config-if)#ip address 192.12.1.1 255.255.255.0
R1(config-if)#shutdown

```

- Fixed interfaces and topology network connection with correct commands:

```

R2>en
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#interface g0/0
R2(config-if)#no shutdown

```

```

R1>
R1>en
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#interface g0/0
R1(config-if)#ip address 10.10.10.10 255.255.255.255
Bad mask /32 for address 10.10.10.10
R1(config-if)#no shutdown

```

```

R2>en
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#interface g0/0
R2(config-if)#no shutdown

```

```

R1#ping 10.10.10.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.2, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/6/25 ms
R1#

```

```
R2>en
R2#ping 10.10.10.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
R2#
```

