


Microsoft® Official Course

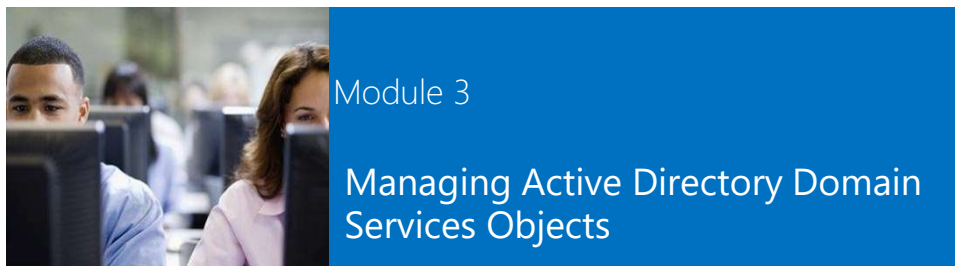

Microsoft

Module Overview

- Managing User Accounts
- Managing Groups
- Managing Computer Accounts
- Delegating Administration

Lesson 1: Managing User Accounts

- AD DS Administration Tools
- Creating User Accounts
- Configuring User Account Attributes
- Creating User Profiles
- Demonstration: Managing User Accounts
- Demonstration: Using Templates to Manage User Accounts

Outils d'administration AD DS

Pour gérer les objets AD DS, on peut utiliser les outils graphiques suivants :

- Active Directory Administration snap-ins
- Active Directory Administrative Center



Ou alors les outils en lignes de commande suivants :

- Active Directory module in Windows PowerShell
- Directory Service commands



Création d'un compte utilisateur

En utilisant : Active Directory Administrative Center

The screenshot shows the 'New User' form in the Active Directory Administrative Center. The form is divided into several sections:

- Name fields:** First name, Middle initials, Last name, and Full name (with a red asterisk indicating a required field).
- Logon information:** User UPN logon (with a dropdown menu) and User SamAccountName (with a red asterisk).
- Password fields:** Password and Confirm password.
- Account settings:** Account expires (radio buttons for 'Never' and 'End of'), Password options (radio buttons for 'User must change password at next log on' and 'Other password options'), and Encryption options (checkboxes for 'Smart card is required for interactive log on', 'Password never expires', and 'User cannot change password').
- Other options:** A checkbox for 'Protect from accidental deletion' and a 'Log on to...' button.

Création d'un compte utilisateur

En utilisant : Active Directory Users and Computers

The screenshot shows the 'New Object - User' dialog box in the Active Directory Users and Computers console. The dialog box has the following fields:

- Create in:** Adatum.com/Users
- Name fields:** First name, Initials, Last name, and Full name.
- User logon name:** A text field and a dropdown menu showing '@Adatum.com'.
- User logon name (pre-Windows 2000):** A text field showing 'ADATUM\'.

At the bottom, there are buttons for '< Back', 'Next >', and 'Cancel'.

Création d'un compte utilisateur

En utilisant : Windows PowerShell

```
New-ADUser -Name "Dan Park" -SamAccountName
  "Dan" -Path "OU=Sales,DC=Adatum,DC=com"
  -AccountPassword (ConvertTo-SecureString -
    AsPlaintext "Pa$$w0rd" -Force)
-GivenName "Dan" -Surname "Park" -DisplayName
  "Dan Park" -Enabled $True
  -UserPrincipalName "Dan@Adatum.com" -
    ChangePasswordAtLogon $false
```

Création d'un compte utilisateur

En utilisant : Directory Service commands (dsadd)

```
dsadd user "cn=Joe
Healy,ou=Managers,dc=adatum,dc=com" -pwd
Pa$$w0rd -disabled no -acctexpires never
-mustchpwd no
```

Création d'un profil utilisateur

Allez dans l'onglet « profil » qui se trouve dans les propriétés d'un profil.

The screenshot shows the 'Profile' tab of a Windows user's properties. The 'Profile path' field contains the text '\\lon-dc1\USERDATA\ed\Profile'. The 'Log on script' field is empty. Under the 'Home folder' section, the 'Local path' radio button is unselected, and the 'Connect' radio button is selected. The 'Connect' section shows a drive letter 'Z:' in a dropdown menu and a path '\\lon-dc1\USERDATA\ed' in a text field.

Gestion de Comptes Utilisateur (PowerShell)

- Changement de mot de passe :
 - **Set-ADAccountPassword** -identity 'cn=amy, ou=IT, dc=contoso, dc=com' -Reset -NewPassword (ConvertTo SecureString -AsPlainText "Pa\$\$w0rd2" -Force)
- Déverrouiller un compte utilisateur
 - **Unlock-ADAccount** -identity 'cn=amy strand, ou=IT, dc=contoso, dc=com'
- Activer/Désactiver un compte utilisateur
 - **Enable-ADAccount** -identity <name>
 - **Disable-ADAccount** -identity <name>

Gestion de Comptes Utilisateur

Voir zone "commentaires".

Gestion de Comptes Utilisateur

Voir zone "commentaires".

Gestion de Comptes Utilisateur

Voir zone "commentaires".

Démonstration: Les "templates"

1. On LON-DC1, in Server Manager, click **Tools**, and then click **Active Directory Administrative Center**.
2. In the Active Directory Administrative Center, click **Adatum (local)**, and then double-click **Sales**.
3. In the Action pane, click **New**, and then click **User**.
4. In the **Create User** dialog box, in **First name**, type **_LondonSales**, in **Last name**, type **Template**.
5. In **User UPN logon**, type **_LondonSales**.
6. Select **Protect from accidental deletion**.
7. Under Organization, in **Department**, type **Sales**.
8. In **Company**, type **A. Datum**.

Démonstration: Les "templates"

9. In **City**, type **London**.
10. In **Description**, type **London Sales users**.
11. In the **Member of** section, click **Add**.
12. In **Enter the object names to select**, type **Sales**, and then click **OK**.
13. In the **Create User _LondonSales Template** dialog box, click **OK**.

Démonstration: Les "templates"

Create a user from the _LondonSales template

1. In the Windows PowerShell window, create a variable (\$LondonSales) to hold the _LondonSales properties by using the following command, and then press Enter:

```
$LondonSales = Get-ADUser -Identity "_LondonSales" -Properties
Department,Company,City
```

2. To create a new Sales user in the Sales OU, type the following command, and then press Enter:

```
New-ADUser -Name "Dan Park" -SamAccountName "Dan" -Path
"OU=Sales,DC=Adatum,DC=com" -AccountPassword
(ConvertTo-SecureString -AsPlainText "Pa$$w0rd" -Force) -GivenName
"Dan" -Surname "Park" -DisplayName "Dan Park" -Enabled
$True -UserPrincipalName "Dan@Adatum.com" -ChangePasswordAtLogon
$true -Instance $LondonSales
```

Verify the User Properties

1. In the Windows PowerShell window, type the following command, and then press Enter:

```
Get-ADUser -Identity "Dan" -Properties *
```

2. Verify that the properties that you defined in the template were copied to the new user.

Lesson 2: Managing Groups

- Group Types
- Group Scopes
- Implementing Group Management
- Default Groups
- Special Identities
- Demonstration: Managing Groups

Les Types de Groupes

- Groupe de distribution
 - Utilisé avec les applications mail.
 - Non « sécurisée » (pas de SID). Attribuer des autorisations impossible.
- Groupe de sécurité
 - « sécurisée » (avec SID). Attribuer des autorisations possible.
 - Peut également être utilisé avec les applications mail.



Un groupe de distribution peut être converti en groupe de sécurité et vice-versa.

Etendue des groups

Group scope	Members from same domain	Members from domain in same forest	Members from trusted external domain	Can be assigned permissions to resources
Local	U, C, GG, DLG, UG and local users	U, C, GG, UG	U, C, GG	On the local computer only
Domain-local	U, C, GG, DLG, UG	U, C, GG, UG	U, C, GG	Anywhere in the domain
Universal	U, C, GG, UG	U, C, GG, UG	N/A	Anywhere in the forest
Global	U, C, GG	N/A	N/A	Anywhere in the domain or a trusted domain

U User
C Computer
GG Global group

DLG Domain-local group
UG Universal group

Stratégie IGDLA

- I Identities
Users or computers, which are members of
 - G Global groups
Which collect members based on members' roles, which are members of
 - DL Domain-local groups
Which provide management such as resource access, which are
 - A Assigned access to a resource
- This best practice for nesting groups is known as IGDLA.



Groupes par défaut

Group	Location
Enterprise Admins	Users container of the forest root domain
Schema Admins	Users container of the forest root domain
Administrators	Built-in container of each domain
Domain Admins	Users container of each domain
Server Operators	Built-in container of each domain
Account Operators	Built-in container of each domain
Backup Operators	Built-in container of each domain
Print Operators	Built-in container of each domain
Cert Publishers	Users container of each domain

Identités spéciales

- Groupes dont l'adhésion est gérée par le système d'exploitation.
- Utilisé par le système d'exploitation Windows Server pour donner accès aux ressources :
 - Basé sur le type d'authentification ou connexion.
 - Et non sur un compte utilisateur.
- Exemple d'identités spéciales :
 - Anonymous Logon
 - Authenticated Users
 - Everyone
 - Interactive (connexion locale)
 - Network
 - Creator Owner (sécurité à la création d'un objet)

Demonstration: Managing Groups


In this demonstration, you will see how to:

- Create a new group
- Add members to the group
- Add a user to the group
- Change the group type and scope
- Modifying the group's Managed By property

Lesson 3: Managing Computer Accounts


- What Is the Computers Container?
- Specifying the Location of Computer Accounts
- Controlling Permissions to Create Computer Accounts
- Performing an Offline Domain Join
- Computer Accounts and Secure Channels
- Resetting the Secure Channel
- Bring Your Own Device

Computers Container

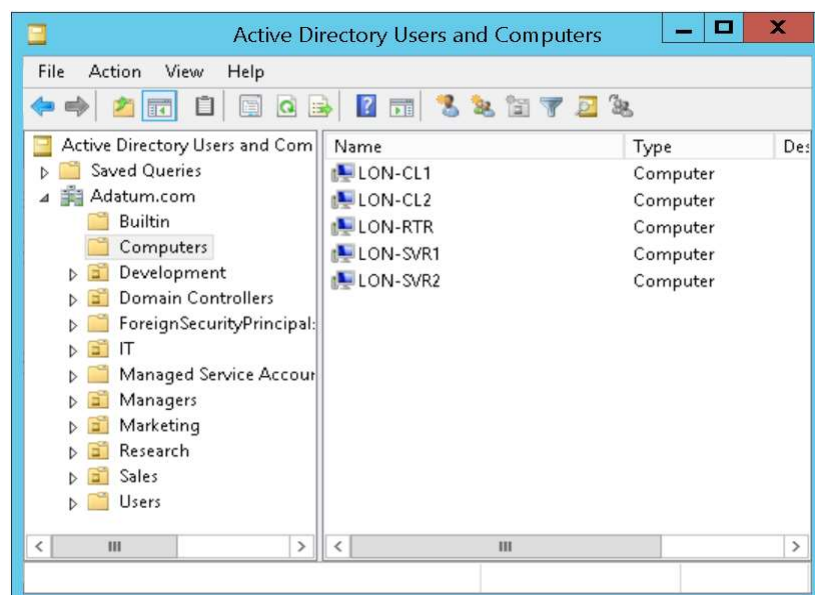


Specifying the Location of Computer Accounts

- Bonne pratique :
 - Servers
 - Diviser par rôle
 - Client computers
 - Diviser par région
- Division des OU:
 - Selon les droits d'administration
 - Pour faciliter l'utilisation des GPO

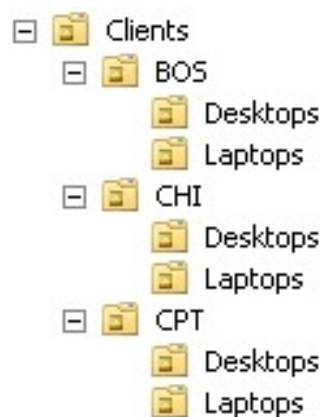

Lever la limite de comptes ordinateurs (10 par défaut)

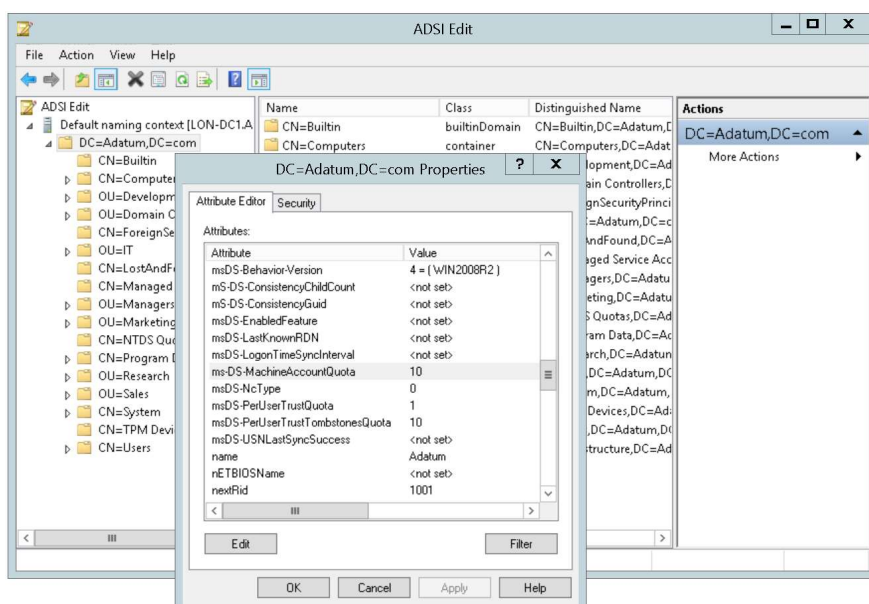

Performing an Offline Domain Join

- Create a domain join file using:

```
djoin.exe /Provision /Domain <DomainName>  
/Machine <MachineName> /SaveFile <filepath>
```

- Import the domain join file using:

```
djoin.exe /requestODJ /LoadFile <filepath>  
/WindowsPath <path to the Windows directory of  
the offline image> /localos
```

Compte ordinateur et canal sécurisé

- Compte ordinateur
 - Couple login (*sAMAccountName*) et mot de passe
 - Utilisé afin de créer un canal sécurisé entre l'ordinateur et le contrôleur de domaine
- Scenarios où ce canal sécurisé peut être brisé
 - Réinstallation d'un ordinateur (génération d'un nouveau SID)
 - Restauration d'un ordinateur à partir d'un point de sauvegarde ou d'un snapshot
 - Désaccord entre l'ordinateur et le domaine à propos du mot de passe
 - Non utilisation de l'ordinateur durant une longue période : *reset* ou effacement du compte

Reset d'un canal sécurisé


- Ne pas effacer le compte ordinateur et l'ajouter à nouveau au domaine !!!
 - Création d'un nouveau compte > Nouveau SID > Perte de toutes les associations de groupes
- Options pour *resetter* un canal sécurisé
 - Active Directory Users and Computers
 - Active Directory Administrative Center
 - **dsmod**
 - **netdom**
 - **nltest**
 - Windows PowerShell

Lesson 4: Delegating Administration

- Considerations for Using Organizational Units
- AD DS Permissions
- Effective AD DS Permissions
- Demonstration: Delegating Administrative Permissions


Utilisation des Unités d'organisation

- Les OUs permettent de subdiviser le domaine afin de mieux le gérer
- Les OUs sont utilisées pour :
 - Faire de la délégation
 - Appliquer des GPOs
- Les OUs peuvent avoir une structure :
 - Plate (un à deux niveaux de profondeur)
 - Profonde (plus de 5 niveaux de profondeur)
 - Ou n'importe quoi entre les deux
- Les OUs se définissent en fonction de la situation géographique, des départements existants ou bien du type de ressources...

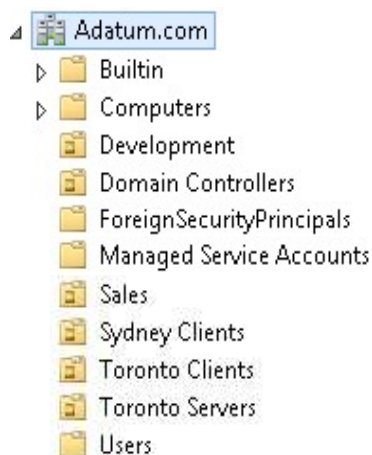

AD DS Permissions

Advanced Security Settings for IT

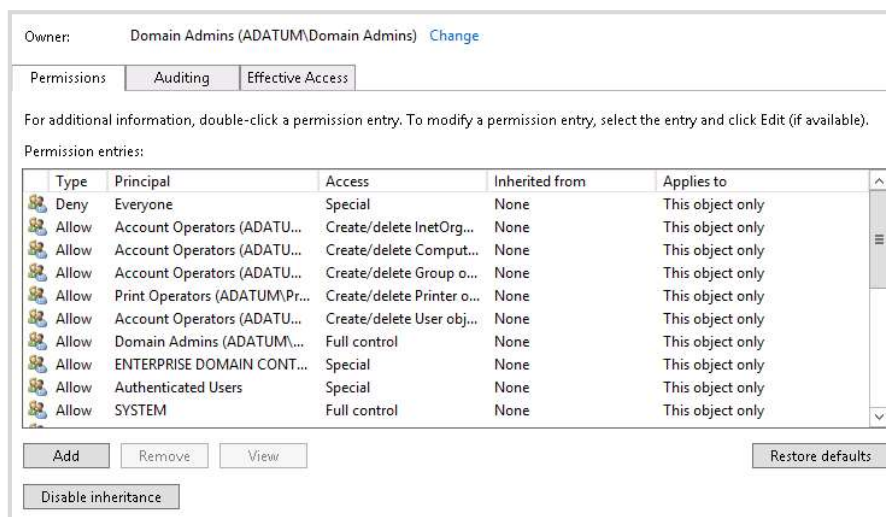

Effective AD DS Permissions

Vue d'ensemble des permissions attribuées aux utilisateurs ou aux groupes

Une bonne pratique est d'attribuer une permission à un groupe et non directement aux utilisateurs

En cas de conflit :

- Un « Deny » écrase un « Allow »
- Une permission explicite écrase une permission héritée
 - Un « Allow » explicite écrase un « Deny » hérité

Pour visualiser les permissions effectives :

- L'onglet « Effective Access »
- Commande **dsaccs**

Demonstration: Delegating Administrative Permissions

In this demonstration, you will see how to:

- Create an OU
- Move objects into an OU
- Delegate a standard task
- Delegate a custom task
- View AD DS permissions resulting from these delegations



Lab: Managing Active Directory Domain Services Objects

- Exercise 1: Delegating Administration for a Branch Office
- Exercise 2: Creating and Configuring User Accounts in AD DS
- Exercise 3: Managing Computer Objects in AD DS

Logon Information

Virtual machines	20410D-LON-DC1 20410D-LON-CL1
User name	Adatum\Administrator
Password	Pa\$\$w0rd

Estimated Time: 70 minutes

Lab Scenario

You have been working for A. Datum Corporation as a desktop support specialist and have visited desktop computers to troubleshoot app and network problems. You have recently accepted a promotion to the server support team. One of your first assignments is to configure the infrastructure service for a new branch office.

To begin deployment of the new branch office, you are preparing AD DS objects. As part of this preparation, you need to create an OU for the branch office and delegate permission to manage it. Then you need to create users and groups for the new branch office. Finally, you need to reset the secure channel for a computer account that has lost connectivity to the domain in the branch office.

Lab Review

- What are the options for modifying the attributes of new and existing users?
- What types of objects can be members of global groups?
- What types of objects can be members of domain-local groups?
- Which two credentials are necessary for any computer to join a domain?

Module Review and Takeaways

- Review Questions
- Best Practices
- Tools



