


# Command line arguments

prog 12 ABC abcdefg

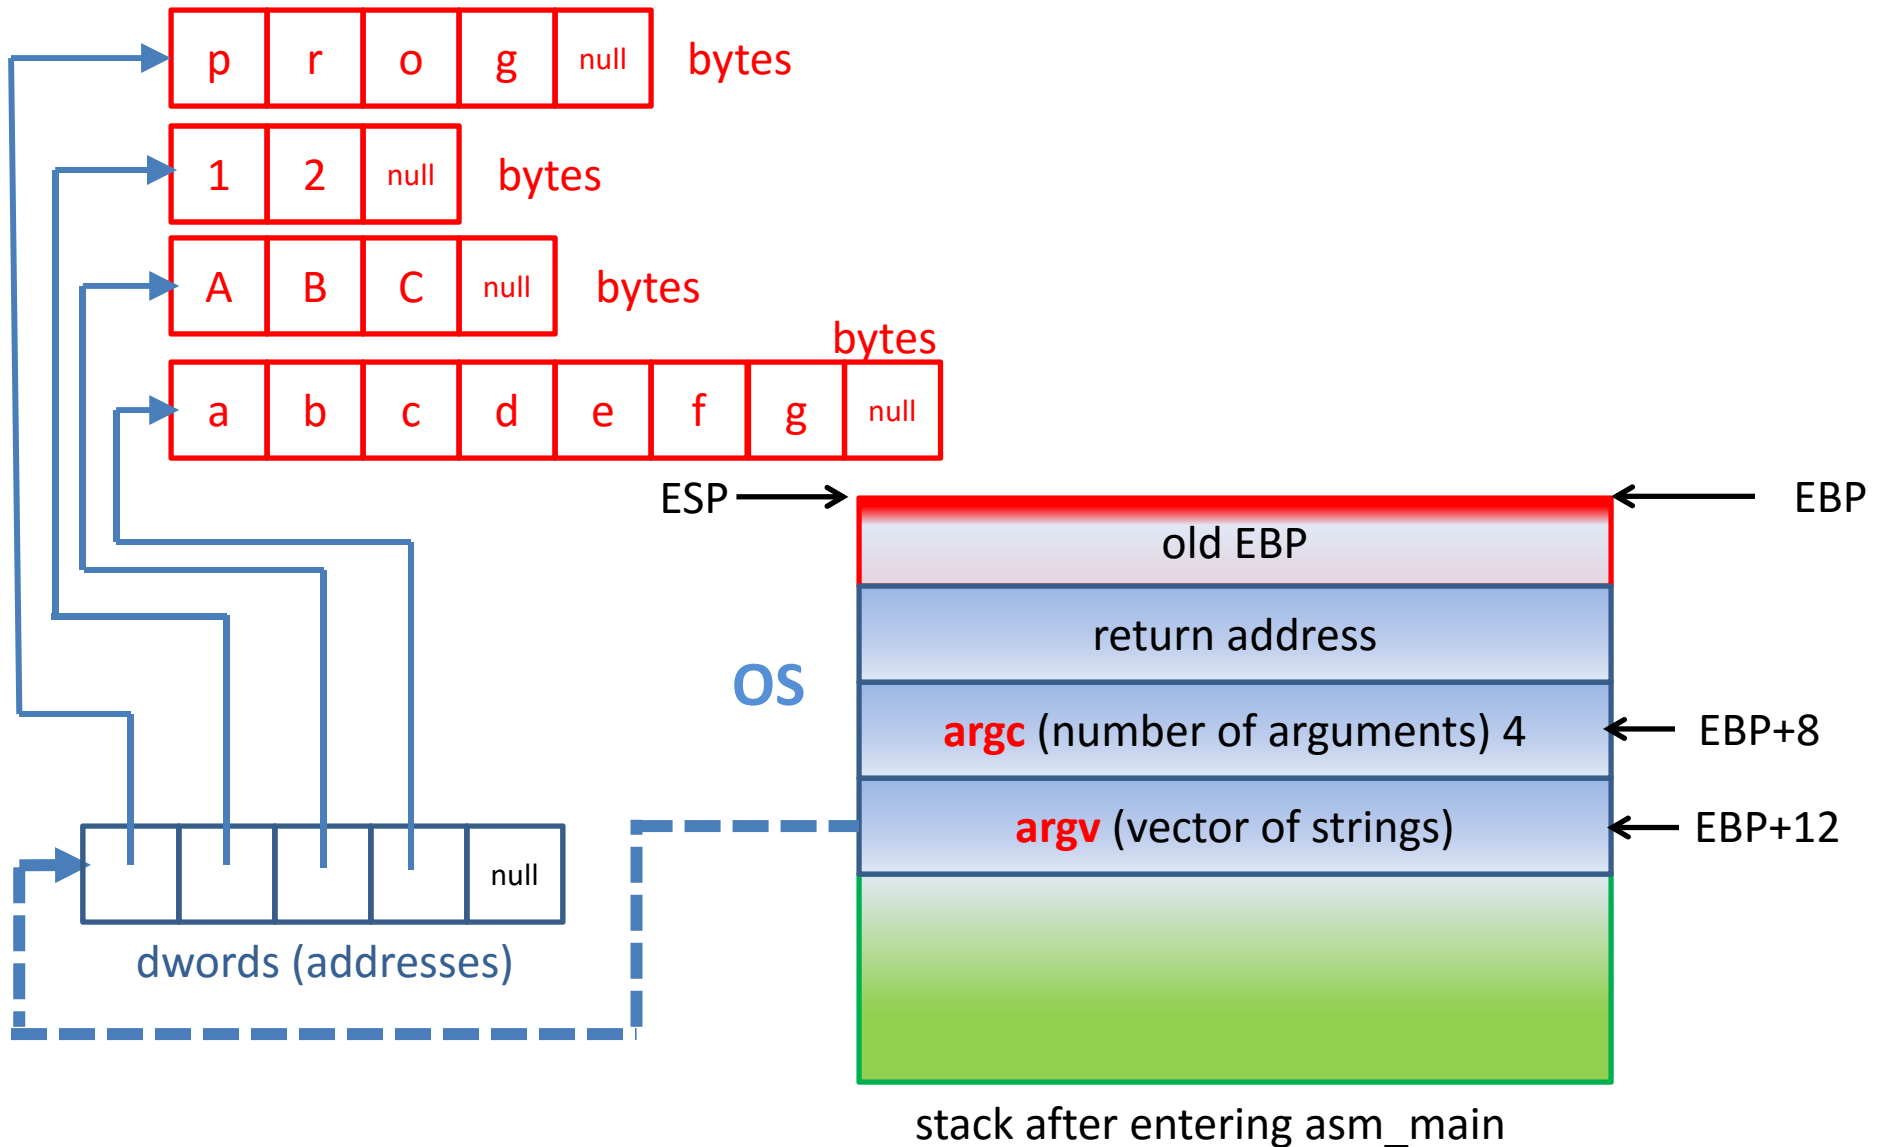

[EBP+8] is the number of command line arguments

[EBP+12] is the address of argv vector

MOV EBX, dword [EBP+12]    EBX points to the vector

[EBX] address of the first string in the vector (**prog**)

[EBX+4] address of the second string in the vector (**12**)

[EBX+8] address of the third string in the vector (**ABC**)

[EBX+12] address of the fourth string in the vector (**abcdefg**)

....

....