

Operating Systems: File System Interface, Implementation, and System Internals – Part II

Neerja Mhaskar

Department of Computing and Software, McMaster University, Canada

Acknowledgements: Material based on the textbook Operating Systems Concepts (Chapter 13, 14 and 15)

Allocation Methods - Contiguous

- An allocation method refers to how disk blocks are allocated to files.
- Three allocation methods are in practice:
 - **Contiguous allocation**
 - **Linked Allocation**
 - **Indexed Allocation**


Contiguous Allocation

Each file occupies set of contiguous blocks

- Directory entry contains only starting location (block #) and length (number of blocks).
- Supports random access.

Problems:

- knowing file size
- Finding contiguous space for file,
- External Fragmentation

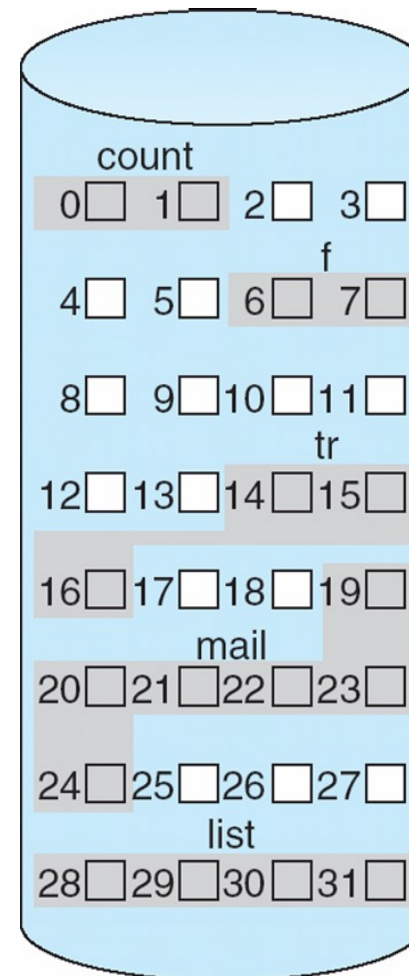


directory

file	start	length
count	0	2
tr	14	3
mail	19	6
list	28	4
f	6	2

Contiguous Allocation Question -1

Problem: How many disk I/O operations are required to add a block at the end of the file `list`? You may assume FCB and other required data structures are in memory.

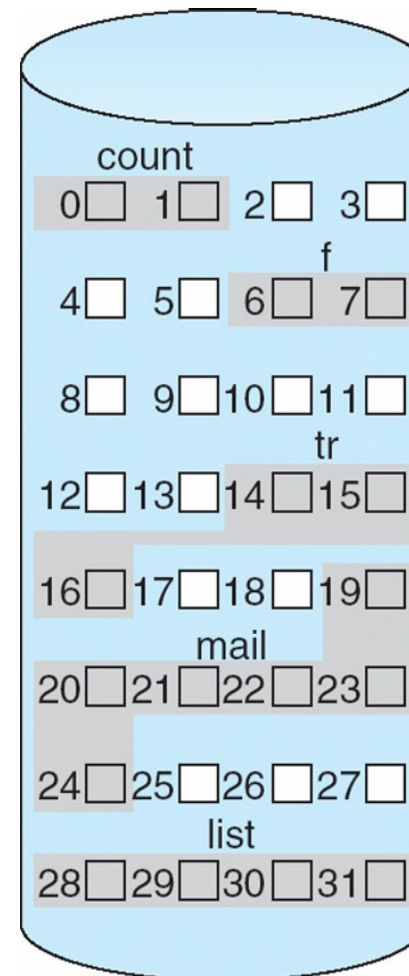

directory

file	start	length
count	0	2
tr	14	3
mail	19	6
list	28	4
f	6	2

Contiguous Allocation


Problem: How many disk I/O operations are required to add a block at the end of the file `list`? You may assume FCB and other required data structures are in memory.

Answer:

- 4 block read operations to read the entire file.
- 4 block write operations to write the entire file
- 1 block write operation to add to the end of the file.
- Total of 9 disk I/O operations.

Contiguous Allocation Question 2

- **Problem**: Consider the file `mail`. If we are currently at logical block 1 (then the last block accessed was block# 20). We want to access logical block 3. How many physical blocks must be read from the disk to access it?

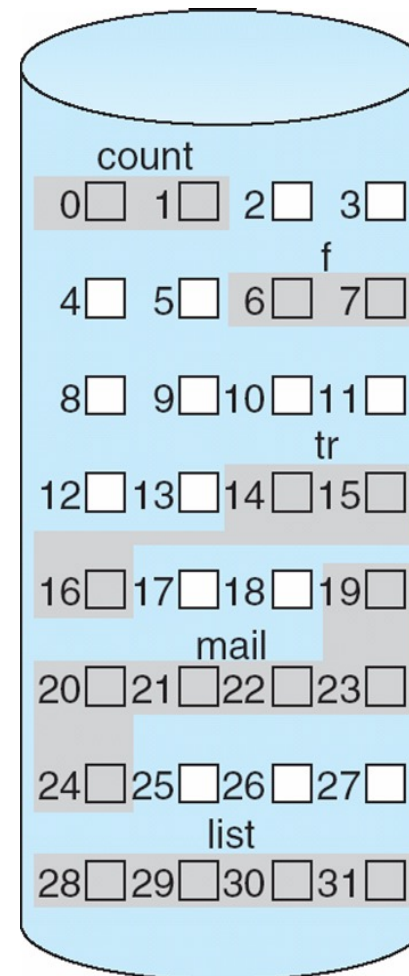

directory

file	start	length
count	0	2
tr	14	3
mail	19	6
list	28	4
f	6	2

Note: Logical blocks are labelled starting from 0.


Extent-Based Systems

- Many newer file systems (i.e., Veritas File System) use a *modified contiguous allocation scheme*
- Extent-based file systems allocate disk blocks in extents
- An **extent** is a contiguous block of disks
 - Extents are allocated for file allocation
 - A file consists of one or more extents

Allocation Methods - Linked

Each file is a linked list of disk blocks, and blocks may be scattered anywhere on the disk

- Each block contains pointer to next block
- Directory contains the starting location (block#) and the ending location (block#)

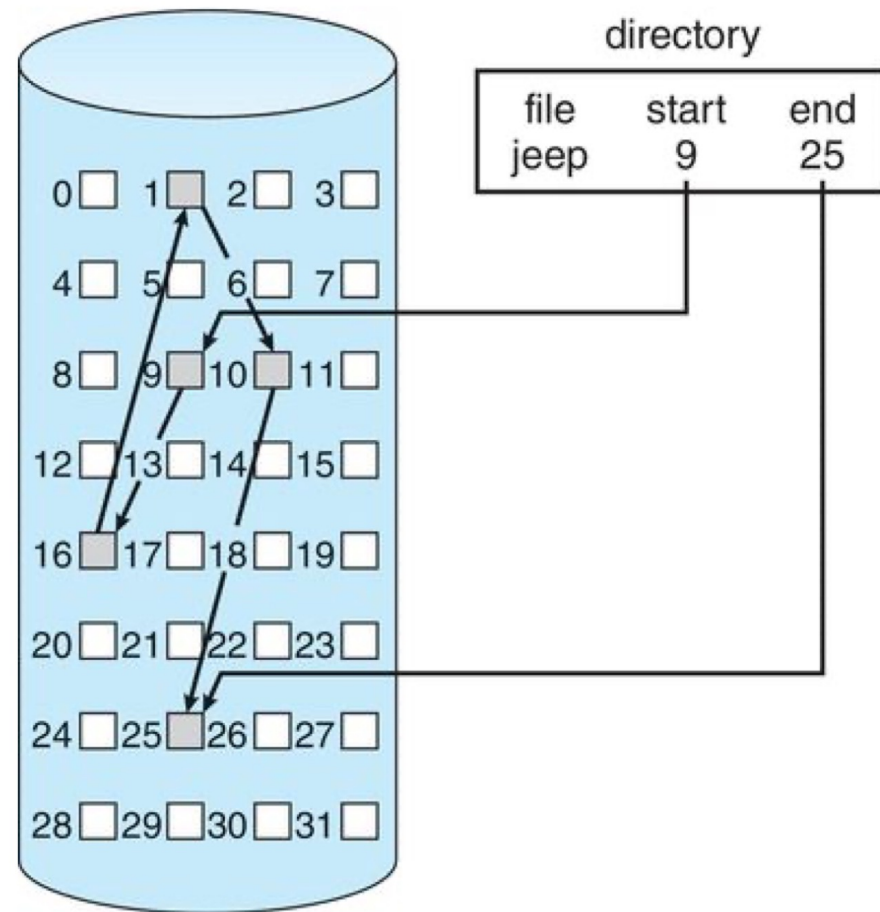


Allocation Methods – Linked Cont...

- No external fragmentation
- Space wasted in storing pointers
 - Alleviate this problem by clustering blocks into groups
 - However, this increases internal fragmentation
- Reliability can be a problem (if pointer is lost or damaged)
 - Use doubly linked lists – however this increases overhead
- Locating a block can take many I/Os
- Accessing a block is slow as you need to traverse all the previous blocks.

Linked Allocation Question -1

Problem: How many disk I/O operations are required to add a block at the end of the file `jeep`? You may assume FCB and other required data structures are in memory.

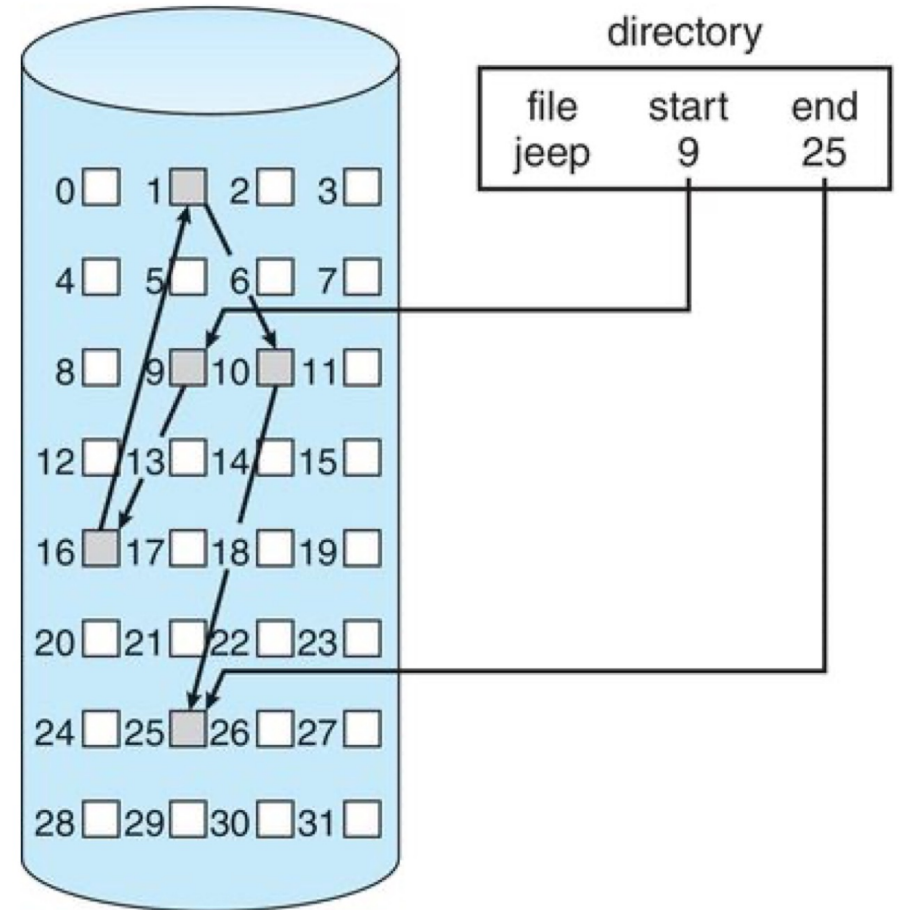

Linked Allocation Question -1


Problem: How many disk I/O operations are required to add a block at the end of the file `jeep`? You may assume FCB and other required data structures are in memory.

- 1 block read operation to read the file's last block (last block# given in the directory structure).
- 1 block write to update the pointer in the (previous) last block (block #25) to point to the newly added block at the end.
- 1 block write operation to write the new block.
- Total of 3 disk I/O operations.

Contiguous Allocation Question 2

- **Problem**: Consider the file `jeep`. If we are currently at logical block 1 (then the last block accessed was block# 16). We want to access logical block 3. How many physical blocks must be read from the disk to access/read it?

Answer: 2

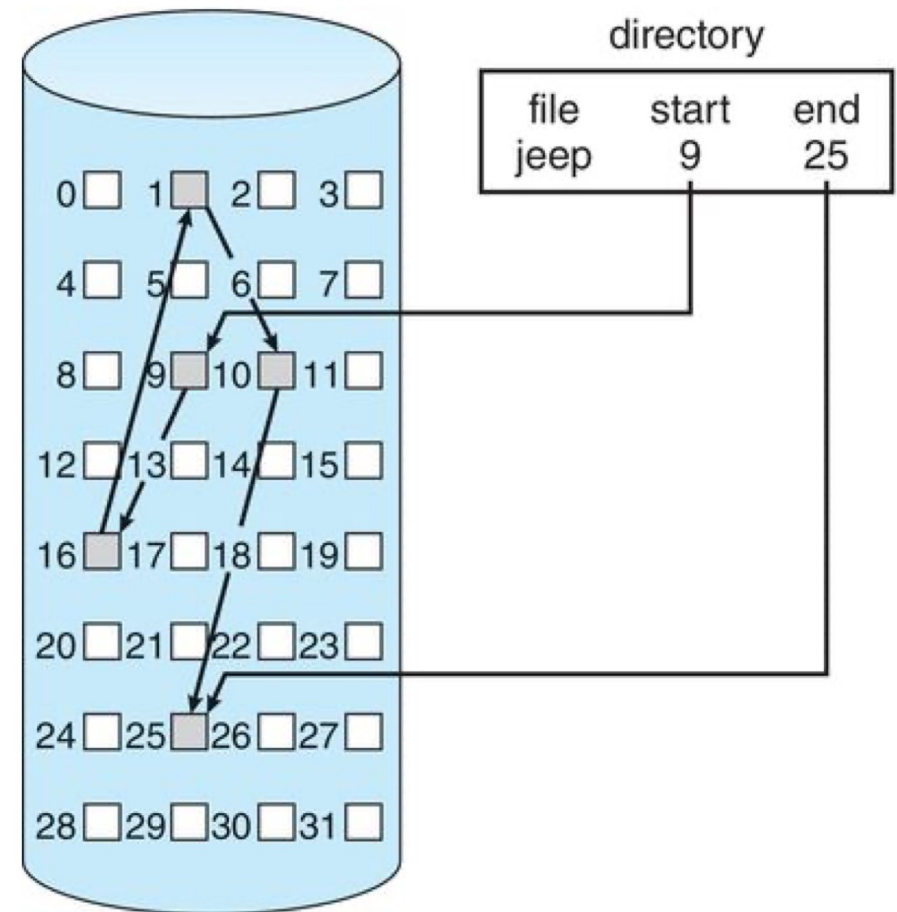


Note: Logical blocks are labelled starting from 0.

Variation of Linked allocation – FAT


- **FAT (File Allocation Table)** variation of Linked Allocation
 - Beginning of volume has this table, indexed by block number
 - Directory entry contains **the block# of the first block of the file**
 - The table entry indexed by that block# contains the block# of the next block in the file
 - Chain continues until it reaches the last block
 - Its table entry has a special end-of-file value
 - An unused block is indicated by a table value of 0
- **FAT table must be cached.**

File-Allocation Table

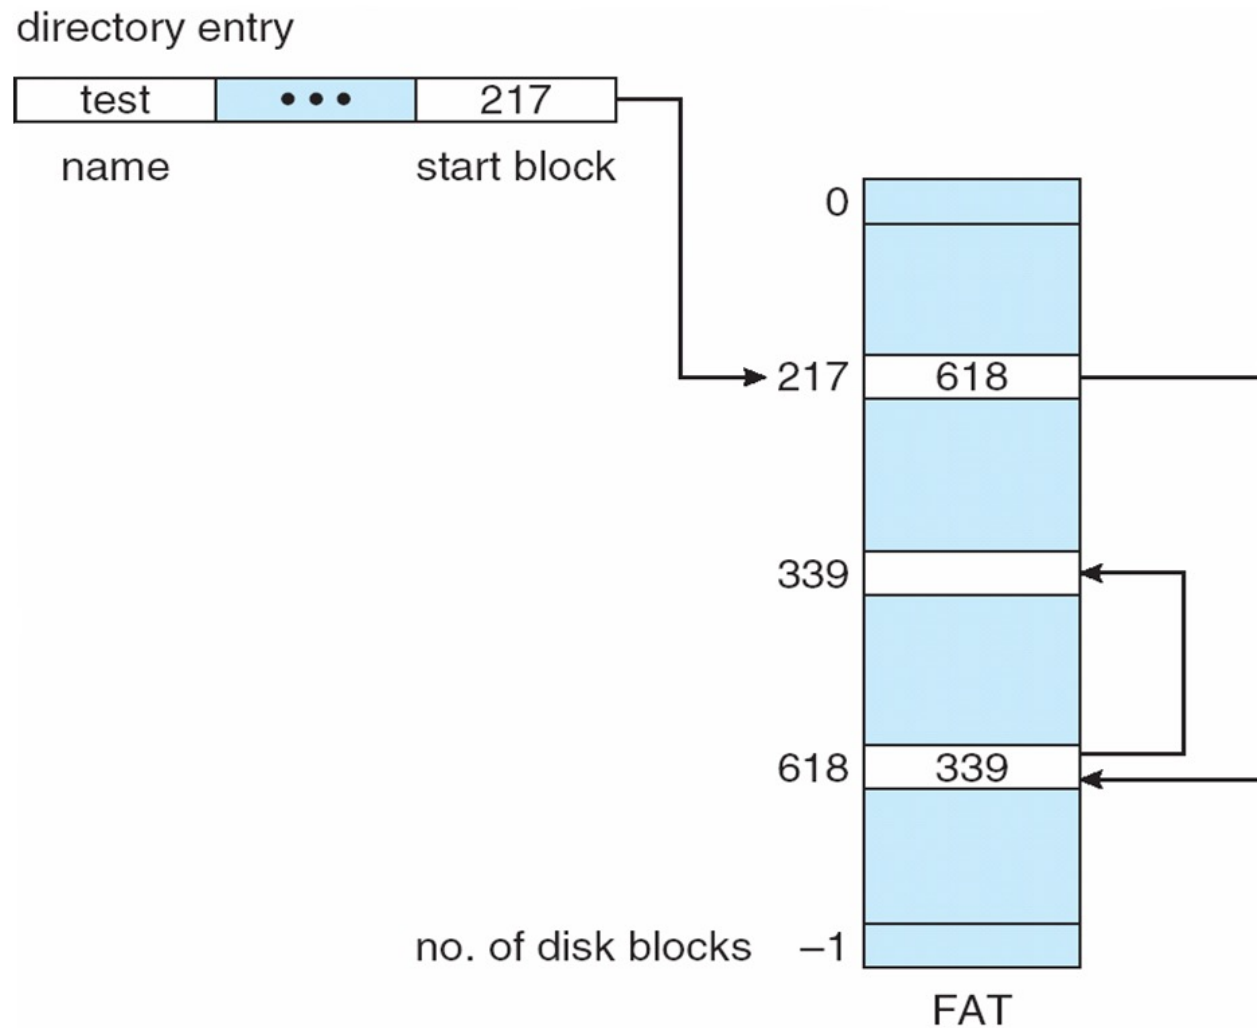


Allocation Methods – Indexed Allocation

- Each file has its own **index block(s)** of pointers to its data blocks
- i^{th} entry in the index block points to the i^{th} block of the file.
- Directory contains the address of the index block
- Similar to paging!
- Logical view

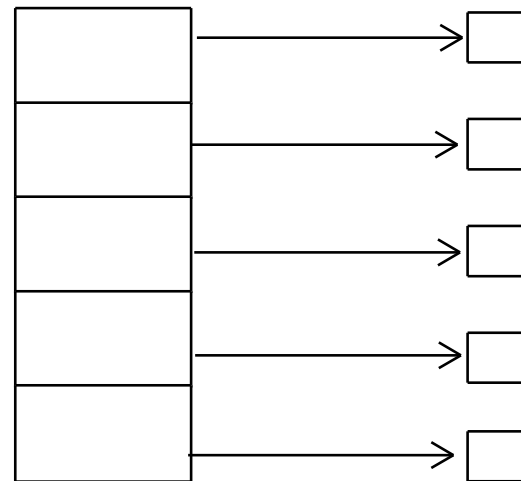

index table

Example of Indexed Allocation

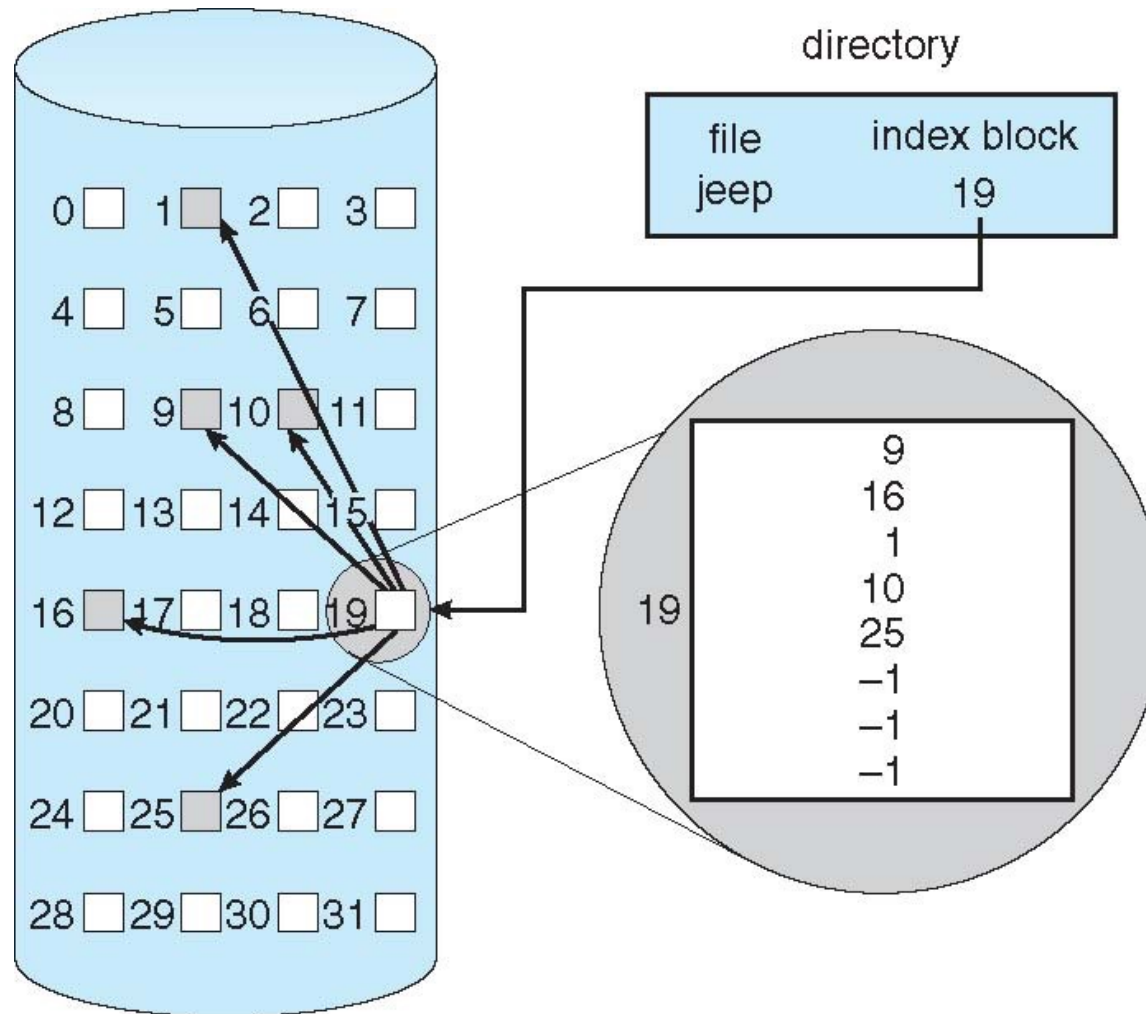

Indexed Allocation (Cont.)

- Supports Random Access, but overhead of index block
- No external fragmentation
- Number of entries in the index block depends on the size of the block and size of the pointer holding block addresses.
 - If block size = 512 bytes and pointer size = 4 bytes:
 - Total number of entries in the index block = $512/4 = 128$
 - If the index table requires just 1 block, what is the max. file size in this case?

Indexed Allocation Cont...

- What happens if file is large such that the index block runs out of space to hold data block addresses?
- Various scheme to deal with this:
 - **Linked Scheme**
 - **Multilevel Scheme - Multilevel index**
 - **Combined Scheme**


Multilevel Scheme - Multilevel index

- **Two level Scheme** – First-level index block points to a set of second-level index blocks, which in turn point to the file's data blocks.
- This approach could be continued to a third, fourth or n-th level, depending on the desired maximum file size.

Indexed Allocation – Multi-Level Scheme


Example: Consider a two-level index scheme. Given block size = 4KB = 2^{12} bytes and pointer size = 4 bytes. What is the maximum file size in the system?

- No. of pointers in one block =
 $2^{12}/4 = 2^{12}/2^2 = 2^{10}$
- First level index block points to 2^{10} second level index blocks.
- Each second level index blocks point to 2^{10} data blocks
- The maximum file size in the system = $2^{10} * 2^{10} * 2^{12} = 2^{32} = 4\text{GB}$

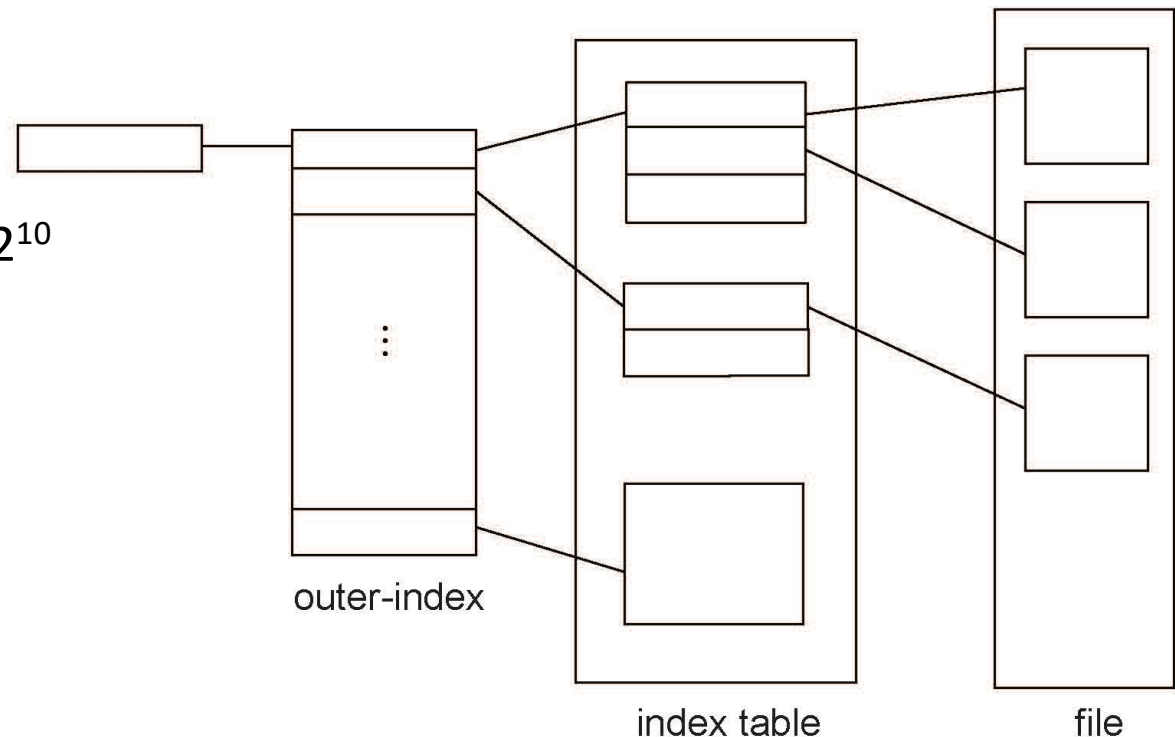

Combined Scheme: UNIX UFS

- Uses direct blocks (addresses of the data blocks) and indirect blocks (addresses of the index blocks).

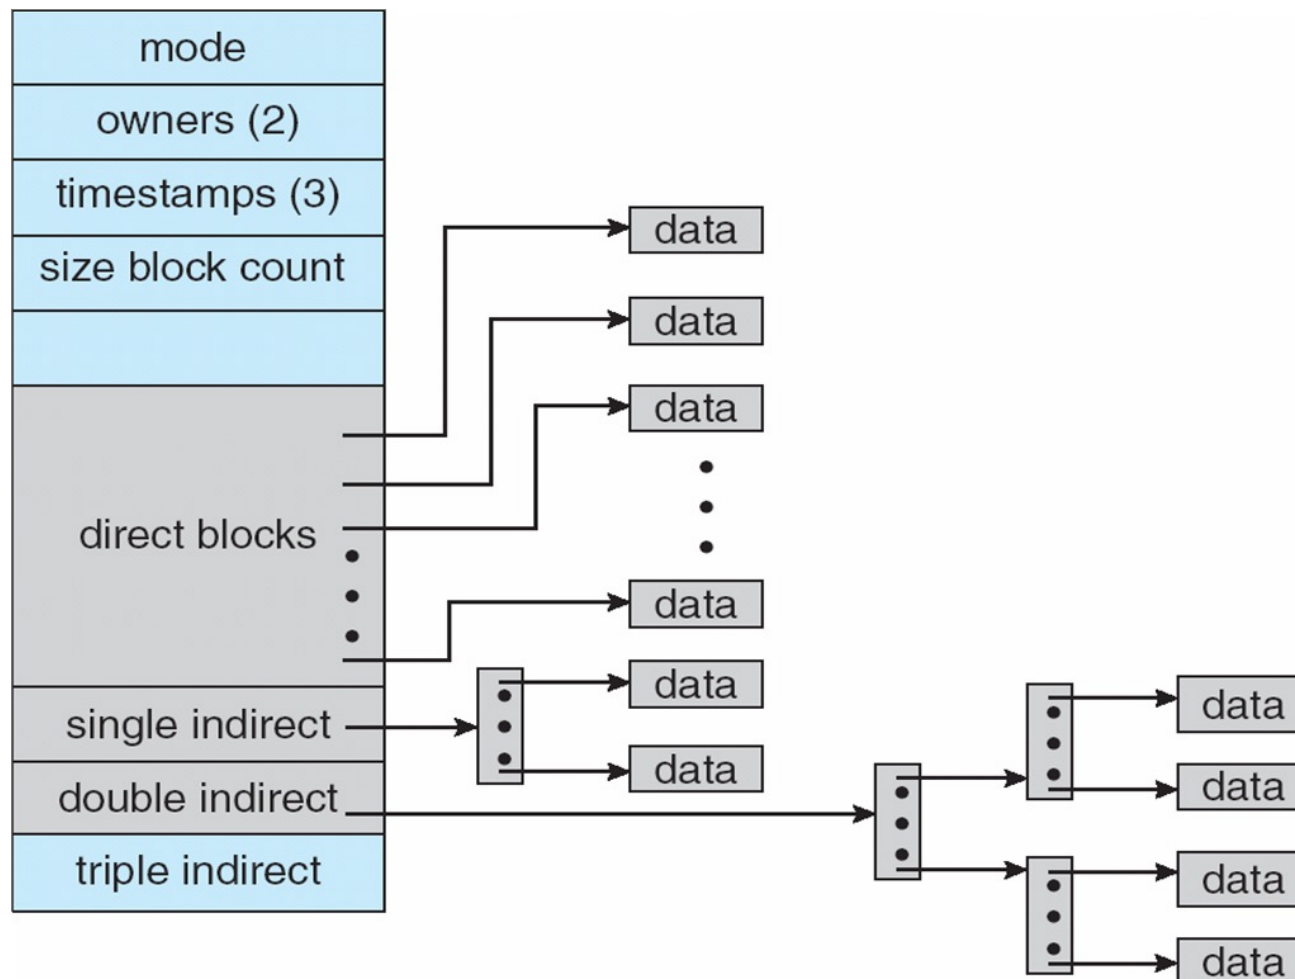

Performance

- Contiguous **great** for sequential and random for relatively small files. However, suffers from external fragmentation.
- Linked **good** for sequential access for large files, but inefficient for random access
- Indexed allocation is more complex, but is good for both sequential and random access, for large files.

Free-Space Management

- File system maintains **free-space list** to track available blocks/clusters
- Many implementations of free-space lists exists
 - **Bit vector** – maintains a bit vector of size n to store information of n blocks.
 - **Linked List** – maintains a linked list of free blocks.
 - Space is frequently contiguously used and freed, with contiguous-allocation, extents, or clustering.
 - Each entry in the free-space list then consists of a disk address and a count.