


a confidence reads one coordinate of P; leverage reads the whole P → Q move


example position: 3SZK chain C F44 (a hotspot) · bars are the real 20-simplex

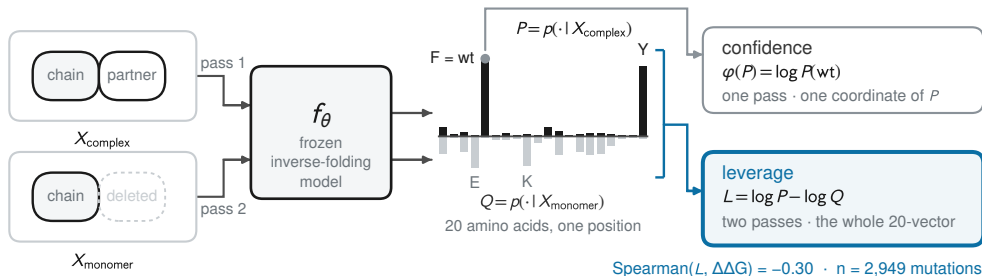

diffusion $\varepsilon_\theta(x|c)$ — $\varepsilon_\theta(x|\emptyset)$ classifier-free guidance
 this work $\log p(\cdot | X_{\text{complex}})$ — $\log p(\cdot | X_{\text{monomer}})$ is this same difference


b confidence does not pin leverage down

13,401 positions · 343 complexes · 327 hotspots

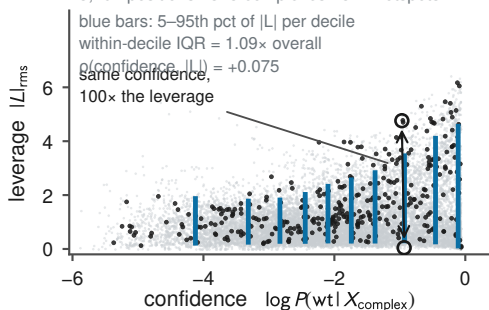


c and neither does all of P

GBM / random forest, complex-held-out

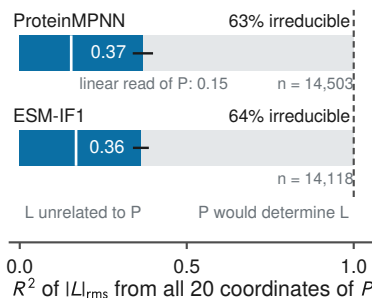

d steer with it, an independent model agrees

frozen ProteinMPNN, scored by ESM-IF1 · $n = 271$

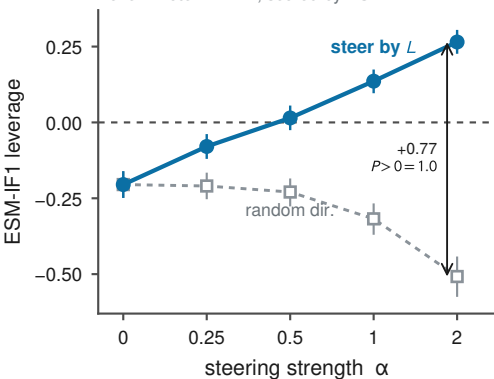

e

at no cost to native recovery

the L direction is native-consistent too

