

IES "JUAN DE GARAY"

VALENCIA

PROYECTO N8N

Taller N.-2

Wikipedia - Agente



WIKIPEDIA

Nombre: Christopher David Ayala Jurado

Curso: 1 ASIR

Fecha: 25/04/2026



What triggers this workflow?

A trigger is a step that starts your workflow

Search nodes...

-  **Trigger manually**
Runs the flow on clicking a button in n8n. Good for getting started quickly
-  **On app event**
Runs the flow when something happens in an app like Telegram, Notion or Airtable
-  **On a schedule**
Runs the flow every day, hour, or custom interval
-  **On webhook call**
Runs the flow on receiving an HTTP request
-  **On form submission**
Generate webforms in n8n and pass their responses to the workflow
-  **When executed by another workflow**
Runs the flow when called by the Execute Workflow node from a different workflow
-  **On chat message**
Runs the flow when a user sends a chat message. Use with AI nodes

Lo activamos copiamos el link y lo abrimos en otra pestaña

 When chat message received Test chat

Parameters Settings Docs

Chat URL

<https://vps-86c1c2aa.vps.ovh.net/webhook/60156aaf-2cbd-4c27-b517-bfb94fbffe02/chat>

Make Chat Publicly Available ☒

Mode
Hosted Chat

Chat will be live at the URL above once you activate this workflow. Live executions will show up in the 'executions' tab


Authentication
None

Initial Message(s)


Impresión con sangría

```
"code":404,"message":"The requested webhook \"GET 60156aaf-2cbd-4c27-b517-bfb94fbffe02/chat\" does not exist. Note that unlike test URL calls, production URL calls aren't shown on the canvas (i.e. they are not visible in the 'executions' tab)\""
```


Ahora vamos a activarlo para que pueda llamar a la URL

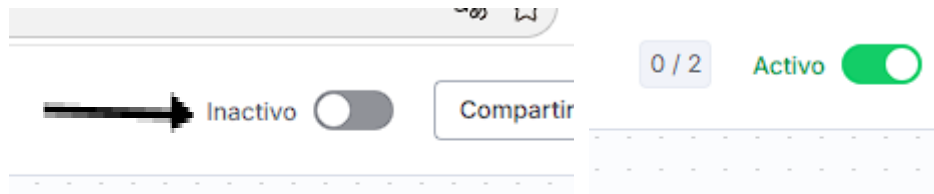

Recargamos la pagina y nos aparece

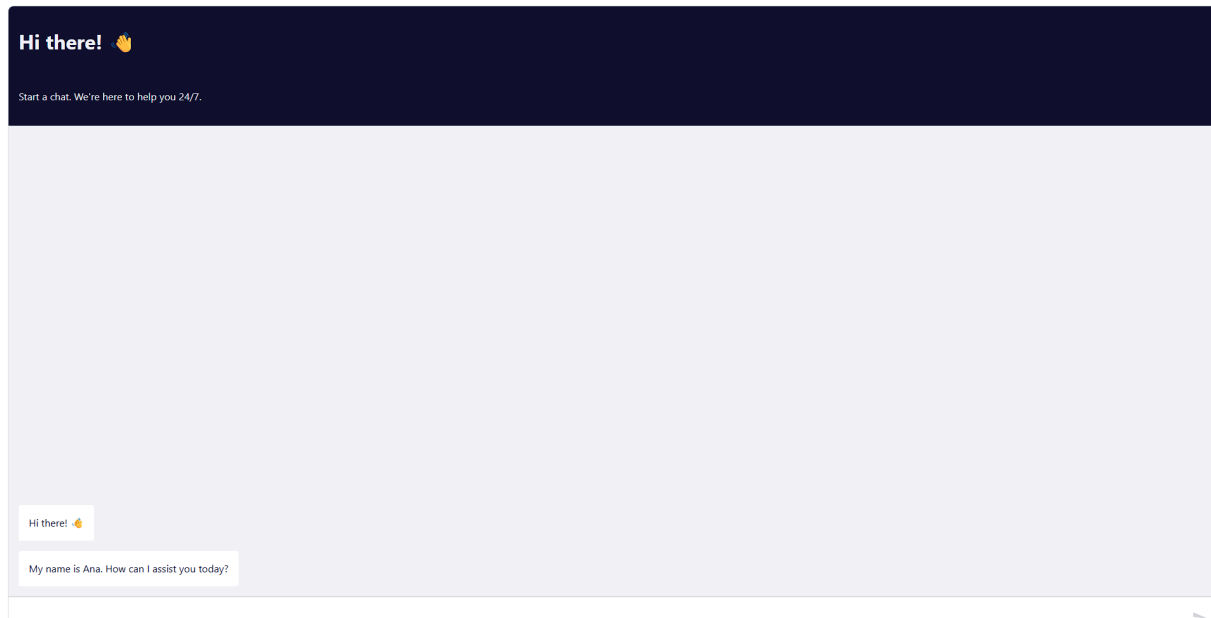

Escribo un hola mundo en el chat para ver que sucede

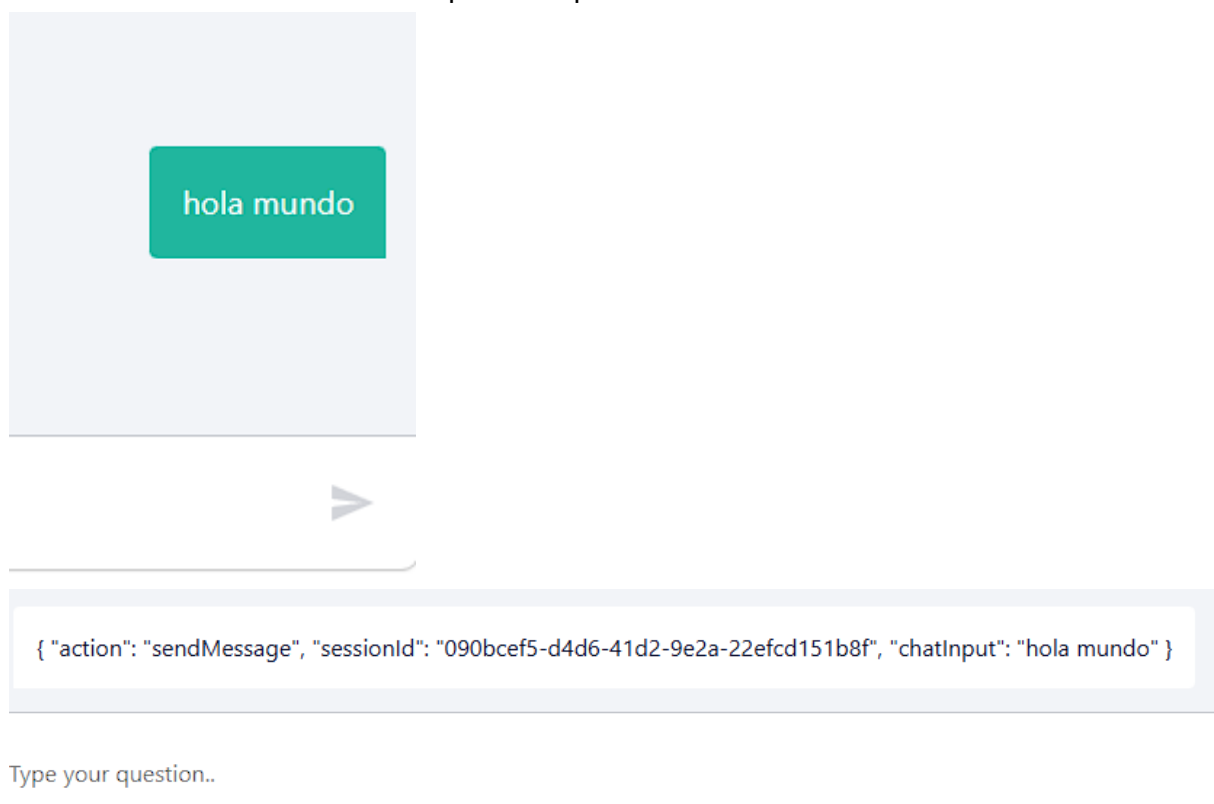

⚡

1 punto

+

Cuando se recibió el mensaje del chat

Esconder chat

Chat

Sesión: fc08b...

Tronc...

Ejecución clara

Cuando se recibió el mensaje del chat

Éxito en 1 ms

Hola mundo

{ "sessionId": "fc08b3ca02d74ef8b6b713796cc9d16a", "acción": "EnviarMensaje", "chatinput": "Hola mundo" }

Éxito en 175 ms

Cuando se recibió ...

PRODUCCIÓN

sessionId	Acción	chatinput
fc08b3ca02d74ef8b6b713796cc9d16a	sendMessage	Hola mundo

Con visual studio Code edite el index.html para agregar el link

Chat URL

https://vps-86c1c2aa.vps.ovh.net/
webhook/60156aaf-2cbd-4c27-b
517-bfb94fbffe02/chat

```
createChat({  
  webhookUrl:  
    'https://vps-86c1c2aa.vps.ovh.net/webhook/60156aaf-2cbd-4c27-b517-bfb94fbffe02/chat',  
  initialMessages: [  
    {  
      text: 'Hola mundo',  
      type: 'text',  
      timestamp: new Date().getTime()  
    }  
  ]  
})
```

Wiki-bot

WikiBot

Empieza una conversación. Estamos aquí para ayudarte
24/7.

Hola! 🤖

Me llamo Ana, soy un asistente
de Wikipedia

Escribe tu pregunta..



Nodo 2 AI Agent (Agente principal)

← Nodos de IA

Selecciona un nodo de IA para añadir a tu flujo de trabajo

🔍 Nodos de búsqueda...



Plantillas de IA

Recomendado

Mira qué es posible y empieza cinco veces más rápido →



Agente de IA

Genera un plan de acción y lo ejecuta. Puedes usar herramientas externas.

TRADA

Esquema Tabla JSON

🔊 Cuando se recibió el mensaje del chat ⚡ 1 punto

T sessionId fc08b3ca02d74ef8b6b713796cc9d16a

T Acción sendMessage

T chatInput Hola mundo

Variables y contexto

🤖 Agente de IA

Paso de ejecución

Parámetros Escenarios Docs


Consejo: Hazte una idea de los agentes con nuestro tutorial rápido o mira un ejemplo de cómo funciona este nodo



Fuente del prompt (mensaje de usuario)
Connected Chat Trigger Node

Prompt (Mensaje de usuario)
fx {{ \$json.chatInput }}

Hola mundo

Requiere un formato de salida específico

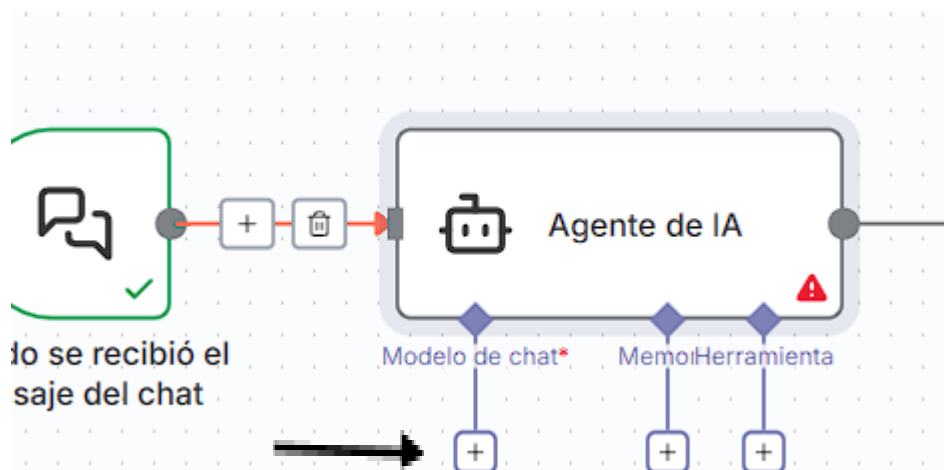

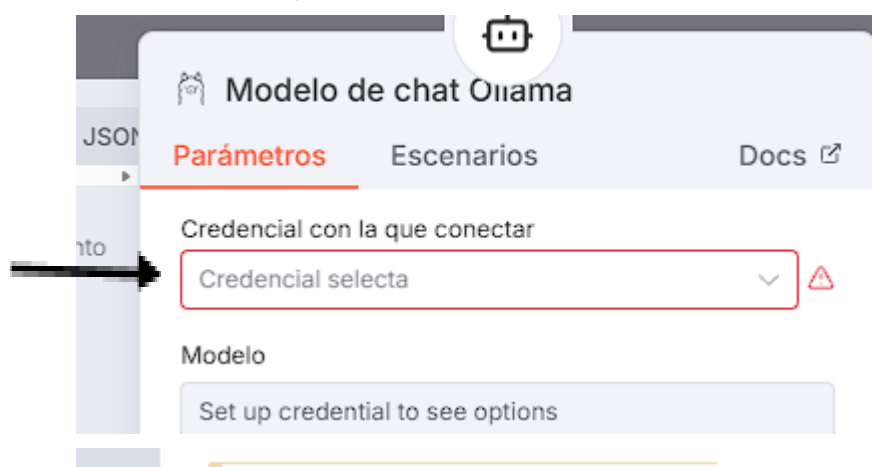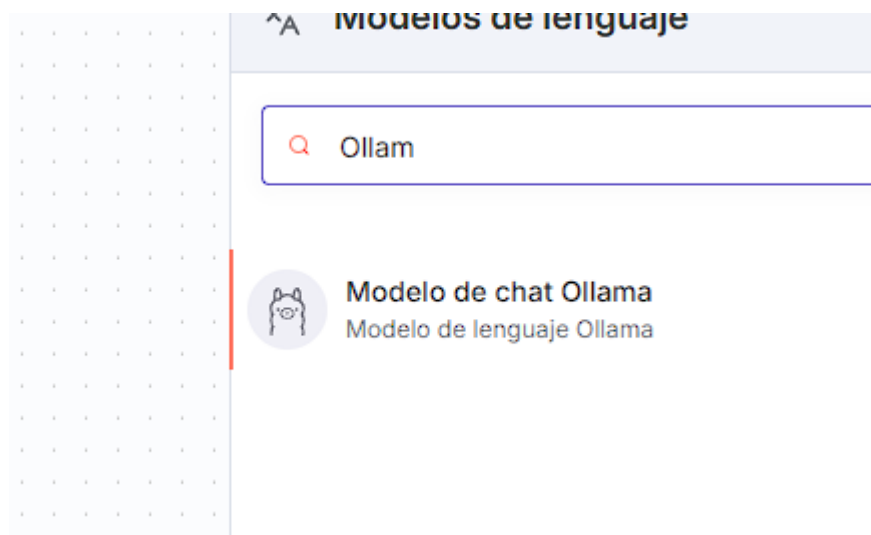


Base URL *

http://ollama:11434

Clave API

y guardamos

Ahora enlazaremos a una memoria simple

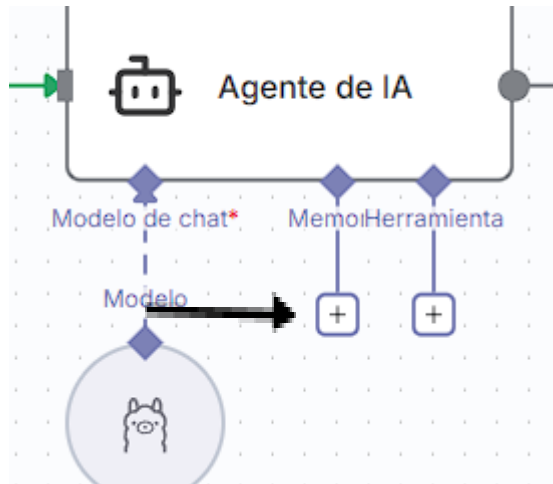

La memoria permite a un modelo de IA recordar y referenciar interacciones pasadas con él

Para principiantes

Memoria simple

Almacena en la memoria n8n, así que no se requiere credenciales

Ahora le digo que guarda los 10 últimos mensajes

```
fx {{ $json.sessionId }}
```

fc08b3ca02d74ef8b6b713796cc9d16a

Longitud de la ventana de contexto

10


Cuántas interacciones pasadas recibe el modelo como contexto


Comprobación exitosa

The screenshot displays a workflow builder interface. At the top, a green line represents the workflow. It starts with a trigger event labeled "Cuando se recibió el mensaje del chat" (When the chat message was received), which has a "1 punto" (1 point) weight. This is followed by an "Agente de IA" (AI Agent) node. Below the agent, there are two sub-nodes: "Modelo de chat*" (Chat Model*) with a "1 punto" weight, and "Memoria simple" (Simple Memory) with a "2 elementos en total" (2 elements in total) weight. The "Memoria simple" node is further detailed with a "Modelo de chat Ollama" (Ollama Chat Model) and a "Memoria simple" (Simple Memory) component. The workflow ends with a green checkmark, indicating success. Below the workflow, there is a chat window showing a session with the ID "fc08b3ca02d74ef8b6b713796cc9d16a". The chat input is "Hola como estas" (Hello how are you), and the output is "¡Hola! Estoy bien, gracias. ¿Y tú? ¿En qué puedo ayudarte hoy?" (Hello! I am well, thank you. And you? How can I help you today?). The chat window also shows a "Troncos" (Branches) section with "Ejecución clara" (Clear execution) and "Memoria simple" (Simple Memory) components. The "Memoria simple" section shows "Éxito en los 0s" (Success in 0s) and "VariablesMemoriaCarga" (MemoryLoad variables).


Ahora añadimos donde va a consultar que sera en la Wikipedia

The screenshot displays a workflow builder interface. At the top, a green line represents the workflow. It starts with a trigger event labeled "Cuando se recibió el mensaje del chat" (When the chat message was received), which has a "1 punto" (1 point) weight. This is followed by an "Agente de IA" (AI Agent) node. Below the agent, there are two sub-nodes: "Modelo de chat*" (Chat Model*) with a "1 punto" weight, and "Memoria simple" (Simple Memory) with a "2 elementos en total" (2 elements in total) weight. The "Memoria simple" node is further detailed with a "Modelo de chat Ollama" (Ollama Chat Model) and a "Memoria simple" (Simple Memory) component. The workflow ends with a green checkmark, indicating success. Below the workflow, there is a search bar labeled "Wiki" with a magnifying glass icon. Below the search bar, there is a result card for "Wikipedia" with the text "Buscar en Wikipedia" (Search on Wikipedia).




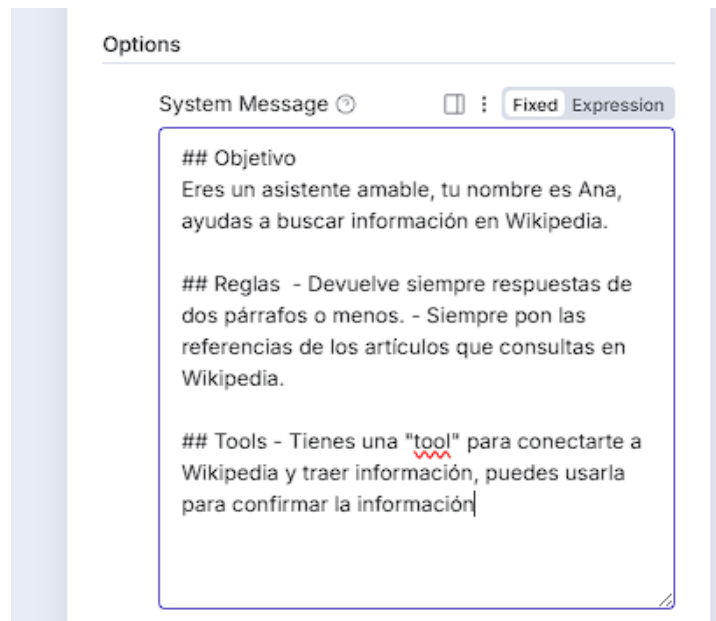

Comprobamos pidiendo que nos diga su nombre

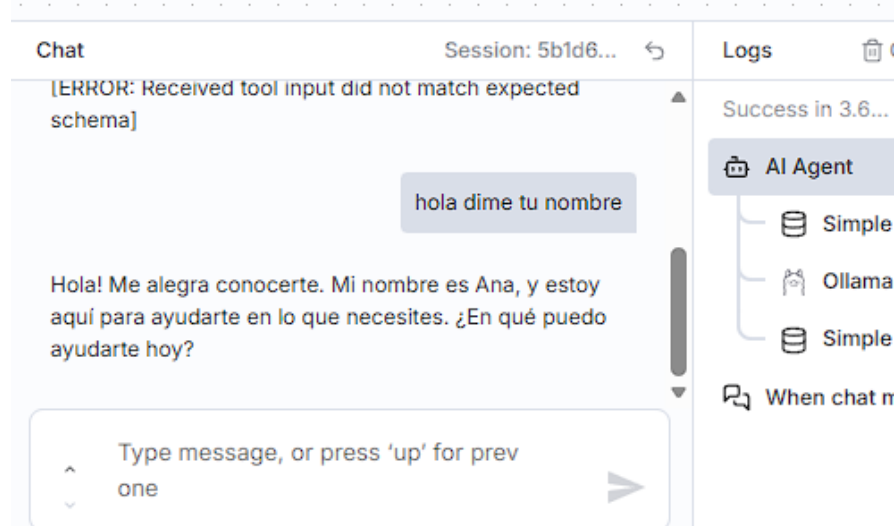

Valo ahora voy a usar openrouter.ai

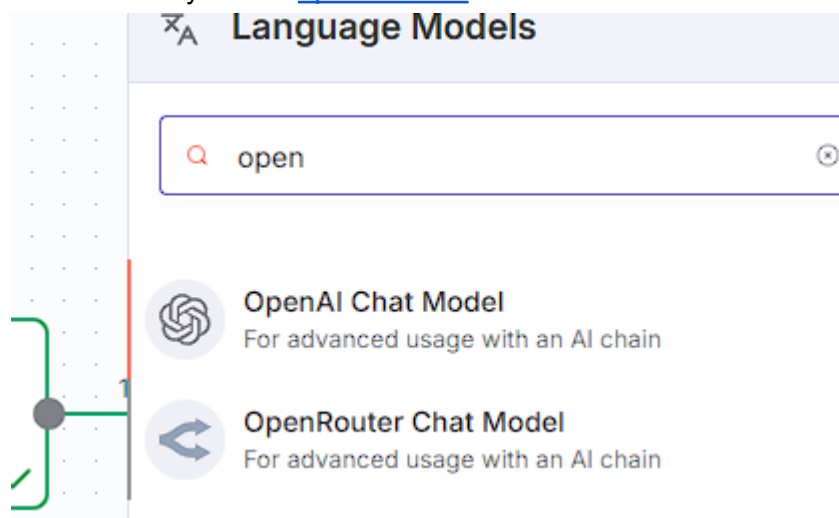

Creo un API key en openrouter.ai

+ New Key

Copio la API key y la guardo

Need help filling out these fields? [Open docs](#)

API Key *

Fixed Expression

.....

Allowed HTTP Request Domains

All

Escojo el modelo de ia

Credential to connect with

OpenRouter account 4

Model

Fixed Expression

nvidia/nemotron-nano-9b-v2:free

Options

No properties

Add Option

Listo puedes empezar a hacer uso del chat

Ahora modificar un poco la página

Options

Custom Chat Styling

Fixed Expression

```
1_v :root {
2   /* Colors */
3   --chat--color-primary: #4a90e2;
4   --chat--color-primary-shade-50: #db4061;
5   --chat--color-primary-shade-100: #cf3c5c;
6   --chat--color-secondary: #a7d8f0;
7   --chat--color-secondary-shade-50: #1ca08a;
8   --chat--color-white: #ffffff;
9   --chat--color-light: #f7faff;
10  --chat--color-light-shade-50: #e6e9f1;
11  --chat--color-light-shade-100: #c2c5cc;
12  --chat--color-medium: #d2d4d9;
13  --chat--color-dark: #2a3a4b;
14  --chat--color-disabled: #d2d4d9;
15  --chat--color-typing: #404040;
```

