

Computer Vision

Multi-label Image Classification

Group 25

Riajul Islam, Andreas Calonius Kreth, Christine Midgaard

Abstract—Multi-label image classification presents significant challenges due to sparse labeling, label imbalance, and the complexity inherent in real-world image datasets. This paper explores two state-of-the-art methodologies addressing these issues: Query2Label (Q2L), which utilizes transformer architectures and asymmetric focal loss to effectively manage label imbalance and localize discriminative features, and Multi-label Learning from Single Positive Labels (MLSPL), which adapts loss functions and employs novel regularization techniques for scenarios with extremely limited supervision. Both models are evaluated on the MS-COCO 2014 dataset and results are reported in mean average precision (mAP). Results indicate that Q2L achieves state of the art performance with its two-stage architecture and MLSPL proves robust in a weakly supervised setting, effectively tackling the challenge of sparse annotations. Results from our experiments show that the methods investigated in this project obtain the expected results on the COCO dataset. However, training with ViT architecture backbones on Query2Label has shown to be infeasible due to limited memory in our experimental environment, and thus require a setup with increased computational power. Further improvements in multi-label classification models seem likely due to the potential in these architectures and training strategies.

Index Terms—Multi-label learning, deep learning, computer vision, multi-label classification, deep learning for MLC.

I. INTRODUCTION

Multi-label classification is a supervised classification task in which each instance can be attached with one or more labels. This difference with respect to single-label or multi-class classification, in which each input is assigned a single class, is what fundamentally changes the nature of the problem. In computer vision, images usually have more than one objects or concepts, so multi-label classification is more appropriate for practical applications such as image tagging, autonomous driving and medical diagnosis [reference here]. However, multi-label classification is not without its hurdles. First, label correlation can lead to performance issues, as labels are not independent — e.g., beach and ocean tend to co-occur [reference here]. Second, the imbalance among classes is very common in the real-word datasets, some categories may occur frequently, while some others may rarely appear, resulting in the model biased toward most categories and ignoring the minority ones. Third, sparse labeling or partial supervision is commonly encountered [reference here]. Full annotation of every image with all the present labels is costly and not always feasible which eventually leads to training data where only a part of the labels are assigned to each image. In this work, we study solutions to two fundamental challenges of multi-label learning: (i) learning from sparsely annotated data,

namely training from a single positive label per image, and (ii) coping with label imbalance while maintaining the capability of feature localization. We consider two most recent [not most recent?] methods—Query2Label [1] that uses transformer-based architectures and attention to model the dependencies between the labels and MLSPL (Multi-label learning from Single Positive Labels) [2] that introduces the new training strategies and loss functions for weak supervision. We evaluate the proposed models’ performance on the MS-COCO 2014 dataset and discuss mAP performance and the capacity for solving the difficulties associated with multi-label image classification.

II. RELATED WORK

Multi-label learning has become increasingly sought after in the computer vision research community. There have been several work proposed to enhance the model performance in under label sparsity, class imbalance, and noisy annotations. This section considers related work on loss functions, positive-unlabeled learning, partially observed labels, and attention-based architectures.

a) Loss Functions: The loss function is a necessary ingredient of any deep learning model to direct how parameter should be optimized. Binary Cross-Entropy (BCE) is commonly used for multi-label classification as it is designed to deal with multiple binary targets per sample [2], [3], [4]. However, BCE treat any unobserved label as the negative, and therefore such approach may not always work as expected in the case where supervision is scarce. Various alternative loss functions have been proposed to deal with class imbalance, such as Focal Loss which falls back on easy negatives and Asymmetric Loss which treats negative as seriously as positive. To address the issue of label sparsity, Cole et al. introduced the Regularized Online Label Estimation (ROLE) loss. [2]. ROLE co-trains a classifier together with a label estimator to obtain soft labels for unseen categories. By using estimated label vectors and encouraging consistency with known positives and desired label counts, ROLE enables the model to recover the true labels that are not directly annotated during training.

b) PU learning: The concept of learning from partially labeled samples, in which only positive labels are observed while the others are unknown, is from PU learning. A complete collection of PU learning methods and the corresponding discussions can be found in the survey of Bekker and Davis [5], and the early investigation in text classification is reported

in [6]. The proposed approaches operate under the assumption that the missing labels may not be negative, a particularly relevant assumption to multi-label image problems. Transplanting such ideas to the case of vision tasks, theoretical works and practical models have been proposed that can learn from noisy weak-supervision datasets, as in the the MLSPL framework [2].

c) Partially Observed Labels: In practice, the great Majority of large Datasets are only partially annotated, as full Annotations are often too costly to obtain. Multiple approaches have been proposed to tackle learning from partially observed labels. Heuristic-based approaches [7], [8] minimize annotation effort but add noise and uncertainty. More principled methods, such as ROLE, attempt to predict missing labels in a structured manner. Durand et al. [3] also consider partial labels within the context of deep networks and investigate how the right choice of loss function and architecture can alleviate the problem of false negatives.

d) Attention and Transformer Architectures:

Transformer-based models have also made a recent foray into computer vision after being successful in natural language processing. The Vision Transformer (ViT) (Dosovitskiy et al.) [9], applies self-attention mechanism to patches of the image, allowing global context modeling with convolutions. Based on this, Query2Label [1] introduces a transformer decoder that attends to feature map grids using label queries. This makes the model to simultaneously learn the label dependencies and make predictions in a more structured manner. Through employing cross-attention between label embeddings and visual features, Query2Label circularly learns label correlations and their spatial distributions. These results showcase the capability of transformer model and structured learning techniques to enhance multi-label classification, especially when the real-world constraints of sparse labels and unbalanced datasets are considered.

III. BACKGROUND

This section describes relevant background theory related to the project and methods from MLSPL and Query2Label. Beginning with the definition of multi-label learning, followed by deep neural network architectures used to solve multi-label classification tasks, and, finally, loss functions as they can handle challenges of label imbalance tasks.

A. Multi-Label Learning

Contrary to binary or multi-class classification where each instance is associated with only one label, multi-label classification allows assigning multiple labels to a single input [1]. Given K categories, an input image $x \in \mathcal{X}$ is associated with a binary vector of labels $y = [y_1, \dots, y_K]$ from the label space $\mathcal{Y} = \{0, 1\}^K$, where $y_k = 1$ represents that k is present in x and $y_k = 0$ otherwise. The goal is to create a model that outputs the probability of the presence of a category $p = [p_1, \dots, p_K]$ [1], [2].

B. Convolutional Neural Networks (CNNs)

In the field of computer vision, Convolutional Neural Networks (CNNs) have been a dominant approach for image analysis tasks since their introduction [3]. CNNs are designed to recognize patterns in images by applying local filters through convolutional layers, preserving the two dimensional input of an image [4]. CNNs consist of three main types of layers: convolutional layers, pooling layers, and a Fully Connected (FC) layer [5]. Convolutional layers extract spatial features through learnable filters, pooling layers reduce dimensionality and summarise information, while the fully connected layer at the end interpret the features to perform the classification.

C. Transformer Architectures

Transformers, introduced by Vaswani et al. [6], are a type of neural network architecture initially developed to model long-range dependencies in sequence data. They achieve this using attention and self-attention mechanisms, which enables the model to have a long-term memory of inputs, and dynamically weigh the importance of each element in the input sequence. Originally, transformer-based models was mainly developed for natural language processing tasks, but the introduction of the Vision Transformer (ViT) by Dosovitskiy et al. [7], transformers have been widely used for computer vision tasks.

a) Architecture: The original transformer consists of an encoder-decoder structure. Both encoder and decoder are made of a stack of identical layers, where encoder layers contain a multi-head self-attention mechanism followed by a position-wise feed-forward network. In addition, decoder layers consists of an encoder-decoder attention layer.

The transfromer encoder is of interest, as the authors of [2] use them to extract features and automatically learn label embedding, as described in section IV-B.

b) Attention: The core principle of the transformer architecture is the attention mechanism, which allows the model to attend to all posistions in an input sequence when processing each element. Thus alloowing the model to weigh the relevance of different posistions in a sequence. Given a query and a set of key-value pairs, the attention function computes a weighted sum of the values, where the weights are determined by similarities between the query and the keys.

c) Self-Attention: The transformer model uses self-attention by relating every element in the input sequence to every other element. The attention function is a function that maps a query and a set of key-value pairs to an output. The scaled dot-product self-attention is defined as:

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^T}{\sqrt{d_k}}\right)V \quad (1)$$

where Q , K , V , are the query, key, and value vectors, and d_k is the dimension of the key vectors and serves as a scaling factor [6].

d) Multi-Head Attention: The transformer applies multiple attention functions in parallel, allowing the model to attend to information from different parts of the sequence. The embedding is split into multiple heads, perform attention for each, and then concatenate them back together, defined as:

$$\text{MultiHead}(Q, K, V) = \text{Concat}(\text{head}_1, \dots, \text{head}_h)W^O \quad (2)$$

where each head is computed as:

$$\text{head}_i = \text{Attention}(QW_i^Q, KW_i^K, VW_i^V) \quad (3)$$

with projection matrices W_i^Q , W_i^K , W_i^V , and W_i^O .

e) *Cross-Attention*: Contrary to self-attention, where queries, keys, and values are generated from the same input, cross-attention is a mechanism where queries come from one source, and the keys and values come from another. This mechanism allows the model to relate elements from one input to relevant parts of another input. The authors of Query2Label [2] make use of this mechanism, where label embeddings (queries) attend to spatial image features (key-value pairs).

f) *Feed-Forward Networks and Positional Encoding*: Each layer in the Transformer also includes a fully connected feed-forward network applied to each position. To compensate for the lack of order in the input sequence, sinusoidal positional encodings are added to the input embeddings. These encodings allow the model to distinguish the order of elements in the sequence using functions of varying frequencies.

g) *Vision Transformers (ViTs)*: The Vision Transformer (ViT), introduced by Dosovitskiy et al. [7], is a model for image classification that leverages the transformer architecture: the self-attention mechanism of transformers that allows the model to selectively weigh the significance of each part of the input, and positional embeddings that represent the order of tokens in a sequence. In ViTs, images are represented as sequences, where the label function as a learnable token for classification. The input image is divided into a sequence of patches that are flattened and linearly embedded into a vector. The spatial information is preserved by adding positional encodings to the embeddings. The resulting sequence is fed into a transformer decoder identical to that introduced in [6] to model global relations for classification.

D. Loss Functions

Loss functions are a fundamental component in deep learning as they serve as a measure of how much the model predictions deviate from the ground truth, guiding optimization of the network [4]. The goal of optimization is to minimize the loss. In the context of multi-label learning, each instance can belong to multiple classes simultaneously, and selecting an appropriate loss function is crucial. This section aims to describe different loss functions employed in multi-label classification, and how they can be used to solve common issues in multi-label learning.

a) *Binary Cross-Entropy (BCE)*: Due to its effectiveness in handling binary decisions for each class, a common choice of loss function for multi-label classification is the Binary Cross-Entropy (BCE) loss [1], [8], [9]. In binary classification, the goal is to classify data as either positive or negative, represented as 0 or 1. The output of the model is a probability score between 0 and 1, indicating the probability of the input belonging to the positive class [9].

The BCE loss for multi-label classification is given by:

$$\begin{aligned} \mathcal{L}_{\text{BCE}} = -\frac{1}{K} \sum_{i=1}^K & [y_i \log(p_i) \\ & +(1 - y_i) \log(1 - p_i)] \end{aligned} \quad (4)$$

where K is the number of categories, $y_i \in [0, 1]$ is the binary label, and p_i is the predicted probability.

Due to its popularity in multi-class classification the BCE loss is used as a benchmark for model performance in [1]. However, BCE loss can be sensitive to class imbalance, where some classes appear more often than others. In this case, the model tends to focus on the majority class and perform poorly on the minority class.

b) *Loss Functions for the Partially Observed Labels Setting*: BCE assumes that each training example indicates the presence or absence of each class, e.g. the example is fully observable. In real-world multi-label datasets, it is often infeasible to annotate all relevant labels for each image, resulting in only partially observed labels. In the case where labels are only partially observed, the assumption of full negative labeling in BCE can lead to false negatives during training, degrading model performance [1].

To address this issue, several loss functions have been proposed to handle partial supervision [1]. In this project, we explore the case of minimal supervision: the single positive label setting, where only one relevant class label is observed per image and the rest are unannotated. The authors of [1] propose Expected Positive Regularization (EPR) and Regularized Online Label Estimation (ROLE) as solutions, described in the following.

c) *Expected Positive Regularization (EPR)*: Assuming that unobserved labels are negative leads to the BCE loss for the positive only case:

$$\mathcal{L}_{\text{BCE}}^+(\mathbf{f}_n, \mathbf{z}_n) = -\sum_{i=1}^L \mathbb{1}_{[z_{ni}=1]} \log(f_{ni}) \quad (5)$$

However, this predicts all labels as positive. The solution to this is the introduction of a regularization term that contains a domain knowledge. They define a scalar k , which is the expected number of positives per image, and an estimated average number of predicted positives $\hat{k}(\mathbf{F}_B)$ from batch predictions, where $\mathbf{F}_B = [f_{ni}]_{n \in B, i \in \{1, \dots, L\}}$ is defined to be the predictions $f_{ni} \in [0, 1]$ for every image in a batch $B \subset \{1, \dots, N\}$. A regularization term at batch level is introduced to penalize deviations from k :

$$R_k(\mathbf{F}_B) = \left(\frac{\hat{k}(\mathbf{F}_B) - k}{L} \right)^2 \quad (6)$$

The overall loss is:

$$\mathcal{L}_{\text{EPR}}(\mathbf{F}_B, \mathbf{Z}_B) = \frac{1}{|B|} \sum_{n \in B} \mathcal{L}_{\text{BCE}}^+(\mathbf{f}_n, \mathbf{z}_n) + \lambda R_k(\mathbf{F}_B), \quad (7)$$

where λ is a hyperparameter.

d) Regularized Online Label Estimation (ROLE): The authors of [1] report that \mathcal{L}_{EPR} does not yield satisfactory results, and thus propose a combination of \mathcal{L}_{EPR} and a label estimator module that maintains online estimates of the missing labels during training, called Regularized Online Label Estimation (ROLE). This method jointly trains the image classifier and a label estimator subject to constraints imposed by \mathcal{L}_{EPR} . This maintains soft estimates of the full label vector during training, resulting in ROLE assuming unobserved labels to have a probability between 1 and 0. For a batch B , let $\tilde{\mathbf{Y}} \in [0, 1]^{N \times L}$ represent the estimated labels, and $\mathbf{F} \in [0, 1]^{N \times L}$ represent the matrix of classifier predictions. The goal is to jointly train the label estimator $g(\cdot; \phi)$ and the image classifier $f(\cdot; \theta)$. An intermediate loss is defined as:

$$\begin{aligned} \mathcal{L}'(\mathbf{F}_B, \tilde{\mathbf{Y}}_B) = & \frac{1}{|B|} \sum_{n \in B} \mathcal{L}_{BCE}(\mathbf{f}_n, \text{sg}(\tilde{\mathbf{y}}_n)) \\ & + \mathcal{L}_{EPR}(\mathbf{F}_B, \mathbf{Z}_B), \end{aligned} \quad (8)$$

where sg is a stop-gradient. This loss is used to update θ while keeping ϕ fixed. By switching the arguments in Eq. 8, ϕ is updated while keeping θ fixed. This leads to the final ROLE loss, given by:

$$\mathcal{L}_{ROLE}(\mathbf{F}_B, \tilde{\mathbf{Y}}_B) = \frac{\mathcal{L}'(\mathbf{F}_B)|\tilde{\mathbf{Y}} + \mathcal{L}'(\tilde{\mathbf{Y}}|\mathbf{F}_B)}{2} \quad (9)$$

where both \mathbf{F}_B and $\tilde{\mathbf{Y}}_B$ are updated simultaneously.

e) Asymmetric focal Loss: A simplified version of asymmetric loss function is used by the authors of Q2L [2]. Asymmetric loss is a version of focal loss but with γ taking on the value of 0 and 1 for positive and negative values respectively. This loss function effectively addresses the sample imbalance problem by making a distinction between negatives and positives, and focusing on the rarer positive labels while down-weighting the negative samples to prevent them taking over during training. For each training sample the loss is calculated using the following asymmetric focal loss function:

$$L = \frac{1}{K} \sum_{k=1}^K \begin{cases} (1 - p_k)^{\gamma^+} \log(p_k), & \text{if } y_k = 1 \\ (p_k)^{\gamma^-} \log(1 - p_k), & \text{if } y_k = 0 \end{cases} \quad (10)$$

IV. METHOD

In real-world datasets, obtaining full label annotations is practically impossible. This project focuses on finding solutions to the multi-label learning problems:

- The challenge of multi-label learning in scenarios where only a single positive label per image is available during training (MLSPL).
- Label imbalance (Query2Label).
- Feature localization (Query2Label).

A. Overview of Approach

A brief description of what we did to solve the multi-label classification problem.

B. Query2Label: A Simple Transformer Way to Multi-Label Classification

Query2Label: A Simple Transformer Way to Multi-Label Classification (Query2Label) by Liu et al. [2] is a two-stage framework for multi-label classification. It uses transformer decoders to extract features with multi-head attentions focusing on different parts of an object category and learn label embeddings from data automatically.

C. Multi-Label Learning from Single Positive Labels

MLSPL's solution to a sparsely annotated training dataset is twofold: first, they develop a training methodology using datasets where annotators have only provided a single confirmed positive label per image, with no confirmed negatives. Second, they extend existing multi-label loss functions to handle this challenging scenario and introduce novel variants to constrain the expected number of positive labels.

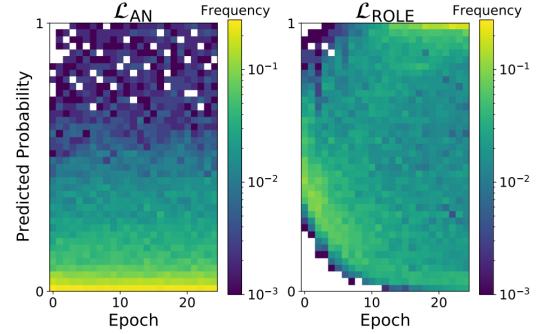


Fig. 1. Figure 2 in MLSPL [1]. The distribution of predicted probabilities for unobserved positives when training with a single positive per image for COCO.

V. EXPERIMENTS

All experiments were conducted on a cluster with access to two NVIDIA GeForce RTX 3060 GPU (12 GB VRAM). The cluster was equipped with Ubuntu 22.04.5 LTS.

A. Dataset

The MS-COCO 2014 [10] dataset is used as a benchmark for evaluation both Query2Label and MLSPL. MS-COCO (Microsoft Common Objects in Context) is a large-scale dataset commonly used for object detection, segmentation, and multi-label image classification. COCO consists of 82,081 training images and 80 classes, and a validation set of 40,137 images.

B. Evaluation Metrics

To assess model performance, we adopt mean Average Precision (mAP), a standard metric widely reported in multi-label classification tasks as it is used to analyze the performance on object detection and segmentation. Both Query2Label and MLSPL report results in terms of mAP.

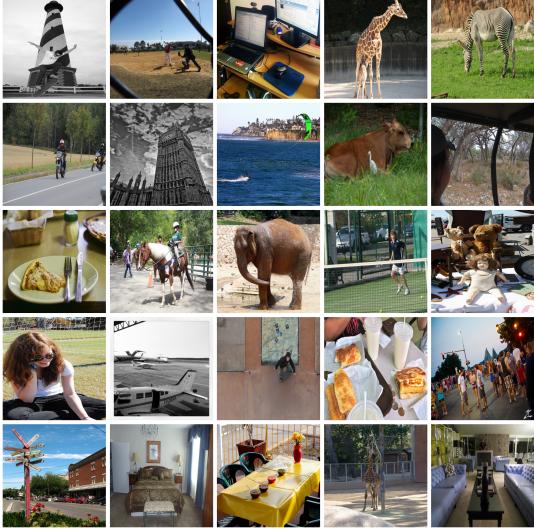


Fig. 2. Examples from the MS-COCO 2014 training set, resized to 448×448 pixels.

C. Query2Label

All Query2Label experiments were conducted using Python 3.7.3 with PyTorch 1.9.0 and Torchvision 0.10.0, compiled with CUDA 11.1. Due to compatibility issues with the `inplace_abn` dependency required by TResNet backbones, we rebuilt the extension from source using commit `938fffd2` to ensure compatibility with our environment.

Additionally, we encountered a missing dependency for RandAugment, which was not included in the original repository. To address this, we manually added the `augmentations.py` file from the `pytorch-randaugment` implementation¹ and modified the import in `get_dataset.py` to use a local version: `from .augmentations import RandAugment`. We also replaced the default `RandAugment()` instantiation with `RandAugment(n=2, m=9)` to explicitly set the parameters. While a similar implementation exists in the `torchvision.transforms` module², it is incompatible with the version of `torchvision` used in this project.

a) Data preparation: While the original work includes experiments on five datasets, our reproduction is limited to the MS-COCO 2014 dataset. The model was evaluated on the MS-COCO 2014 dataset. All images were resized to match the input resolution required by each respective backbone. Label annotations for each image were preserved in their multi-label format.

b) Training: Attempts to train Query2Label with the CvT-w24 backbone failed due to memory limitations of the available 12GB GPUs. However, due to time constraints, we did not replicate the original training procedure using our own setup, and only tested if training was possible with the limited memory availability, and instead, we relied on the publicly released pretrained models provided by the authors. The Query2Label framework was evaluated using four backbone

configurations: ResNet-101 at resolutions of 448×448 and 576×576 , as well as Swin-L(22k) and CvT-w24(22k) at 384×384 , both pretrained on the ImageNet-22k [11] dataset. These models were originally trained on the MS-COCO 2014 training set and evaluated in our experiments on the MS-COCO 2014 validation set. We used a batch size of 16 and made no further modifications or fine-tuning.

We tested training the Query2Label model from scratch using the ResNet-101 backbone. Distributed training was enabled to leverage both GPUs. Training was conducted with a batch size of 8, chosen to fit within the memory constraints of the GPUs. The model was optimized using AdamW with a learning rate of 10^{-4} , weight decay of 10^{-2} , and trained for 80 epochs with early stopping enabled. Data augmentation included random cutout with one hole and a cut factor of 0.5. Four data loading workers were used per process. No modifications were made to the original model architecture or loss design.

D. Multi-Label Learning from Single Positive Labels

The original implementation was developed with older library versions, specifically PyTorch 1.7.0+cu110, and Torchvision 0.8.1+cu110. In contrast, our reproduction was conducted using PyTorch 2.2.1+cu121, and Torchvision 0.17.1+cu121. The original implementation had unknown versions of Python and CUDA, whereas our experiments were conducted using python 3.11.8 and CUDA 12.4. Despite keeping the code unchanged, and using the original random seed, differences in default behavior between library versions may cause deviations in results. Nevertheless, all code ran without modification, and we verified that training and evaluation completed successfully.

Although two GPUs were available on the system, only a single GPU was utilized during training to maintain consistency and reproducibility of the results.

a) Data preparation: While the original work includes experiments on four datasets, our reproduction is limited to the MS-COCO 2014 dataset. The COCO dataset was converted to a single-positive label format to simulate a weakly supervised setting. Following Cole et al. [1], this was done by starting with the fully annotated multi-label dataset and corrupting it by discarding all but one randomly selected positive label per image. Importantly, the same selected label is consistently used throughout training to ensure fair comparisons across methods. Additionally, 20% of the training data was set aside for validation. Both the validation and test sets remain fully labeled.

To prepare the data, we followed the authors' instructions: first, the standard COCO 2014 training and validation images and annotations were downloaded. Next, we obtained the pre-extracted features provided by the authors. Finally, the `format_coco.py` script was used to produce uniformly formatted image lists and corresponding labels.

b) Training: Results are reported on two training scenarios: (i) linear classification on fixed features and (ii) end-to-end fine-tuning. For each method, a hyperparameter search was conducted, and results are reported for the configuration

¹<https://github.com/ildoonet/pytorch-randaugment>

²<https://pytorch.org/vision/main/generated/torchvision.transforms.RandAugment.html>

TABLE I

COMPARISON OF MAP RESULTS FROM OUR EXPERIMENTS AND THE REPORTED RESULTS ON QUERY2LABEL ON THE MS-COCO 2014 DATASET.

Method	Backbone	Resolution	mAP(Ours)	mAP (Paper)
Q2L-R101	ResNet-101	448 × 448	84.9	84.9
Q2L-R101	ResNet-101	576 × 576	86.5	86.5
Q2L-TresL	TResNetL	448 × 448	87.3	87.3
Q2L-Tres	TResNetL(22k)	448 × 448	89.2	89.2
Q2L-SwinL	Swin-L(22k)	384 × 384	90.5	90.5
Q2L-CvT	CvT-w24(22k)	384 × 384	91.3	91.3

achieving the best mean average precision (mAP) on the validation set.

In replicating the experiments, we conducted a similar hyperparameter search, considering learning rates $\{1e-2, 1e-3, 1e-4, 1e-5\}$ and batch sizes 8, 16. The linear classifier was trained for 25 epochs, and the fine-tuning phase for 10 epochs. The validation set used was the clean variant, meaning it was fully labeled.

c) *Selected Hyperparameters:* The final results reported for MS-COCO were obtained using the hyperparameters that achieved the highest validation mAP during the search. For the linear classifier, we used a batch size of 16 and a learning rate of 0.001. For the fine-tuned ResNet-50 model, the learning rate was set to 0.00001, with the same batch size of 16.

VI. RESULTS AND DISCUSSION

This section presents the findings of our experiments, comparing the reproduced results for Query2Label and MLSPL with those reported in the respective papers. The discussion focuses on whether these methods successfully address the challenges of multi-label classification: feature localization and sparse supervision.

A. Results from Query2Label

Table I compares our results with the original Query2Label paper across various backbones. We observe that our reproduced mean average precision (mAP) scores match the original results across all configurations. For example, with a CvT backbone, both our implementation and the original achieved an mAP of 91.3%.

This consistency demonstrates that the publicly available pretrained models function as intended on our specific hardware configuration. However, attempts to train the model using transformer backbones like CvT-w24 and SwinL failed due to hardware memory limitations. With CNN-based backbones, training was successfully initialized using a reduced batchsize, confirming that the pipeline works under constrained settings. Overall, our experiments show that the Query2Label framework effectively tackles the feature localization under label imbalance, given appropriate computational resources.

B. Results from Multi-Label Learning from Single Positive Labels

Our implementation of MLSPL also achieved mAP values close to those reported in the original paper. As shown in

table II, our linear classifier trained using ROLE loss achieved an mAP of 66.3%, consistent with the reported baseline. Interestingly, our fine-tuned ROLE model slightly exceeded the original, scoring 66.9% versus the reported 66.3%. Discrepancies between our experiments and the original results are minimal and can be attributed to differences in software versions and hardware configurations. Nevertheless, our findings validate the reproducibility and effectiveness of ROLE's joint optimization of classifier and label estimator.

TABLE II
COMPARISON OF MAP RESULTS FROM OUR EXPERIMENTS AND THE REPORTED RESULTS ON MULTI-LABEL LEARNING FROM SINGLE POSITIVE LABELS ON THE MS-COCO 2014 DATASET.

Loss	Method	mAP(Ours)	mAP (Paper)
\mathcal{L}_{ROLE}	Linear	66.3	66.3
\mathcal{L}_{ROLE}	Fine-Tuned	66.9	66.3

C. Summary

Both Query2Label and MLSPL demonstrate the capacity to address distinct challenges in multi-label learning. Query2Label leverages transformers to encode label dependencies and spatial localization effectively, whereas MLSPL tackles sparse label annotation through loss regularization and online label estimation. Although a direct comparison of the two methods is impossible, a key difference still lies in their computational feasibility. While Query2Label achieves SOTA performance, it requires large-scale memory, whereas MLSPL demands less resources.

VII. CONCLUSION

Two of the major challenges in multi-label classification problems were examined and evaluated through machine learning models. MLSPL was evaluated in terms of tackling a specific environment in which each training image only has one positive label. Q2L was evaluated as a two-stage framework to achieve a SOTA performance in traditional multi-label classification problems. Each was evaluated on the MS14-COCO dataset. Our experimental results confirmed that both methods performed as expected: Query2Label achieved identical mean average precision scores to those reported in the original paper, validating the publicly released pre-trained models. However, we found that training Query2Label with transformer-based backbones requires greater memory resources, demonstrating its practical limitations. Likewise,

the batchsizes of the CNN-based backbones were lowered to accommodate for the limited memory.

On the other hand, the implementation of MLSPL ran without resource constraints. Our implementation demonstrated results that slightly outperformed the reported results. This indicates that the ROLE loss is a robust choice that can be implemented with various configurations.

Multi-label classification continues to mature as novel training methods and frameworks are discovered and refined. Innovation in the field multi-label classification shows potential as many recent novelties are introduced and unexplored variants of the classification problems are investigated.

REFERENCES

- [1] E. Cole, O. M. Aodha, T. Loriel, P. Perona, D. Morris, and N. Jojic, “Multi-label learning from single positive labels,” 2021. [Online]. Available: <https://arxiv.org/abs/2106.09708>
- [2] S. Liu, L. Zhang, X. Yang, H. Su, and J. Zhu, “Query2label: A simple transformer way to multi-label classification,” 2021. [Online]. Available: <https://arxiv.org/abs/2107.10834>
- [3] Y. Lecun, L. Jackel, L. Bottou, A. Brunot, C. Cortes, J. Denker, H. Drucker, I. Guyon, U. Muller, E. Sackinger, P. Simard, and V. Vapnik, “Comparison of learning algorithms for handwritten digit recognition,” 01 1995.
- [4] A. Zhang, Z. C. Lipton, M. Li, and A. J. Smola, *Dive into Deep Learning*. Cambridge University Press, 2023. [Online]. Available: <https://d2l.ai>
- [5] X. L. C. Asawa, *CS231n: Convolutional Neural Networks for Visual Recognition*. Stanford University, 2023. [Online]. Available: <http://cs231n.github.io/>
- [6] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin, “Attention is all you need,” 2023. [Online]. Available: <https://arxiv.org/abs/1706.03762>
- [7] A. Dosovitskiy, L. Beyer, A. Kolesnikov, D. Weissenborn, X. Zhai, T. Unterthiner, M. Dehghani, M. Minderer, G. Heigold, S. Gelly, J. Uszkoreit, and N. Houlsby, “An image is worth 16x16 words: Transformers for image recognition at scale,” 2021. [Online]. Available: <https://arxiv.org/abs/2010.11929>
- [8] T. Durand, N. Mehrasa, and G. Mori, “Learning a deep convnet for multi-label classification with partial labels,” 2019. [Online]. Available: <https://arxiv.org/abs/1902.09720>
- [9] N. Nayan, “Binary cross entropy — machine learning,” <https://medium.com/@neerajnam/binary-cross-entropy-machine-learning-1c5dee1f2d52>, Apr. 2024, medium.
- [10] T.-Y. Lin, M. Maire, S. Belongie, L. Bourdev, R. Girshick, J. Hays, P. Perona, D. Ramanan, C. L. Zitnick, and P. Dollár, “Microsoft coco: Common objects in context,” 2015. [Online]. Available: <https://arxiv.org/abs/1405.0312>
- [11] J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei, “Imagenet: A large-scale hierarchical image database,” in *2009 IEEE Conference on Computer Vision and Pattern Recognition*, 2009, pp. 248–255.