


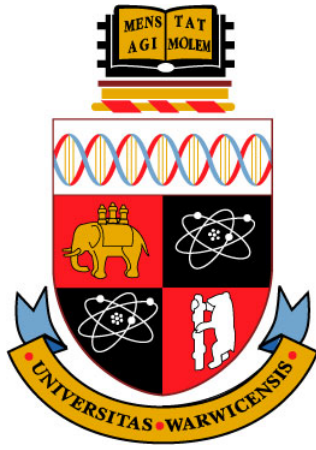

Counting Complexity of PureCircuit -1

CS907 Dissertation Project

Christos Demetriou 2018918

Supervisor: Dr. Christian Ikenmeyer

Department of Computer Science

University of Warwick

2024-2025

Abstract

When this thing gets up to 88 mph, you're gonna see some serious s...

Keywords: Flux Capacitor, 1.21 Gigawatts, Calvin Klein

Acknowledgements

Always good to acknowledge people.

Abbreviations

Turing Machine	TM
Non-Deterministic Turing Machine	NTM

Contents

Abstract	ii
Acknowledgements	iii
Abbreviations	iv
List of Figures	viii
List of Tables	ix
List of Algorithms	x
List of Notations	xi
1 Introduction	1
1.1 Introduction	2
1.2 Theoretical Preliminaries and Literature Overview	4
1.2.1 Search problems	4
1.2.2 Counting Complexity and Combinatorial Interpretations	12
1.2.3 Kleene Logic and Hazard-Free Circuits	13
1.2.4 Bridging Counting Complexity, Search problems and Kleene Logic	17
1.3 Project Question and Objectives	18
2 Theory Analysis	20
2.1 PureCircuit and EndOfLine	21
2.2 SourceOrExcess analysis	36
2.3 PPAD Counting Hierarchies	42
2.4 Supplementary Findings	43
3 Software Deliverable	45
3.1 Tooling Selection	45
3.1.1 Rust Programming Language	45
3.1.2 Bevy and the ECS architecture	45
3.1.3 Software Testing methodology	45
3.2 Program Visualisation Summary	46

3.3	Solution Selection	47
3.3.1	Hill Climbing Algorithm	47
3.3.2	Genetic Algorithm	47
3.3.3	Solution Enumeration	49
4	Chapter Conclusions and Future Directions	53
4.1	Conclusions	53
4.2	Future Work	54
4.2.1	Theory Directions	54
4.2.2	Software future Directions	55
5	Project Management	57
5.1	Project management methodology	57
5.2	Tooling	57
5.3	Ethical Considerations	58
5.4	Risk Management	58
5.5	Timetable	58
5.6	Appraisals and Reflections	58
	Appendices	63
	Appendices	64
.1	Reduction to the EndOfLine	64
.2	Visualisation Program Demonstration	64
.2.1	Small Circuits Example	64
.2.2	Bit Generator Example	64
.2.3	Large Circuits Example	64

List of Figures

1.2.1 TFNP hierarchy. Figure re-created by [31].	5
1.2.2 Types of subgraphs in <i>EndOfLine</i>	6
1.2.3 A colouring example of a subdivided simplex. As we can observe, no matter how we modify colourings, there will always be a small simplex that contains all colours	9
1.2.4 Visual interpretation of the <i>StrongSperner</i> problem. Figure from paper [16]	10
1.2.5 Example on an 8×8 chessboard with a missing square. As we can observe, there will always be one square we cannot tile	11
1.2.6 Example of reducing a 6x6 sudoku puzzle, into a graph colouring problem	13
1.2.7 Hazard circuit and hazard-free circuit. Figure by [28]	14
1.2.8 Computation tree of an ATM with labellings	17
2.1.1 Dimension doubling. We demonstrate the example in two dimensions.	22
2.1.2 Kleene Hypercube using unary notation	23
2.1.3 Overlapping Sperner Solutions	24
2.1.4 Pure Circuit construction visualisation	26
2.1.5 Purification gadget. The red nodes denote the outputs of the purification gadget.	26
2.1.6 Figure redrawn from [10]	28
2.1.7 Edge between points i, j of the original graph. Main observation is the fact that each point comes with a pair of exponentially long lines, which we refer to as the input output lines.	28
2.1.8 K_3 graph construction. Combinations of colours indicate an edge between the two nodes. Solid dots indicate edges from 0, crossed lines indicate edges from 1 and stripped lines indicate edges from 2. We Add two coloured stripped circles on the 4 degree nodes to indicate the E_n^2 edges. Image reconstructed from [10].	29
2.1.9 Depiction of the edge removal. Main idea is that this we keep the number of sources or sinks as well as invertible (we can trace the source or sink from the original instance), despite losing a lot of graph information.	29
2.1.10 Shielding method on 2D-EoL embeddings.	30
2.1.11 2D-EoL Bipolar Colouring	31
2.1.12 Transformed domain mapping example.	32

2.1.13 Snake Embedding technique view between the folded dimension j and the new dimension. The x -axis denotes the folded dimension and the y -axis denotes the new dimension. The point ℓ_i denote the indexes that correspond the j dimension of the pre-folded space.	34
2.1.14 Snake Embedding technique between the folding dimension and the new dimension	34
2.2.1 The current table shows how we deal with excess nodes. All other nodes such as sources, sinks, lines or isolated vertices stay the same.	37
2.2.2 2D-StrongSperner with 2D-SourceOrExcess(2,1)	38
2.2.3 1-MC with 2D-SourceOrExcess(2,1)	38
2.2.4 Panchromatic edge for 2 dimensions	39
2.2.5 Double sink depiction from a 2D point of view	40
2.2.6 Colouring example based on the proposed circuit	41
2.2.7 Example colouring where the arrow denotes the direction. In between the red and blue cubes in the bottom corners we have the positive line. The brown cubes around denote the negative labels	41
2.2.8 Colouring around the double sink points. The colours correspond to the colour legend of 2.2.6	42
2.3.1 PolyS-Unbalanced transformation to Unbalanced	43
2.4.1 TARSKI construction	44
3.1.1 ECS visualisation implementation	46
3.3.1 Visual representation of the genetic algorithm cycle	48
3.3.2 Crossover with multiple cutoff points. Image source [34]	48
5.2.1 Usages of Obsidian	58

List of Tables

1.2.1 Three-valued logic [35]	8
2.1.1 Kleene Unary Examples	23
3.3.1 AND value propagation rules	51
3.3.2 OR value propagation rules	51
3.3.3 Purify value propagation rules	51
3.3.4 NOR value propagation rules	52
3.3.5 NAND value propagation rules	52
5.6.1 Risk management table.	59

List of Algorithms

2.1.1 Turing machine F with input $(p_1, p_2) \in B_{2^{4k+10}}$	31
3.3.1 PureCircuit Backtracking Algorithm Enumerator	49

List of Symbols

$[n]$ List of numbers $1, \dots, n$.

$[n]_0$ Defined as $[n] \cup \{0\}$.

$\mathbb{N}$ Set of natural numbers excluding 0.

$\mathbb{N}_0$ Natural numbers including 0.

$n^{O(1)}$ Set of all functions $f : \mathbb{N} \rightarrow \mathbb{N}$, where $f \in O(n^c)$ for some $c \in \mathbb{N}$.

x_{-i} Given $x \in A^d$, we use x_{-i} to denote all members excluding index i .

$x_{-i}(e) \equiv x(x_{-i}, e)$ Given $x \in A^d$, we denote $x_{-i}(e)$ or $x(x_{-i}, e)$ to indicate n dimensional vector, where

$$\forall j \in [n] : [x_{-i}(e)]_j = [x(x_{-i}, e)]_j = \begin{cases} e & \text{if } j = i \\ x_i & \text{otherwise} \end{cases}$$

Will be used to indicate element replacement.

$[x]_j$ Given $x \in A^d$ for some $j \in [d]$, we have $[x]_j = x_j$.

$\mathbb{B}$ The binary set $\{0, 1\}$.

$\mathbb{T}$ Defines the set $\{0, 1, \perp\}$ which depicts the kleene algebra.

Chapter 1

Introduction

1.1 Introduction

Combinatorics is a field of study in mathematics that primarily focuses on the notion of counting objects with certain properties. Over time, this notion has shifted, especially in the subfield of algebraic combinatorics, where there is no clear notion of the object that we are counting, and the numbers express something more abstract [41]. Researchers have started asking whether it is possible to ask the inverse question, or more informally, can we associate our sequence of numbers to sets of objects? [31, 41, 32]

To understand this notion, we provide an example from the papers by Ikenmeyer and Pak [41, 31]: Assume that $f(G)$ counts the number of 3-colourings of a graph G . Now one can, ask: does the function $h(G) \triangleq f(G)/6$ also count something? The answer is yes as argued in [41, 31] and the idea is, as for every colouring χ , we can compute $3!$ additional colourings since we can permute the colours we assigned. Therefore, we only need to count one of the permutations, or the smallest colouring. We can therefore argue that $h(G)$ counts the smallest possible 3-colourings of a graph G . We say that this is a “combinatorial interpretation of $h(G)$ ”.

But not all non-negative functions have such a clear interpretation. We use an example by Ikenmeyer et al. [31]. We recall a combinatorial variant of the *Pigeonhole principle*, where given a circuit $C : \{0,1\}^n \rightarrow \{0,1\}$, find x such that $C(x) = 0^n$ or distinct $x, y \in \{0,1\}^n$ such that $C(x) = C(y)$ and $C(C(x)) \neq 0$. C essentially maps $\{0,1\}^n \rightarrow \{0,1\}^n \setminus \{0^n\}$. Every point that is mapped to 0^n is considered a violation. The problem counts every pair of points that is mapped to the same bin or to a point that is a violation. We add the restriction of $C(C(x)) \neq 0$ to avoid double counting. We can clearly observe that, if $e(C)$ counts the number of solutions, under the pigeonhole principle, it must be the case $e(C) \geq 1$ since we either have a violation or there exists at least one pair of points that is mapped to the same bin by the pigeonhole principle. So now we can ask: does the function $e'(C) \triangleq e(C) - 1$ also have a set of object which we can enumerate over? Ikenmeyer et al. [31] demonstrated that this problem does not have a combinatorial interpretation. This leads to the questions of how can we formally represent the meaning of combinatorial interpretations, and what can we do to verify whether a function has one?

In recent years, there has been a revolutionary initiative to answer the aforementioned questions, with the help of counting complexity theory and the complexity class of $\#P$. In fact, being able to find such definitions or interpretations is crucial, as it allows us to utilise tools from enumerative combinatorics to understand and reveal hidden structures and properties of such functions [41, 31]. Moreover, there are several problems or numbers, such as *Kronecker coefficients* [37], whose combinatorial interpretation could lead to groundbreaking breakthroughs, such as a step closer to the resolution of the $P \neq NP$ conjecture [31, 30].

In our current work, we focus on extending the work done by Ikenmeyer et al. [31], where they focused on the creation of frameworks that determine whether $f \in \#P$, by looking at the subclasses of $\#TFNP - 1$ problems, a class of problems whose combinatorial nature guarantee the existence of a solution. More specifically, we look into the **PPAD** class which seems to have several problems where under decrementation, may or may not have a combinatorial interpretation [31]. This implies that **PPAD** acts as some sort of barrier, to $\#P$ which motivates the research as to what causes

To accomplish this task, we studied *PureCircuit* which was created by Deligkas et al. [19], as we hope its **PPAD**-completeness and circuit-like nature may give us useful insights to the counting complexity of **PPAD** - 1.

We will now give an extensive introduction to the literature and the related problems and then offer formal and precise objectives that capture our goal. We will then go over the main results of our theory research with the conjectures and possible directions that we uncovered. Moreover, we will give an overview of the visualisation software we developed to verify our theoretical results and give an overview of its capabilities and limitations. Lastly we will give brief analysis

of our project management, the lessons we learnt and a conclusion that summarises our project as a whole.

1.2 Theoretical Preliminaries and Literature Overview

In the current section, we introduce all the necessary preliminaries with respect to search problems and counting complexity theory. Moreover we give an overview of the core problem of the research *PureCircuit*, and its connections with search problems and *Kleene logic*.

1.2.1 Search problems

In complexity theory, we are interested in different kinds of problems. A common example are problems founds in **P** and **NP** classes, known as decision problems, where given an input, the output is a boolean value of whether the specific instance is in the language or not. Function problems or search problems are extensions of decision problems, where we can represent functions or relations as explained in the definitions 1.2.1. In addition, we reference an additional subclass of these problems known as *Total Search problems*, in which for every input, there must exist at least one solution.

Definition 1.2.1: Search Problems

Search problems can be defined as relations $R \subseteq \mathbb{B}^* \times \mathbb{B}^*$, where given $x \in \mathbb{B}^*$, we want to find $y \in \mathbb{B}^*$ such that xRy .

Total Search problems are search problems such that for each input, there must exist at least one solution.

We mainly focus on the search variants of **NP** know an **FNP** and its subclass for *total problems* known as **TFNP** using the definitions in 1.2.1.

Definition 1.2.2: FNP and TFNP

FNP are *search problems* such that there exists poly-time TM $M : \mathbb{B}^* \rightarrow \mathbb{B}$ and a polynomial function $p : \mathbb{N} \rightarrow \mathbb{N}$ such that:

$$\forall x \in \mathbb{B}^*, y \in \mathbb{B}^{p(|x|)} : xRy \iff M(x, y) = 1$$

Lastly **TFNP** = $\{L \in \mathbf{FNP} \mid L \text{ is total}\}$

Adding on, in the decision problem space, it is common to relate a problem to each other with the usage of reductions such as *Kerp reductions*. We introduce its search problem variant known as *Levin Reductions* using the definition in 1.2.1.

Definition 1.2.3: Levin Reductions

Let A and B be two search problems with relations $R_A \subseteq \{0,1\}^* \times \{0,1\}^*$ and $R_B \subseteq \{0,1\}^* \times \{0,1\}^*$, respectively.

We say that A is *Levin reducible* to B , denoted $A \leq_L B$, if there exist polynomial-time computable functions $f : \{0,1\}^* \rightarrow \{0,1\}^*$ and $g : \{0,1\}^* \times \{0,1\}^* \rightarrow \{0,1\}^*$ such that:

1. f applies a *Kerp reduction* from problems of A to problems of B such that:

$$\forall x \in \{0,1\}^* : x \in S_{R_A} \implies f(x) \in S_{R_B}$$

2. Using an element $R_b(f(x))$, we can construct a solution to R_A such that:

$$\forall x \in S_{R_A}, y' \in R_B(f(x)) : (x, g(x, y')) \in R_A$$

Where we denote the sets S_R and $R(\cdot)$ as the domain and co-domain of the relations R , or more formally

$$S_R \triangleq \{x \mid \exists y : xRy\}$$

$$R(x) \triangleq \{y \mid \exists x : xRy\}$$

Various **TFNP** were introduced by various researchers which form the hierarchy as seen in 1.2.1 [43, 33, 15, 22]. In the current project we are mainly interested in **PPAD**, known as “Polynomial Parity of Augmented DiGraphs”, created by Papadimitriou [43]. We will give a formal definition of the class as well as several cornerstone problems that we will refer to in the upcoming chapters. We will first introduce the *EndOfLine* problem 1.2.1 by Papadimitriou [43], which takes advantage of the combinatorial fact that if there exists an unbalanced node in a directed graph, there must always exist a different one.

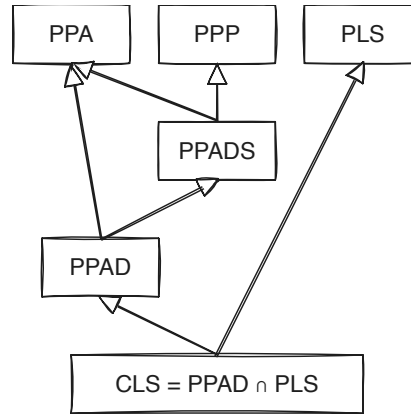


Figure 1.2.1: TFNP hierarchy. Figure re-created by [31].

Definition 1.2.4: EndOfLine problem [43]

Given poly-sized circuits $S, P \in \mathbb{B}^n \rightarrow \mathbb{B}^n$, we define a digraph $G = (V, E)$ such that $V = \mathbb{B}^n$ and E defined as:

$$E = \{(x, y) \in V^2 : S(x) = y \wedge P(y) = x\}$$

We define source nodes as $v \in V : \deg(v) = (0, 1)$ and sink nodes as $\deg(v) = (1, 0)$. We also syntactically ensure that the 0^n node is always a source, meaning $S(P(0^n)) \neq 0 \wedge P(S(0^n)) = 0^n$. A node $v \in V$ is a solution iff $\text{in-deg}(v) \neq \text{out-deg}(v)$.

An illustrative example of an *EndOfLine* instance can be seen in figure 1.2.2. The idea that of the

Types of Subgraphs in EOL

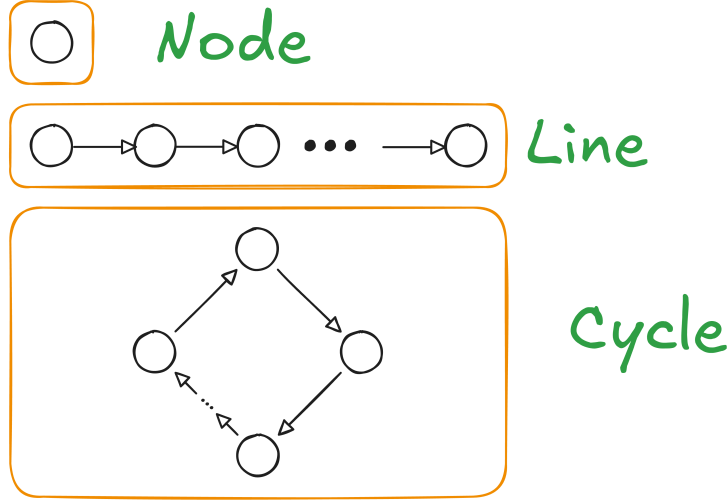


Figure 1.2.2: Types of subgraphs in *EndOfLine*

problem is that its solutions will always be at the beginning and the end of some line, hence its name. We also always guarantee a solution since we ensure that the 0^n is always a source and therefore there must exist a pairing sink. From this problem, we define the **PPAD** complexity class 1.2.5.

Definition 1.2.5: PPAD complexity class [43]

PPAD is defined as the set of search problems that are *levin reducible* 1.2.1 to the *EndOfLine* problem 1.2.1.

EndOfLine variants and extensions

We introduce several key variants of the *EndOfLine* that have been created in the past. Alexandros et al. in the paper [27] was able to demonstrate that for several modifications of the original problem such as adding k known sources, where k can be a polynomial function with respect to the number of sources. Moreover, people have experimented with changing the degrees of the graphs, as demonstrated by Ikenmeyer et al. [31], with the problems such as *SourceOrExcess*($k, 1$) where k is the maximum in-degree for each node as defined in 1.2.1. All these problems remain **PPAD** complete. More interestingly, works by Papadimitriou [42], Beame et al. [3] and Alexandros et al. [27] were able to demonstrate that in the more general case of superpolynomial graphs, if we bound the in-degree and out-degree of each node to some polynomial of the input size, then the problem remains **PPAD**.

Definition 1.2.6: SourceOrExcess problem [31]

We define as *SourceOrExcess*($k, 1$) for $k \in \mathbb{N}_{\geq 2}$ as such Given a poly-sized successor circuit $S : \mathbb{B}^n$ and a set of predecessor poly-sized circuits $\{P_i\}_{i \in [k]}$, we define the graph $G = (V, E)$ such that, $V = \mathbb{B}^n$ and E as:

$$\forall x, y \in V : (x, y) \in E \iff (S(x) = y) \wedge \bigvee_{i \in [k]} P_i(y) = x$$

We ensure that 0^n is as source, meaning $\deg(0^n) = (0, 1)$. A valid solution is a vertex v such that $\text{in-deg}(v) \neq \text{out-deg}(v)$.

In addition to the aforementioned adjustments, researchers were able to give a topological interpretation to the *EndOfLine* 1.2.1 problem, by creating embeddings of the graph into 2D or 3D spaces as demonstrated by several researchers [10, 27, 14]. We will mainly look at two of these problems, known as *RLeafD* and *2D-EOL* created by Chen et al. and Alexandros respectively.

Definition 1.2.7: 2D-EOL problem [10, 27]

Input: Two poly-sized circuits $P, S : \{0,1\}^{2n} \rightarrow \{0,1\}^{2n}$ where $P(0^n, 0^n) = (0^n, 0^n) \neq S(0^n, 0^n)$.

Output: A point $x \in \{0,1\}^{2n}$ such that one of the following conditions are satisfied:

1. Sinks: $P(S(x)) \neq x$
2. Sources: $S(P(x)) \neq x \wedge x \neq 0^n$
3. Invalid successor: $x - S(x) \notin \{(0,0), (0,1), (0,-1), (1,0), (-1,0)\}$
4. Invalid predecessor: $x - P(x) \notin \{(0,0), (0,1), (0,-1), (1,0), (-1,0)\}$

The above description defines a superpolynomial such that an edge $(x,y) \in E$ if and only if $S(x) = y \wedge P(y) = x$ as well as the closeness constraint $\|x - S(x)\|_1 \leq 1$. Chen et al. [10] introduced a reduction on how one can parsimoniously reduce an *EndOfLine* problem to a *2D-EOL* problem (written as *RLeafD* in their paper) using planar graph embeddings. We find this construction useful for our results and therefore we give a full report on how it works.

Multi-Source vairiants Lastly we introduce the class of variants for which the *EndOfLine* problem which we extend the known number of sources. These multi source problems (formally defined using 1.2.1) were created by Hollender et al. [27] and were demonstrated to be **PPAD**-complete.

Definition 1.2.8: PolyS-EoL definition

Input: We are given triplet $(S, P, \bar{f})$, where S, P are successors, predecessor circuits of an *EndOfLine* problem with n input-output bits, and $\bar{f}$ is a poly-sized circuit that computes some polynomial function $f : \mathbb{N} \rightarrow \mathbb{N}$. In addition, we impose the following restriction:

$$\forall i \in [f(n)]_0 : S(P(i)) \neq i \wedge P(S(i)) = i$$

Output: A node $k \notin [f(n)]_0$ such that $S(P(x)) \neq x \oplus P(S(x)) \neq x$.

The PureCircuit problem

The *PureCircuit* problem is a discretised version of the ϵ -GCircuit which was first introduced by Chen et al. [19, 11]. General idea of ϵ -GCircuit is that we have a directed graph $T = (V, G)$ where V denote value nodes and G denote gate nodes. Each value node is assigned a value in $[0, 1]$ and the gates denote can denote the standard set of arithmetic operations $\{+, -, *\}$ with other nodes or some constant, or boolean operators $\{\wedge, \vee, \neg, <, >, =\}$ with other nodes or some constant. The goal of the problem is to assign every problem with a value such that the assingment is correct up to a factor of $\pm\epsilon$. This problem was crucial to demonstrate *PPAD*-hardness for constant $\epsilon > 0$ by Rubinstein [19, 44].

PureCircuit is the problem that we get when taking the limit $\epsilon \rightarrow \infty$ of the ϵ -GCircuit problem. This results in a circuit which uses the set of values $\{0, \perp, 1\}$ to denote the range of values $(0), (0,1), (1)$. Incidentally, the above triplet of values coincides with *Kleene algebra* which extends the traditional binary logic [35]. We will explore the above algebra in greater depth in section 1.2.3. This problem was created by Deligkas et al. [19] to demonstrate the hardness of approximating **PPAD** problems and was shown to be **PPAD**-complete.

Definition 1.2.9: PureCircuit Problem Definition [19]

An instance of *PureCircuit* is given by vertex set $V = [n]$ and gate set G such that $\forall g \in G : g = (T, u, v, w)$ where $u, v, w \in V$ and $T \in \{\text{NOR}, \text{Purify}\}$. Each gate is interpreted as:

1. *NOR*: Takes as input u, v and outputs w
2. *Purify*: Takes as input u and outputs v, w

And each vertex is ensured to have $\text{in-deg}(v) \leq 1$. A solution to input instance (V, G) is denoted as an assignment $\mathbf{x} : V \rightarrow \{0, \perp, 1\}$ such that for all gates $g = (T, u, v, w)$ we have:

1. *NOR*:

$$\begin{aligned} \mathbf{x}[u] = \mathbf{x}[v] = 0 &\implies \mathbf{x}[w] = 1 \\ (\mathbf{x}[u] = 1 \vee \mathbf{x}[v] = 1) &\implies \mathbf{x}[w] = 0 \\ \text{otherwise} &\implies \perp \end{aligned}$$

2. *Purify*:

$$\begin{aligned} \forall b \in \mathbb{B} : \mathbf{x}[u] = b &\implies \mathbf{x}[v] = b \wedge \mathbf{x}[w] = b \\ \mathbf{x}[u] = \perp &\implies (\mathbf{x}[v], \mathbf{x}[w]) \in \{(0, \perp), (\perp, 1), ((0, 1))\} \end{aligned}$$

In addition to the gates above, we will make use of the standard set of gates $\{\vee, \wedge, \neg\}$, whose behaviour is depicted in the tables 1.2.1. Moreover, we will make use of the *Copy* gate which we can define as $\text{Copy}(x) = \neg(\neg x)$. These gates are well defined based on the *NOR* gate as shown by Deligkas et al. [19] and do not directly affect the complexity of the problem. Furthermore, with respect to the *Purify* gate, the original problem states that one of two outputs must contain a pure value. We restrict the solution set to the one written in the definition as Deligkas et al. [19] showed that the only *Purify* solutions essential for **PPAD**-completeness are $\{(0, \perp), (\perp, 1), (0, 1)\}$, and the addition of more solutions does not affect its complexity.

not		and	0	$\perp$	1	or	0	$\perp$	1
0	1	0	0	0	0	0	0	$\perp$	1
$\perp$	$\perp$	$\perp$	0	$\perp$	$\perp$	$\perp$	$\perp$	$\perp$	1
1	0	1	0	$\perp$	1	1	1	1	1

(a) not gate (b) and gate (c) or gate

Table 1.2.1: Three-valued logic [35]

Topological problems

This section refers to types of problems which take advantage of some combinatorial property of their topology in order to guarantee a solution.

Sperner Problems Below we will refer to the notion of Sperner problems, which are types of problems that are based around *Sperner's Lemma* [51]. The idea is as follows, given a triangle that has subdivided into smaller subtriangles, we first define the index of each point using the following set:

$$\forall n \in \mathbb{N} : \mathcal{T}_n \triangleq \{(x, y, z) \in [n] \mid x + y + z = n\}$$

We say $\lambda : \mathcal{T}_n \rightarrow [3]$ is a valid colouring if and only if it satisfies the following conditions:

$$\forall (x_1, x_2, x_3) \in \mathcal{T}_n : \lambda(x) \in \begin{cases} \{2, 3\} & \text{if } x_1 = 0 \\ \{1, 3\} & \text{if } x_2 = 0 \\ \{1, 2\} & \text{if } x_3 = 0 \end{cases}$$

Given a valid colouring λ , we can always find a small triangle τ where all 3 colours are assigned to one of its vertices. A visual example can be seen in figure 1.2.3.

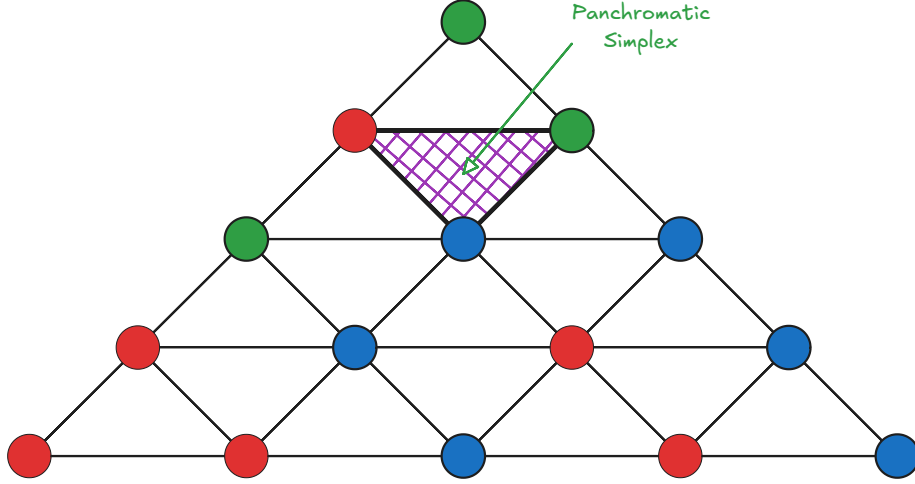


Figure 1.2.3: A colouring example of a subdivided simplex. As we can observe, no matter how we modify colourings, there will always be a small simplex that contains all colours

This type colouring will be referred to as the **linear** colouring where for dimension d , assign $d + 1$ distinct colours to each point [14, 10], and it was shown that one can define a **PPAD**-complete variant of this lemma property. There several variants of the problem, where we can either work in a triangle with an exponential amount of subdivisions or polynomial subdivision but on higher dimensional simplexes. Both of these problems are **PPAD**-complete [43, 11, 10].

We introduce an alternative variant of the Sperner problems, introduced by Daskalakis et al. [17], known as *StrongSperner* or *BiSperner*. Instead of assigning $d + 1$ colours to find a panchromatic simplex, each vertex is assigned d colours rather than one. We refer to the figure 1.2.4 for a visual interpretation of the colouring. Essentially for each point in some hypercube $[N]^d$, we assigned d colours, where for colour i have choices either $\{i^+, i^-\}$. The goal is to find a cube where in every dimension there exists at least two points that cover both colours. This has been used in many problems throughout literature as seen in the papers [11, 19, 17] to demonstated **PPAD**-hardness of many problems.

We will refer to this type of colouring as **bipolar** colouring, which has been used in grid-like topologies of the Sperner property. We note that these terms are not standard in literature; we adopt this naming convention for of clarity.

Definition 1.2.10: Bipolar colouring

Given a set S^d , where S is some arbitrary set, we refer to bipolar colouring C as:

$$\forall v \in S^d, j \in [d] : [C(v)]_j \in \{-1, 1\}$$

We say that a set of points $A \subseteq S^d$ **cover all the labels** if:

$$\forall i \in [d], \ell \in \{-1, +1\}, \exists x \in A : [\lambda(x)]_i = \ell$$

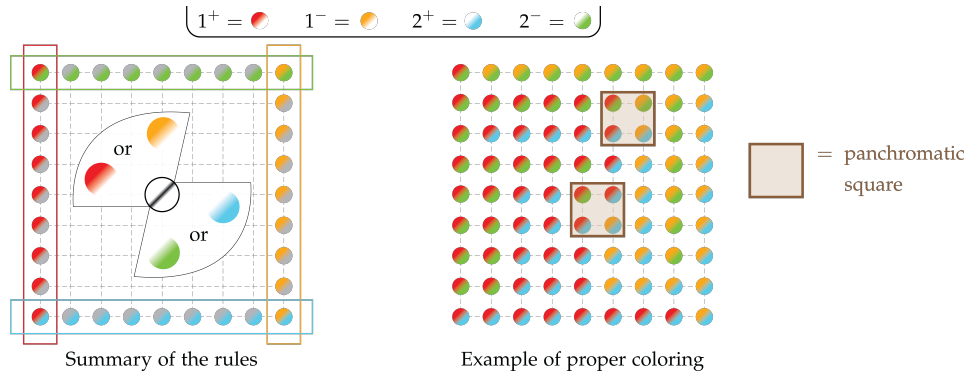


Figure 1.2.4: Visual interpretation of the *StrongSperner* problem. Figure from paper [16]

Compared to the linear colouring variant, Deligkas et al. [19, 18] showed that $\forall A \subseteq S^d : |A| \geq d + 1$ and satisfies the colouring, $\exists D \subseteq A : |D| \leq d$ where D also satisfies the colouring condition, which implies that we need at most d separate points to achieve a colouring.

Definition 1.2.11: *StrongSperner* problem

Input: A boolean circuit that computes a bipolar labelling $\lambda : [M]^N \rightarrow \{-1, 1\}^N$ 1.2.1 satisfying the following boundary conditions for every $i \in [N]$:

- if $x_i = 1 \implies [\lambda(x)]_i = +1$
- if $x_i = M \implies [\lambda(x)]_i = -1$

Output: A set of points $\{x^{(i)}\}_{i \in [N]} \subseteq [M]^N$, such that:

- *Closeness condition:* $\forall i, j \in [N] : \|x^{(i)} - x^{(j)}\|_\infty \leq 1$
- *Covers all labels* as defined in 1.2.1

Throughout literature the same variants of the problem or specifications have been defined using the names *Sperner* or discrete Brouwer [11, 10, 14, 19]. This is very similar to a different type of problem known as *StrongTucker*, which can be thought of as the *PPA* analog of *StrongSperner* [43, 1]. The two problems satisfy different boundary conditions but due to their similar labelling nature, we will borrow some techniques used in later sections.

It is important to observe that the *StrongSperner* problem is defined for hypercubes of dimensionality n and width $m \in n^{O(1)}$. Chen et al. [11] demonstrated that for a fixed dimensionality with an exponentially large width the problem remains **PPAD**-complete, as defined in 1.2.1.

Definition 1.2.12: *nD-StrongSperner* problem

Input: A tuple $(\lambda, 0^k)$ such that $\lambda : (\mathbb{B}^k)^n \rightarrow \{-1, +1\}^n$, and λ abides the *boundary conditions* of the *StrongSperner* problem.

Output: A point $\alpha = (a_1, \dots, a_n) \in (\mathbb{B}^k \setminus \{1^k\})^n$ such that

$$\{\alpha + x \mid x \in \mathbb{B}^n\} \text{ covers all the labels } 1.2.1$$

We assume dimensionality $n \geq 2$.

The authors refer to both colouring schemes interchangeably when discussing their reductions, so we can assume that all reductions (not necessarily counting reductions) work similarly for either colouring [11, 19, 14, 10].

Other than topological colouring, we will also give a small introduction, to a tiling problem known as mutilated chessboards. Tiling spaces has been used throughout literature [27, 8]. We

will use as reference the **PPAD**-complete **1-MC** problem. We refer to the problem introduced by Blank [4] as follows: assume we have a $2n \times 2n$ chessboard. If we are provided with 1×2 pieces, we can trivially tile the board by filling each row with n horizontal pieces. The idea is when we remove the bottom left corner, the board becomes impossible to tile. The argument can be thought of as such: each tile piece covers an even square and an odd square, which implies that it has to be the case that one of the squares has to remain untiled. An example can be seen in the figure 1.2.5. More formally we use the following definition 1.2.1, and Hollender et al. [27] demonstrated that this problem

Definition 1.2.13: 1-MC [27]

Input: Given a circuit $C : \{0, 1\}^{2n} \rightarrow \{0, 1\}^{2n}$, such that $C(0, 0) = (0, 0)$, such that tiling between two squares is indicated such that:

$$\forall x \in \{0, 1\}^{2n} : C(C(x)) = x \wedge x - C(x) \in \{(0, 1), (1, 0), (0, -1), (-1, 0)\}$$

Output: We want to find a point $x \in \{0, 1\}^{2n} \setminus \{(0, 0)\}$ such that we have no tiling.

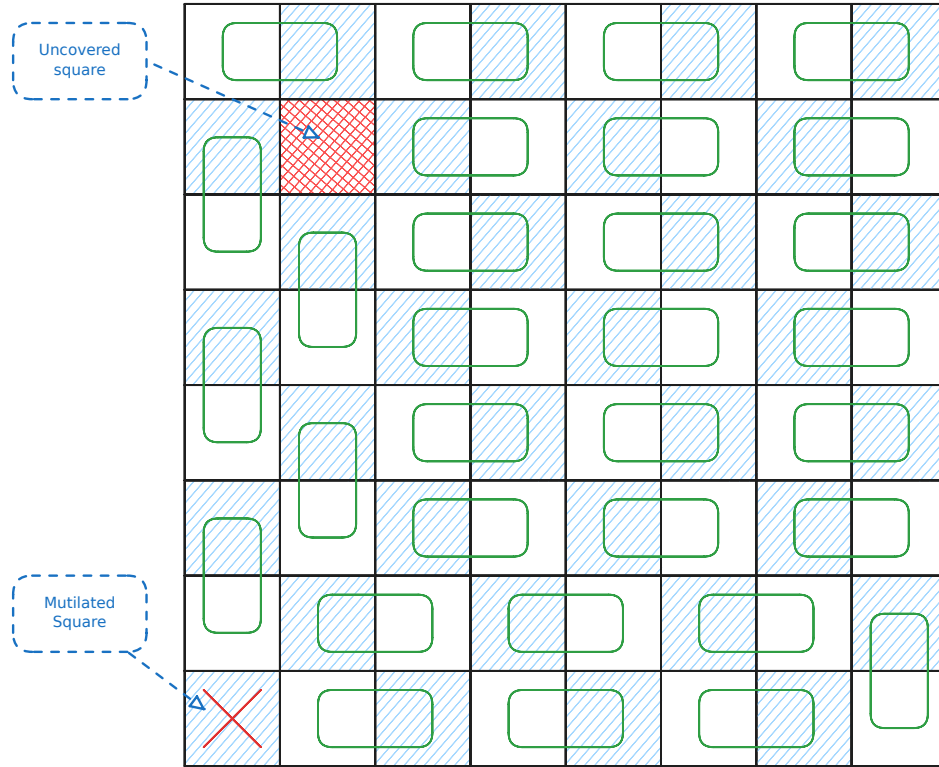


Figure 1.2.5: Example on an 8×8 chessboard with a missing square. As we can observe, there will always be one square we cannot tile

Lastly, we will introduce *Tarski* 1.2.15 which uses the Knaster-Tarski fixed point theorem 1.2.1 and belongs in **CLS**, the class that converts the intersection of parity graphs (**PPAD**) and local search (**PLS**) [43, 33, 21].

Definition 1.2.14: Monotone functions

Given two partially ordered sets $(L_1, \leq_{L_1})$ and $(L_2, \leq_{L_2})$, a function $f : L_1 \rightarrow L_2$ is **monotone** if and only if:

$$\forall x, y \in L_1 : x \leq_{L_1} y \implies f(x) \leq_{L_2} f(y)$$

Theorem 1.2.1: Knaster Tarski Fixed point theorem[5, 23]

Given a *monotone* function $f : L \rightarrow L$ 1.2.14 of a complete lattice $(L, \wedge, \vee)$, $\exists c \in L : f(c) = c$.

Definition 1.2.15: Tarski problem definition [23]

Given a *monotone* function $f : L \rightarrow L$ 1.2.14 of a lattice $(L, \wedge, \vee)$ we define solutions to the problem as:

1. Find $x \in L : f(x) = x$
2. Find $x, y \in L$ such that $x \leq y$ and $f(x) \not\leq f(y)$

We assume that f is represented by boolean circuits.

The above argues the existence of either finding points that are maximum in the partial order chain, or points that violate the monotonicity constraint.

1.2.2 Counting Complexity and Combinatorial Interpretations

Search problems as we observed earlier ask what is a valid solution given the current input instance like what is a valid colouring of a graph, satisfying assignment to a 3-SAT problem etc. Counting complexity, or counting problems take it a step further and usually ask how many valid solutions does a problem have. Valiant formalised this idea with the help of $\#P$ complexity class 1.2.2, in which he demonstrated that even if a problem is polynomially solvable in its decision/search variant, can be much harder. A much simpler example can be found in the book by Barak et al. [2] where they provide a reduction from *Ham-Cycle* to *#Cycle*.

Definition 1.2.16: #P Complexity Class [49]

A function $f : \mathbb{B}^* \rightarrow \mathbb{N} \in \#P$, if there exists a poly-function $p : \mathbb{N} \rightarrow \mathbb{N}$ and a poly-time TM M such that:

$$f(w) = \left| \left\{ v \in \mathbb{B}^{p(|w|)} \mid M(w, v) = 1 \right\} \right|$$

Alternative but equivalent definition is as follows: A function $f \in \#P$, if there exists a non-deterministic poly-time TM N such that:

$$f(w) = \#acc_N(w)$$

Where $\#acc_N(w)$ denotes the number of accepting paths of N on w .

In hindsight, we can observe that functions in $\#P$ express functions of the form $\forall w \in \{0,1\}^* : f(w) = |A_w|$, where A_w is a set of verifiers or accepting paths of size polynomial to the input. Given the above definition, Pak et al. [41, 32] used $\#P$ to decide whether a class of numbers or objects have or do not have a combinatorial interpretation. Moreover, they argue that the usage of $\#P$ has several benefits:

1. By polynomially bounding objects, we avoid cases such as: $f(w) = |\{1, \dots, f(w)\}|$. In other words, we create a set of combinatorial objects.
2. We can work with $f(\cdot)$ even if its direct computation is hard. For example, counting the number of cycles in a graph is believed to be an **NP**-complete problem but verifying individual cycles is trivial.
3. $\#P$ is a formal system that is highly flexible. Specifically, we are able to use results in complexity theory and NTMs to find interpretations or prove their non-existence.

Lastly, we introduce the idea of correlating two counting problems with the help of *parsimonious reductions*. Simply, we say that a problem A can be parsimoniously reduced to a problem B , if for inputs of A , one can create instances of B such that the set of solutions between the two problems have the same cardinality. More formally we refer to the definition 1.2.17. An example

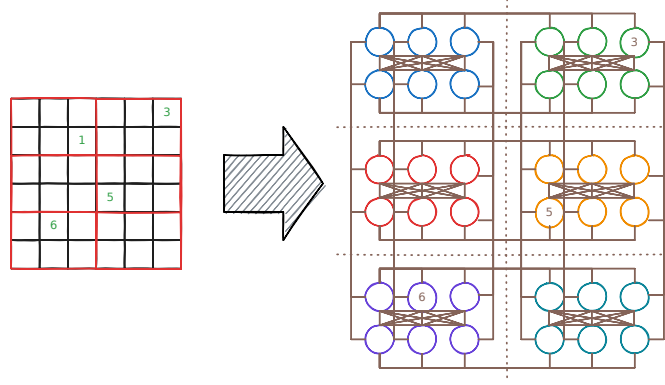


Figure 1.2.6: Example of reducing a 6x6 sudoku puzzle, into a graph colouring problem

of how such reduction may look like, can be seen in figure 1.2.6, where we relate the difficulty of sudoku solving to a graph colouring problem.

Definition 1.2.17: Parsimonious reductions

Let R, R' be search problems, and let f be a reduction of $S_R = \{x \mid R(x) \neq \emptyset\}$ to $S_{R'} = \{x \mid R'(x) \neq \emptyset\}$. We say f is **parsimonious** if:

$$\forall x \in S_R : |R(x)| = |R'(f(x))|$$

Where for relation R we say $R(x) \triangleq \{y \in \{0, 1\}^* \mid xRy\}$

1.2.3 Kleene Logic and Hazard-Free Circuits

Kleene logic uses the boolean system with an additional *unstable* value [35]. The study of Kleene logic assisted in the development of robust physical systems [24] and aiding in the development of lower bounds for monotone circuits [20, 28, 29, 6]. The current section offers a brief summary to relevant notions and concepts in Kleene logic.

Definition 1.2.18: Kleene value ordering [40]

The *instability ordering* or *information ordering* for $\leq^u$ is defined as: $\perp \leq^u 0, 1$. The n -dimensional extension of the ordering is:

$$\forall x, y \in \mathbb{T}^n : x \leq^u y \implies \forall j \in [n] : (x_j \in \mathbb{B} \implies x_j = y_j)$$

We can also refer to an alternative type of ordering, known as *voltage* ordering, such that:

$$0 \leq^v \perp \leq^v 1$$

Definition 1.2.19: Kleene Resolutions [40, 28]

Given $x \in \mathbb{T}^n$, we define the *resolutions* of x , using the following notation:

$$\text{RES}(x) \triangleq \{y \in \mathbb{B}^n \mid x \leq^u y\}$$

Definition 1.2.20: Natural functions [28]

A function $F : \mathbb{T}^n \rightarrow \mathbb{T}^m$ for some $n, m \in \mathbb{N}$ is *natural* if and only if it satisfies the following properties:

1. *Preserves stable values*: $\forall x \in \mathbb{B}^n : F(x) \in \mathbb{B}^m$
2. *Preserves monotonicity* 1.2.14 1.2.3

Unless otherwise specified, we assume that all Kleene functions are *natural* 1.2.20, since they can be represented by circuits 1.2.1. Natural functions essentially indicate that a point with its resolution should respect the information order, or more simply if $f(00) = 1$ then $f(0\perp) \neq 0$ as then it will not preserve stability. Moreover we can think resolutions of a point x as all the values it “could be”. For example resolutions of $0\perp$ could be either 00 or 01 . Naturally, if $f(00) = f(01) = 1$ then naturally we should also expect that $f(0\perp) = 1$. This yields the concept of hazards or points in $x \in \mathbb{T}^n$ where, its resolutions have the same value but the point itself does not more formally defined in 1.2.3. Detecting hazards is a concept that is analysed heavily when talking about Kleene logic and it is an NP-hard problem [28]. An example of hazard values can be seen in the figure 1.2.7.

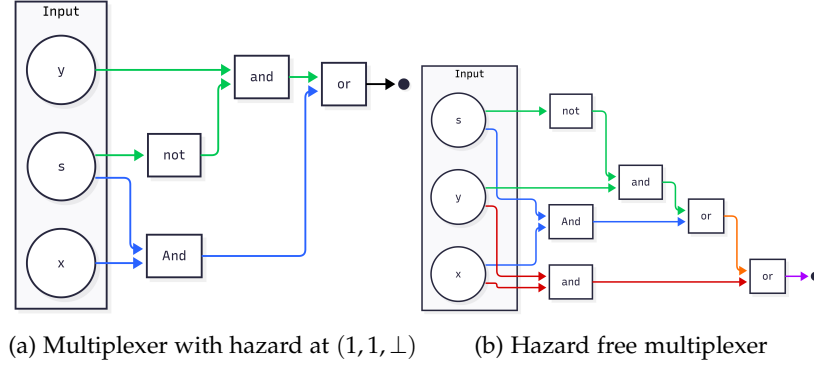


Figure 1.2.7: Hazard circuit and hazard-free circuit. Figure by [28]

Proposition 1.2.1: Natural functions and Circuits [40, 28]

A function $F : \mathbb{T}^n \rightarrow \mathbb{T}^m$ can be computed by a circuit iff F is *natural* 1.2.20

Definition 1.2.21: Hazard [28, 20]

A circuit C , on n inputs has **hazard** at $x \in \mathbb{T}^n \iff C(x) = \perp$ and $\exists b \in \mathbb{B}, \forall r \in \text{Res}(x) : C(r) = b$. If such value does not exist then we say that C is hazard-free.

Definition 1.2.22: K-bit Hazard [28]

For $k \in \mathbb{N}$ a circuit $C : \mathbb{T}^n \rightarrow \mathbb{T}$ has a *k-bit hazard* at $x \in \mathbb{T}^n \iff C$ has a hazard at x and $\perp$ appears at most k times.

We also wish to introduce the following corollary by Ikenmeyer et al. [28] which allows us to construct k -bit hazard free circuits

Corollary 1.1: K-bit Hazard Construction [28]

Given circuit $C : \mathbb{T}^n \rightarrow \mathbb{T}$, one can construct a k -bit hazard free circuit of C denoted as C' such that:

$$\begin{aligned} \text{size}(C') &= \left(\frac{ne}{k}\right)^k (\text{size}(C) + 6) + O(n^{2.71k}) \\ \text{depth}(C') &= \text{depth}(C) + 8k + O(k \log n) \end{aligned}$$

Where $\text{size}(P)$ denotes the number of gates of P and $\text{depth}(P)$ denotes the longest path from the input bit to the output bit

Kleene logic and Complexity Theory

Lastly we want to introduce the notion of *Alternating Turing Machines*, which are meant to represent a generalisation of non-deterministic Turing machines. These have been introduced

by Chandra et al. [9] and the idea is that we introduce universal and existential quantifiers to alternate the course of computation. The informal presentation can be thought as follows: In a non-deterministic TM, given a single state q or configuration c , we execute $\beta_1, \dots, \beta_k$ separate processes. We say that q will accept if at least one of the processes $\{\beta_i\}_{i \in [k]}$ accepts. Alternating Turing machines introduce additional conditions where one impose the condition that all subprocesses $\{\beta_i\}_{i \in [k]}$ must accept or in case of a negation state, if β_1 accepts, then q rejects or vice versa. More formally, we offer the definition in 1.2.3.

Definition 1.2.23: Alternating Turing Machines(ATM) [36, 9]

An alternating TM is a seven tuple

$$M = (k, Q, \Sigma, \Gamma, \delta, q_0, g)$$

Where each term denotes:

1. $k \in \mathbb{N}$: The number of work tapes
2. Q : Finite set of states
3. Σ : Finite input alphabet. Moreover, $\star \notin \Sigma$ denotes the end of the input
4. Γ : Finite work tape alphabet. Moreover $\# \in \Gamma$ to denote blank symbol.
5. δ transition relation which is defined as:

$$\delta \subseteq \left(Q \times \Gamma^k \times (\Sigma \cup \{\star\}) \right) \times \left(Q \times (\Gamma \setminus \{\#\})^k \times \{L, R\}^{k+1} \right)$$

Important to observe that for a single state, input symbol and work tape symbols, we can take multiple types of transitions.

6. $q_0 \in Q$: Is the initial state
7. $g : Q \rightarrow \{\vee, \wedge, \neg, \mathbf{1}, \mathbf{0}\}$: Where g denotes the type of state and $\mathbf{1}, \mathbf{0}$ denote whether it is accepting or not.

The machine essentially contains a read-only input tape with endmarkers and k work tapes which are initially blank. A *step* of M consists of reading a symbol from the input tape, writing a symbol to each work tape, moving the writing head in each head left or right while transitioning into a new state.

Definition 1.2.24: ATM configurations [36, 9]

A configuration $\mathcal{C}$ of an ATM M is a element of the set $\mathcal{C}_M$

$$\mathcal{C}_M \triangleq Q \times \Sigma^* \times (\Gamma \setminus \{\#\})^k \times \mathbb{N}^{k+1}$$

Which represent, the current state, the input, the current contents of each work tape, and the $k + 1$ head positions.

We say that $\mathcal{C}$ that *configuration* is universal (existential, negating, accepting or rejecting) if q is also universal (existential, negating, accepting or rejecting). The initial configuration of M on input x is

$$\sigma_M(x) = (q_0, x, \lambda^k, 0^{k+1})$$

Where λ is a null string.

Definition 1.2.25: Successor of configurations [9]

Given ATM M , we write $\mathcal{C} \vdash \mathcal{C}'$ to say that $\mathcal{C}'$ is the successor of $\mathcal{C}$, if we can go from one configuration to another with a single δ rule. We require for δ that, for accepting or rejecting configurations to have no successors, for universal or existential to have at least one successor configuration, and for negating configurations to have only one. We can define the **computation** of a path on x as a sequence $a_0 \vdash a_1 \vdash \dots \vdash a_n$ where $a_0 = \sigma_M(x)$

Denoting Accepting or Rejecting computations As mentioned previously, we start from the original configuration. If a process is in an existential configuration $\mathcal{C}$ and $\beta_1, \dots, \beta_m$ are all possible successors, then we spawn a process for each configuration and run each one concurrently. If at least one process is accepting we report back to the parent and terminate the rest. Same line of reasoning can be done with the universal quantifiers. Ideally we would like a labelling function f which is defined as

$$f(\mathcal{C}) = \begin{cases} \bigwedge_{\mathcal{C} \vdash \beta} f(\beta) & \text{if } \mathcal{C} \text{ is universal} \\ \bigvee_{\mathcal{C} \vdash \beta} f(\beta) & \text{if } \mathcal{C} \text{ is existential} \\ \neg f(\beta) & \text{where } \mathcal{C} \vdash \beta \text{ if } \mathcal{C} \text{ is negating} \\ \mathbf{1} & \text{if } \mathcal{C} \text{ is accepting} \\ \mathbf{0} & \text{if } \mathcal{C} \text{ is rejecting} \end{cases}$$

But some processes may never halt or require a much greater computation than necessary. We therefore use Kleene logic $\mathbb{T}$ where $\perp$ denotes configurations that we do not know if they are accepting or not. The quantifiers use the same logic as described in the tables 1.2.1. We now say that a labelling of configurations is a map $\ell : C_M \rightarrow \{0, \perp, 1\}$. We define an operator τ to be an operator of mappings such that:

$$\tau(\ell)(\mathcal{C}) = \begin{cases} \bigwedge_{\mathcal{C} \vdash \beta} \ell(\beta) & \text{if } \mathcal{C} \text{ is universal} \\ \bigvee_{\mathcal{C} \vdash \beta} \ell(\beta) & \text{if } \mathcal{C} \text{ is existential} \\ \ell(\beta) & \text{where } \mathcal{C} \vdash \beta \text{ if } \mathcal{C} \text{ is negating} \\ \mathbf{1} & \text{if } \mathcal{C} \text{ is accepting} \\ \mathbf{0} & \text{if } \mathcal{C} \text{ is rejecting} \end{cases}$$

We can check that τ is monotone with respect to $\leq$ since if $l \leq l'$, then $\tau(l) \leq \tau(l')$. By 1.2.1 there must exist maximum labelling such that

$$\ell^* = \sup_{m \in \mathbb{N}} \tau^m(\Omega)$$

where the supremum is with respect to $\leq$, where

$$\begin{aligned} \tau^0(\ell) &= \ell \\ \tau^{m+1}(\ell) &= \tau(\tau^m(\ell)) \end{aligned}$$

where Ω is denoted as the minimal labelling function $\lambda x. \perp$. In a way that the above procedure describes is the "propagation" process from the leaf nodes up to the root of the tree where the leaf nodes are assigned a label of $\perp$ or accepting. Lastly given the above we can finally give a definition of halting states

Definition 1.2.26: Halting states[9]

We say that M halts on x iff $\lambda^*(\sigma_M(x)) \in \{0,1\}$ and it accepts or rejects respectively iff $\lambda^*(\sigma_M(x)) = 1$ or $\lambda^*(\sigma_M(x)) = 0$

We aim for this ATM to work for only recursively enumerable sets and therefore we aim to limit to the depth of the recursion. Therefore, we define operator τ_C where $C \subseteq C_M$ such that

$$\tau_C(\ell)(a) \triangleq \begin{cases} \tau(\ell)(a) & \text{if } a \in C \\ \perp & \text{otherwise} \end{cases}$$

Where we can say that C is the set of configuration that are reachable within some $f(|x|)$ steps or require space of at most $f(|x|)$. An example of a computation tree can be observed in the figure 1.2.8.

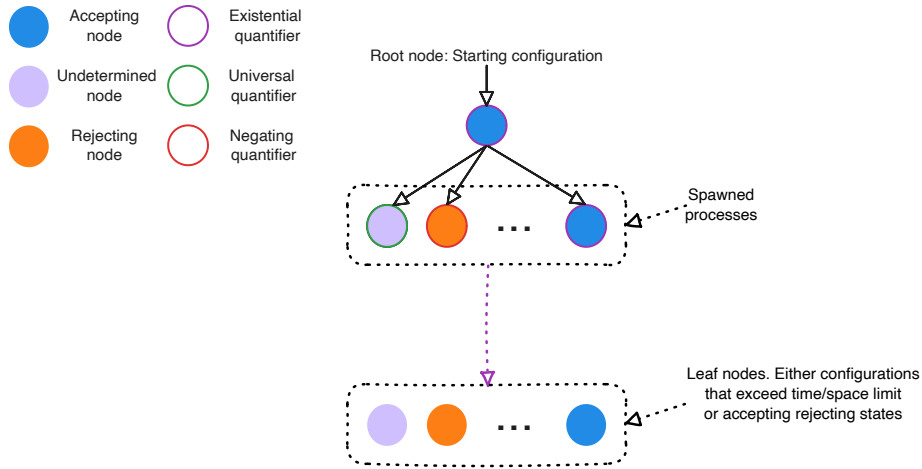


Figure 1.2.8: Computation tree of an ATM with labellings

We can observe that one can encode Kleene logic into the computation of Turing machines. We use this framework as one of the main motivations of the project.

1.2.4 Bridging Counting Complexity, Search problems and Kleene Logic

Our work is primarily focused around the paper by Ikenmeyer et al. [31] and the parsimonious reductions discovered across various **PPAD** problems. We introduce the notation $\#\mathbf{PPAD}(L)$, where this indicates the class of problems which are parsimoniously reducible to L . In fact, we extend this notation with $f(\#\mathbf{PPAD}(L))$ to indicate reductions of the form, given L' , we say that $L' \in f(\#\mathbf{PPAD}(L))$ if

$$\forall x \in S_{L'} : |R_{L'}(x)| = f(|R_L(g(x))|)$$

We demonstrate an example of the above notation using a finding from the paper by Ikenmeyer et al. [31]: $\#\mathbf{PPAD}(\text{EndOfLine} - 1)/2 = \#\mathbf{P}$. To show inclusion it is easy to see that one can accept all the non-zero sources, since each source is paired with a sink, and we are able to ignore the sink paired with the 0^n source. To show the other direction, they demonstrate an example where they reduce $\#\mathbf{CircuitSAT} \subseteq ((\#\mathbf{EndOfLine}) - 1)/2$ by creating a graph, where for each input x , we create a source and sink pair $(0x, 1x)$ if and only if $f(x) = 1$.

In the paper by, Ikenmeyer et al. [31], they developed tools to demonstrate how one can show whether a problem is in $\#\mathbf{P}$ or not, with the help of relativising techniques. The idea of relativisation is that we can equip our circuits or TMs with calls to arbitrary oracles. They demonstrated that for several problems in **TFNP** as seen in figure 1.2.1, some can be parsimoniously

reduce to each other under all oracles, where as for some directions (the ones with the warning sign) this is not the the case. From the figure we can observe that for seveal **PPAD**-complete, **CLS** and **PPADS** problems one can indeed find parsimonious redutions. For other problems, even **PPAD**-complete ones like $\#PPAD(\text{SourceOrExcess}(k,1)) - 1$, this does not seem to be the case.

1.3 Project Question and Objectives

As mentioned in the previous section, we observed how different **PPAD** problems can behave differently. The main motivation comes from the observation of how *Kleene logic* can be used to simulate the computation paths of NTMs. We can parallelise this to the boolean problem of SAT which given by the *Cook-Levin* theorem [13] one can convert every **NP** problem into a SAT problem. The general idea is to create a boolean expression for each snapshot of the Turing Machine such that a satisfying assingment corresponds to an accepting path. As corollary the *Cook-Levin* also demonstrates that every **NP** problem can be parsimoniously reduced to the SAT problem, meaning:

$$\forall L \in \mathbf{NP} : \#L \subseteq \#SAT$$

A reasonable conjecture would also be if one can exploit Kleene-circuit nature of *PureCircuit* to create a *Cook-Levin* type equivalent reduction for **PPAD** problems, or more formally:

$$\forall L \in \mathbf{PPAD} : \#PPAD(L) \subseteq \#PPAD(\text{PureCircuit})$$

If the above statement were indeed true, then it would give us insights as to how counting problems behave in **PPAD** – 1. Unfortunately, there is limited research with respect to the combinatorial nature of the problem. We wish to offer a new perspective of *PureCircuit* and establish its *parsimonious relations* with other problems. To break down our conjecture we offer the following set of objectives:

1. Establish a chain of parsimonious reductions from the *EndOfLine* to the *PureCircuit* problem.
2. Establish a chain of parsimonious reductions from the *SourceOrExcess*(2,1) to the *PureCircuit* problem. Ideally, we would like to extend this to the entire hierarchy of *SourceOrExcess*($k,1$) problems for some $k \in \mathbb{N}$ or ideally. We will introduce these problems more formally in the upcoming sections *PolySourceOrExcess*.
3. Establish a *Cook-Levin* type theorem for the all **PPAD** problems or more formally

$$\forall L \in \mathbf{PPAD} : \#PPAD(L) \subseteq \#PPAD(\text{PureCircuit})$$

The above milestones were created in mind to tackle the main conjecture in incremental steps. Demonstrating a parsimonious reduction from the *EndOfLine* is an important baseline as every **PPAD** problems reduces to the *EndOfLine* even if its not parsimoniously. The second milestone is meant to demonstrate that we can use *PureCircuit* for problems with no combinatorial interpretations. Our last objective is the overall main conjecture that we are trying to prove.

Our main findings sections focuses as to how we tackled each problem and the efforts we did. Even though, the project did not manage to yield any positive results, we provides several tools, new problems and conjectures that may help in future research. To assist with the theory development, we set out to develop a visualisation tool that will be able to visualise instances of the problem as well as find solutions or enumerate through solutions for small instances. We therefroee provide this additional list of software deliverables:

1. Establish a program that in which the user is able to construct a *PureCircuit* instance. The tool should be capable of verifying instance or highlighting unsatisfied nodes.

-
2. Establish algorithms to find solutions or at least approxiamte solutions.
 3. Establish algorithms to enumerate solutions for small graphs.

We will a give a greater in-depth overview of the tool in the section 3 and the algorithms used to fulfil the aforementioned requirements.

Chapter 2

Theory Analysis

In this section, we explore on the approaches and findings we uncovered while tackling each of our theory objectives. More specifically, while we have not achieved a complete proof for each objective, we highlight several theorems that may assist in their full resolution. The core idea that we employed comes from following set of observations: when working with *PureCircuit*, one cannot fully work with binary logic, meaning there is no trivial method for detecting $\perp$ values and removing them, as made clear by Marino’s continuity argument [38]. We therefore make use of topological problems with the idea that resolutions of our input corresponds to some set nearby points in a space. If all points abide some property then we can use that to detect solutions. This is an extension of the non-parsimonious reduction used by Deligkas et al. [19] when showing **PPAD**-hardness.

With respect to the first objective, we provide the following list of theorems.

1. $\#nD\text{-StrongSperner} \subseteq \#HF\text{-}nD\text{-StrongSperner}$ 2.1.1
2. $\#Hf\text{-DiscreteStrongSperner} \subseteq \#PureCircuit$ 2.1.2
3. $\#EndOfLine \subseteq \text{AntipodalStrongSperner}$ 2.1.3

The problems mentioned are defined in the section 2.1, where we also discuss their implications with respect to the current objective and with **PPAD** as a whole

Following the same thought process for our second objective, we demonstrated how to reduce *SourceOrExcess* to a topological problem. Specifically in section 2.2 we argue the following result

$$\#SourceOrExcess(2, 1) \subseteq \#3D\text{-CountingStrongSperner} \text{ 2.2.1}$$

Where we define a different combinatorial version of the *3D-StrongSperner* and demonstrate how it can be used for parsimonious reductions between the *SourceOrExcess*(2, 1) problem.

In the third section, we offer an combinatorial extension to the **PPAD** class with regards to directed graphs and the number of known sources. Specifically given Hollender et al.’s work [27] on directed graphs with multiple known sources, we make on observations as to the combinatorial nature of the problems that can be created as well as important problems to analyse for a full *PureCircuit* Cook-Levin type theorem.

Lastly we provide two supplementary findings with regards to the *PureCircuit* reductions. We first demonstrate how we can relate to *Tarski* with *Kleene theory* and show how to create parsimonious reductions using *PureCircuit*. Second, we show how simplifications of the *PureCircuit* problem can lead to parsimonious reductions to the *EndOfLine*. Since these proofs do not offer any indication of the hardness of the problem, we provide their full proofs in the appendix.

2.1 PureCircuit and EndOfLine

As mentioned previously, the current project focuses on using topological expressions for reductions between problems. We built upon the *StrongSperner* idea that Deligkas used by expressing how we can redefine the problems under *Kleene logic* [19]. We then demonstrate how we can relate *PureCircuit* and the *EndOfLine* problem to each of them as well as highlighting the current limitations of these approaches.

Hazard Free StrongSperner

First we begin with the idea that solutions of *StrongSperner* problems revolve around the notion of panchromatic hypercubes. We can use the idea and make the following definitions

Definition 2.1.1: StrongSperner anchor points

Given a hypercube $H \subset \mathbb{Z}^n$ of side lengths 1, we denote the $\mathbf{Anc}(H)$ as

$$\mathbf{Anc}(H) = \min_{p \in H} \|p\|_1$$

Alternatively, we will refer to these hypercubes using the notation $\mathbf{Cube}(\cdot)$ such that

$$\mathbf{Cube}(p) \triangleq \{(p + b) \mid b \in \{0, 1\}^n\}$$

Ideally, we would like to express a cube as a coordinate of Kleene numbers, implying the resolutions of the point will result in a hypercube, where each point is within $\|\cdot\|_\infty \leq 1$ of each other. This leads to a natural interpretation of the *StrongSperner* problem in *Kleene logic*. We will start with two definitions, one for *nD-StrongSperner* and the other for *StrongSperner*. We remind that the main difference of the two problems is the former has fixed dimensions n of exponentially large cubes, whereas the other can have varying dimensions of polynomially large widths.

Definition 2.1.2: HF-nD-StrongSperner problem

Input: A circuit $\lambda : (\{0, 1\}^k)^n \rightarrow \{-1, +1\}^n$, that describes a *nD-StrongSperner* labelling, as explained in 1.2.1, such that it is hazard free on inputs $(p_i \perp)_{i \in [n]}$ where $p_i \in \{0, 1\}^{k-1}$

Output: A point $p \in \times_{i \in [n]} (\{0, 1\}^{k-1} \times \{0, 1, \perp\})$ if and only if: $\lambda(p) = \perp^n$.

We argue that the above problem is **PPAD**-complete for all *HF-nD-StrongSperner* problems. First we can observe that all *HF-nD-SS* are reducible to their *nD-SS* counterparts since hazard-free transformations have no effect on binary inputs and therefore our circuits acts like any other boolean circuit. To show the hardness, we claim that

Theorem 2.1.1: HF-nD-SS hardness

$$\#\mathbf{PPAD}(nD\text{-}SS) \subseteq \#\mathbf{PPAD}(HF\text{-}nD\text{-}SS)$$

Proof. Given circuit $\lambda : (\{0, 1\}^k)^n \rightarrow \{-1, +1\}^n$ from *nD-SS*, assume that S is the set of anchors points of a panchromatic cube. We create $\Lambda : (\{0, 1\}^{k+1})^n \rightarrow \{-1, +1\}^n$ such that:

$$\Lambda((x_i)_{i \in [n]}) = \lambda \left(\left(\left\lfloor \frac{x_i + 1}{2} \right\rfloor \right)_{i \in [n]} \right) \quad (2.1.1)$$

We prove the following claim

Claim 2.1.1: Transformation claim

Given S_{even} the set of even solutions of the transformed space or more formally:

$$S_{\text{even}} \triangleq \left\{ (p_i 0)_{i \in [n]} \mid p \in (\mathbb{B}^{(k)})^n : (p_i 0)_{i \in [n]} \text{ is an anchor of a panchromatic cube} \right\}$$

We claim $|S| = |S_{\text{even}}|$

Proof. We argue that we can bijectively map between $S \leftrightarrow S_{\text{even}}$. To show the left to right direction, assume $p \in S$. Using figure 2.1.1 as reference, we can observe that each point becomes an n -dimensional hypercube. Essentially the hypercube that was anchored at $(p_1, \dots, p_n)$ is mapped to the hypercube anchored at $(2p_1, \dots, 2p_n)$. To prove that, we can observe that:

$$\begin{aligned} \forall (2p_i)_{i \in [n]} \in (\{0, 1\}^{k+1})^n, b \in \{0, 1\}^n : \Lambda((2p_i + b_i)_{i \in [n]}) \\ &= \lambda \left(\left(\left\lfloor \frac{2p_i + b_i + 1}{2} \right\rfloor \right)_{i \in [n]} \right) \\ &= \lambda \left(\left(\left\lfloor p_i + \frac{b_i + 1}{2} \right\rfloor \right)_{i \in [n]} \right) \\ &= \lambda((p_i + b_i)_{i \in [n]}) \end{aligned}$$

Which implies that the cube anchored at p must also be panchromatic. □

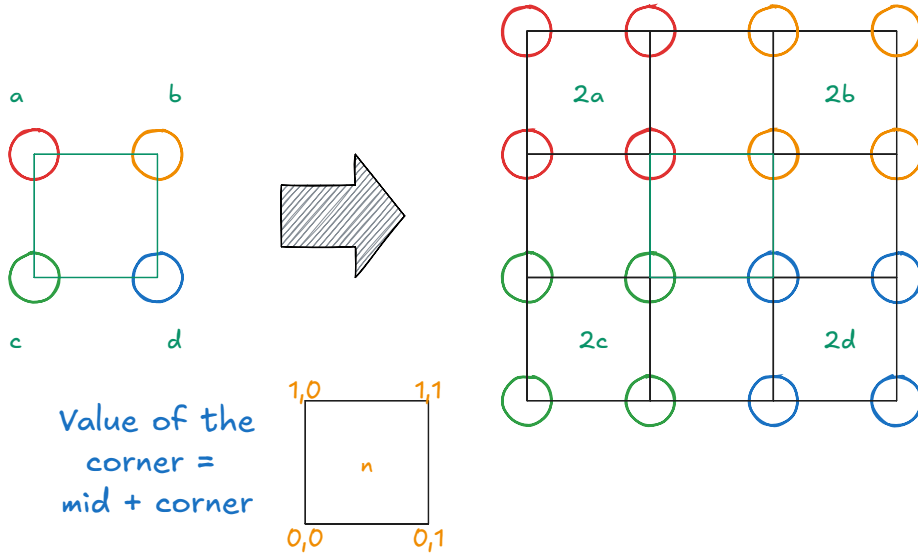


Figure 2.1.1: Dimension doubling. We demonstrate the example in two dimensions.

To ensure that Λ is hazard free we can use the corollary 1.2.3, where we can create an n -bit hazard-free circuit. One must observe that even though, the size of the circuit increases exponentially with respect to the dimensions, but since all the input instances scale with respect to the width of the hypercube space, that would imply that we are able to keep the size of the circuit polynomial. We therefore claim that this reduction is polynomial and can parsimoniously find all panchromatic cubes. □

To introduce *HF-StrongSperner*, we will first introduce how to work with kleene unary 2.1 numbers. We will then demonstrate how to extend this notation to define the full *HF-StrongSperner* problem.

Definition 2.1.3: Kleene Unary Numbers

Given a number $p \in M$, its unary representation can be depicted as a binary number $\{0,1\}^M$ such that: $k \in M \rightarrow 1^k \in \bar{M}$. Under Kleene algebra, we mainly refer to notations M_k^n where $k, n, M \in \mathbb{N}_0$ such that:

$$M_k^n \triangleq \bigtimes_{i \in [n]} \{1^j \perp^k \mid \forall j \in \mathbb{N}_0 : j + k \leq M\}$$

For a cleaner notation, given $1^j \perp^k \in M_k$ we denote it as $j \perp^k$.

For examples of the above notation we refer to the following table:

Kleene Unary Sets	Member examples
3_1^2	$(11\perp, 1\perp 0) = (2\perp, 1\perp)$
5_0^3	$(11000, 11110, 11111) = (2, 4, 5)$
7_2^1	$11\perp\perp 000 = 2\perp^2$

Table 2.1.1: Kleene Unary Examples

Definition 2.1.4: HF-StrongSperner problem

Input: A hazard-free circuit $\lambda : [M]^n \rightarrow \{-1, +1\}^n$, where $M \in n^{O(1)}$ that describes a *StrongSperner* labelling, as explained in 1.2.1, where the inputs are represented using Kleene Unary numbers 2.1.

Output: A point $p \in M_{\leq 1}^n$ if and only if: $\lambda(p) = \perp^n$.

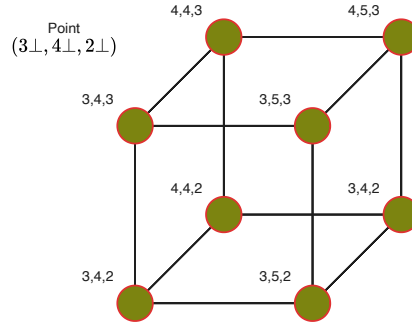


Figure 2.1.2: Kleene Hypercube using unary notation

We will mainly focus on subproblems of the *HF-StrongSperner* where two cubes do not overlap with each other. We will use figure 2.1.3 for reference, but essentially if two cubes overlap, that means a subspace of the cube (face or edge) is panchromatic. This means that for the same cube, we can have multiple solutions, such as the cube it self, the face that contains the panchromatic edge or the edge it self. To simplify the counting arguments, we define the problem *HF-DiscreteStrongSperner* 2.1.5, such that all solutions are *discrete*, meaning there are no overlapping panchromatic cubes,

Definition 2.1.5: HF-DiscreteStrongSperner problem

An *HF-StrongSperner* instance λ such that $\forall p \in M_1^n$, if $\lambda(p) = \perp^n$, then

$$\forall y \in M_{\leq 1}^n : p \leq y \implies \lambda(y) \neq \perp^n$$

Essentially, any subspace of the cube should not yield a panchromatic solution.

Lastly we introduce a specific subset of the above solutions where we enforce antipodal panchromatic cubes. In the specific type of solution, we argue that every two opposite corners of a cube contain opposite colourings. More formally we say

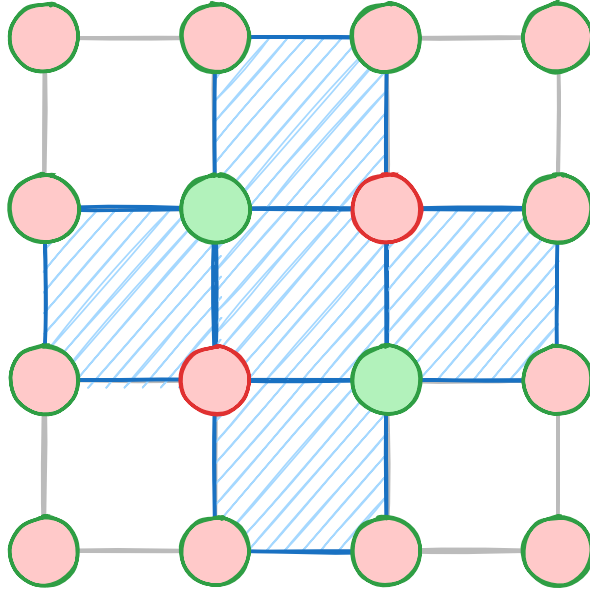


Figure 2.1.3: Overlapping Sperner Solutions

Definition 2.1.6: MinRes min and max resolution functions

We use the **MinRes**, to denote the smallest resolution of a kleene string. More formally we can use the following equivalent definitions:

$$\forall x \in \{0, 1, \perp\}^*, j \in [|x|] : [\mathbf{MinRes}(x)]_j \triangleq \begin{cases} x_j & \text{if } x_j \in \{0, 1\} \\ 0 & \text{otherwise} \end{cases}$$

For the maximum resolution we will use the **MaxRes** function where we instead replace all $\perp$ with 1 instead.

Definition 2.1.7: HF-AntipodalStrongSperner problem

An *HF-DiscreteStrongSperner* instance λ such that $\forall p \in M_1^n$, if $\lambda(p) = \perp^n$, and denote $\mathbf{MinRes}(x) = \hat{x}$ as the *anchor* of the cube, then:

$$\forall b \in \{0, 1\}^n, j \in [n] : [\lambda(\hat{x} + b)]_j = -[\lambda(\hat{x} + 1^n \oplus b)]_j$$

We emphasize that the above class considers the subset of the *Hf-DiscreteStrongSperner* as the antipodality condition cannot ensure discreteness. We can also define a non-HF variant of the problem which we can refer to *AntipodalStrongSperner* where for each cube, we only need to check its two opposite ends to verify if its a valid solution.

Claim 2.1.2: Antipodal discrete squares

Given a panchromatic solution of a *HF-AntipodalStrongSperner* p , it must be the case then that:

$$\forall j \in \{-1, 1\}^n, \exists! x \in \mathbf{Res}(p) : \lambda(x) = j$$

We essentially claim that a panchromatic solution of a *HF-AntipodalStrongSperner* contains all 2^d colours.

Proof. We are going to assume proof by contradiction. Assume there exists colour j that is duplicated on two points $p_1 = p + b_1, p_2 = p + b_2$ such that p is the anchor of a panchromatic solution and $b_1, b_2 \in \mathbb{B}^n$. Since the cube is antipodal, that means that we have to be wary of $\bar{p}_2$ which is at the position $p + \bar{b}_2$. Since the cube is discrete, it implies that $\bar{p}_2$ and p_1 cannot belong in any $(n-1)$ -subspace, otherwise our cube won't be discrete. But that would imply that $\forall i \in [n] : |[\bar{p}_2 - p_1]_i| = 1$. We know the only position in the hypercube that satisfies that is $\bar{p}_1$ which implies $p_1 = p_2$. Therefore every corner of an antipodal discrete cube must contain a different colour. $\square$

All the problems above are clearly in **PPAD** as all of them reduce to the *StrongSperner* problem, since we assume by construction that they are *natural* and therefore behave as normal binary circuits. For the purposes of our current research, we demonstrate a parsimonious reduction from *HF-DiscreteStrongSperner* to *PureCircuit*.

Hazard Free StrongSperner To PureCircuit

Theorem 2.1.2

$$\#\mathbf{PPAD}(\mathbf{HF-DiscreteStrongSperner}) \subseteq \#\mathbf{PPAD}(\mathbf{PureCircuit})$$

Proof. Given an input instance Λ of a *HF-DiscreteStrongSperner*, we create a *PureCircuit* instance which we break down into the following parts: *Input nodes*, *Output nodes*, *Bit generator gadget* and *Circuit application gadget*. To visualise our construction we will refer to the figure in 2.1.4. Each of these parts describe the following:

1. **Input nodes:** Vector of n value nodes which will be represented as s_i for element i .
2. **Bit generator gadget:** Given a value node s_i , apply the *Bit generator* gadget such that we create Kleene unary number as defined in 2.1. We will refer to the bit generator circuit as C_i and the Kleene unary numbers as (u_j^i) for $i \in [n]$ and $j \in [M]$.
3. **Circuit application gadget:** Since the above numbers form coordinates in a $M_{\leq 1}^n$ space, we apply the Λ function to extract a set of output nodes $(o^i)_{i \in [n]}$.
4. **Output nodes:** We use the **COPY** gate to copy $o^i \rightarrow s_i$, for all $i \in [n]$.

Bit generator gadget In order to create Kleene unary numbers we make use of a binary tree of **PURIFY** gates as seen in the figure 2.1.5. We now claim that the current construction has certain desirable properties.

Claim 2.1.3: Purification Claim

Given the description of the bit generator gadget, we make the following two claims:

1. $b \in \{0, 1\}^n : C_i(b) = b^n$
2. $C_i(\perp) \in M_n^{\leq 1}$

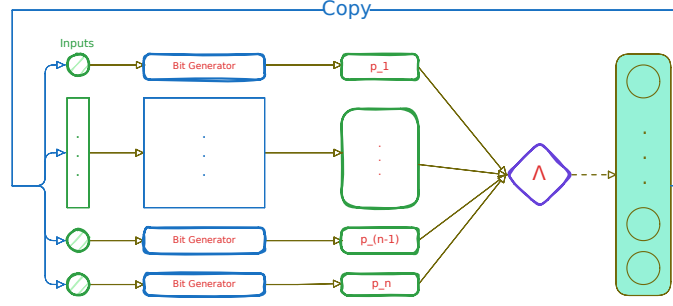


Figure 2.1.4: Pure Circuit construction visualisation

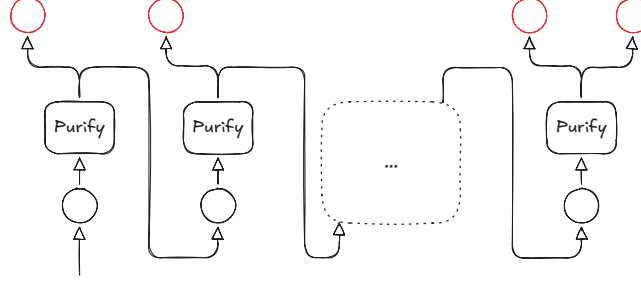


Figure 2.1.5: Purification gadget. The red nodes denote the outputs of the purification gadget.

Proof. From the definition of the PURIFY gate we know that $\forall b \in \{0, 1\} : \text{PURIFY}(b) = (b, b)$, and therefore any subtree that takes a pure input, will copy its value to all its leaves, which follows our first claim directly. To the second part of our lemma, we can observe that the only valid outputs are $(0, \perp), (\perp, 1), (0, 1)$. Based on our previous observation, if a purify gate outputs a $(0, \perp)$ value, it will propagate $\perp$ to the rest of the tree and return 0 in the current level, if the value is $(\perp, 0, 1)$, the tree will return $\perp/0$ at the specific level, and then propagate 1 to the rest of the leaves. This shows that all possible strings generated are of the form $0^* \perp^{0|1} 1^k \in M_{\leq 1}$. $\square$

Correctness and parsimonious argument One can observe that we have a valid construction since the instance is of polynomial size, all gates have the correct arity and every value node has in-degree of at most 1. It suffices to demonstrate that every assignment corresponds to a solution of *HF-DiscreteStrongSperner* using lemma 2.1.

Lemma 2.1.1: Correctness Lemma

A correct assignment corresponds to panchromatic cube in the original problem instance.

It suffices to show that every vector assignment is of the form $\forall i \in [n] : \mathbf{x}[o^i] = \perp$. Assume that we have a correct assignment, and WLOG $\mathbf{x}[o^i] = 0$ for some $i \in [n]$. By our copy that, we know that $\mathbf{x}[o^i] = \mathbf{x}[s_i]$. By our bit generator lemma 2.1 we know that $\mathbf{x}[u^i] = 0^i$. Since our circuit is hazard-free and applies the boundary conditions of the sperner problem, we know that $[\Lambda(x_{-i}(0))]_i = 1 \neq \mathbf{x}[o^i]$. We can make a similar argument for $\mathbf{x}[o^i] = 1$. Therefore, a satisfying assignment corresponds to some panchromatic solution. Given that our instance is in *HF-DiscreteStrongSperner*, it has to be the case that all $u^i \in M_1^n$, otherwise that would imply that there exists a $(n - 1)$ -subspace that also covers all the labels. This also shows that there exists a 1-to-1 mapping between a panchromatic cube and a satisfying assignment. $\square$

Although the above reduction also works for the general *HF-StrongSperner*, it will not be parsimonious since the *PureCircuit* will accept solutions for all $(n - 1)$ subspaces that contain a covering set as explained previously. Since all *AntipodalStrongSperner* are also discrete, it directly follows The corollary 2.1.

Corollary 2.1

$$\#PPAD(HF\text{-}AntipodalStrongSperner) \subseteq \#PPAD(PureCircuit)$$

EndOfLine to AntipodalStrongSperner

Proving hardness for *HF-StrongSperner* is a much harder task. Chen et al. [11] showed that every Sperner problem of space $[f(n)]^d$ where $d = \left\lfloor \frac{n}{f(n)} \right\rfloor$ and $f(n) \leq n/2$ for large enough n , it is **PPAD**-complete and parsimonious from the *EndOfLine* problem, using *Snake Embedding* technique. The idea is that we start from the *2D-Sperner* problem and repeatedly fold and pad dimensions until we reach the desired space.

Ideally we would like to use the same method to go from *2D-DiscreteStrongSperner* to *HF-DiscreteStrongSperner* as that would demonstrate a full parsimonious reduction chain from the *EndOfLine*. The problem is that we cannot guarantee, the hazard-freeness property after every fold. If we try to use the corollary 10 by 1.2.3, we observe that the circuit size will increase exponentially. This implies the best we can hope is the following space:

$$M = n^k, f(n) = \log_2(n)^k \implies d = \frac{n}{\log(n)^k}$$

But that would imply that the size of our circuit is $\Omega(2^{n/\log^k(n)})$. In the upcoming sections, we propose a chain of parsimonious reductions from the *EndOfLine* to *AntipodalStrongSperner*. We emphasize that this method will still not be hazard-free, but we hope that the antipodal properties of resulting problem may enable for a full reduction in the future since by 2.1, we know that its hazard-free variant can be parsimoniously reduced. We will start with a formal description of the planar embedding technique in order to define *2D-EoL* instances.

Planar Graph Embedding We define the graph embedding of a graph $G = (V, E)$ as $G_n = (V_n, E_n)$ where $|V| = n$ and V_n is defined as

$$\forall n \in \mathbb{N} : V_n \triangleq \left\{ \mathbf{u} \in \mathbb{N}_0^2 \mid \mathbf{u}_1 \leq 3(n^2 - 1), \mathbf{u}_2 \leq 6(n - 1) + 3 \right\}$$

G can have any in- and out-degree. For a vertex $i \in V$, we correspond it to the node $(0, 6i)$ in the embedded version. To define the edge set, we will first introduce the following notations.

Definition 2.1.8: $E(\mathbf{p}^1, \mathbf{p}^2)$

Given two points $\mathbf{p}^1, \mathbf{p}^2 \in V_n$ we define the set of edges $E(\mathbf{p}^1, \mathbf{p}^2)$ as:

$$E(\mathbf{p}^1, \mathbf{p}^2) \triangleq \begin{cases} \{(\alpha, k) \mid k \in \mathbb{N} : \min\{\mathbf{p}_2^1, \mathbf{p}_2^2\} \leq k \leq \max\{\mathbf{p}_2^1, \mathbf{p}_2^2\}\} & \text{if } \mathbf{p}_1^1 = \mathbf{p}_1^2 = \alpha \\ \{(k, \alpha) \mid k \in \mathbb{N} : \min\{\mathbf{p}_1^1, \mathbf{p}_1^2\} \leq k \leq \max\{\mathbf{p}_1^1, \mathbf{p}_1^2\}\} & \text{if } \mathbf{p}_2^1 = \mathbf{p}_2^2 = \alpha \\ \emptyset & \text{otherwise} \end{cases}$$

Definition 2.1.9: E_{ij}

Given an edge of the original graph $(i, j) \in E$, we define the set of edges E_{ij} as:

$$\begin{aligned} \mathbf{p}^1 &= (0, 6i) \\ \mathbf{p}^2 &= (3(ni + j), 6i) \\ \mathbf{p}^3 &= (3(ni + j), 6j + 3) \\ \mathbf{p}^4 &= (0, 6j + 3) \\ \mathbf{p}^5 &= (0, 6j) \\ E_{ij} &\triangleq E(\mathbf{p}^1 \mathbf{p}^2) \cup \dots \cup E(\mathbf{p}^4 \mathbf{p}^5) \end{aligned}$$

To formally define E_n , we first split E_n into two disjoint sets E_n^1 and E_n^2 . We define E_n^1 as $\bigcup_{ij \in E} E_{ij}$. The graph generated by (V_n, E_n) has some special properties such as, $\forall v \in V_n : \text{in-deg}(v) + \text{out-deg}(v) \leq 4$ and $\forall v \in V_n : \text{in-deg}(v) + \text{out-deg}(v) = 4 \implies \text{in-deg}(v) = 2 = \text{out-deg}(v)$. Moreover, for every 4-degree node, every incoming edge has an opposite outgoing edge. We use this fact to add 4 additional edges denoted in blue based on the cases denoted in the figure 2.1.6.

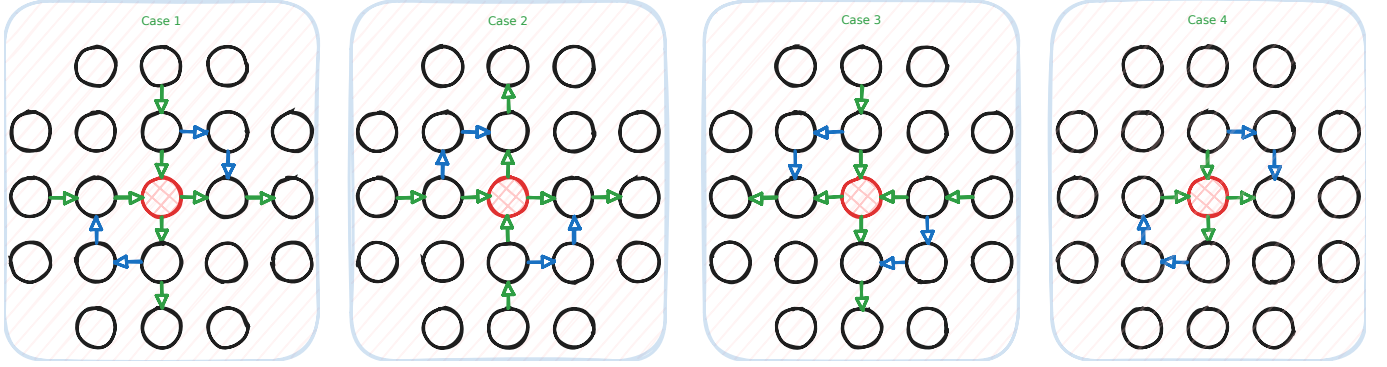


Figure 2.1.6: Figure redrawn from [10]

Given the above we have a full description of G_n . A visual explanation can be seen in figure 2.1.7 and an example of the K_3 complete graph in figure 2.1.8.

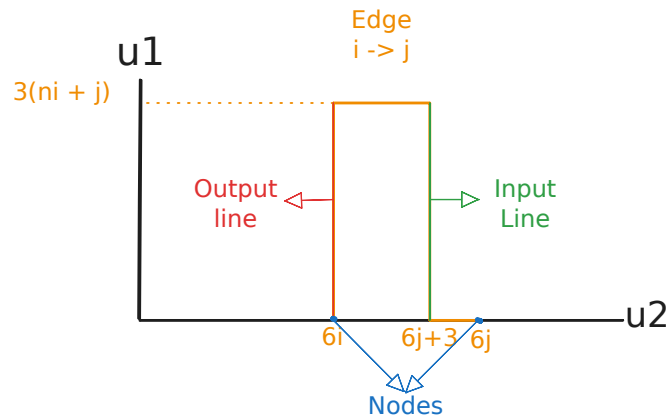


Figure 2.1.7: Edge between points i, j of the original graph. Main observation is the fact that each point comes with a pair of exponentially long lines, which we refer to as the input output lines.

Embedding of EndOfLine Chen et al. [10] demonstrated how every *EndOfLine* can be reduced to a 2D-EoL problem. Key insight, is the observation that every planar embedding of an *EndOfLine*

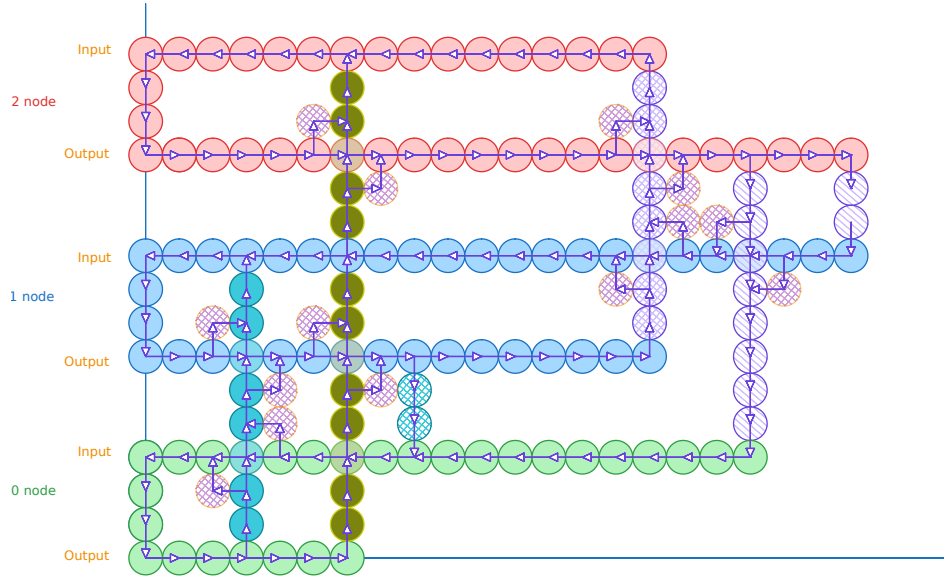


Figure 2.1.8: K_3 graph construction. Combinations of colours indicate an edge between the two nodes. Solid dots indicate edges from 0, crossed lines indicate edges from 1 and striped lines indicate edges from 2. We Add two coloured striped circles on the 4 degree nodes to indicate the E_n^2 edges. Image reconstructed from [10].

graph has the following property:

$$\forall v \in V_n : \deg(v) \in \{(0,0), (1,1), (1,0), (0,1), (2,2)\}$$

Using as reference the figure 2.1.7, we remove all the edges of nodes with degree of $(2,2)$. This in a way creates a different graph but the key insight is that the number of sources or sinks remain the same as we are essentially redirecting the lines as we can see from the figure 2.1.9. We will use these reductions in later sections to demonstrate reductions with excess problems as well.

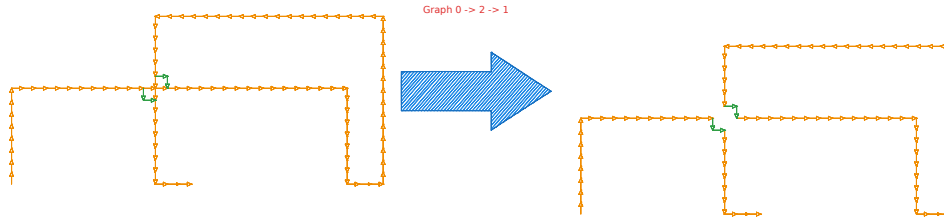


Figure 2.1.9: Depiction of the edge removal. Main idea is that this we keep the number of sources or sinks as well as invertible (we can trace the source or sink from the original instance), despite losing a lot of graph information.

Assume that $C_n \subset G_n$ are the sets of all planar graphs such that $\forall v \in V_n : \deg(v) \in \{(1,0), (0,0), (0,1), (1,1)\}$

Clearly we can observe that by the above construction of edge removal, all *EndOfLine* problems parsimoniously reduce to the *2D-EoL* problem.

Bipolar colouring of 2D-EoL We give bipolar colouring variant of Chen et al. [10] colouring technique for *2D-EoL* instances. Given an *2D-EoL* we construct space :

$$B_n \triangleq [n]_0 \times [n]_0$$

We will use points $\mathbf{u}, \mathbf{v}, \mathbf{w} \in V_{2k}$ and $\mathbf{p}, \mathbf{q}, \mathbf{r} \in B_{2^{4k+10}}$. Moreover a panchromatic square will be denoted if all the points in the neighbouring squares satisfy the bipolar colouring. Below we

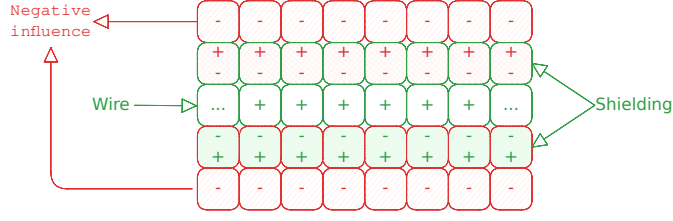


Figure 2.1.10: Shielding method on 2D-EoL embeddings.

will denote our colouring scheme for clarity:

$$\begin{aligned} + &= (+1, +1) \\ \pm &= (+1, -1) \\ \mp &= (-1, +1) \\ - &= (-1, -1) \end{aligned}$$

First, we define mapping $\mathcal{F} : V_{2k} \rightarrow B_{2^{4k+10}}$ such that

$$\mathcal{F}(\mathbf{u}) = \begin{pmatrix} 6\mathbf{u}_1 + 6 \\ 6\mathbf{u}_2 + 6 \end{pmatrix} \in B_{2^{4k+10}}$$

Since $G \in C_{2k}$, its edge-set can be decomposed into a collection of paths and cycles $(P_i)_{i \in [m]}$. By using $\mathcal{F}$, every P_i is mapped to a set $I(P_i) \subset B_{2^{4k+10}}$. We will colour every point on $I(P_i)$ with +

$$\begin{aligned} P &= \mathbf{u}^1, \dots, \mathbf{u}^t, \text{ if } P \text{ is a cycle } \mathbf{u}^1 = \mathbf{u}^t \\ I(P) &\triangleq \bigcup_{i \in [t-1]} I(\mathbf{u}^i \mathbf{u}^{i+1}) \end{aligned}$$

It is common to use the method of shielding when dealing with line reductions. Line reductions, as seen in [10, 18, 1, 11, 14]. Essentially we embed our lines and cycles in a grid, everything not a line is denoted as a negative charge -. All lines are denoted as positive charge +. To protect our lines from creating solutions, we cover them with $\pm, \mp$ lines. A visualisation can be seen in figure 2.1.10. We define the following set to denote the set of shielding points around our paths.

$$O(P) = \{\mathbf{p} \in B_{2^{4k+10}} \setminus I(P) : \exists \mathbf{p}' \in I(P), \|\mathbf{p} - \mathbf{p}'\|_\infty = 1\}$$

If P is a simple path we can decompose $\{\mathbf{s}_p, \mathbf{e}_p\} \cup L(P) \cup R(P)$ such that: $\mathbf{s}_p = \mathcal{F}(\mathbf{u}^1) + \Delta + \Delta^\perp$, where $\Delta = (\mathbf{u}^1 - \mathbf{u}^2)$, $\mathbf{e}_p = \mathcal{F}(\mathbf{u}^1) + \bar{\Delta} + \bar{\Delta}^\perp$, where $\bar{\Delta} = (\mathbf{u}^t - \mathbf{u}^{t-1})$ and $x^\perp$, denotes the vector perpendicular to x . Choice of which perpendicular vector we consider is arbitrary. Starting from $\mathbf{s}_p$, enumerate vertices in $O(P)$ clockwise as $\mathbf{s}_p, \mathbf{q}^1, \dots, \mathbf{q}^{n_1}, \mathbf{e}_p, \mathbf{r}^1, \dots, \mathbf{r}^{n_2}$ such that

$$\begin{aligned} L(P) &= \{\mathbf{q}^i\}_{i \in [n_1]}, \\ R(P) &= \{\mathbf{r}^i\}_{i \in [n_2]} \end{aligned}$$

If P is a simple cycle, then can can decompose $L(P) \cup R(P)$, where $L(P)$ contains all the vertices on the left side of the cycle and $R(P)$ all the vertices on the right side. If G is specified by $(S, P, 0^k) \subset C_{2k}$, we can uniquely decompose the edge set into $P_1, \dots, P_m$. Every path is either a maximal path, or a cycle in G . We can use the following to describe our colouring algorithm:

Algorithm 2.1.1 Turing machine F with input $(p_1, p_2) \in B_{2^{4k+10}}$

```

if  $p_1 = 0$  then
  if  $p_2 \leq 6$  then
    return  $+$ 
  else
    return  $\pm$ 
else if  $p_1 < 6$  then
  if  $p_2 = 6$  then
    return  $+$ 
  else if  $p_2 < 6$  then
    return  $\mp$ 
  else if  $p_2 = 7$  then
    return  $\pm$ 
  else
    return  $-$ 
else
  return  $M_K(\mathbf{p})$ 

```

Where $M_k(\mathbf{p})$ is can be described with the following description:

$$M_k(\mathbf{p}) = \begin{cases} + & \text{if } \exists i, \mathbf{p} \in I(P_i) \\ \pm & \text{if } \exists i, \mathbf{p} \in L(P_i) \vee p_1 = 0 \\ \mp & \text{if } \exists i, \mathbf{p} \in R(P_i) \vee p_2 = 0 \\ - & \text{otherwise} \end{cases}$$

We will call the path of nodes $(0,0) \rightarrow (0,6) \rightarrow (6,6)$ as the tail, which ensures that the 0^n node of our original graph is not a solution. An example of how such reduction looks like can be seen in figure 2.1.11.

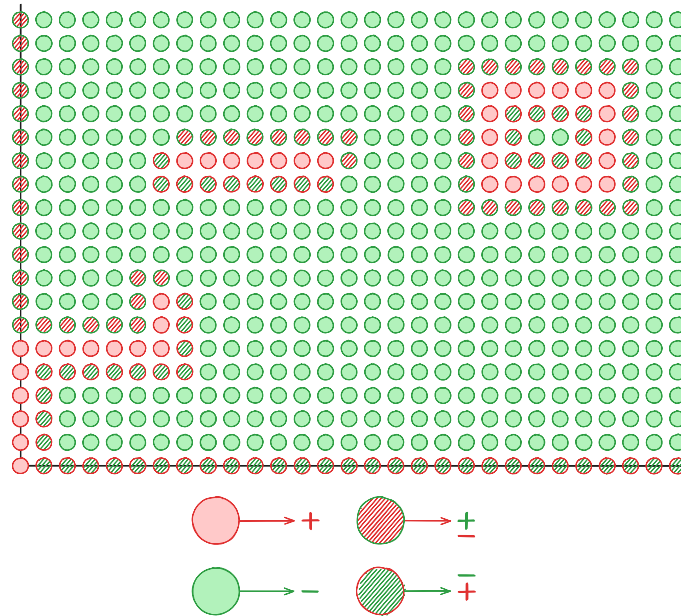


Figure 2.1.11: 2D-EoL Bipolar Colouring

Lemma 2.1.2: Correctness Lemma

The following statements hold correct:

1. $\forall i, j : \min_{x \in P_i, y \in P_j} \|\mathcal{F}(x) - \mathcal{F}(y)\|_\infty > 4$
2. All panchromatic squares represent solutions

To prove the first statement, assume we have $a, b \in V_{2^k} : \|a - b\|_\infty \geq 1$. WLOG assume $a - b = (x, y)$ for some $x, y \in \mathbb{N}$ which implies the following:

$$\mathcal{F}(a) = \mathcal{F} \begin{pmatrix} b_x + x \\ b_y + y \end{pmatrix} = \begin{pmatrix} 6b_x + 6x + 6 \\ 6b_y + 6y + 6 \end{pmatrix}$$

$$\mathcal{F}(a) - \mathcal{F}(b) = \begin{pmatrix} 6x \\ 6y \end{pmatrix}$$

Since $x + y > 0 \implies \|\mathcal{F}(a) - \mathcal{F}(b)\|_\infty \geq 6 > 4$. This statement is meant to show that all lines and their shieldings are far enough from each other such that the colourings will not create additional solutions. Visually what this looks like is, if we had to parallel lines in V_{2^k} , then the mappings with the colourings, will look like the figure in 2.1.12.

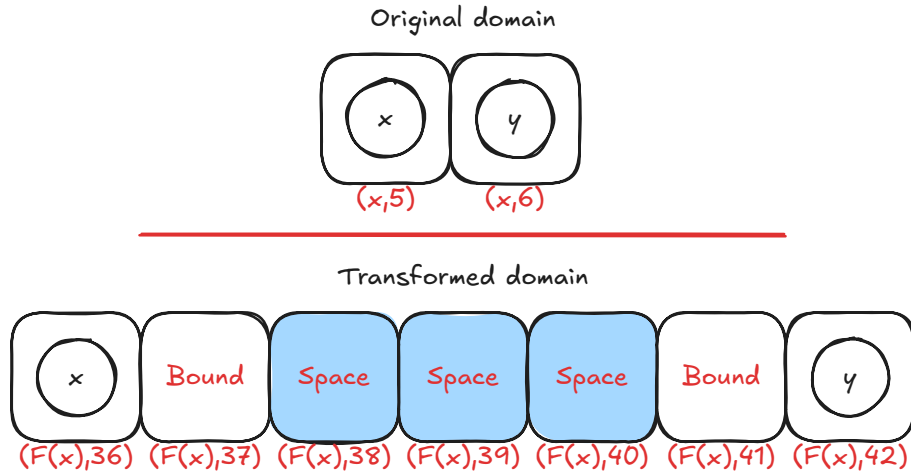


Figure 2.1.12: Transformed domain mapping example.

To show our second part of our solution, we can observe that: All nodes that are not boundary and not in $\bigcup_i I(P_i) \cup L(P_i) \cup S(P_i)$ are coloured $-$. We will use figure 2.1.11 for reference. We can observe that all squares on the left or the right of the line do not result in solutions as they contain only labels $\{\pm, +\}$ and $\{\mp, +\}$ respectively as seen in figure 2.1.11. One can observe that the square that contains s_{P_i} or e_{P_i} and a point of the line will be panchromatic as the two points will be antipodal. Therefore, we have a valid and parsimonious reduction since we only cubes and the beginnings or ends of lines can be solutions. We call this coloured instances as *2D-StrongEoL*.

Going from 2D to higher dimensions We now demonstrate how to go from *2D-StrongEoL* to *AntipodalStrongSp*. We employ a slightly adjusted method than one proposed by Chen et al. [11], which closely resembles the *Snake Embedding* technique used by Deligkas et al. [18] on the *StrongTucker* version of the problem, which reduced the space from $2^n \times 2^n \rightarrow [7]_0^m$, where $m = O(n)$. We will show how to expand their method for the *StrongSperner* problems as well as demonstrate that such reduction will resolve in an *AntipodalStrongSperner* instance.

Theorem 2.1.3

$$\#PPAD(2D\text{-}StrongEoL) \subseteq \#PPAD(AntipodalStrongSperner)$$

Proof. We are given as an input a $2^n \times 2^n$ grid representing any $2D\text{-}StrongEoL$ problem. The procedure is summarised as follows: Given dimension to fold i where width of i is $n > 8$, apply the *padding operation* such that $n' = 3 \cdot s + 1$ for some $s \in \mathbb{N}$. Then apply the *folding operation*, which reduces “width” of the space to $s + 3$ and compresses the space into a higher dimension. This resembles how we can take a sheet of paper and fold it half way such that it now has a third dimension, but a smaller width on the folded one. We will now go into a greater detail as to how each operation works. To make notation simple and consistent, we define M^t as

$$M^t \triangleq \bigtimes_{i \in [n_t]} [m_i^t]$$

Where m_i^t denotes the width of dimension i at iteration t , and n_t as the number of dimensions.

Padding Dimensions We will use the definition 2.1 to define our operation.

Definition 2.1.10: Padding dimension $P(T, i, u)$

Given labelling function $\Lambda^t : M^t \rightarrow \{-1, +1\}^{n_t}$, we define the padding operation $P(\Lambda^t, i, u)$ for $i \in [n_t]$ and $u \in \mathbb{N}$ where $n_{t+1} = n_t$ and

$$\forall j \in [n_{t+1}] : m_j = \begin{cases} m_i & \text{if } i \neq j \\ m_i + u & \text{otherwise} \end{cases}$$

The above operation extends dimension i with u additional layers. How the operation work is that we append a *null* dimension such that, given $\bar{x} = x_{-i}(m_i^t + 1)$ where $x \in M^t$

$$\forall j \in [n] : [\Lambda^{t+1}(\bar{x})]_j = \begin{cases} -1 & \text{if } \bar{x}_i > 0 \\ +1 & \text{otherwise} \end{cases}$$

We can be sure that the above will not result in any new solutions since in $[\Lambda^t(\cdot, m_i^t, \cdot)]_i = -1$, and therefore any solution between $(\cdot, m_i^t, \cdot), (\cdot, m_i^t + 1, \cdot)$ will not yield in a solution. We can repeat the above procedure u times, if we need to pad the dimension by u .

Snake Folding below we will give a overview of the snake folding operation. Before giving a formal definition, we will first give an informal overview of what the technique actually does based on the figure 2.1.13 where we view our folding with respect to the folded and new dimension. The y -axis denotes the new dimension, denoted as n_{t+1} and the x axis denotes the folded dimension referred as $\bar{i}$ with width $m_{\bar{i}}^{t+1} = s + 3 = m_i^{t'}$, given that the original width was $3s + 1$ for some $s \in \mathbb{N}$. Moreover, we will use notation (a, b) to refer to a as the labels in the n_t subspace and b as the label of the $n_t + 1$ dimension. From the figure we observe that we have orange, red, green and blue lines. Blue and orange lines denote $(\omega, -)$ and $(\omega, +)$ where ω is the n_t -dimensional *null* space, where for each point > 0 , we use label $-$ and for 0 we use label $+$. These lines are meant to satisfy the boundary conditions. For the red and green lines, these are denoted as $(\star, -), (\star, +)$ where $\star$ is the n_t -dimensional copy of the lower space with some additional points. The core idea is that all solutions, must belong in between the red and green lines, such that if we have a solution in the n_t -space, we should also have a solution in the $n_t + 1$ space, as shown in the figure 2.1.14.

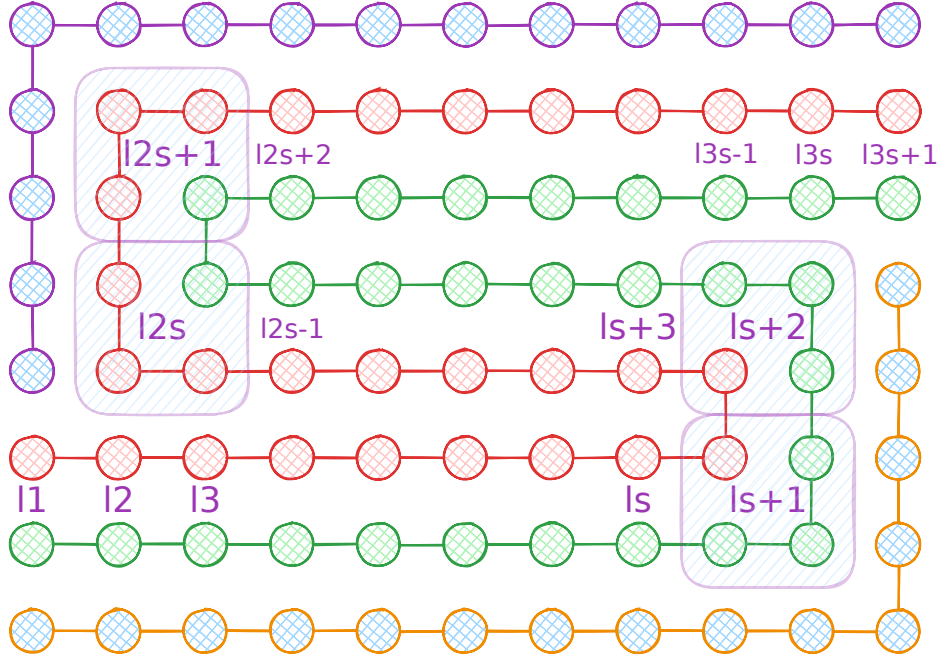


Figure 2.1.13: Snake Embedding technique view between the folded dimension j and the new dimension. The x -axis denotes the folded dimension and the y -axis denotes the new dimension. The point ℓ_i denote the indexes that correspond the j dimension of the pre-folded space.

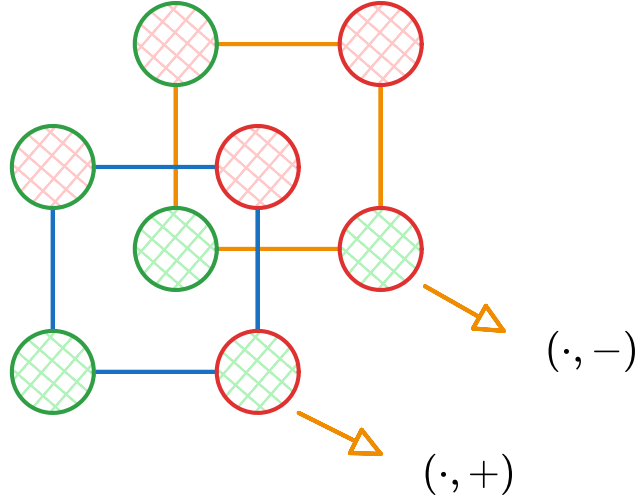


Figure 2.1.14: Snake Embedding technique between the folding dimension and the new dimension

To define the above more formally, we define sets $B^U, B^L \subseteq M^{t'}$ which denote the set of boundary indices of the orange and blue lines. In addition, we define functions $\ell^P, \ell^N \subseteq M^{t'}$ to denote the points on the green and red lines with functions ϕ^P, ϕ^N that are the inverse maps to the original original space. Given our new circuit Λ^{t+1} , we define the following:

$$\forall x \in M^{t+1}, j \in [n_t] : [\Lambda^{t+1}(x)]_j = \begin{cases} -1 & \text{if } x \in B^U \cup B^O \wedge x_j > 0 \\ +1 & \text{if } x \in B^U \cup B^O \wedge x_j = 0 \\ [\Lambda^t(\phi^P(x))]_j & \text{if } x \in \ell^P \\ [\Lambda^t(\phi^N(x))]_j & \text{if } x \in \ell^N \end{cases}$$

For the new dimension, we apply the labelling rules as described previously

$$\forall x \in M^{t+1} : [\Lambda^{t+1}(x)]_{n_{t+1}} = \begin{cases} -1 & \text{if } x \in B^U \cup \ell^N \\ +1 & \text{if } x \in B^L \cup \ell^P \end{cases}$$

Using the above we formally define the operation the snake embedding operation $S(T, i)$.

Definition 2.1.11: Snake Embedding operation $S(\Lambda^t, i)$

Given labelling function $\Lambda : M^t \rightarrow \{-1, +1\}^{n_t}$, apply the snake embedding operation on dimension $i \in [n]$, where $m_i \equiv 1 \pmod{3}$, to get a new labelling function $\Lambda^{t+1} : M^{t+1} \rightarrow \{-1, +1\}^{n_{t+1}}$ such that $m'_i = s + 3, n_{t+1} = n_t + 1, m_{n_{t+1}} = 8$, where Λ^{t+1} is defined based on the above description.

Claim 2.1.4: Antipodality Solution preservation

Given operation $S(\Lambda^t, i)$, we argue the following hold true:

1. If Λ^t is a discrete antipodal colouring function, Λ^{t+1} will preserve its properties.
2. The number of solutions between the two spaces will be preserved

Proof. We observe to the labelling conditions by comparing the original with its folded state. Assume we apply the snake folding operation on dimension j . We can observe that all solutions in the embedded space will be anchored between the red or green lines (using figure 2.1.13), otherwise the new dimension will not be covered. Moreover, one can observe that a panchromatic hypercube can never be anchored in any of the turning points since our labelling is discrete and we know that any $n_t - 1$ subspace cannot yield any panchromatic solutions.

Assume we have a point in $p \in M^{t+1}$, which is an anchor of some panchromatic solution for some $p_j \in [m_j^{t+1}]$ and $p_x \in [m_{n_{t+1}}^{t+1}]$. We can observe from the diagram 2.1.13 that the coordinates $(\cdot, p_j, p_x)$ correspond to some point $(\cdot, j)$ for some point in the pre-folded space. We can also observe that the point $(\cdot, j + 1)$ may correspond to the point $(\cdot, p_j + 1, p_x)$ or $(\cdot, p_j, p_x + 1)$, depending on whether $j \in \{2s, 2s + 1\}$ as it implies whether its on the vertical portion of the space or the horizontal portion. We denote this observation as the effective direction, meaning if $(\cdot, j) \rightarrow (\cdot, j + 1) \implies (\cdot, p_j, p_x) \rightarrow (\cdot, p_j + 1, p_x)$, then we say that the j th dimension is the effective direction, otherwise the n_{t+1} th will be the effective dimension

WLOG we assume the effective dimension is j Since $(\cdot, p_j, p_x)$ are the anchor of a panchromatic cube it implies that the points $(\cdot, p_j, p_x), (\cdot, p_j + 1, p_x)$ cover all the n_t labels and p_x will cover the n_{t+1} th dimension. This shows that we can map bijectively between each space and therefore preserve the cardinality of the solution sets.

We can also observe that our solutions remain antipodal. WLOG assumet that the effective dimension is j . We know that if p is a solution of the prefolded, then $\forall b : \Lambda^t(p + b) = -\Lambda^t(p + \bar{b})$. This implies that if $\hat{p}$ is its corresponding solution in the folded space then:

$$\forall b \in \{0, 1\}^{n_{t+1}} : \Lambda^{t+1}(\hat{p} + b_{-n_{t+1}}(0)) = -\Lambda^{t+1}(\hat{p} + \bar{b}_{-n_{t+1}}(1))$$

since the n_{t+1} th dimension will not affect the labelling of the other dimensions. $\square$

We observed that our operations do not affect the cardinality of solutions. We now outline our construction of our new circuit

1. Check if there is a dimension j with $m_j^t > 8$. If yes, first pad the dimension such that $m_j^t \equiv 1 \pmod{3}$. Afterwards fold the dimension on j to get new folded circuit

2. If the folding results in a width of $m_j^t < 8$, then we can pad the dimension to have a width of 8
3. If there are no operations that can be applied then we can terminate

We can observe that in each step of the algorithm we preserve our solutions. Moreover, each fold divides the dimension by some factor of 3. Since we start with space of $2^n \times 2^n$, we can conclude that the number of operations needed will be on the factor of $O(n \log_3 2)$. This concludes our proof. $\square$

This is the closest that we manage to bring the reduction chain across *EndOfLine* and *PureCircuit*. We can observe two interesting directions: if one can create a bit generator for Kleene binary numbers as presented previously, then we can have a similar construction to the proof we did in 2.1.2 for a full parsimonious reduction between *nD-SS* to *PureCircuit*. Alternatively one can attempt to reduce *AntipodalStrongSperner* to *HF-AntipodalStrongSperner* or *PureCircuit* parsimoniously. We argue that the antipodality property allows us to check for solutions much more efficient than trying to find $d + 1$ points in some hypercube. In hindsight, we argue that if one could construct a gadget to generate the maximum and the minimum resolution of a *Kleene unary*, it would offer a major breakthrough towards the full reduction.

2.2 SourceOrExcess analysis

The current section focuses on how we can extend our reductions to *SourceOrExcess*. In the previous sections, we gave an overview on how we can go from an *EndOfLine* problem to a topological *StrongSperner* problem. By providing a topological interpretation of the *SourceOrExcess* problem, we hope to re-use the construction for future reductions with the *PureCircuit* problem.

We will first show how we can topologically reduce the *SourceOrExcess*(2,1) problem to a 2D space. We will demonstrate some limitations with 2D topological problems and then we will demonstrate how using 3D counting version of the *StrongSperner* problem will allow for a full parsimonious reduction.

Topological representations

Given a *SourceOrExcess*(2,1) input we first eliminate all excess nodes, meaning nodes with degree (2,1) by separating one of the lines as shown in the figure 2.2.1. This simplifies our counting argument to only 3 scenarios. Moreover for double sinks, we enforce that the MSB value of the bit-string for one of the two values is one. We can observe that these modifications can be done in polynomial time since they only require to analyse the local neighbouring of nodes, and they preserve the number of solutions

Planar Transformation Our transformation 2.1 is identical to the one that done when reducing *EndOfLine* to *2D-EoL* with a slight change on the space and the paths the nodes take. First we double V_n as such:

$$\forall n \in \mathbb{N} : V_n \triangleq \left\{ \mathbf{u} \in \mathbb{N}_0^2 \mid \mathbf{u}_1 \leq 6(n^2 - 1), \mathbf{u}_2 \leq 12(n - 1) + 6 \right\}$$

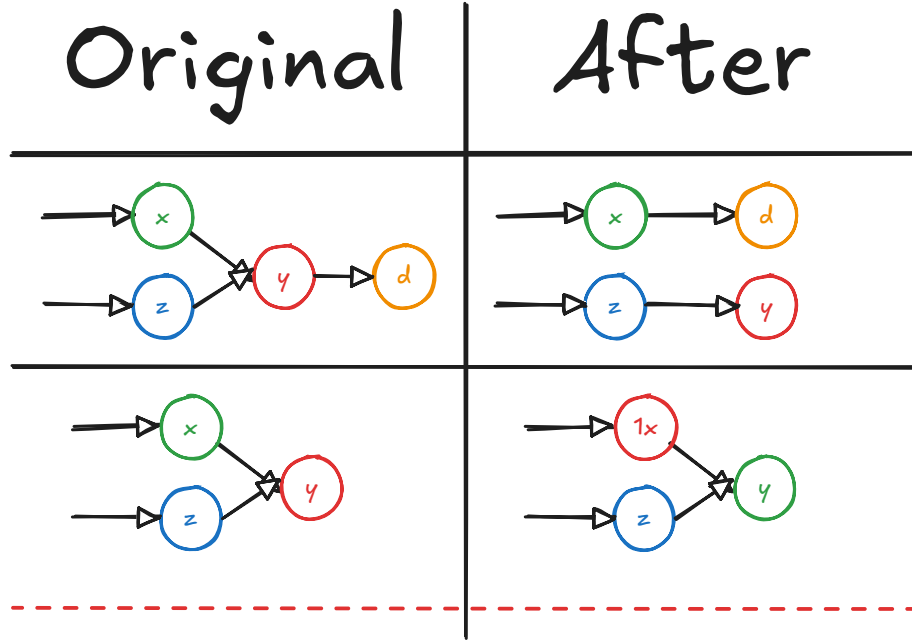


Figure 2.2.1: The current table shows how we deal with excess nodes. All other nodes such as sources, sinks, lines or isolated vertices stay the same.

Such that now every node is represented as $(0, 12i)$. Moreover for edge in $(i, j) \in E_n$ create path and MSB of i is 0, then we define path:

$$\begin{aligned}
 \mathbf{p}^1 &= (0, 12i) \\
 \mathbf{p}^2 &= (6(ni + j), 12i) \\
 \mathbf{p}^3 &= (6(ni + j), 12j + 6) \\
 \mathbf{p}^4 &= (0, 12j + 6) \\
 \mathbf{p}^5 &= (0, 12j) \\
 E_{ij} &= E(\mathbf{p}^1 \mathbf{p}^2) \cup \dots \cup E(\mathbf{p}^4 \mathbf{p}^5)
 \end{aligned}$$

If j is a double sink, attach a small tail:

$$\begin{aligned}
 \mathbf{p}^6 &= (3, 12j) \\
 E'_{ij} &= E_{ij} \cup E(\mathbf{p}^5 \mathbf{p}^6)
 \end{aligned}$$

If $i^{n+1} = 1$, then we create path

$$\begin{aligned}
 \mathbf{p}^1 &= (0, 12i) \\
 \mathbf{p}^2 &= (6(ni + j), 12i) \\
 \mathbf{p}^3 &= (6(ni + j), 12j) \\
 \mathbf{p}^4 &= (3, 12j) \\
 E_{ij} &= E(\mathbf{p}^1 \mathbf{p}^2) \cup E(\mathbf{p}^3 \mathbf{p}^4) \cup E(\mathbf{p}^2 \mathbf{p}^3)
 \end{aligned}$$

In the original problem, we argued that for every node, we have I/O lines that denote the input output nodes, which can be exponentially large. This would make it computationally difficult to differentiate between double sinks and excess nodes and we would end up double counting solutions. By removing excess nodes, we only have to focus on double sinks. Since there is no

output line in a double sink, we take advantage of that by sending one input from the traditional input path, and the other from the output path.

We can use similar arguments as in the original proof, to argue that: $\forall v \in V : \text{degree}(v) \in \{(0,1), (1,0), (1,1), (2,2), (2,0)\}$. We can observe that, if we do not have any double sinks, our graph follows the original transformation where only 4 out of the 5 possible degrees are possible. The only difference occurs on double sinks. We can observe that if the MSB of a node is 1, it can only ever be incident to double sink, meaning $(3, 12i)$ can never have an outwards edge. We know that for every node in its path, besides $(3, 12i)$, its degrees can only ever be one of the 4 cases outlined. Similarly for the other node with LSB 0 its main path stays the same except if its incident to a double sink, where we add 3 additional edges. Since the lowest path $E(\mathbf{p}^2, \mathbf{p}^3)$ can only be at height 6, we can observe that no path other than two incoming edges will ever intersect $(3, 12i)$ and therefore our reduction is valid.

We follow the same construction for the E_n^2 and apply the same removal transformation. The resulting graph is the same as in the traditional $2D\text{-}EoL$ problem but with the addition of double sinks and we call this $2D\text{-}SourceOrExcess(2, 1)$. Moreover we can observe that $2D\text{-}SourceOrExcess(2, 1)$ is parsimonious to the $SourceOrExcess(2, 1)$ problem as sources and sinks are preserved, and any removal of edges can never affect our doubled sinks.

Topological Difficulty We observe that in the $2D\text{-}StrongEoL$ bipolar colouring, we use the left handed rule to colour the shielding of our lines in a specific way, such that we always end up with panchromatic solutions at the ends of a line. The issue is that when we try to extend the same logic to the $2D\text{-}SourceOrExcess(2, 1)$ problem, we end up with the problem shown in the figure 2.2.2. Any permutation of colours we choose will always result in 2+ solutions. Even if we relax the problem to allow squares incident to panchromatic edges to count as a single solution, we still get multiple solutions. The problem occurs due to the chirality of the colouring since we are connecting a left handed line with another left handed line at opposite ends.

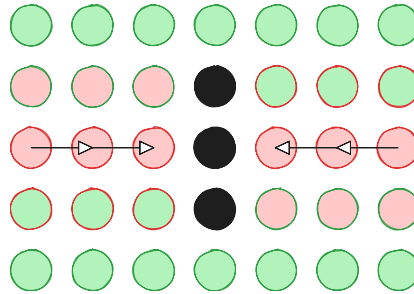


Figure 2.2.2: $2D\text{-}StrongSperner$ with $2D\text{-}SourceOrExcess(2, 1)$

The chirality problem extends $StrongSperner$ instances. Hollender et al. [27], demonstrated how one can use the $2D\text{-}EoL$ construction to create 1-MC parsimonious reductions from the $EndOfLine$. To avoid the heavy details, given an edge between two nodes, we can add 3 domino tiles to represent the edge. When two opposite paths meet we always end up with two squares that cannot be covered as seen in the figure 2.2.3. We can observe that again due to chirality, we can never find appropriate tiling.

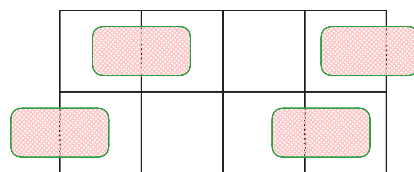


Figure 2.2.3: $1\text{-}MC$ with $2D\text{-}SourceOrExcess(2, 1)$

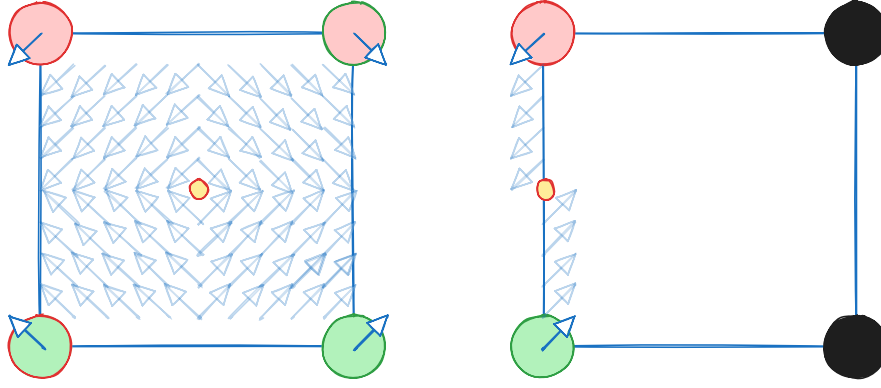


Figure 2.2.4: Panchromatic edge for 2 dimensions

Topological colouring

The key insight of our objective is showing how going to 3 dimensions and allowing panchromatic edges, allows us to achieve parsimonious reductions with *StrongSperner*. We first define the problem *3D-CountingSS*, which is a combinatorial friendly version of the *3D-StrongSperner*.

Definition 2.2.1: *3D-CountingSS* problem definition

Input: A colouring circuit $\lambda : (\{0, 1\}^k)^3 \rightarrow \{-1, +1\}^3$ which follows the boundary conditions of the *StrongSperner* problem as explained in 1.2.1.

Output: A coordinate $p = (i, j, k) \in (\{0, 1\}^k)^3$ such that the points in $\mathbf{Cube}(p)$ cover all labels. To reduce duplicated solutions, assume there exists $H \subset \mathbf{Cube}(p)$ which also covers the labels. Assume $\mathcal{D} = \{A \subseteq H \mid A \text{ covers all labels}\}$ such that $A = \arg \min_{A \in \mathcal{D}} |A|$. Accept only if $p = \mathbf{Anc}(A)$.

The above idea is a natural extension of the *StrongSperner* interpretation, where its labelling represents the direction of a continuous function. If a face of a cube is panchromatic, then that implies that there has to be a fixed point somewhere, as seen in the figure 2.2.4. If an edge were to be panchromatic, then that means that a fixed point could lie on the edge. If we were treating this as a fixed point problem instead of a colouring one, it would make sense to argue that we have one solution. We abuse this notion to count only the smallest possible subspace that contains the solution, for example in 2D, only count the edge that satisfies the colouring condition instead of all the cubes that contains the edge.

Trivially *3D-CountingSS* can be reduced to *3D-StrongSperner* even if we are overcounting the cubes. To show hardness, we make the following theorem:

Theorem 2.2.1

$$\#\mathbf{PPAD}(2D\text{-SourceOrExcess}(2, 1)) \subseteq \#\mathbf{PPAD}(3D\text{-CountingSS})$$

Proof of the theorem Our first reduction is transforming our 2D grid, into a 3D with grid points:

$$B_n^3 = \left\{ \mathbf{p} \in \mathbb{N}_0^3 \mid \mathbf{p}_3 \leq 6, \mathbf{p}_{-3} \in [n]_0 \times [n]_0 \right\}$$

We denote the transformation $\mathcal{F} : V_{2^k} \rightarrow B_{2^{4k+10}}^3$ such that

$$\forall \mathbf{p} \in B_n : \mathcal{F}\left(\begin{pmatrix} \mathbf{p}_1 \\ \mathbf{p}_2 \end{pmatrix}\right) \rightarrow \left\{ \begin{pmatrix} 6\mathbf{p}_1 + 6 \\ 6\mathbf{p}_2 + 6 \\ 0 \end{pmatrix}, \begin{pmatrix} 6\mathbf{p}_1 + 6 \\ 6\mathbf{p}_2 + 6 \\ 1 \end{pmatrix} \right\}$$

We can observe that the above essentially is our $2D\text{-SourceOrExcess}(2, 1)$ but copied twice in the 3D space. We note of the terms $I^b(P_i), L^b(P_i), R^b(P_i), \mathbf{s}_{P_i}^b, \mathbf{e}_{P_i}^b$ that we defined in the paragraph 2.1 and say use index b to denote the first copy and the second copy. Lastly, we introduce m_{ij}^b to denote the “midpoint” or the point with degree $(2, 0)$ that meets path i and path j with b to denote the upper and lower face. The ends of the paths P_1, P_2 are placed collinearly to the “midpoint” m_{ij} as seen in the figure 2.2.5.

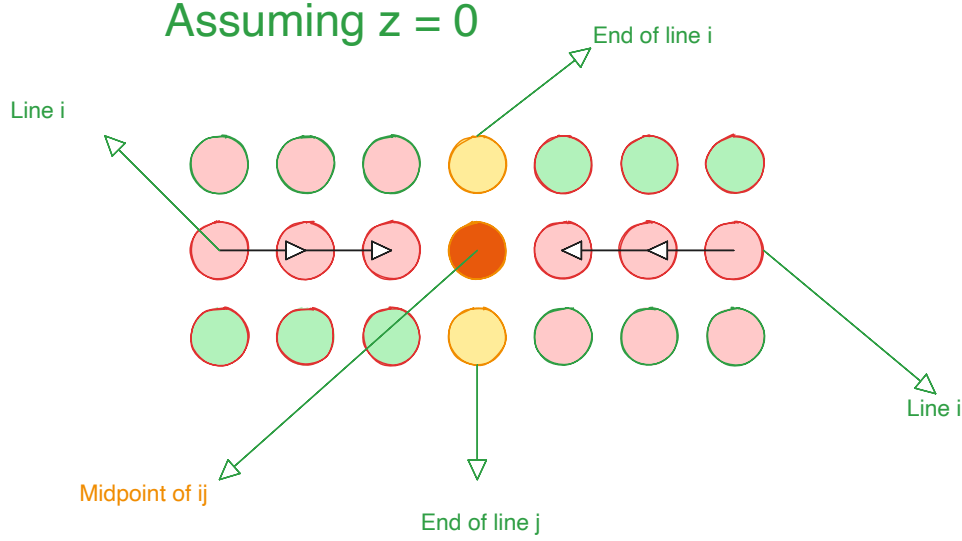


Figure 2.2.5: Double sink depiction from a 2D point of view

We now propose our colouring circuit $\mathcal{M}$:

$$\mathcal{M}(\mathbf{p}) \triangleq \begin{cases} (+, +, (-1)^b) & \text{if } \exists i, b : \mathbf{p} \in I^b(P_i) \\ (-, +, (-1)^b) & \text{if } \exists i, b : \mathbf{p} \in R^b(P_i) \\ (+, -, (-1)^b) & \text{if } \exists i, b : \mathbf{p} \in L^b(P_i) \\ (-, -, (-1)^b) & \text{if } \exists i, b : \mathbf{p} \in \{\mathbf{s}_{P_i}^b, \mathbf{e}_{P_i}^b\} \\ (-1)^b * (-, -, +) & \text{if } \exists i, j, b : \mathbf{p} = \mathbf{m}_{ij}^b \\ ((-1)^{\mathbb{1}(\mathbf{p}_1 > 0)}, (-1)^{\mathbb{1}(\mathbf{p}_2 > 0)}, (-1)^{\mathbb{1}(\mathbf{p}_3 > 0)}) & \text{otherwise} \end{cases}$$

An example of how the above colouring for simple lines can be seen in figure 2.2.6.

Correctness proof We now prove that our reduction is correct. We use figure 2.2.7 and assume that we have an edge $\mathbf{p}^t, \mathbf{p}^{t+1}$ of some path. We use red to represent the points on the left of the edge, blue the points on the right, and brown for the surrounding. The red cube will not be panchromatic as x -coordinate is $+$ on all corners and vice versa for the blue cube on the y -coordinate. In addition we can observe that the brown cubes surrounding each face will also not result in a panchromatic cube as: for the brown cube on the left of red will be $-$ on all y coordinates, with the same argument for blue. And for the brown cubes on top, we can observe that z -coordinate will be $-$ on all points. Therefore points in between lines or cycles will not result in solutions.

As we can observe from the figure 2.2.6, we can see that in the ends of lines, using the colouring of figure, the corner with the max coordinates and the one with min coordinate cover all the labels. In addition we can observe our colouring is discrete and antipodal which implies that no additional cubes are generated.

For the double sink case, we use the figure 2.2.8, to observe what happens around the double sink area. For points m_{ij}^0, m_{ij}^1 , we can observe that their labelling is antipodal, meaning given our

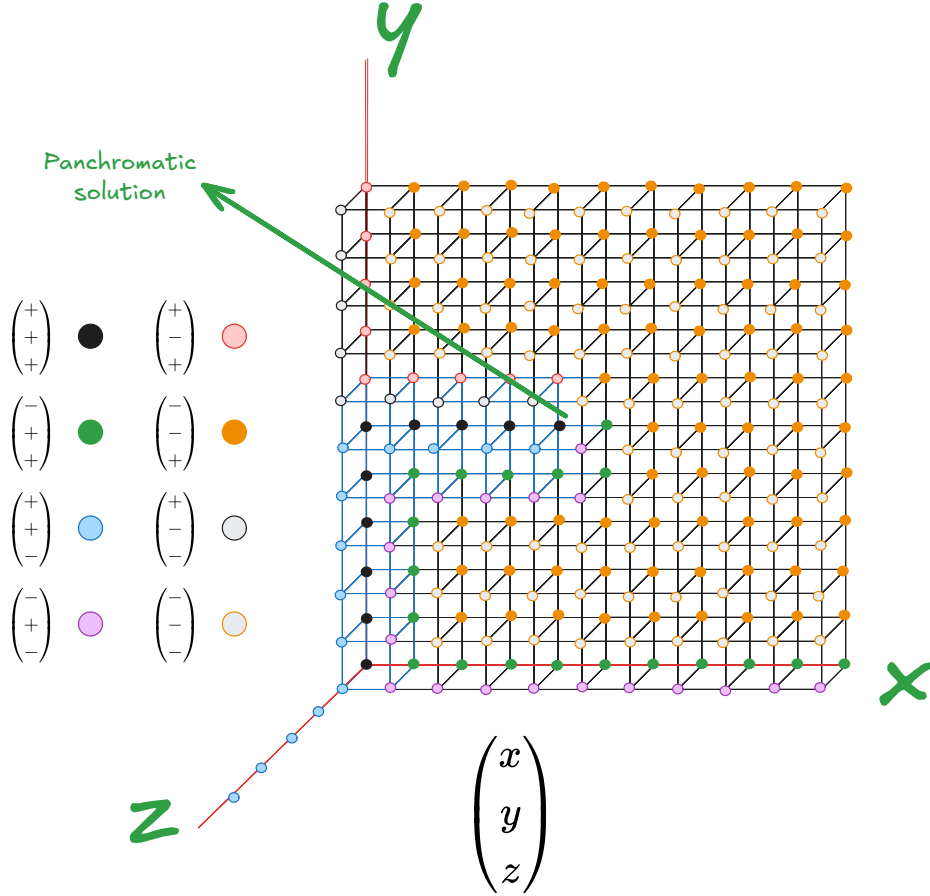


Figure 2.2.6: Colouring example based on the proposed circuit

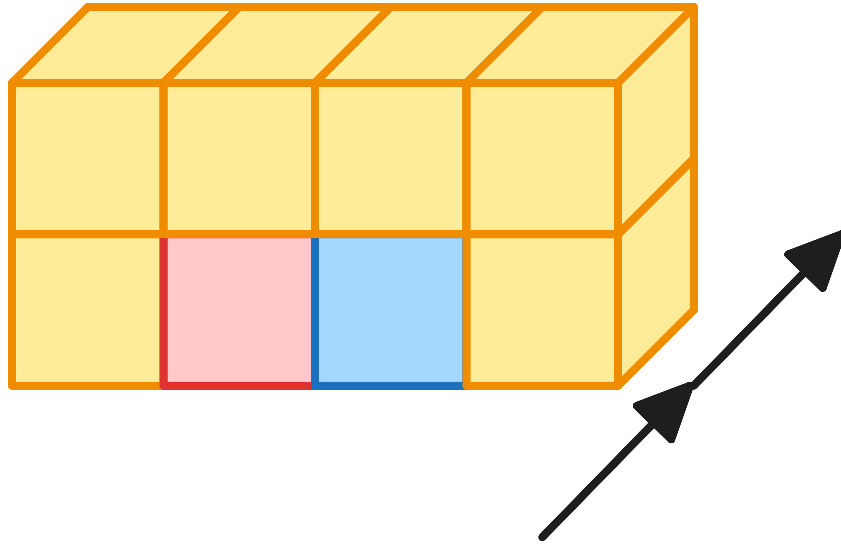


Figure 2.2.7: Example colouring where the arrow denotes the direction. In between the red and blue cubes in the bottom corners we have the positive line. The brown cubes around denote the negative labels

counting definition, all surrounding cubes that contain the side (m_{ij}^0, m_{ij}^1) count as one solution. We can manually observe that for each outer face of the combined panchromatic cube there will always exist a dimension whose colouring is not covered. For example we can see that for all

faces on top of the combine cube never cover the – dimension. We can make similar arguments for the left and right outer faces. Since the outer faces do not yield a solution, that means we have only one solution and therefore we can observe that the set of panchromatic solutions correspond to a 1-to-1 mapping with the *SourceOrExcess*(2,1) problem.

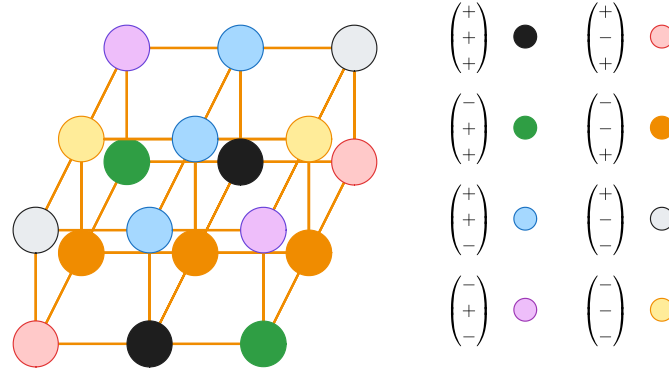


Figure 2.2.8: Colouring around the double sink points. The colours correspond to the colour legend of 2.2.6

2.3 PPAD Counting Hierarchies

As previously mentioned, we want to extend the work done by Ikenmeyer et al. [31], in order to analyse the combinatorial nature of **PPAD** as a whole. Although the project did not manage to achieve the desired theorem, we hope to demonstrate interesting findings that can allow us to reveal more intricate properties of **#PPAD**. Our first step is to extend the hierarchy between *EndOfLine* and *SourceOrExcess*(2,1). To start we give a formal definition of the *Unbalanced* problem, which is essentially the generalisation of the *EndOfLine* problem, to graphs with polynomial degree.

Definition 2.3.1: Unbalanced problem definition

Input: We are given tuple $(\mathbf{S}, \mathbf{P}, f, g)$, such that $\mathbf{S} = \{S_i\}_{i \in [f(n)]}$ and $\mathbf{P} = \{P_i\}_{i \in [g(n)]}$ and $f, g : \mathbb{N} \rightarrow \mathbb{N}$ are poly-time computable polynomial functions. This describes a graph $G = (V, E)$ such that $V = \{0, 1\}^n$ and

$$\forall (x, y) \in E, \exists i \in [f(n)], j \in [g(n)] : S_i(x) = P_j(y)$$

We enforce the condition that $\forall P_i : P_i(0^n) = 0^n$ and $\exists S_j : S_j(0^n) \neq 0^n$

Output: A node $v \in \{0, 1\}^n \setminus \{0^n\}$ such that $\text{in-deg}(v) \neq \text{out-deg}(v)$.

If $f(\cdot) = p$ or $g(\cdot) = k$ for some $p, k \in \mathbb{N}$, we will denote the problem as *Unbalanced*(p, k)

Lemma 2.3.1

Unbalanced is **PPAD**-complete [27]

We can also prove that the number of known sources does not affect the complexity of the *Unbalanced* problem.

Lemma 2.3.2

$$\#\text{PPAD}(\text{PolyS-Unbalanced}) \subseteq \#\text{PPAD}(\text{Unbalanced})$$

Proof. To show our reduction, that we have an instance of *PolyS-Unbalanced*, where have $f(n)$ known sources. Assume that $g(n)$ describes the input degree and $h(n)$ the output degree. We create a new *Unbalanced* instance with in- and out-degree polynomials $p(n) = (\max\{g(n), h(n)\}) \cdot f(n)$. We will use the figure 2.3.1 to illustrate our reduction. Essentially, we are

where s_i is the i th known source of the original problem. For each node k of the i th group, denoted as v_k^i , we are adding edge $v_k^i \rightarrow s_i$. Since each s_i element has *in-degree* = *out-degree*, we can observe that we are not creating any additional solutions. Since this transformation is local, any other unbalanced node will stay the same and therefore the set of Solutions is preserved.

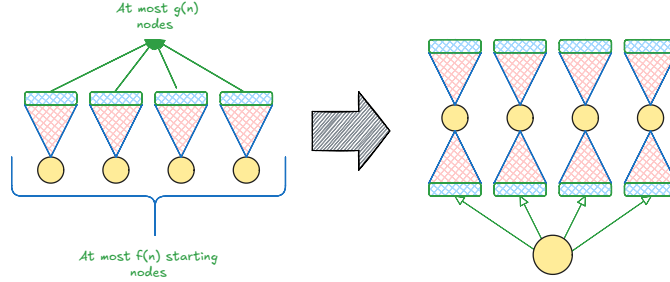


Figure 2.3.1: *PolyS-Unbalanced* transformation to *Unbalanced*

□

Lastly we can make the observation that we can create a 3D-matrix of problems such that

$$\forall i, j, k \in \mathbb{N} \cup \{Poly\} : M_{i,j,k} = kS\text{-}Unbalanced(i,j)$$

Where ω denotes polynomial values. The reason why we make this observation is for 3 main reasons. First, this gives us greater insights as to how problems in *PPAD* relate with each other. For example, *EndOfLine* and *2S-EoL*, even though they are very similar and we can reduce directly from one to another, their reductions between each other are non-parsimonious or if there exists one it must be non-trivial. This indicates possibilities for multiple hierarchies with oracle separations of another.

Second reason is that these hierarchies seem to reveal some hidden interesting structures in **PPAD** and in **TFNP** as a whole. As Hollender et al. [27] also indicated, we can observe that in *kS-EoL*, we have at least k solutions. In fact, we can make additional observations such as, given $\alpha S\text{-}SourceOrExcess(\beta, 1)$, by the pigeonhole principle we have at least $\lceil \alpha/\beta \rceil$ solutions. This implies there exists subclasses in **PPAD** which we can denote as **PPAD**(k) where we have **PPAD** problems with at least k solutions. This may lead in future directions where we can ask about combinatorial interpretations of **PPAD**(α) – β for $\alpha \geq \beta$.

Third reason would be to demonstrate that an important milestone for our conjecture is to establish the relation between *Unbalanced* and *PureCircuit*. By our lemmas 2.3, 2.3, we can observe that every possible variant of input, output degree and known sources can be eventually reduced to *Unbalanced*. In addition, the majority of problems in *PPAD* are related with each other by some form of an unbalanced directed graph, due to their eventual reductions to the *EndOfLine* problems. We emphasize that this does not imply that every **PPAD** problem can be parsimoniously reduced to the *Unbalanced* problem, but more to indicate some heuristical argument as to why this might be an important problem to study.

2.4 Supplementary Findings

In this section we would like to present additional findings that do not align with any of our current objectives, but they give insights as to how *PureCircuit* works.

Hazard Circuits and Tarski

We define the following subclass of *Tarski* 1.2.15:

Definition 2.4.1: KleeneTarski problem definition

Given $F : \mathbb{T}^n \rightarrow \mathbb{T}^n$, where F is a *natural* function 1.2.20, find $x \in \mathbb{T}^n$ such that $F(x) = x$. We assume F will be represented as a circuit that uses set of gates $\{\wedge, \vee, \neg, 0, 1\}$.

Proposition 2.4.1: Parsimonious Reduction between KleeneTarski and PureCircuit

$$\#KleeneTarski \subseteq \#PureCircuit$$

Proof. Given an input circuit $C : \mathbb{T}^n \rightarrow \mathbb{T}^n$, construct *PureCircuit* instance:

1. Initiate a vector of n nodes, which we denote as s .
2. Construct the C using the standard set of gates and apply $C(x)$ to create output vector o .
3. Copy the results back into s .

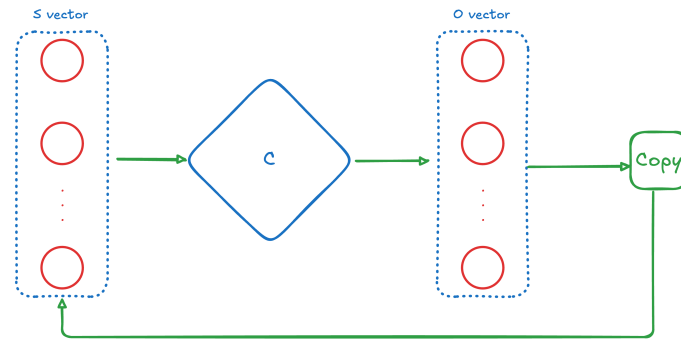


Figure 2.4.1: TARSKI construction

We can visualise the above construction in figure 2.4.1. We can observe that, for any valid assignment $\mathbf{x} \implies \mathbf{x}[s] = \mathbf{x}[o]$, which implies $\mathbf{x}[o] = F(\mathbf{x}) = \mathbf{x}[s]$. $\square$

Chapter 3

Software Deliverable

In the current section, we give an extensive overview of the software tool we developed to help with the our theory crafting. Core idea is to be able to draw *PureCircuit* gadgets, verify correctness and find solutions. We split this chapter giving an overview on the tooling we used, the architecture of the software the algorithtms we deployed for solutions finding.

3.1 Tooling Selection

3.1.1 Rust Programming Language

The development language used for is Rust ¹. Rust is a systems-level compiled programming language that can achieve high speeds due to its low-level compilation, while maintaining memory safety. The key reasons, for the specific language of choice is its speed as well as having an advanced algebraic type system.

3.1.2 Bevy and the ECS architecture

Bevy ² is a Rust library, primarily used for game development. It uses the Entity-Component-System architecture where entities with varying components exist in world state. Each *entity* interacts with each other based on systems. A visual reference is provided in the figure 3.1.1. The idea is that we are able to decouple the logic from entities to their individual components and express more intricate relations.

This choice offered several pros and cons. From the one hand, the current choice offers flexibility when it comes to drawing and interacting with shapes on a screen. We wanted to give our tool and editor-like aesthetic where the user can move the screen and individual nodes themselves as well as interact with them. In addition, it is one of the most used libraries in rust for graphic development and its incorporation with rust implies the ability to take advantage of low level programming. On the other hand, this library is still in its early stages, which implies limited documentation and features. Moreover, as its prioritizes game development, it has a limitation when dealing with UI concepts and state management. Ultimately, we chose the tool as the UI is simple enough to not hinder the experience of the tool.

3.1.3 Software Testing methodology

The core philosophy of our testing is Test-Driven-Development. This methodology was used to develop and validate our critical parts of our code, such as graph validation or solution

¹<https://www.rust-lang.org/>

²<https://bevy.org/>

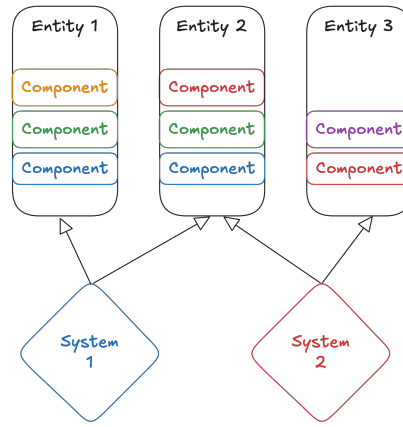


Figure 3.1.1: ECS visualisation implementation

enumeration. The main idea of this development is to first write the unit test, and then develop the code to resolve them. This allows us for the code to be self-documenting as well as ensuring that we are acting within the expected scope.

Another testing technique that we heavily took advantage of is *Property-based Testing*, which we implement using the Proptest library³. This idea was inspired by the Haskell library QuickCheck [12], where we test the properties of a pure function across a range of inputs. The idea is, the more complex, the input of the function, the greater is the input space and therefore harder and cumbersome to check all possible combinations or edge-cases. With Proptest, we check whether a property of our function is maintained across all possible inputs, such as a sorted output, or a validating assignment.

For our purposes, we use value-based property testing in which: We define a set of types where in each one we define a *generator* and a *shrinking strategy*. The *generator* is responsible for generating random values or significant values that represent the specific type. The *shrinking strategy* is responsible for finding the smallest case in which our case fails. We then define test cases that automatically run the generator and shrinker procedures until, we have tested that our function passes across all generated inputs, or finds the smallest test case it fails on.

3.2 Program Visualisation Summary

The program is composed of a mini UI legend that captures the state and a drawing board. Contains functionalities as to the current state of the program and the controls to navigate and operate. Moreover it contains buttons that find solutions or enumerate through a set of solutions.

The controls are summarised as follows. We have two main states, which we denote as node state and operation state. The operation state, determines whether we are adding an edge or a node and the node state determines the type of node that we are adding. We also provide operations to move nodes around or move the whole canvas around. When in edge mode, we can click a node to add an edge between two non-homogeneous nodes, where the order implies the direction of the edge. Moreover, every time you click on a node, you modify its value, so for example for value nodes or for gate nodes you can cycle through its different types by clicking on them. For each gate, we colour-coded its status, so for example if a gate has an invalid arity, then it is surrounded by a pink circle or if it has an invalid assignment then it is coloured red.

For the main algorithms, we provide two metaheuristic algorithms for finding solutions or approximate solutions, using either evolutionary algorithms or hill climbing search. Moreover for solution enumeration, we are using a modified backtracking algorithm, which upon execution

³<https://github.com/proptest-rs/proptest>

returns a list of solutions. We are limiting the algorithm to at most 20 value nodes in order to keep the computational expense low. Each time we modify the structure of the circuit, we reset the solution set.

3.3 Solution Selection

For the solution selection we opted with metaheuristic algorithms. Since these problems are conventionally hard to find solutions especially as the number of nodes increase, we focused on the idea of approximation algorithms such in order to find mostly satisfying assignments in large graphs or gadgets. With the help of the `genetic_algorithm`⁴ library, we use the *HillClimbing algorithm* and *Evolutionary algorithm* in order to find solutions. We will give a brief explanation on how they work in the upcoming sections but in general we express our graph as a chromosome of *Value* nodes which correspond to nodes in the original graph. Moreover we formulate our problem as series of gates with references to the location of their incident value nodes and we count the of unsatisfying gates. The goal of either algorithm is to minimise the number of errors. Once an assignment is found, we pass the solutions back into our graph and display them.

3.3.1 Hill Climbing Algorithm

The idea of hill climbing algorithms is to start by some base solution and repeatedly improve the solution. We allow for 2 strategies, one of them strictly always chooses the best neighbour whereas one allows for stochastic choice. Moreover we allow for additional option such as multiple re-runs in order to increase the odds of finding a successful assignment.

Overall this algorithm, one of the simplest and faster algorithms to run and can work well for convex problems as explained in [45]. It may significantly struggle against large graphs or instances that multiple changes need to occur in order to reach an optimal point. In fact we can further argue that hill climbing may struggle on the *Purify* gate due to the non-linearity that they present. Future ideas can adopt *Simulating annealing* which is a metaheuristic algorithm, where at the start of our run, we allow for a greater variance in our choices and as we progress, we become stricter and stricter with the next neighbour choice [45].

3.3.2 Genetic Algorithm

Evolutionary algorithms as the names suggests are based of the idea of evolution. They were introduced by [26], it is a useful algorithm has found several usages in computer science, particularly in optimisation problems such as *TSP* problems [39] or *Neural Networks* [48, 47].

Given figure 3.3.1, we can summarise the 5 core elements of the genetic algorithm:

1. **Chromosomes:** Solution assignments of our *PureCircuit* instance.
2. **Population:** A set of **chromosomes**.
3. **Fitness step:** Evaluation step. We measure how good the assignment is by counting the number of errors it has.
4. **Selection step:** Given a selection strategy, select suitable candidates in order to create the population for the next step. In literature, there are many types that one can use [34] such as *Roulette based* selection, or *Tournament based* selection. We mainly use *Tournament based* selection where randomly select a set of chromosomes and pick the best one. This process is repeated until enough chromosomes have been selected.

⁴https://crates.io/crates/genetic_algorithm

5. **Crossover step:** Given two chromosomes from the **Selection step**, combine the genes from each parent, in order to create a new instance. We allow for two main types of crossover methods:
 - (a) *Crossover Uniform:* Each gene of the child is randomly selected from either parent. This allows for diverse solutions to be explored. Can reduce diversity but performs well on large population sizes [34].
 - (b) *Crossover MultiPoint:* Using figure 3.3.2 as reference, we select crossover points that determine cutoff points from each parent. For each even sequence we use the sequence of the other parent. This method can be useful if consecutive pairs of genes are needed to improve the fitness.
6. **Mutation step:** Given the offspring of the **Crossover step**, we stochastically modify each gene in order to introduce diversity, which allows our chromosomes to explore the solution space and escape local optima [34].

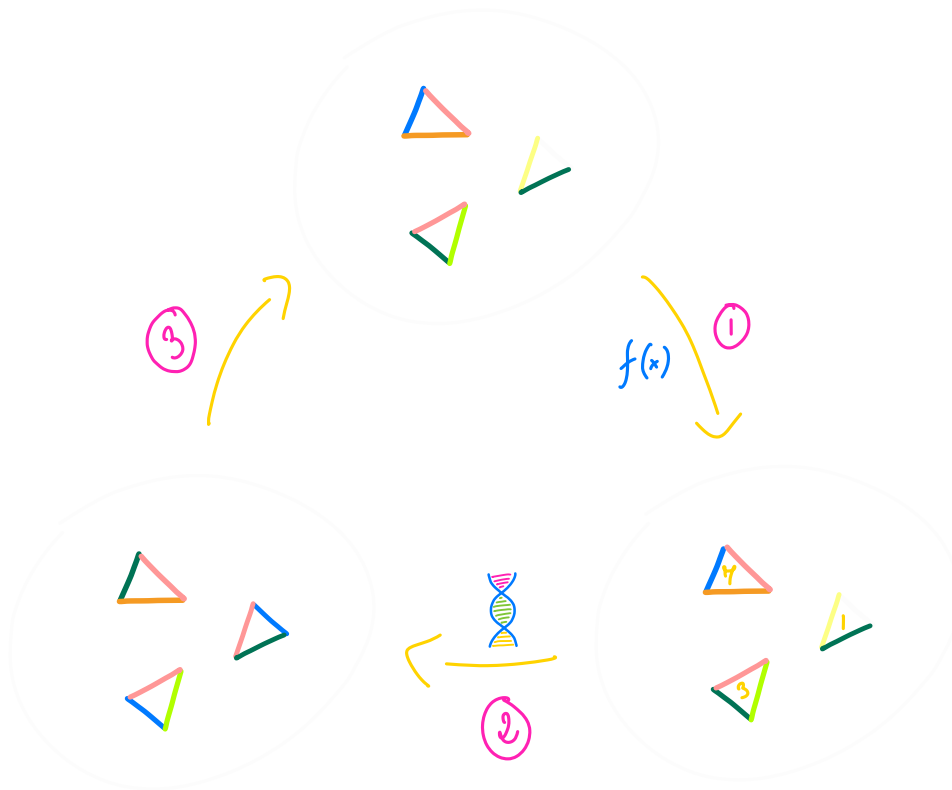


Figure 3.3.1: Visual representation of the genetic algorithm cycle. Image source [50]



Figure 3.3.2: Crossover with multiple cutoff points. Image source [34]

The repetition of the steps eventually converges to an assignment that is satisfying. The benefits of these methods over our own personal experimentations is that it seems to scale significantly well. As we aim for the tool to be usable for many situations, we allow for the user to tune the parameters and strategies to their needs in order to adapt to each solution. Moreover, we use speciation techniques were separate our chromosomes to different species in order to maintain diversity and increase the odds of finding a solution.

3.3.3 Solution Enumeration

To enumerate through solutions, we employed a traditional backtracking algorithm. We split our algorithm to two main procedures: **Backtrack Initialisation** and **Backtrack Solution Enumerator**.

Algorithm 3.3.1 PureCircuit Backtracking Algorithm Enumerator

```

function BACKTRACKINSTANTIATION(pc : PureCircuitInstance)
  V ← PCEXTRACT(pc) ▷ Extract value nodes from the PureCircuit instance
  S ← ARR(|V|, KLEENESSETINIT({0, ⊥, 1})) ▷ Create a state vector that contains the KleeneSet data-structure.
  Q ← PRIORITYQUEUEINIT(∅)
  for el ∈ V do
    pq_key ← KEYSTRUCT(3, el.is_source(), el.num_neigh())
    PUSHPQ(Q, pq_key, el.index)
  return S, Q

function BACKTRACKPURECIRCUIT(pc : PureCircuitInstance)
  S, Q ← BACKTRACKINSTANTIATION(pc)
  A ← ARR(|V|, ∅)
  r ← BACKTRACKITERATION(pc, A, S, Q)
  return r

function BACKTRACKITERATION(
  pc : PureCircuitInstance,
  A : Arr[Kleene],
  S : Arr[KleeneSet],
  Q : PriorityQueue
)
  if ISEMPTY(Q) then
    return [A]
  min_graph_ind ← EXTRACTMIN(Q)
  r ← []
  for v ∈ S[m] do
    S' ← CLONE(S)
    Q' ← CLONE(Q)
    A' ← CLONE(A)
    result ← UNITPROPAGATE(pc, min_graph_ind, v, A', S', Q')
    if result = ⊥ then
      Continue
    r' ← BACKTRACKITERATION(pc, A', S', Q')
    r ← CONCATARRAY(r, r')
  return r

function UNITPROPAGATION(
  pc : PureCircuitInstance,
  nod_ind : GraphIndex,
  nod_val : GraphValue,
  A : Arr[Kleene],
  S : Arr[KleeneSet],
  Q : PriorityQueue
)
  ASSIGNNODE(nod_ind, nod_val, A, S, Q)
  PROPAGATENODE(pc, nod_ind, nod_val, A, S, Q)
  while ¬ISEMPTY(Q) ∧ PEEKKEY(Q).set_length = 1 do ▷ While the queue contains an element whose value can take only one element, assign its value

```

```

    ind ← EXTRACTMIN(Q)
    val ← S[ind]
    ASSIGNNODE(ind, val, A, S, Q)
    PROPAGATENODE(pc, nod_ind, nod_val, A, S, Q)
  if IsEMPTY(Q) then ▷ If every element is assigned, accept
  | return ⊤
  if PEEKKEY(Q).set_length = 0 then ▷ If the queue contains an element which does not have a
  | satisfying assignment, discard the current assignment
  | return ⊥
  return ⊤
function PROPAGATENODE(
  pc : PureCircuitInstance,
  nod_ind : GraphIndex,
  A : Arr[Kleene],
  S : Arr[KleeneSet],
  Q : PriorityQueue
)
  for g ∈ GETALLGATENEIGHBOURS(pc, nod_ind) do
    I ← GETVALUESETS(Input)
    O ← GETVALUESETS(Output)
    (I', O') ← SETSIMPLIFICATION(g, I, O) ▷ Determine the available value sets for each input
    output element given the elements that have been already assigned
    PROPAGATESETVALUES(Q, S, I', I) ▷ Propagate the changes to their value sets and to their
    queue keys for both the input and output elements
    PROPAGATESETVALUES(Q, S, O', O)

```

Backtrack Initialisation We initialise two main structures, a priority queue Q , and a solution map S for each node. S is the a set of possible values a node can take. The priority queue will essentially dictate which nodes to select and evaluate. We want to reduce the recursive calls as much as possible and eliminate any partial assignments that lead to unsatisfying solutions. stores the node references of the value nodes and uses as keys the structure $\text{KEYSTRUCT}(e)$. The KEYSTRUCT is a structrue that orders elements lexicographically based on the following order:

1. **In descending:** The number of possible value elements the current node can take
2. **In Ascending:** Whether the node has an *in-degree* of 0
3. **In Ascending:** The total number of neighbours

We argue that the above strategy minimises the breadth of the recursive calls. Moreover, for each node with *in-degree* of 0 as for each value of their assignment, a solution should exist. The heuristical argument for this can be observed in Deligkas et al. [19], where there construction for finding solutions allows for source nodes to be independent. Lastly, prioritising nodes with the highest neighbour count implies that we propagate changes to a greater number gates and therefore maximise the influence of the *Unit Propagation* procedure.

Unit Propagation operation The algorithm essentially, assigns the selected value to a node by modifying to the solution set and the value set. Then for each gate that is incident to the node apply the *Set simplification* operation. While the top element of the queue has one possible solution, extract the solution and repeat the *unit value propagation operation* until the queue is empty or the cardinality of the value set at the head of the priority queue is different than 1. If it's zero then current assignment is not valid and we return false, otherwise we return true.

Set simplification operation Given a gate, we have a set of possible values for each of our nodes, as determined by our value set. The idea is that we want to reduce the set possible values by following the rules of the gate. For example, we given an **AND** gate. If the output value is assigned the value 1, then we know that the inputs can only take values (1,1) and therefore we restrict the values of the input sets to $\{1\}, \{1\}$. If the current solution set of a node is v_t , then its updated set is $v_{t+1} \leftarrow v_t \cap \omega$, where ω are the set of values denoted by the simplification operation. We provide the rules of **AND** and **OR** work and in the appendix we provide the full table. If a value is not assigned, we denote it as $\cdot$.

AND input	Output sets
$\forall v \in \mathbb{T} : (\cdot, \cdot, v)$	$(\mathbb{T}_{\geq v}, \mathbb{T}_{\geq v}, \{v\})$
$\forall v \in \mathbb{T} : (\cdot, v, \cdot)$	$(\mathbb{T}, \{v\}, \mathbb{T}_{\leq v})$
$\forall a, b \in \mathbb{T} : a < b \implies (\cdot, a, b)$	Invalid combination
$\forall v \in \mathbb{T} : (\cdot, v, v)$	$(\mathbb{T}_{\geq v}, \{v\}, \{v\})$
$\forall a, b \in \mathbb{T} : a > b \implies (\cdot, a, b)$	$(\{b\}, \{a\}, \{b\})$
$\forall a, b \in \mathbb{T} : (a, b, \cdot)$	$(\{a\}, \{b\}, \{\min(a, b)\})$
$\forall a, b, c \in \mathbb{T} : (a, b, c)$	$(\{a\}, \{b\}, \{c\})$, only if the triplet (a, b, c) is a correct AND assignment

Table 3.3.1: **AND** value propagation rules

OR input	Output sets
$\forall v \in \mathbb{T} : (\cdot, \cdot, v)$	$(\mathbb{T}_{\leq v}, \mathbb{T}_{\leq v}, \{v\})$
$\forall v \in \mathbb{T} : (\cdot, v, \cdot)$	$(\mathbb{T}, \{v\}, \mathbb{T}_{\geq v})$
$\forall a, b \in \mathbb{T} : a < b(\cdot, a, b)$	$(\{b\}, \{a\}, \{b\})$
$\forall v \in \mathbb{T} : (\cdot, v, v)$	$(\mathbb{T}_{\leq v}, \{v\}, \{v\})$
$\forall a, b \in \mathbb{T} : a > b(\cdot, a, b)$	Invalid combination
$\forall a, b \in \mathbb{T} : a > b(a, b, \cdot)$	$(\{a\}, \{b\}, \{\max(a, b)\})$
$\forall a, b, c \in \mathbb{T} : (a, b, c)$	$(\{a\}, \{b\}, \{c\})$, only if the triplet (a, b, c) is a correct OR assignment

Table 3.3.2: **OR** value propagation rules

Purify input	Output sets
$\forall b \in \mathbb{B} : (b, \cdot, \cdot) \vee (b, \cdot, b) \vee (b, b, \cdot)$	$(\{b\}, \{b\}, \{b\})$
$(\perp, \cdot, \cdot)$	$(\{\perp\}, \mathbb{T}_{\leq \perp}, \mathbb{T}_{\geq \perp})$
$(\cdot, \cdot, 0)$	$(\{0\}, \{0\}, \{0\})$
$(\cdot, \cdot, 1)$	$(\mathbb{T}_{\geq \perp}, \mathbb{T}, \{1\})$
$(\cdot, \cdot, \perp)$	$(\{\perp\}, \{0\}, \{\perp\})$
$(\cdot, 0, \cdot)$	$(\mathbb{T}_{\leq \perp}, \{0\}, \mathbb{T})$
$(\cdot, 1, \cdot)$	$(\{1\}, \{1\}, \{1\})$
$(\cdot, \perp, \cdot)$	$(\{\perp\}, \{\perp\}, \{1\})$
$(\perp, 0, \cdot)$	$(\{\perp\}, \{0\}, \mathbb{T}_{\geq \perp})$
$(\perp, \cdot, \perp)$	$(\{\perp\}, \{0\}, \{\perp\})$
$(\perp, \cdot, 1)$	$(\{\perp\}, \mathbb{T}_{\leq \perp}, \{1\})$
$(\perp, \perp, \cdot)$	$(\{\perp\}, \{\perp\}, \{1\})$
$\forall a, b, c \in \mathbb{T} : (a, b, c)$	$(\{a\}, \{b\}, \{c\})$, only if the triplet (a, b, c) is a correct PURIFY assignment
—	Any unlisted combinations are considered invalid

Table 3.3.3: **Purify** value propagation rules

Backtrack Operation The *backtrack* operation is summarised in 3 key steps. If the priority queue is empty then we found a satisfying assignment. Otherwise, pick a node from the priority queue. For each value in its set, create a copy of the current queue, current solution assignment and value set state and apply the *Unit value propagation* operation. After that create a recursive call apply the *backtrack operation* again until the current recursion chain terminates with a solution or rejects. At the root of every execution call, merge the solution assignments in each level and return the sets. The root call will return a set of every possible valid assignment set.

NOR input	Output sets
$\forall v \in \mathbb{T} : (\cdot, \cdot, v)$	$(\mathbb{T}_{\leq -v}, \mathbb{T}_{\leq -v}, \{v\})$
$\forall v \in \mathbb{T} : (\cdot, v, \cdot)$	$(\mathbb{T}, \{v\}, \mathbb{T}_{\leq -v})$
$\forall a, b \in \mathbb{T} : a > b \implies (\cdot, a, b)$	$(\{-b\}, \{a\}, \{b\})$
$\forall v \in \mathbb{T} : (\cdot, v, -v)$	$(\mathbb{T}_{\leq v}, \{v\}, \{-v\})$
$\forall a, b \in \mathbb{T} : a < b \implies (\cdot, a, b)$	Invalid combination
$\forall a, b \in \mathbb{T} : (a, b, \cdot)$	$(\{a\}, \{b\}, \{\neg \max(a, b)\})$
$\forall a, b, c \in \mathbb{T} : (a, b, c)$	$(\{a\}, \{b\}, \{c\})$, only if the triplet (a, b, c) is a correct NOR assignment

Table 3.3.4: **NOR** value propagation rules

NAND input	Output sets
$\forall v \in \mathbb{T} : (\cdot, \cdot, v)$	$(\mathbb{T}_{\geq -v}, \mathbb{T}_{\geq -v}, \{v\})$
$\forall v \in \mathbb{T} : (\cdot, v, \cdot)$	$(\mathbb{T}, \{v\}, \mathbb{T}_{\geq -v})$
$\forall a, b \in \mathbb{T} : a < b(\cdot, a, b)$	$(\{-b\}, \{a\}, \{b\})$
$\forall v \in \mathbb{T} : (\cdot, v, -v)$	$(\mathbb{T}_{\geq v}, \{v\}, \{-v\})$
$\forall a, b \in \mathbb{T} : a > b(\cdot, a, b)$	Invalid combination
$\forall a, b \in \mathbb{T} : a > b(a, b, \cdot)$	$(\{a\}, \{b\}, \{\neg \max(a, b)\})$
$\forall a, b, c \in \mathbb{T} : (a, b, c)$	$(\{a\}, \{b\}, \{c\})$, only if the triplet (a, b, c) is a correct NAND assignment

Table 3.3.5: **NAND** value propagation rules

Correctness and Running Time analysis

For the running time analysis, we can observe that each time we assign a node, the unit propagation operation, restricts the solution set of the value nodes that are incident by one gate. Even in the worst case scenario where no reduction occurs, we can clearly see that each time, our priority queue will select a node and will recurse through each of its possible values, creating a call tree with depth of at most n . Therefore, we can argue that the running time of the algorithm is $O(3^n)$, we can observe as the unit propagation and set reduction methods attempt to reduce in the average cases.

As for correctness, the algorithm essentially picks nodes in a certain order and selects a value that we believe that will give a satisfying assignment. We only have to look at what happens at the *unit propagation* stage. We can observe that in each stage, we are essentially limiting the set of solutions to only the ones that will give a satisfying assignment. The idea is that we are fast-forwarding the backtracking calls by taking advantage of the localised changes of each gate. Value that we discard are nodes that guarantee to give unsatisfying assignments, and therefore we are not discarding any solutions. If the value set of a node is zero, it means that no assignment will lead to a solution and therefore we reject the current path. If no nodes are left in the queue, that means that all value nodes are assigned and therefore we can return the current assignment. This implies that our resulting array of assignments contains only valid solutions, and this array covers the maximal solution set.

Chapter 4

Chapter Conclusions and Future Directions

4.1 Conclusions

In summary, we demonstrated how to work with topological representations of various **PPAD** problem, and how under certain conditions one can parsimoniously reduce them to *PureCircuit*. First we showed how *Kleene logic* can be embedded into **PPAD** using as a primary example the *StrongSperner* problem and how certain problems retain their **PPAD**-completeness. Moreover, we demonstrated that under hazard-free conditions and discreteness, how one can parsimoniously reduce *HF-DiscreteStrongSperner* to *PureCircuit*. We were also able to construct a parsimonious reduction from the *EndOfLine* problem to *StrongSperner* instances with discrete and antipodal properties. Since we know that the hazard free version of *AntipodalStrongSperner* can be parsimoniously reduced to the *PureCircuit*, we argue that if one can construct a hazard-free version of the circuit, we can achieve the full parsimonious reduction chain between *EndOfLine*.

Extending this idea, we showed how *SourceOrExcess*(2,1) can also be encoded topologically and demonstrated how the dimensionality of the space we encode it can affect the counting hardness of problems. We argue that this has some substantial consequences as first we found another **PPAD**-complete problem with no clear combinatorial interpretation. Moreover, this lead to interesting questions as one can ask how does the degree of a graph affect the smallest possible space we can encode it in.

Moreover we investigate the different counting classes that can be represented in **PPAD** by expanding on Hollender et al.'s work [27]. Specifically we expanded on the combinatorial argument their combinatorial to argued about the infinite hierarchy of **PPAD** problems and their minimum number of solutions. In addition, we argued the importance of the *Unbalanced* problem as an important stepping stone to a total *PureCircuit* Cook-Levin theorem, due to its overall relation with all the other unbalanced digraph problems.

Lastly, we showcased our work on our *PureCircuit* visualisation software. We demonstrated its core functionalities such as *PureCircuit* editor tool with assignment verification. Moreover we implemented several metaheuristic algorithms for assignment finding assignments in large graphs, such as *Hill Climbing* and *Genetic Algorithms*. Most importantly, we also implemented a specialised backtracking algorithm which takes advantage of the structure of the graph. Despite its high worst-case running time, we manage to use several greedy methods to cut down breadth and with of the tree making it ideal for verification of small circuits.

4.2 Future Work

4.2.1 Theory Directions

In our research were able to highlight several directions that one could take. We mainly highlight to directions: **HF-PPAD** in **PPAD** and topological representations of directed graphs

HF-PPAD in PPAD

In our sections 2.1 and 2.2, made references to how Kleene logic can be incorporated with **PPAD** problems. For the nD -*StrongSperner* problems we observed that *Kleene logic* provides a natural extension and is equivalent to its non hazard counterpart. For other problems such as *StrongSperner*, we observed that this is not clear by current complexity assumptions and indeed proving **PPAD**-hardness would be essential for establishing the counting hardness of *PureCircuit*. But one could ask further questions such as, could we define complexity classes such as **HF-PPAD** and could we show that **HF-PPAD** = **PPAD**. Along similar line, we can also ask the questions as to existence of problems *HF-nD-Counting-SS* and if they are parsimonious to their non hazard-free variants. We know that the non counting version can be resolved parsimoniously but we argue that it is not so simple when we omit panchromatic cubes as by doubling the cubes, we may introduce more solutions.

Even more naturally, one can also ask further questions such as, how does hazard-freeness affect **TFNP** as a whole. We conjecture that one can make similar observations to the *StrongTucker* problem [1], in order to create similar classes such as **HF-PPA** as it also uses a very similar colouring argument as the *StrongSperner* argument. Moreover we were able to observe how we can use *Kleene logic* with *PLS* subproblems like *Tarski*. We believe that this shift in perspective may also give insights to other areas such as the circuit complexity *Hazard-Free Circuits*.

Parsimonious Topological Representations of PPAD problems

From the previous sections we observed how to reduce *SourceOrExcess*(2,1) to a topological problem. Just like in the *EndOfLine* problem, we found it essential to reduce it to a *StrongSperner* problem with polynomial sides and very high dimensionality. We believe that one could abuse the *Snake Embedding* methodology that we proposed earlier but there are two main questions that need to be resolved:

1. Will the number of solutions between foldings stay the same?
2. Is there a natural way to define *Counting-SS*?

More interestingly, we made references of $\alpha - SUnbalanced(\Delta_i, \Delta_o)$ and how they can affect the counting nature of each other. Like we mentioned previously, for *2D-StrongSperner* and *1-MC*, we cannot guarantee parsimonious reductions, but when we mapped our instances to a 3D space that was indeed possible. We therefore make the following conjecture:

Conjecture 4.2.1: nD -CountingSS and Unbalanced

There exist some polynomial computable function $f : \mathbb{N}^3 \rightarrow \mathbb{N}$, such that given $\alpha, \Delta_i, \Delta_o \in \mathbb{N}$ and $m = f(\alpha, \Delta_i, \Delta_o)$

$$\mathbf{PPAD}(\alpha\text{-}SUnbalanced(\Delta_i, \Delta_o)) \subseteq \mathbf{PPAD}(mD\text{-}CountingSS)$$

What the above conjecture essentially describes is, given a number of known sources and the maximum number of input/output vertices of graph, can we create some nD -CountingSS that is

parsimonious to its graphical representation? Since we know that the problem *Unbalanced* can parsimoniously count every variant, can we also reduce *Unbalanced* to a topological problem? A reduction like that would be an important milestone for the usage topological *PureCircuit* constructions for enumerating solutions.

PureCircuit Gate Extension

The *PureCircuit* instance we defined uses the gate set *NOR*, *Purify*. In fact, Deligkas et al. [19] demonstrated that if G is our gate set, then for the problem to be **PPAD**-complete, it must be the case that

$$\begin{aligned} G \supseteq \{\text{PURIFY}, v\} \text{ for } v \in \{\text{NOR}, \text{NAND}\} \\ \text{or} \\ G \supseteq \{\text{PURIFY}, \text{NOT}, v\} \text{ for } \{\text{AND}, \text{OR}\} \end{aligned}$$

The proof for the **PPAD**-inclusion can be summarised as expressing a *PureCircuit* instances as a *Brouwer* function from $[0,1]^n \rightarrow [0,1]^n$, given fixed point x^* then we denote the folloiwng assignment: if $x_i^* \in \{0,1\}$ then $v_i = x_i^*$, otherwise $v_i = \perp$. We argue that there may exist gates which exhibit any behaviour of the sort $f \in [0,1]^k \rightarrow [0,1]^m$ such that f is contiuous, where they may make our reductions easier and more straight forward. This could raise additional directions as to the behaviour of the additional functions and whether they may affect the combinatorial nature of the *PureCircuit* problem.

4.2.2 Software future Directions

Algorithmic Extensions

Although the aforementioned algorithms work as expected, there are several improvements that can be made. For all three of the algoritmic methods we mentioned, the first and most important extension is to treat weakly directly connected components individually. Trivially an assignment in one weakly connected component should not affect the solution set of the other one. We can therefore reduce the search spaces of our problems by finding the solution sets in each graph seperately. Moreover for the *backtracking* algorithm, we can extend the above idea by considering the cartesian product of the solution sets, meaning: let G_i denote a (weakly) connected component of G and $\text{sol}(\cdot)$ denotes its solution set. Its trivial to observe that

$$\text{sol}(G) = \bigtimes_{k \in [k]} \text{sol}(G_k)$$

We can also optimise the backtracking algorithm even further. First one can observe that if our graph was acyclic, then the permutation of the nodes with no *in-degree* solutions essentially dictate the assignments of the downstream nodes (excluding nodes incident to purify gates). With this in mind, we can apply the following sequence of steps to make the backtracking algorithm simpler:

1. Identify the strongly connected components (SCCs) of the circuit, using polynomial time algorithms such as Kosaraju's Algorithm [46] or Gabow's Algorithm [25].
2. Treating SCCs as an individual node, identify nodes by their distances from base nodes (nodes with no incoming edges)

-
3. Extend the backtracking algorithm so instead of the using the is start label, use the distance from base instead. The greater distance a node has from the base, the less impact it has and therefore should be postponed in later stages of the backtracking calls.

We argue that the above heuristic may result in improved average times but of course further research can be done in order to determine more suitable selection heuristics. Furthermore, an additional heuristic that we failed to consider is using the notion of alternation or varying path. This has been introduced by [20] and the idea is the “application” of the gates to propagate values. Their algorithm can be summarised as such: Start with an initial set of nodes, and apply gates of each circuit enough times. For nodes that alternate their values between 0,1, replace their value with $\perp$. Repeat until no alternation occurs. This algorithm is still exponential in its running time but one could deduce useful insights as to notion of alternating paths. It has to be noted that it may not be entirely clear how such construction could be applied as the purify gate has a non-deterministic output, meaning for the $\perp$ value, the outputs could be multiple.

Chapter 5

Project Management

5.1 Project management methodology

Due to the hybrid nature of our project, we wanted to make sure we were able to both the software portion and the theory portion of the project. With respect to our software management, we primarily used the waterfall approach while incorporating iterative sprints, since we expected the core set of requirements to change over time as we developed our theories and ideas.

With regard to the research management, we revolved our methodology around the *Zettelkasten method*. Niklas Luhmann developed this method to keep track of notes and information when dealing with a massive wave of publications [7]. The method embodies the following elements:

1. **Literature Notes:** Atomic notes that have been extracted from each paper which contain the ideas and techniques of the paper.
2. **Fleeting notes:** Ideas that pop up randomly but are not really linked with any particular source.
3. **Permanent notes:** Reviewed literature notes and fleeting notes which have been promoted to **permanent** ones.


Each of these notes can be annotated with a tagging system and relate to each other with the use of references.

5.2 Tooling


To aid our research management, we made use of the Obsidian¹ tool. Obsidian's graphical representation of the semantical relations between nodes as well as its smart tagging system, made it easier to keep track of our ideas and on-going theories. Moreover it incorporates additional features as seen in the figure 5.2.1, such as a canvas or a mindmap. All these features allowed us to streamline and refine thought processes, throughout the project. In addition, to keep version control, we used Github² as it is one of the most well known version control applications in industry. This allowed us to keep constant backups of our code and notes, whilst being able to refer back in case something unexpected occurred.

¹<https://obsidian.md/>


²<https://github.com/>

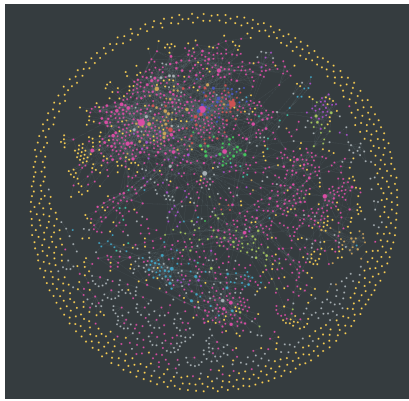

(a) Obsidian graph. Each dot represents a node and each link corresponds to a reference between two nodes

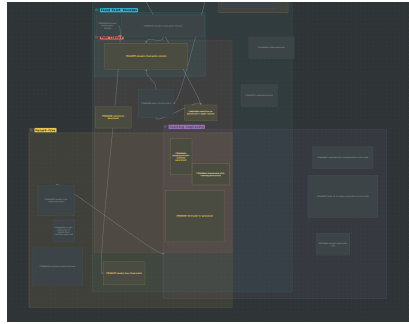

(b) Obsidian Canvas

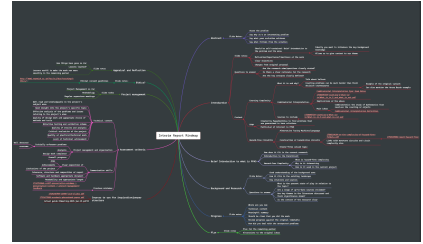

(c) Obsidian mindmap

Figure 5.2.1: Usages of Obsidian

5.3 Ethical Considerations

Due to the nature to the theoretical nature of the project, there were no ethical consideration that were required. All the data and diagrams that were created were either made by the author, redrawn by the author or borrowed from another paper. The libraries used to build the software were under the MIT licence.

5.4 Risk Management

5.5 Timetable

We provide a figure of our final iteration of our gantt chart in figure. Overall the project followed the expected timetable, with some changes that had to be made after the interim report. First and foremost, we prioritised finishing the software. This was mainly due to ensure a final deliverable as well as to have a tool to verify our *PureCircuit* gadgets. Moreover, we shifted our focus to find supporting arguments for objectives, we faced a lot of difficulties achieving our goals.

5.6 Appraisals and Reflections

Unfortunately there were some things that did not go as planned. First, a minimum viable version of the software was completed towards a much later stage project. In an idea scenario, it would have been more valuable for us had we prioritised the development of the visualisation tool as it would have allowed for a faster verification of results. Moreover, one of our major results from the interim report, ended up having a major issues that halted our process. Luckily we were able to adjust to that incident by finding results that help or may help resolve our objectives.

On the hand, we were able handle some of the incidents. Through our intensive note taking procedure, we were able to tackle a difficult topic by breaking ideas down and combining ideas from people. In addition, a lot of our failed ideas came together in the end such as, the main proofs in our sections in our sections 2.1 and 2.2, For each proof or theorem in those sections, we have 10 other failed attempts or ideas, from all which we were able to extrapolate the missing piece of the next puzzle.

Moreover, our extensive testing gave us confidence in our resulting applciation.

Severity	Probability	Description	Mitigation	Address
High	Medium	Software may not be feasible within the remaining time frame.	We focus on the validation and creation of instances. The current project is primatoly research-based, and therefore we are mainly prioritising the theoretical development aspect.	Not yet
Low	Medium	Software not identifying a correct solution.	Usage of TDD techniques and property testing to ensure correctness. Comparison with handmade instances.	Not yet
Medium	Low	Difficulty of showing the parsimonious reduction between PURECIRCUIT and ND-STRONGSPERNER.	Consult with the researchers that actively work on these problems. Lower the requirements to polynomially bounded reductions instead.	Not yet
High	High	Inability to make significant progress on the SOURCEOREXCESS problems or the generalised statement.	Establish reductions from other problems in order to demonstrate #P hardness by starting from ND-STRONGSPERNER.	Not yet
High	High	Incorrect proofs or reductions.	Analyse the problem under different constraints. Apply the duck method, where you attempt to explain the solution to a person who is not necessarily an expert. Validate proof with the supervisor or use the tool to investigate sample cases.	On-going
High	Medium	Develop combinatorial-friendly variants of PURECIRCUIT.	Apply robustness on the gate set of PURECIRCUIT. Develop new gates or variants are easier to work with or focus on a subset of solutions as explained in 1.2.1.	✓

Table 5.6.1: Risk management table.

Bibliography

- [1] J. Aisenberg, M. L. Bonet, and S. Buss. 2-D Tucker is PPA complete. *Journal of Computer and System Sciences*, 108:92–103, Mar. 2020.
- [2] S. Arora and B. Barak. *Computational Complexity: A Modern Approach*. Cambridge University Press, Cambridge, 2009.
- [3] P. Beame, S. Cook, J. Edmonds, R. Impagliazzo, and T. Pitassi. The Relative Complexity of NP Search Problems. *Journal of Computer and System Sciences*, 57(1):3–19, Aug. 1998.
- [4] M. Black. *Critical Thinking: An Introduction to Logic and Scientific Method*. Prentice-Hall Philosophy Series. Prentice-Hall, Incorporated, 1946.
- [5] K. Bronisław. Un theoreme sur les fonctions d’ensembles. 6:133–134, 1928.
- [6] J. Bund, C. Lenzen, and M. Medina. Small Hazard-Free Transducers. *IEEE Transactions on Computers*, 74(5):1549–1564, May 2025.
- [7] A. Cevolini. *Forgetting Machines: Knowledge Management Evolution in Early Modern Europe*. Dec. 2018.
- [8] S. H. Chan and I. Pak. Computational complexity of counting coincidences. *Theoretical Computer Science*, 1015:114776, Nov. 2024.
- [9] A. K. Chandra, D. C. Kozen, and L. J. Stockmeyer. Alternation. *Journal of the ACM (JACM)*, 28(1):114–133, 1981.
- [10] X. Chen and X. Deng. On the complexity of 2D discrete fixed point problem. *Theoretical Computer Science*, 410(44):4448–4456, Oct. 2009.
- [11] X. Chen, X. Deng, and S.-H. Teng. Settling the complexity of computing two-player Nash equilibria. *J. ACM*, 56(3):14:1–14:57, May 2009.
- [12] K. Claessen and J. Hughes. QuickCheck: A lightweight tool for random testing of Haskell programs. *SIGPLAN Not.*, 35(9):268–279, Sept. 2000.
- [13] S. A. Cook. The complexity of theorem-proving procedures. In *Proceedings of the Third Annual ACM Symposium on Theory of Computing, STOC ’71*, pages 151–158, New York, NY, USA, May 1971. Association for Computing Machinery.
- [14] C. Daskalakis, P. Goldberg, and C. Papadimitriou. *The Complexity of Computing a Nash Equilibrium*, volume 39. Association for Computing Machinery, Jan. 2006.
- [15] C. Daskalakis and C. Papadimitriou. Continuous local search. In *Proceedings of the Twenty-Second Annual ACM-SIAM Symposium on Discrete Algorithms, SODA ’11*, pages 790–804, USA, Jan. 2011. Society for Industrial and Applied Mathematics.

-
- [16] C. Daskalakis, S. Skoulakis, and M. Zampetakis. The Complexity of Constrained Min-Max Optimization, Sept. 2020.
- [17] C. Daskalakis, S. Skoulakis, and M. Zampetakis. The complexity of constrained min-max optimization. In *Proceedings of the 53rd Annual ACM SIGACT Symposium on Theory of Computing*, STOC 2021, pages 1466–1478, New York, NY, USA, June 2021. Association for Computing Machinery.
- [18] A. Deligkas, J. Fearnley, A. Hollender, and T. Melissourgos. Constant inapproximability for PPA. In *Proceedings of the 54th Annual ACM SIGACT Symposium on Theory of Computing*, STOC 2022, pages 1010–1023, New York, NY, USA, June 2022. Association for Computing Machinery.
- [19] A. Deligkas, J. Fearnley, A. Hollender, and T. Melissourgos. Pure-Circuit: Tight Inapproximability for PPAD. *J. ACM*, 71(5):31:1–31:48, Oct. 2024.
- [20] E. B. Eichelberger. Hazard Detection in Combinational and Sequential Switching Circuits. *IBM Journal of Research and Development*, 9(2):90–99, Mar. 1965.
- [21] J. Fearnley, P. W. Goldberg, A. Hollender, and R. Savani. The complexity of gradient descent: CLS = PPAD and PLS. In *Proceedings of the 53rd Annual ACM SIGACT Symposium on Theory of Computing*, STOC 2021, pages 46–59, New York, NY, USA, June 2021. Association for Computing Machinery.
- [22] J. Fearnley, S. Gordon, R. Mehta, and R. Savani. CLS: New Problems and Completeness, Apr. 2017.
- [23] J. Fearnley, D. Pálvölgyi, and R. Savani. A Faster Algorithm for Finding Tarski Fixed Points. *ACM Trans. Algorithms*, 18(3):23:1–23:23, Oct. 2022.
- [24] S. Friedrichs, M. Függer, and C. Lenzen. Metastability-Containing Circuits. *IEEE Transactions on Computers*, 67(8):1167–1183, Aug. 2018.
- [25] H. N. Gabow. Path-based depth-first search for strong and biconnected components. *Information Processing Letters*, 74(3):107–114, May 2000.
- [26] J. H. Holland. *Adaptation in Natural and Artificial Systems: An Introductory Analysis with Applications to Biology, Control, and Artificial Intelligence*. The MIT Press, Apr. 1992.
- [27] A. Hollender and P. Goldberg. The Complexity of Multi-source Variants of the End-of-Line Problem, and the Concise Mutilated Chessboard, June 2018.
- [28] C. Ikenmeyer, B. Komarath, C. Lenzen, V. Lysikov, A. Mokhov, and K. Sreenivasaiah. On the complexity of hazard-free circuits. *Journal of the ACM*, 66(4):1–20, Aug. 2019.
- [29] C. Ikenmeyer, B. Komarath, and N. Saurabh. Karchmer-Wigderson Games for Hazard-free Computation, Nov. 2022.
- [30] C. Ikenmeyer, K. D. Mulmuley, and M. Walter. On vanishing of Kronecker coefficients. *computational complexity*, 26(4):949–992, Dec. 2017.
- [31] C. Ikenmeyer and I. Pak. What is in #P and what is not? In *2022 IEEE 63rd Annual Symposium on Foundations of Computer Science (FOCS)*, pages 860–871, Oct. 2022.
- [32] C. Ikenmeyer, I. Pak, and G. Panova. Positivity of the Symmetric Group Characters Is as Hard as the Polynomial Time Hierarchy. *International Mathematics Research Notices*, 2024(10):8442–8458, May 2024.
- [33] D. S. Johnson, C. H. Papadimitriou, and M. Yannakakis. How easy is local search? *Journal of Computer and System Sciences*, 37(1):79–100, Aug. 1988.

-
- [34] S. Katoch, S. S. Chauhan, and V. Kumar. A review on genetic algorithm: Past, present, and future. *Multimedia Tools and Applications*, 80(5):8091–8126, Feb. 2021.
- [35] S. Kleene and M. Beeson. *Introduction to Metamathematics*. Ishi Press International, 2009.
- [36] D. Kozen. *Theory of Computation*. Texts in Computer Science. Springer London, 2006.
- [37] R. H. Makar. On the Analysis of the Kronecker Product of Irreducible Representations of the Symmetric Group. *Proceedings of the Edinburgh Mathematical Society*, 8(3):133–137, Dec. 1949.
- [38] L. R. Marino. General theory of metastable operation. *IEEE Transactions on Computers*, C-30(2):107–115, Feb. 1981.
- [39] C. Moon, J. Kim, G. Choi, and Y. Seo. An efficient genetic algorithm for the traveling salesman problem with precedence constraints. *European Journal of Operational Research*, 140(3):606–617, Aug. 2002.
- [40] M. Mukaidono. On the B-ternary logic function. *Trans. IECE*, 55:355–362, Jan. 1972.
- [41] I. Pak. What is a combinatorial interpretation?, Sept. 2022.
- [42] C. Papadimitriou. On graph-theoretic lemmata and complexity classes. In *Proceedings [1990] 31st Annual Symposium on Foundations of Computer Science*, pages 794–801 vol.2, Oct. 1990.
- [43] C. H. Papadimitriou. On the complexity of the parity argument and other inefficient proofs of existence. *Journal of Computer and System Sciences*, 48(3):498–532, June 1994.
- [44] A. Rubinfeld. Inapproximability of Nash Equilibrium. In *Proceedings of the Forty-Seventh Annual ACM Symposium on Theory of Computing, STOC '15*, pages 409–418, New York, NY, USA, June 2015. Association for Computing Machinery.
- [45] H.-P. Schwefel. *Evolution and Optimum Seeking*. Number Book, Whole. Wiley, New York;Chichester;, 1995.
- [46] M. Sharir. A strong-connectivity algorithm and its applications in data flow analysis. *Computers & Mathematics with Applications*, 7(1):67–72, Jan. 1981.
- [47] K. O. Stanley. A Hypercube-Based Indirect Encoding for Evolving Large-Scale Neural Networks. 2009.
- [48] K. O. Stanley and R. Miikkulainen. Evolving Neural Networks through Augmenting Topologies. *Evolutionary Computation*, 10(2):99–127, June 2002.
- [49] L. G. Valiant. The complexity of computing the permanent. *Theoretical Computer Science*, 8(2):189–201, Jan. 1979.
- [50] P. Wychowanec. Learning to fly: Let’s simulate evolution in rust (pt 3), 2021.
- [51] Z. Yang. Sperner Theory. In Z. Yang, editor, *Computing Equilibria and Fixed Points: The Solution of Nonlinear Inequalities*, pages 311–322. Springer US, Boston, MA, 1999.

Appendices

-
- .1 Reduction to the EndOfLine**
 - .2 Visualisation Program Demonstration**
 - .2.1 Small Circuits Example**
 - .2.2 Bit Generator Example**
 - .2.3 Large Circuits Example**