The 3-SAT Decision Problem Exhaustive Search Implementations Team Satisfaction

Christopher Wood, Eitan Romanoff, Ankur Bajoria

March 26, 2013

Agenda

- 1 Problem Statement
- 2 Exhaustive Search Algorithm
- 3 Sequential Program Demo

Boolean Satisfiability

Boolean satisfiability is an NP-complete decision problem defined as:

$$SAT: \phi \rightarrow \{YES, NO\}$$

Input: Boolean formula ϕ on n variables.

Output: *YES* if there exists a variable truth assignment to the variables in ϕ that will cause it to evaluate to true, *NO* otherwise.

$$\phi$$
 is satisfiable \Leftrightarrow $SAT(\phi) = YES$

3- $SAT \in NP$

- **A** special case of *SAT* that fixes the format of ϕ .
- Each input formula is in 3-CNF form:
 - The conjunction (Boolean AND) of arbitrarily many clauses, where each clause is the disjunction (Boolean OR) of exactly three literals (a literal is a Boolean variable or its negation).

$$(x_1 \lor x_2 \lor \neg x_3) \land (x_1 \lor x_2 \lor x_3) \land (x_1 \lor x_2 \lor x_3)$$

■ SAT reduces to 3-SAT, so 3-SAT \in NP.

Exhaustive Search for 3-SAT

```
Input: 3-CNF formula \phi_n on n variables, Output: YES or NO
```


```
1: C \leftarrow 0^n (vector of n 0, the initial configuration)
 2: for r = 0 \rightarrow 2^{n} - 1 do
 3: SAT ← TRUE
    for all clause \in \phi_n do
 4:
         if evaluate(clause, C) = FALSE then
 5:
           SAT \leftarrow FALSF
 6.
 7:
        end if
 8: end for
 9: if SAT = TRUE then return YES
10: C \leftarrow nextConfig(C)
11: end for
12: return NO
              Algorithm 1: Exhaustive search for 3-SAT.
```

Exhaustive Search for 3-SAT - A Very Satisfiable Example!

Input: $\phi_5 = (\neg X_1 \lor \neg X_2 \lor \neg X_3) \land (X_3 \lor \neg X_4 \lor \neg X_5)$

Output: Yes

Note: no early termination once a satisfiable solution is found

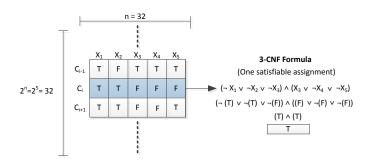

The Sequential Solver

Demo time!

$$\phi_5 = (\neg X_1 \vee \neg X_2 \vee \neg X_3) \wedge (X_3 \vee \neg X_4 \vee \neg X_5)$$