

What Panel B measures, T3 in full, and the figure that should carry it

José Lucas de Melo Costa · 16 September 2026

Companion to the Table 1 dossier. Every number is read from the stored results at build time; the script that draws the figures reproduces all 27 published cells of the source table.

1 What the numbers in Panel B are

Every cell holds two numbers separated by a slash. The second one is easy: it is the raw coverage, the fraction of problems on which the interval the procedure actually reported contained the true causal effect. The first one is the whole design of the table, and it is not a width in effect units. It is the answer to this question:

If we forced this procedure to be honest, how wide would it have to be, compared with the width that throwing the knowledge away would need?

The reason the table is built that way is that a raw width and a raw coverage, printed as two free columns, let any procedure shelter in one of them. Discarding the knowledge and reporting the interval over every graph the data allows covers the truth essentially always, in every regime. It passes any coverage gate that could be written. So the argument has to happen in the width column, and a width column is only meaningful between procedures that cover equally. Calibrating first, then measuring width, is what makes the comparison fair.

1.1 Step 1. How far off is one reported interval

Take a single problem at a single sample: a network, a treatment, an outcome, one random draw of data. The procedure reports an interval. It has a midpoint and a half-width. The true effect is known, because the data was generated from a graph we hold.

Measure the distance from the interval's midpoint to the truth, in units of the interval's own half-width. Call it λ_i . A value below one means the interval already contains the truth. A value of exactly one means it reaches it at the endpoint. A value of three means the interval would have to be made three times wider, about its own midpoint, before it touched the truth.

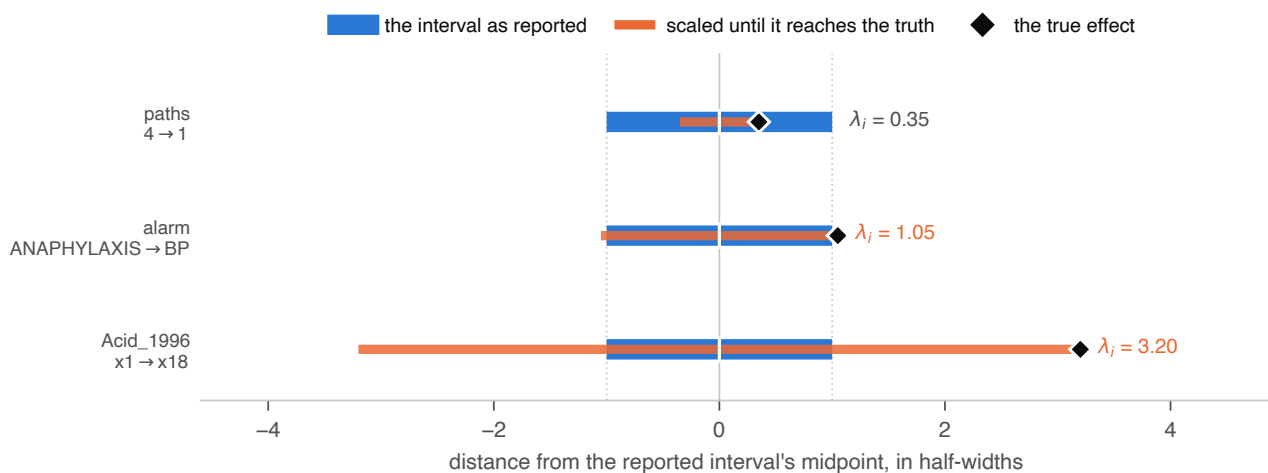


Figure 1: Three real problems from the one-wrong-claim condition, at $n = 1000$, drawn on a common scale where the reported interval always runs from -1 to $+1$. The factor λ_i is what the interval would have to be multiplied by, about its own midpoint, to reach the true effect.

1.2 Step 2. One factor for the whole cell

Now do that for every problem in the cell and every random draw. A cell of Panel B at one wrong claim holds 359 problems and twenty draws each, so 7,180 of these numbers.

Sort them and take the 95th percentile. Call it λ^* . By construction, multiplying every interval in the cell by λ^* makes 95% of them contain the truth. That is the single factor that buys honest coverage for this procedure on this population.

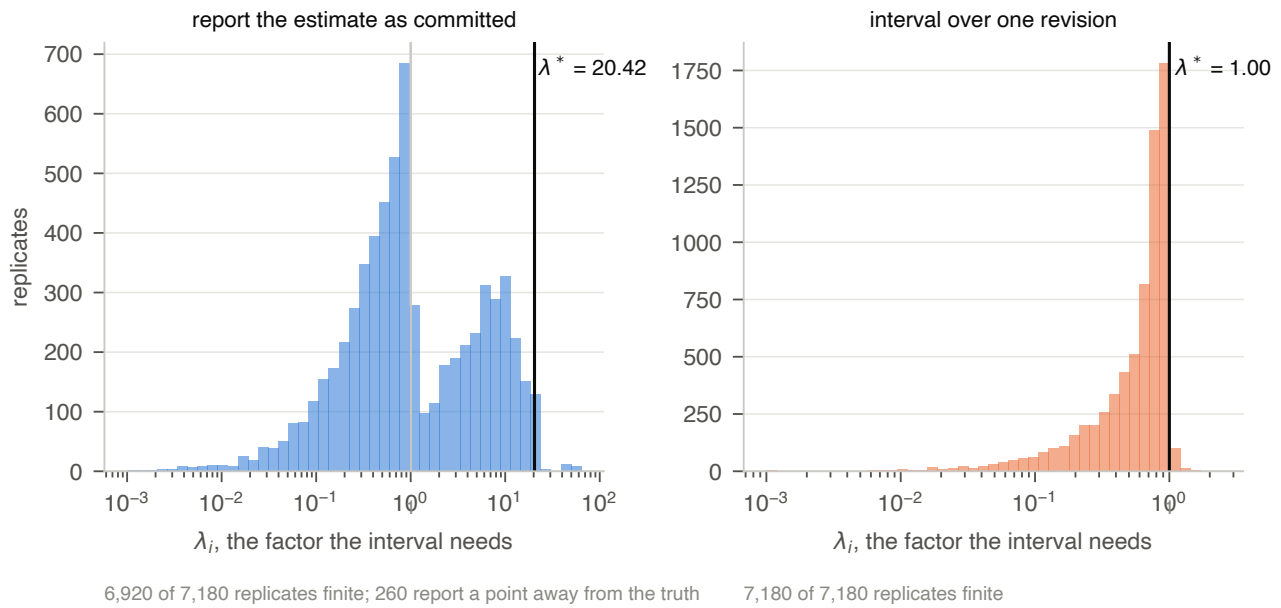


Figure 2: The distribution of λ_i over all 7,180 replicates of the one-wrong-claim cell, for two procedures. Reporting the estimate as committed is bimodal: one group of problems is roughly right, and a second group sits an order of magnitude away, which is what one false claim does. Its 95th percentile is 20.4. The interval over one revision needs no stretching at all, so its factor is 1.00.

The shape on the left is the finding behind the whole column. Committing to the analyst's graph does not produce intervals that are a bit too narrow. It produces two populations: problems where the false claim did not matter, and problems where the reported effect is simply somewhere else.

1.3 Step 3. From the factor to a width, and then to a ratio

Multiply each interval by λ^* and average the resulting widths. That is the calibrated width, in effect units. Then divide by the calibrated width of the procedure that discards the knowledge entirely. The result is the number printed in the cell.

At one wrong claim, $n = 1000$, semi-synthetic panel:

procedure	λ^*	mean half-width	calibrated width
report the estimate as committed	20.416	0.3855	15.7397
interval over one revision	1.000	1.3064	2.6129
discard the knowledge, whole class	1.000	1.5361	3.0721

$15.7397/3.0721 = 5.123$. $2.6129/3.0721 = 0.851$.

Those are the two numbers in the middle column of the table. So the row that reports the estimate as committed is a narrow interval, mean half-width 0.39 against 1.54 for the whole class, and it is the most expensive of the three once you require it to be right.

1.4 Why a number can exceed one, and what that means

A procedure earns a number above one when its interval is narrow and centred in the wrong place. Stretching happens about the interval's own midpoint, so a displaced midpoint has to be compensated on both sides. Committing to a graph built on a false claim puts the midpoint at the effect that graph implies, which is a different quantity from the one being estimated.

A value above one is therefore a strong statement, and it is the statement the table is making about current practice: at one wrong claim, an analyst who reports the estimate their graph produced is worse off than an analyst who never elicited any knowledge, by a factor of five.

1.5 Reading the whole panel

Five things are worth saying out loud from that picture.


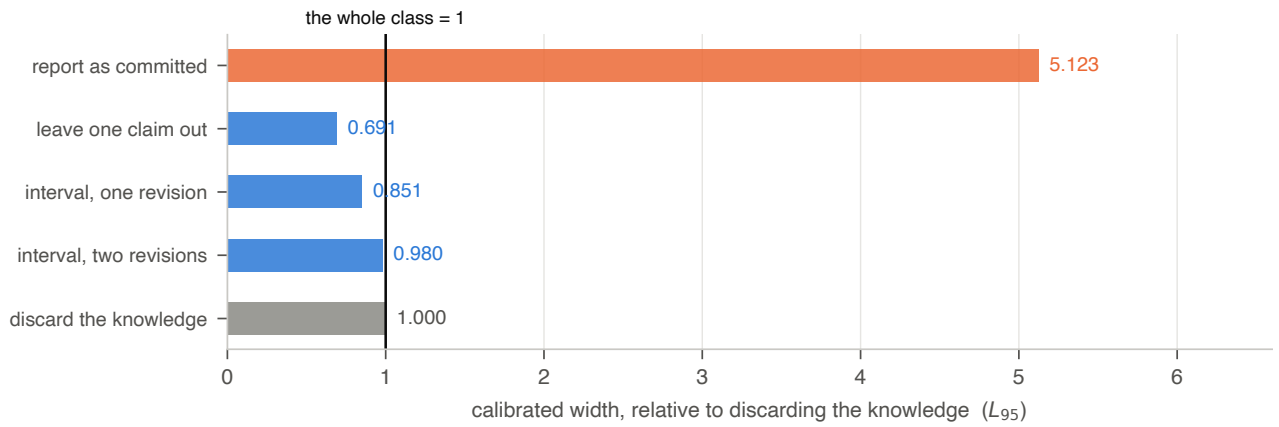


Figure 3: The middle column of Panel B, as calibrated widths relative to discarding the knowledge. Anything to the right of the line costs more than using no background knowledge at all.

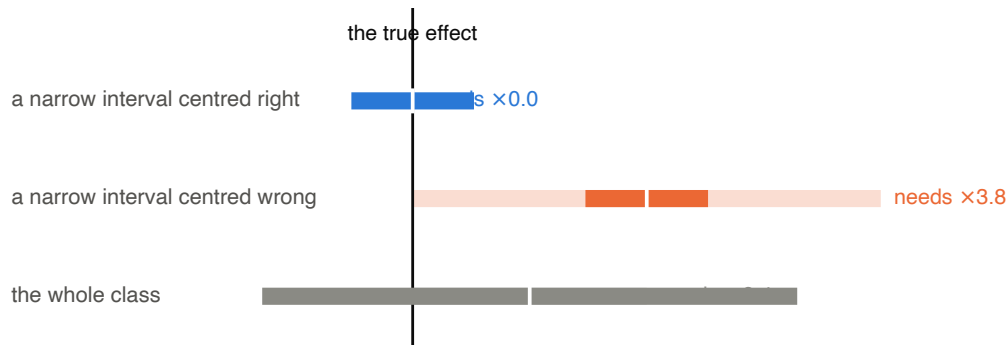

Scaling happens about the interval's own midpoint, so an interval that is narrow and displaced needs a larger factor than one that is wide and honest. That is how a procedure earns a number above 1.

Figure 4: Three intervals and the factor each needs. A narrow interval centred on the truth is cheap. A narrow interval centred away from it is the most expensive object in the table. Schematic.

The first column is a defeat and it has to be. When nothing is wrong, the committed report needs 0.464 and the interval over one revision needs 0.957, so the insurance costs about twice the width when the knowledge is correct. A table in which the proposed method wins every column is a design error, and a reviewer reads it as one.

One wrong claim is bought back cheaply. The committed report drops to 0.597 coverage, and the interval over one revision covers 0.980 while needing 0.851 of the class width. It is also 15 % narrower than the procedure that uses no knowledge at all, which is the reason the knowledge was worth eliciting in the first place.

Two wrong claims need two retractions. The interval over one revision fails at two wrong claims (coverage 0.781, and a calibrated width of 4.234 that is worse than the class), and the interval over two pays. The depth of the budget has to match the number of errors; there is no budget that is free.

Retracting one claim far from the query is not the bargain it looks like. That row is the matched negative control, and it costs more than doing nothing while buying four points of coverage. On the semi-synthetic panel it is not inert, because a far retraction still propagates into the component through the orientation rules. That prediction was recorded as partial rather than supported.

The free screen and the interval agree at this depth. The leave-one-out screen needs 0.691 at one wrong claim against the interval's 0.851, and fails at two wrong claims exactly where the interval over one revision fails. That is the tie the paper states as a property rather than hiding.

1.6 Two cautions about the panel as printed

The three columns are three populations. A problem enters the one-wrong-claim column only if it has at least one local claim to falsify, and the two-wrong-claim column only if it has two and they can be reversed consistently. That is why the counts fall from 391 to 359 to 131 and the network count from 23 to 9. The populations are nested, and the counts are printed under the panel for that reason. Comparing down a column is exact; comparing across a row is comparing three different problem sets.

The numbers depend on the sample size, and the table shows only one. At $n = 20\,000$ the committed report's number rises from 5.123 to 14.368, because more data makes a wrongly centred interval

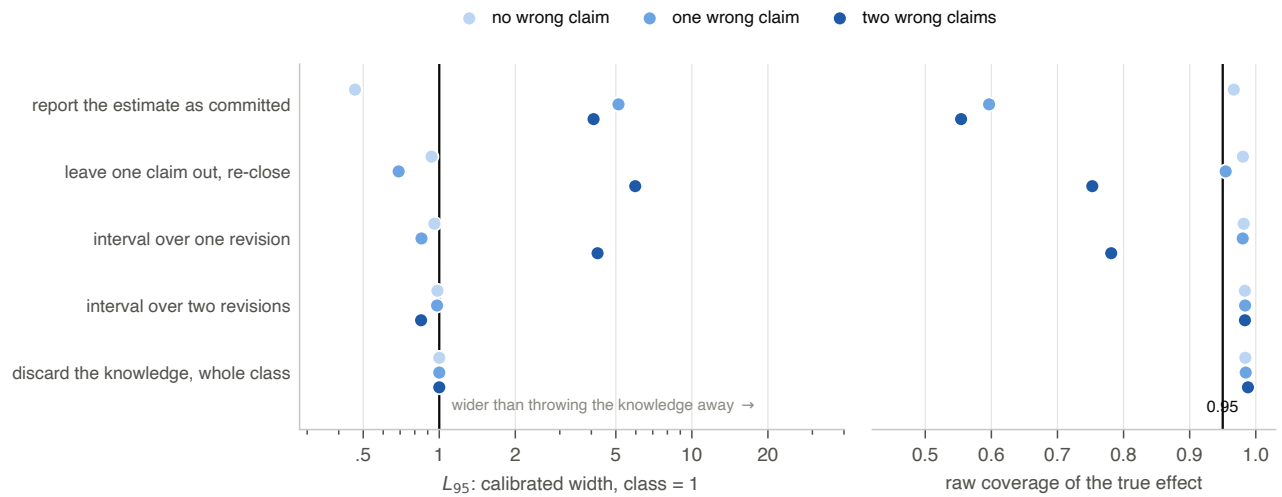


Figure 5: Panel B as a chart. Left: the calibrated width of each procedure, with the whole class at one. Right: the raw coverage each procedure achieved before any calibration. Semi-synthetic parameters on published structures, $n = 1000$; 391, 359 and 131 problems over 23, 23 and 9 networks.

narrower without moving it. The relative price of the interval improves from 0.851 to 0.758. The direction is the same and the magnitudes are not, so the sample size belongs in the caption of any quotation.

1.7 The definitions behind the row names

row	what the procedure does
report the estimate as committed	Take the analyst's graph, read off the adjustment set the generalised criterion gives, fit, report the ordinary 95% interval. Where the graph commits to no set, report the band over its own possible parent sets, which is the budget-zero interval. This is the documented practice, and it is the default the table is arguing against
leave one claim out, re-close, widen if it changes	For each claim in turn, drop it, close the graph again under the orientation rules, recompute the committed set. If any of them changes the answer, report the interval over one revision; otherwise report the committed estimate
interval over one revision	The union of the estimates over every knowledge state within one elementary revision of the analyst's claims, taken as an interval
interval over two revisions	The same over two revisions
discard the knowledge, whole class	The interval over every adjustment set the equivalence class admits, using no background knowledge. It is the denominator of every cell, so it is 1.000 by construction, and its raw coverage is printed to show that it is honest rather than merely wide

Every row uses the same estimator and the same data. What differs between rows is only how many revisions of the asserted knowledge the reported interval is willing to tolerate.

2 T3 in full: all twenty-six rows

This is the whole table, generated from the stored results rather than transcribed. The knowledge condition is the recovering set, the estimates are at $n = 20\,000$ with the first seed, and the population interval behind each band is in the source file. Three declared queries are excluded and they are listed under the table with the reason.

T3. Sensitivity reports on twenty-six named analyses. $|K|$ is the number of claims the analyst asserts, with the number inside the treatment's own component in parentheses. The two interval columns are the union of the estimate over every knowledge state within one and two elementary revisions of those claims. r_0 is the null radius, the number of revisions after which the interval contains zero, from the population, from the band at the first seed, and as the range over twenty seeds. r_{val} is the breakdown radius, the number of revisions after which the committed adjustment set stops being valid. The last column names the claims whose retraction first opens the interval to zero, in the source's own variable names. Knowledge: the recovering set; estimates at $n = 20\,000$, first seed.

network	query	$ K $	true	estimate [95 %]	one revision	two revisions	r_0 pop / seed / range	r_{val}	first breaking claims
<i>Published analyses: the treatment and the outcome are the ones the source paper declares.</i>									
Acid_1996	x3 $\rightarrow$ x15	1 (0)	-2.169	-2.176 [-2.203, -2.149]	[-2.226, -2.147]	[-2.226, -2.147]	never / >3 / >3	never	-
Didelez_2010	HRT $\rightarrow$ TCI	1 (0)	-0.586	-0.586 [-0.599, -0.572]	[-0.604, -0.568]	[-0.604, -0.568]	never / >3 / >3	never	-
Kampen_2014	SUS $\rightarrow$ EGC	3 (0)	-0.643	-0.647 [-0.663, -0.630]	[-0.663, -0.630]	[-0.663, -0.630]	never / >3 / >3	never	-
Polzer_2012	ToothLoss $\rightarrow$ Mortality	5 (0)	1.193	1.190 [1.183, 1.197]	[1.128, 1.208]	[1.128, 1.208]	never / >3 / >3	>3	-
Sebastiani_2005	EDN1.3 $\rightarrow$ EDN1.7	7 (0)	-1.212	-1.209 [-1.219, -1.199]	[-1.234, -1.179]	[-1.234, -1.179]	never / >3 / >3	>3	-
Shrier_2008	WarmUpExercises $\rightarrow$ Injury	2 (0)	-1.351	-1.348 [-1.358, -1.339]	[-1.431, -1.228]	[-1.431, -1.228]	never / >3 / >3	never	-
Thoemmes_2013	x $\rightarrow$ y	1 (1)	-0.923	-0.913 [-0.928, -0.898]	[-1.002, -0.871]	[-1.002, -0.871]	never / >3 / >3	never	-
mediator	X $\rightarrow$ Y	3 (3)	-2.603	-2.600 [-2.623, -2.576]	[-2.623, -1.109]	[-2.623, 0.000]	2 / 2 / 2	1	Z $\rightarrow$ I / Z $\rightarrow$ X
paths	E $\rightarrow$ D	1 (0)	1.194	1.193 [1.188, 1.197]	[1.169, 1.216]	[1.169, 1.216]	never / >3 / >3	never	-
<i>Networks with coefficients fitted to real data: the frame rows whose analyst graph commits to a set.</i>									
ecoli70	asnA $\rightarrow$ aceB	10 (1)	0.547	0.542 [0.511, 0.572]	[-0.011, 0.572]	[-0.011, 0.572]	1 / 1 / 1.. >3	1	asnA $\rightarrow$ icdA
ecoli70	b1191 $\rightarrow$ yfaD	10 (1)	-0.098	-0.097 [-0.105, -0.089]	[-0.114, 0.029]	[-0.114, 0.029]	1 / 1 / 1	1	b1191 $\rightarrow$ fixC
ecoli70	cspG $\rightarrow$ hupB	10 (7)	0.257	0.265 [0.246, 0.283]	[0.003, 0.308]	[0.003, 0.308]	1 / >3 / 1.. >3	1	-
ecoli70	pspB $\rightarrow$ nmpC	10 (7)	-0.108	-0.100 [-0.118, -0.082]	[-0.531, 0.026]	[-0.531, 0.026]	1 / 1 / 1..3	1	pspB $\rightarrow$ pspA
ecoli70	eutG $\rightarrow$ lacY	10 (1)	0.309	0.309 [0.279, 0.338]	[0.277, 0.377]	[0.277, 0.377]	never / >3 / >3	1	-
arth150	100 $\rightarrow$ 245	29 (3)	1.535	1.534 [1.527, 1.542]	[0.000, 1.545]	[0.000, 1.545]	1 / 1 / 1	1	100 $\rightarrow$ 245
arth150	81 $\rightarrow$ 464	29 (10)	0.256	0.184 [0.118, 0.250]	[0.097, 0.265]	[0.097, 0.265]	>3 / >3 / >3	≥ 2	-
magic-niab	G1853 $\rightarrow$ G43	8 (1)	-0.039	-0.028 [-0.038, -0.017]	[-0.038, 0.020]	[-0.038, 0.020]	1 / 1 / 1.. >3	1	G1853 $\rightarrow$ G311
magic-niab	G311 $\rightarrow$ G43	8 (1)	-0.255	-0.251 [-0.259, -0.244]	[-0.260, 0.000]	[-0.260, 0.000]	1 / 1 / 1	1	G1853 $\rightarrow$ G311
magic-niab	G418 $\rightarrow$ FUS	8 (2)	0.003	-0.003 [-0.015, 0.010]	[-0.022, 0.011]	[-0.022, 0.011]	1 / 0 / 0..1	1	-
magic-niab	G1217 $\rightarrow$ FT	8 (1)	0.068	0.015 [-0.029, 0.060]	[-0.031, 0.131]	[-0.031, 0.131]	never / 0 / 0.. >3	1	-
magic-niab	G1217 $\rightarrow$ YLD	8 (1)	0.009	0.011 [0.003, 0.018]	[0.004, 0.021]	[0.004, 0.021]	never / >3 / 0.. >3	1	-
magic-irri	G1378 $\rightarrow$ SUB	10 (1)	-0.035	-0.031 [-0.044, -0.017]	[-0.048, 0.021]	[-0.048, 0.021]	1 / 1 / 1	1	G1378 $\rightarrow$ G1311
magic-irri	G3212 $\rightarrow$ FT	10 (2)	0.004	-0.025 [-0.070, 0.020]	[-0.143, 0.008]	[-0.143, 0.008]	1 / 0 / 0..1	1	-
magic-irri	G3925 $\rightarrow$ GTEMP	10 (1)	0.000	0.001 [-0.034, 0.036]	[-0.131, 0.038]	[-0.131, 0.038]	1 / 0 / 0	1	-
magic-irri	G4145 $\rightarrow$ G3222	10 (2)	-0.020	-0.015 [-0.025, -0.004]	[-0.026, 0.026]	[-0.026, 0.026]	1 / 0 / 0..1	1	-
magic-irri	G4156 $\rightarrow$ CHALK	10 (2)	0.404	0.501 [0.361, 0.641]	[-0.154, 0.664]	[-0.154, 0.664]	1 / 1 / 1.. >3	1	G4156 $\rightarrow$ G4145

Excluded, with the reason: M-bias, E on D, because the published diagram is not a directed acyclic graph; Schipf 2010, TT on T2DM, because the outcome is not a possible descendant of the treatment, so there is no effect to report; confounding, E on D, because the treatment has no undirected edge, so no claim of the analyst's bears on it.

2.1 What the table says once you have read it twice

The published analyses are robust and the sampled ones are not. Of the nine declared queries that can be certified, eight are unbroken by any retraction down to depth three: their interval is a point, their radius is never reached, and no claim the analyst made is load-bearing. The one exception is mediator, a four-node textbook diagram. Below the rule, on the four networks with fitted coefficients, sixteen of seventeen informative queries break at the first retraction.

The reason is mechanical and it belongs in the paper. A query enters the sampled frame only if some retraction changes the validity of the committed set, so a query that no retraction can touch is rejected before it is measured. The population the method is evaluated on is therefore close to the complement of the queries these source papers exist to answer, which is an applicability statement rather than a result.

The radius is almost always one. Across the whole table r_{val} takes the value one on every informative row except mediator. In practice the quantity is a pointer to a single claim rather than a graded scale.

The null radius and the breakdown radius are different numbers and they disagree. On mediator the set stops being valid after one revision while the interval only reaches zero after two. On several fitted rows the null radius read from the band at a single seed is zero, meaning the reported interval already contained zero before any retraction: at that sample size there was no conclusion to break. The range column exists because that reading moves with the seed, so any sentence about the null radius has to carry which of the three readings it uses.

One retraction is not a small perturbation. On sixteen of the seventeen informative rows the interval after retracting one claim is the whole class interval, to four decimals. All the identifying power the knowledge supplies sits in a single claim, and withdrawing it returns the analyst to where they would have been with no background knowledge at all. That fact is what the figure in the next section is built around.

3 The figure for T3

3.1 The constraint nobody wrote down

The obvious figure for a sensitivity analysis is a curve: the conclusion on one axis, the amount of assumed knowledge withdrawn on the other, and a smooth frontier where the conclusion gives out. That is the shape Rosenbaum's plots have, and it is the shape the paper's own figure rule went looking for: a row whose interval stays flat for a while and then breaks.

That rule returned nothing. No query under the recovering set or under truthful knowledge has both radii in the middle of the range on a network with real coefficients, and the rows that do have them widen by a factor of twenty-seven to thirty-four before they break, so the plateau never happens.

The reason is in the data and it is the most important design fact here. The curve is not smooth. It is a single step.

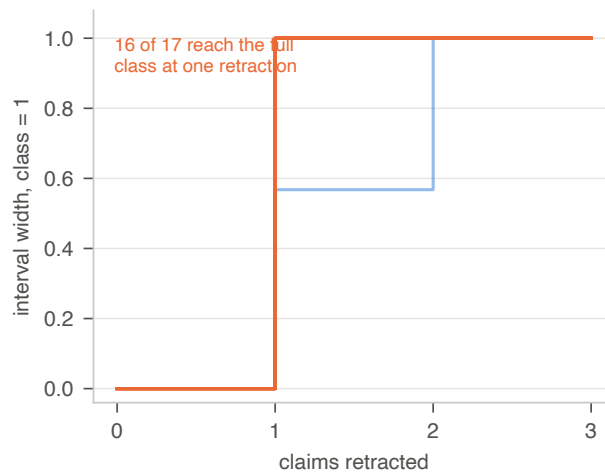


Figure 6: Interval width against the number of claims retracted, one line per analysis, each normalised to the width of the interval that uses no knowledge. Sixteen of the seventeen informative analyses go from a point to the full class in one step. The exception is the textbook mediator, which takes two.

Any figure that draws a frontier on this data is drawing something that is not there. The honest encodings are the ones that treat the budget as what it is, a small integer, and put their effort into showing what the step costs rather than pretending it is gradual.

3.2 Five candidates

F-A. The one-claim cliff. Every analysis on one axis, each normalised so that the effect the analyst reported sits at one and the null sits at zero. Three marks per row: the reported estimate, the interval after retracting one claim, and the interval with no knowledge at all. The claim that does it is named in its own column.

What it shows: the reported effect and no effect become indistinguishable after one revision, on every query drawn from the sampled frame, and on none of the queries the source papers declared. Both halves are load-bearing and they sit in one picture.

What it costs: it needs a normalisation, and a reader has to accept that dividing by the reported effect is fair. Two rows run off the axis and carry an arrow.

F-B. The step law. The figure above, in the section on the constraint. Width against budget, one line per analysis.

What it shows: that the quantity is a step and not a frontier, which is the honest correction to what a reader expects.

What it costs: sixteen of the lines are the same line. It is one fact, and a sentence carries it as well as a panel does.

F-C. The state strip. One row per analysis, one cell per budget, coloured by whether the interval at that budget still determines the sign of the effect. No normalisation and no continuous axis, so nothing is implied about magnitude.

What it shows: the discreteness, honestly, and the contrast between the declared queries and the sampled ones at a glance.

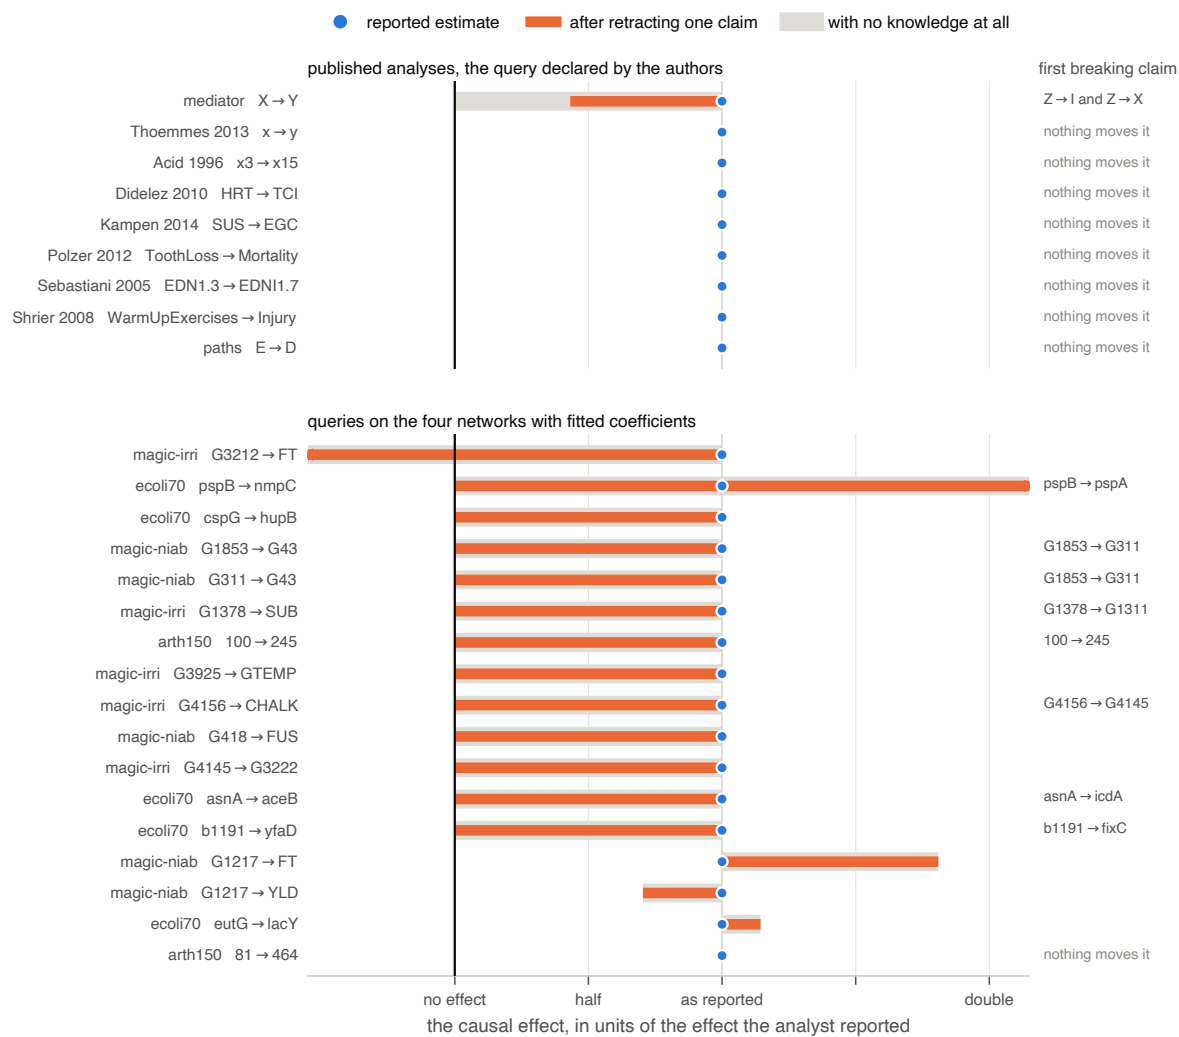


Figure 7: F-A, drawn from the twenty-six rows of T3. Normalising by the reported effect puts every analysis on one scale and makes the pattern arithmetic rather than rhetorical: below the rule, one retraction opens the interval from a point at the reported effect to everything between that and zero. Where only the orange bar is visible, the grey one is underneath it, which is the finding.

What it costs: it drops the magnitude entirely. A reader learns that the conclusion goes and not that it goes all the way to zero, which is the part that should alarm them.

F-D. The paradigm card. One analysis, three lanes: what the analyst reports, what they would report having withdrawn one named claim, and what they would report having asserted nothing.

What it shows: the object, the quantity and the sentence a practitioner would say, in one picture that needs no axis labels to be understood.

What it costs: it is one row of a twenty-six-row table, so on its own it is an illustration. A reviewer asks immediately whether it was chosen.

F-E. The cliff with its population. F-A, with the distribution of the radius over every query in the corpus beside it, so that the named analyses can be located in the population they were drawn from.

What it shows: where the twenty-six named analyses sit in the population they were drawn from. They are a selection, and the next section measures which of their columns that selection moved and which it left alone.

What it costs: two populations in one float, which has to be said in the caption and read carefully.

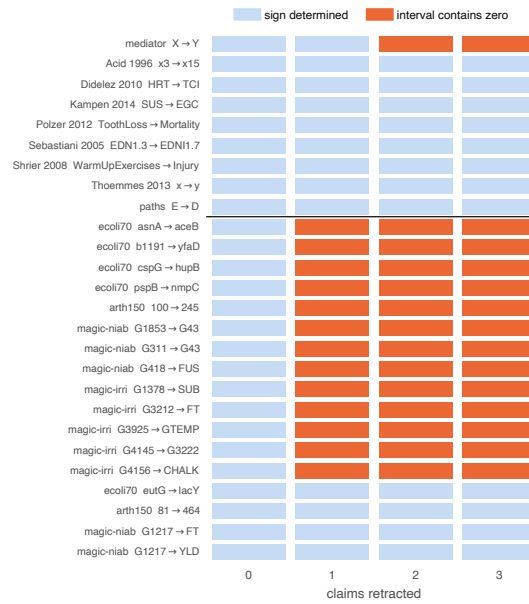


Figure 8: F-C. The state of each conclusion at each budget, read from the stored null radius rather than recomputed. Above the rule, the analyses whose queries the source papers declared.



Figure 9: F-D. A single query on a network with fitted coefficients. The second lane and the third are the same interval, which is what it means for the conclusion to rest on one claim.

3.3 The recommendation

Draw F-A, and put the population panel of F-E beside it. Use F-D as the page-one teaser, with a different query from the one F-A leads with, so the two do not restate each other. Keep F-B as a sentence in the results and F-C in the appendix.

The argument for F-A over the others is that it is the only candidate that carries all three things a reader needs at once. It shows the quantity, because the bar is the interval at one retraction. It shows the consequence in the units the analyst reports in, because the axis is their own effect. And it shows the comparison, because the grey bar behind is what they would have had with no knowledge at all, and on sixteen rows of seventeen it is hidden underneath the orange one.

That last point is worth stating as the caption's one sentence, because it is the finding that the table makes and the curve figure cannot: *on these analyses, retracting a single claim returns the analyst to the interval they would have had if they had asserted nothing.*

3.4 Can this be the paper's main contribution

It can be the main *figure*. Two cautions before it becomes the main *claim*.

The first is selection, and the next section measures it. The rows in the lower panel were chosen by a rule that puts queries with a finite null radius first, so the null radius column of T3 is not representative: 76 % of the printed rows against 43 % of the eligible ones. The width claim the figure is built on is untouched by that rule, holding on 26 of 26 eligible queries and on 211 of 226 across the corpus. So the figure is safe and the caption must still say how the rows were drawn.

The second is that the figure is read as showing the null radius while the paper's headline quantity is the breakdown radius. They coincide on most of these rows and they are different objects, and the one analysis where they differ is the textbook one. A figure built on the interval reaching zero is making a claim about

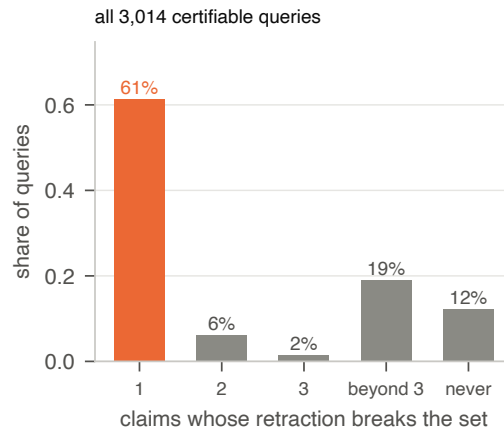


Figure 10: The right-hand panel of F-E: the breakdown radius over all 3,014 certifiable queries, eleven knowledge conditions, 27 networks. The last two bars are queries whose set survives every retraction the search reached, and queries no retraction can break at all. On 61 % of them the committed set rests on a single claim.

conclusions; a figure built on the set ceasing to be valid is making a claim about validity. Choose which, and say so in the axis label rather than in the text.

With both of those handled, the figure carries the paper. A reviewer who has read only the abstract can look at it and see what the method measures, what it costs, and why the answer is uncomfortable.

4 Why twenty-six rows, and what the other networks say

T3 is not the corpus. It is a selection from it, made by two rules, and only one of them is defensible. This section prints the funnel, names both rules, and measures what the selection did to the numbers the table reports.

4.1 The funnel, under the recovering set

	stage
39	networks parsed from the corpus
33	have a frame, meaning at least one treatment beside an undirected edge with the outcome a possible descendant
27	are swept. The six that are not exceed 500 nodes, or all their chain components exceed the questionnaire cap
80,132	candidate treatment–outcome pairs, built from observables alone
648	pairs sampled into the frame, capped at twenty per network
537	rows under the recovering set: 528 sampled plus 9 the source papers declare. All are certifiable
234	of those say the outcome cannot descend from the treatment on the analyst’s own graph, so the effect is zero and there is no adjustment set to report on
303	commit to an adjustment set. This is the population a sensitivity report could be written for: 9 declared and 294 sampled, over 27 networks
26	are printed in T3

So the table shows 9 of the 9 declared queries and 17 of the 294 sampled ones, which is 5.8 % of the eligible population. The 277 that are missing are missing for two different reasons.

4.2 Rule one: only four networks have real coefficients

Of the 27 swept networks, four carry coefficients fitted to real data: `ecoli70`, `arth150`, `magic-niab` and `magic-irri`. The other 23 carry structure from a published source and parameters we drew ourselves, uniform in a fixed range with unit noise.

A sensitivity report on a named analysis prints an effect size and an interval. On a semi-synthetic network those numbers are ours, not the field’s, so the row would read as a report on a real analysis while carrying an invented effect. That is why the other 23 networks contribute 257 eligible rows and none of them appear.

This rule is defensible and it should be printed in the caption, which it currently is not. Those 23 networks are not absent from the paper: they are the population behind the price table, the certificate ladder and the funnel, where only the structure matters and the parameters are a nuisance. They are absent from this one table, because this one table is about named effects.

4.3 Rule two: the first five per network, and it is not defensible as written

On the four remaining networks, 37 queries commit to a set and are therefore eligible. The table takes five per network, which is 17 of 37, because `arth150` only has two.

The 20 that were dropped are 9 on `magic-niab`, 8 on `magic-irri` and 3 on `ecoli70`. The cap is arbitrary and a reviewer will say so, but the cap is not the problem. The ordering is.

The eligible queries are sorted so that those with a finite null radius come first, and then the first five are taken. A finite null radius means the interval reaches zero within the search depth, which is the outcome the table exists to illustrate.

The effect is measurable. Across the 37 eligible queries, 16 have a finite null radius, which is 43 %. Among the 17 the table prints, 13 do, which is 76 %. Among the 20 it drops, 3 do, which is 15 %.

So the null-radius column of T3 is not representative of the population it is drawn from, and the fix is one line: sort by frame index alone, or print all 37. Either is honest and the second is better, because the inclusion rule then has nothing in it that a reader has to trust.

4.4 What the selection did not do

The claim the figure of the previous section is built on survives the audit, and it survives it comfortably.

population	queries	informative	of those, one retraction reaches the whole class
printed in T3	17	16	16 of 16
dropped by the cap	20	10	10 of 10
the full eligible pool	37	26	26 of 26
every committed row, 27 networks	294	226	211 of 226

On every query the table could have shown, and on 93 % of every query in the corpus, retracting a single claim returns the interval to the one the analyst would have had with no background knowledge at all. The cap did not manufacture that pattern; it is the pattern of the corpus.

4.5 What to change

Three things, and none of them is expensive.

Print the inclusion rule in T3's caption, naming both the real-coefficient restriction and the cap, and give the count of eligible queries beside the count shown. Instance selection is this form's whole attack surface and the only defence is stating the rule.

Remove the finite-null-radius term from the sort. The cap can stay at five per network if space demands it, but taking the first five in frame order costs nothing and removes the bias from the null-radius column.

Draw the figure on the 37, not the 17. It is the same picture, it is one page, it needs no inclusion rule at all beyond the real-coefficient restriction, and it contains the eleven rows where nothing moves, which the table currently hides.

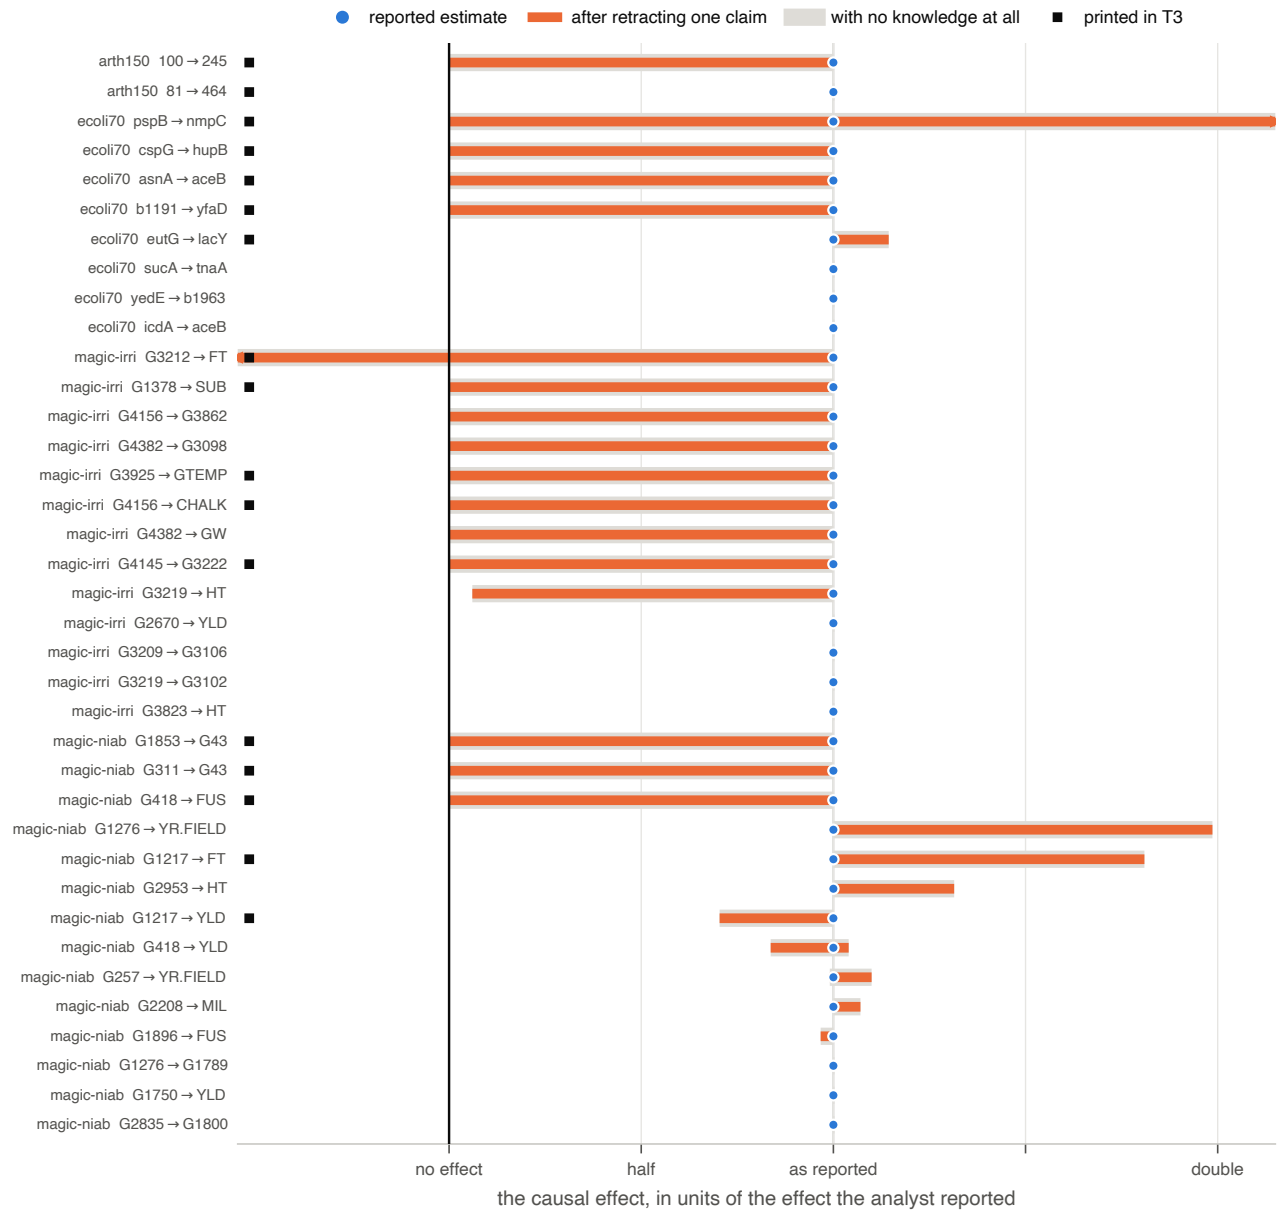


Figure 11: The recommended figure drawn on all 37 eligible queries rather than the seventeen T3 prints, with the printed ones marked. Eleven rows carry no bar at all: on those the class already pins the effect and no retraction moves it, which is the honest counterweight and is invisible in the table as printed.

5 Why one revision and two revisions print the same interval

On 25 of the 26 rows the two interval columns are identical, in the printed band and in the population. The only row where they differ is **mediator**. The reason is structural, and it is the same fact the figure is built on seen from another angle.

The interval over r revisions is a union over knowledge states, so it grows with r and it is bounded above by the interval over the whole equivalence class. The class interval is a ceiling that no amount of retracting can pass, because retracting all of the knowledge is exactly what the class already assumes. So the two columns can only differ on a row where the first revision has not yet reached that ceiling.

rows	what the second revision adds, and why
9	The class interval is a point. The effect is identified by the data alone, no asserted claim bears on it, and every budget returns the same sampling interval. Seven of these are declared queries whose claims all sit outside the treatment's component
16	The first revision already returns the whole class, to four decimals. The ceiling is reached at $r = 1$, so $r = 2$ has nothing left to add
1	mediator. The first revision covers 57% of the class and the second saturates it. This is the only row in the table where the second column carries information

The mechanism behind the sixteen is the breakdown radius itself. The extreme of the class is attained by some knowledge state, and reaching it requires retracting the smallest set of claims that reaches it. That set is a single claim on 141 of the 157 queries with an exact certificate, and on every one of those the union at $r = 1$ already contains the extreme. A second retraction can only add states that were already inside.

5.1 The same count on all 303 rows

The exhaustive table lets the question be asked of the whole population rather than of the twenty-six.

rows	of the 303 queries that commit to an adjustment set
281	print the same interval at one and at two revisions, in the band and in the population, which is 92.7%
76	have a class interval that is a point: no asserted claim bears on the query at any budget
205	reach the whole class at the first revision
22	have a first revision strictly inside the class, and on 20 of those the second revision widens the interval

So the second column carries information on 20 queries in 303. Where those 20 sit is the part worth noticing: they are on insurance, Polzer 2012, Kampen 2014, sachs, Schipf 2010 and mediator. Every one of those networks except mediator is excluded from the printed T3 by the real-coefficient rule. The column looks empty in T3 because T3 drops the networks on which it is full.

What to do with the column. Replace *two revisions* with *no knowledge at all*, the class interval. On the sixteen saturated rows the reader then sees two identical intervals side by side, and that identity is the finding rather than a redundancy. On mediator they differ, and the difference is legible for the first time. The exhaustive table below prints all three columns so the substitution can be checked.

6 The exhaustive table

Both selection rules removed. Every query under the recovering set whose analyst graph commits to an adjustment set: 303 rows over all 27 swept networks, with the four fitted-coefficient networks and the 23 semi-synthetic ones in separate blocks and a provenance column, so the rule that was dropped is visible rather than applied. A bullet marks the 26 rows the printed T3 selects.

Every cell that the printed T3 also shows was checked against it before this table was written, and all 26 rows agree cell by cell.

Two queries appear twice, once as a declared pair and once as an independently sampled one: Thoemmes 2013, x on y, and mediator, X on Y. They are the same query reached by two routes, and both rows are kept.

T3-X, the exhaustive table. Every query under the recovering set whose analyst graph commits to an adjustment set: 303 rows over 27 networks. Neither rule of the printed T3 is applied here, so networks with parameters we drew appear beside the four with coefficients fitted to real data (*param.*), and no per-network cap is used. A bullet after the network name marks the 26 rows the printed T3 selects. *loc.* is the number of asserted claims inside the treatment’s own chain component. The *no knowledge* column is the interval over the whole equivalence class, which is the ceiling every other interval is bounded by. Estimates at $n = 20\,000$, first seed; the two revision columns are bands at that seed, the class column is the population.

network	param. query	K	loc.	true estimate [95 %]		one revision	two revisions	no knowledge	r ₀	r _{val}	first breaking claim
Queries the source papers declare.											
Acid_1996●	semi-s. x3 → x15	1	0	-2.169	-2.176 [-2.203, -2.149]	[-2.226, -2.147]	[-2.226, -2.147]	[-2.169, -2.169]	never	never	-
Didelez_2010●	semi-s. HRT → TCI	1	0	-0.586	-0.586 [-0.599, -0.572]	[-0.604, -0.568]	[-0.604, -0.568]	[-0.586, -0.586]	never	never	-
Kampen_2014●	semi-s. SUS → EGC	3	0	-0.643	-0.647 [-0.663, -0.630]	[-0.663, -0.630]	[-0.663, -0.630]	[-0.643, -0.643]	never	never	-
Polzer_2012●	semi-s. ToothLoss → Mortality	5	0	1.193	1.190 [1.183, 1.197]	[1.128, 1.208]	[1.128, 1.208]	[1.193, 1.193]	never	>3	-
Sebastiani_2005●	semi-s. EDN1.3 → EDN1.7	7	0	-1.212	-1.209 [-1.219, -1.199]	[-1.234, -1.179]	[-1.234, -1.179]	[-1.212, -1.212]	never	>3	-
Shrier_2008●	semi-s. WarmUpExercises → Injury	2	0	-1.351	-1.348 [-1.358, -1.339]	[-1.431, -1.228]	[-1.431, -1.228]	[-1.351, -1.351]	never	never	-
Thoemmes_2013●	semi-s. x → y	1	1	-0.923	-0.913 [-0.928, -0.898]	[-1.002, -0.871]	[-1.002, -0.871]	[-0.923, -0.923]	never	never	-
mediator●	semi-s. X → Y	3	3	-2.603	-2.600 [-2.623, -2.576]	[-2.623, -1.109]	[-2.623, 0.000]	[-2.603, 0.000]	2	1	Z→I / Z→X
paths●	semi-s. E → D	1	0	1.194	1.193 [1.188, 1.197]	[1.169, 1.216]	[1.169, 1.216]	[1.194, 1.194]	never	never	-
Sampled queries, networks with coefficients fitted to real data.											
arth150●	fitted 100 → 245	29	3	1.535	1.534 [1.527, 1.542]	[0.000, 1.545]	[0.000, 1.545]	[0.000, 1.535]	1	1	100→245
arth150●	fitted 81 → 464	29	10	0.256	0.184 [0.118, 0.250]	[0.097, 0.265]	[0.097, 0.265]	[0.256, 0.256]	>3	≥2	-
ecoli70●	fitted asnA → aceB	10	1	0.547	0.542 [0.511, 0.572]	[-0.011, 0.572]	[-0.011, 0.572]	[0.000, 0.547]	1	1	asnA→icdA
ecoli70●	fitted b1191 → yfaD	10	1	-0.098	-0.097 [-0.105, -0.089]	[-0.114, 0.029]	[-0.114, 0.029]	[-0.098, -0.000]	1	1	b1191→fixC
ecoli70●	fitted cspG → hupB	10	7	0.257	0.265 [0.246, 0.283]	[0.003, 0.308]	[0.003, 0.308]	[0.000, 0.257]	1	1	-
ecoli70●	fitted eutG → lacY	10	1	0.309	0.309 [0.279, 0.338]	[0.277, 0.377]	[0.277, 0.377]	[0.309, 0.354]	never	1	-
ecoli70●	fitted icdA → aceB	10	1	1.046	1.049 [1.046, 1.052]	[1.043, 1.058]	[1.043, 1.058]	[1.046, 1.046]	never	>3	-
ecoli70●	fitted pspB → nmpC	10	7	-0.108	-0.100 [-0.118, -0.082]	[-0.531, 0.026]	[-0.531, 0.026]	[-0.525, 0.000]	1	1	pspB→pspA
ecoli70	fitted sucA → tnaA	10	1	0.111	0.113 [0.109, 0.116]	[0.086, 0.127]	[0.086, 0.127]	[0.111, 0.111]	never	>3	-
ecoli70	fitted yedE → b1963	10	7	0.351	0.352 [0.340, 0.363]	[0.259, 0.421]	[0.259, 0.421]	[0.351, 0.351]	>3	>3	-
magic-irri●	fitted G1378 → SUB	10	1	-0.035	-0.031 [-0.044, -0.017]	[-0.048, 0.021]	[-0.048, 0.021]	[-0.035, 0.000]	1	1	G1378→G1311
magic-irri	fitted G2670 → YLD	10	1	-0.082	-0.086 [-0.095, -0.076]	[-0.099, -0.077]	[-0.099, -0.077]	[-0.082, -0.082]	never	>3	-
magic-irri	fitted G3209 → G3106	10	1	-0.189	-0.203 [-0.219, -0.186]	[-0.218, -0.171]	[-0.218, -0.171]	[-0.189, -0.189]	never	>3	-
magic-irri●	fitted G3212 → FT	10	2	0.004	-0.025 [-0.070, 0.020]	[-0.143, 0.008]	[-0.143, 0.008]	[-0.042, 0.004]	1	1	-
magic-irri	fitted G3219 → G3102	10	1	-0.072	-0.088 [-0.101, -0.075]	[-0.102, -0.075]	[-0.102, -0.075]	[-0.072, -0.072]	never	>3	-
magic-irri	fitted G3219 → HT	10	1	0.070	0.030 [-0.082, 0.142]	[-0.137, 0.176]	[-0.137, 0.176]	[0.004, 0.070]	never	1	-
magic-irri	fitted G3823 → HT	10	1	0.359	0.318 [0.208, 0.428]	[0.234, 0.485]	[0.234, 0.485]	[0.359, 0.359]	never	>3	-
magic-irri●	fitted G3925 → GTEMP	10	1	0.000	0.001 [-0.034, 0.036]	[-0.131, 0.038]	[-0.131, 0.038]	[0.000, 0.000]	1	1	-
magic-irri●	fitted G4145 → G3222	10	2	-0.020	-0.015 [-0.025, -0.004]	[-0.026, 0.026]	[-0.026, 0.026]	[-0.020, -0.000]	1	1	-
magic-irri●	fitted G4156 → CHALK	10	2	0.404	0.501 [0.361, 0.641]	[-0.154, 0.664]	[-0.154, 0.664]	[0.000, 0.404]	1	1	G4156→G4145
magic-irri	fitted G4156 → G3862	10	2	0.000	0.001 [-0.007, 0.010]	[-0.007, 0.017]	[-0.007, 0.017]	[0.000, 0.000]	1	1	-
magic-irri	fitted G4382 → G3098	10	1	0.008	0.006 [-0.008, 0.020]	[-0.018, 0.020]	[-0.018, 0.020]	[0.000, 0.008]	1	1	-
magic-irri	fitted G4382 → GW	10	1	0.002	0.002 [0.000, 0.005]	[-0.003, 0.005]	[-0.003, 0.005]	[0.000, 0.002]	1	1	-
magic-niab●	fitted G1217 → FT	8	1	0.068	0.015 [-0.029, 0.060]	[-0.031, 0.131]	[-0.031, 0.131]	[0.068, 0.122]	never	1	-
magic-niab●	fitted G1217 → YLD	8	1	0.009	0.011 [0.003, 0.018]	[0.004, 0.021]	[0.004, 0.021]	[0.007, 0.009]	never	1	-
magic-niab	fitted G1276 → G1789	8	1	0.039	0.032 [0.022, 0.042]	[0.020, 0.042]	[0.020, 0.042]	[0.039, 0.039]	never	>3	-
magic-niab	fitted G1276 → YR.FIELD	8	1	0.015	0.018 [0.012, 0.024]	[0.012, 0.041]	[0.012, 0.041]	[0.015, 0.030]	never	1	-
magic-niab	fitted G1750 → YLD	8	1	-0.011	-0.006 [-0.015, 0.003]	[-0.014, 0.008]	[-0.014, 0.008]	[-0.011, -0.011]	never	>3	-
magic-niab●	fitted G1853 → G43	8	1	-0.039	-0.028 [-0.038, -0.017]	[-0.038, 0.020]	[-0.038, 0.020]	[-0.039, 0.000]	1	1	G1853→G311
magic-niab	fitted G1896 → FUS	8	1	-0.242	-0.243 [-0.255, -0.231]	[-0.258, -0.226]	[-0.258, -0.226]	[-0.242, -0.234]	never	1	-
magic-niab	fitted G2208 → MIL	8	1	0.424	0.412 [0.375, 0.449]	[0.372, 0.480]	[0.372, 0.480]	[0.424, 0.454]	never	1	-
magic-niab	fitted G257 → YR.FIELD	8	1	-0.082	-0.080 [-0.087, -0.073]	[-0.096, -0.072]	[-0.096, -0.072]	[-0.090, -0.081]	never	1	-
magic-niab	fitted G2835 → G1800	8	2	0.124	0.122 [0.110, 0.133]	[0.110, 0.135]	[0.110, 0.135]	[0.124, 0.124]	never	>3	-
magic-niab	fitted G2953 → HT	8	1	-1.026	-1.014 [-1.082, -0.945]	[-1.393, -0.935]	[-1.393, -0.935]	[-1.349, -1.026]	never	1	-
magic-niab●	fitted G311 → G43	8	1	-0.255	-0.251 [-0.259, -0.244]	[-0.260, 0.000]	[-0.260, 0.000]	[-0.255, 0.000]	1	1	G1853→G311

continues on the next page

network	param. query	$ K $	loc.	true estimate [95 %]		one revision		two revisions		no knowledge		r_0	r_{val}	first breaking claim
magic-niab	fitted G418 $\rightarrow$ FUS	8	2	0.003	-0.003 [-0.015, 0.010]	[-0.022, 0.011]	[-0.022, 0.011]	[-0.022, 0.011]	[-0.022, 0.011]	[0.000, 0.003]	[0.000, 0.003]	1	1	-
magic-niab	fitted G418 $\rightarrow$ YLD	8	2	0.043	0.045 [-0.037, 0.052]	[0.028, 0.054]	[0.028, 0.054]	[0.028, 0.054]	[0.028, 0.054]	[0.036, 0.045]	[0.036, 0.045]	never	1	-
<i>Sampled queries, networks whose parameters we drew (structure from a published source).</i>														
Acid_1996	semi-s. x1 $\rightarrow$ x10	1	1	-2.725	-2.686 [-2.735, -2.637]	[-2.749, -1.315]	[-2.749, -1.315]	[-2.749, -1.315]	[-2.749, -1.315]	[-2.725, -1.433]	[-2.725, -1.433]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x11	1	1	3.064	3.026 [2.988, 3.064]	[0.772, 3.072]	[0.772, 3.072]	[0.772, 3.072]	[0.772, 3.072]	[0.847, 3.064]	[0.847, 3.064]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x12	1	1	6.934	6.844 [6.744, 6.944]	[2.684, 6.972]	[2.684, 6.972]	[2.684, 6.972]	[2.684, 6.972]	[2.918, 6.934]	[2.918, 6.934]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x13	1	1	-9.327	-9.211 [-9.347, -9.076]	[-9.384, -3.611]	[-9.384, -3.611]	[-9.384, -3.611]	[-9.384, -3.611]	[-9.327, -3.925]	[-9.327, -3.925]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x14	1	1	0.674	0.661 [0.636, 0.685]	[0.569, 0.684]	[0.569, 0.684]	[0.569, 0.684]	[0.569, 0.684]	[0.674, 0.674]	[0.674, 0.674]	never	never	-
Acid_1996	semi-s. x1 $\rightarrow$ x15	1	1	2.446	2.412 [2.365, 2.458]	[1.150, 2.458]	[1.150, 2.458]	[1.150, 2.458]	[1.150, 2.458]	[1.287, 2.446]	[1.287, 2.446]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x16	1	1	-0.565	-0.545 [-0.569, -0.520]	[-0.568, -0.462]	[-0.568, -0.462]	[-0.568, -0.462]	[-0.568, -0.462]	[-0.565, -0.565]	[-0.565, -0.565]	never	never	-
Acid_1996	semi-s. x1 $\rightarrow$ x17	1	1	-3.277	-3.213 [-3.283, -3.143]	[-3.283, -1.778]	[-3.283, -1.778]	[-3.283, -1.778]	[-3.283, -1.778]	[-3.277, -2.032]	[-3.277, -2.032]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x18	1	1	2.450	2.409 [2.361, 2.458]	[1.140, 2.458]	[1.140, 2.458]	[1.140, 2.458]	[1.140, 2.458]	[1.288, 2.450]	[1.288, 2.450]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x3	1	1	-0.593	-0.585 [-0.599, -0.571]	[-0.606, -0.547]	[-0.606, -0.547]	[-0.606, -0.547]	[-0.606, -0.547]	[-0.593, -0.593]	[-0.593, -0.593]	never	never	-
Acid_1996	semi-s. x1 $\rightarrow$ x4	1	1	-1.382	-1.366 [-1.380, -1.352]	[-1.380, 0.000]	[-1.380, 0.000]	[-1.380, 0.000]	[-1.380, 0.000]	[-1.382, 0.000]	[-1.382, 0.000]	1	1	x1 $\rightarrow$ x4
Acid_1996	semi-s. x1 $\rightarrow$ x5	1	1	-2.127	-2.105 [-2.130, -2.080]	[-2.135, -0.537]	[-2.135, -0.537]	[-2.135, -0.537]	[-2.135, -0.537]	[-2.127, -0.588]	[-2.127, -0.588]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x6	1	1	0.675	0.659 [0.639, 0.680]	[0.597, 0.687]	[0.597, 0.687]	[0.597, 0.687]	[0.597, 0.687]	[0.675, 0.675]	[0.675, 0.675]	never	never	-
Acid_1996	semi-s. x1 $\rightarrow$ x7	1	1	2.536	2.499 [2.457, 2.541]	[1.206, 2.554]	[1.206, 2.554]	[1.206, 2.554]	[1.206, 2.554]	[1.334, 2.536]	[1.334, 2.536]	never	1	-
Acid_1996	semi-s. x1 $\rightarrow$ x9	1	1	2.702	2.665 [2.618, 2.711]	[1.296, 2.725]	[1.296, 2.725]	[1.296, 2.725]	[1.296, 2.725]	[1.421, 2.702]	[1.421, 2.702]	never	1	-
Acid_1996	semi-s. x4 $\rightarrow$ x10	1	1	0.935	0.922 [0.905, 0.939]	[0.895, 1.648]	[0.895, 1.648]	[0.895, 1.648]	[0.895, 1.648]	[0.935, 1.616]	[0.935, 1.616]	never	1	-
Acid_1996	semi-s. x4 $\rightarrow$ x11	1	1	-1.605	-1.601 [-1.616, -1.586]	[-2.029, -1.579]	[-2.029, -1.579]	[-2.029, -1.579]	[-2.029, -1.579]	[-2.007, -1.605]	[-2.007, -1.605]	never	1	-
Acid_1996	semi-s. x4 $\rightarrow$ x12	1	1	-2.907	-2.887 [-2.922, -2.853]	[-4.360, -2.832]	[-4.360, -2.832]	[-4.360, -2.832]	[-4.360, -2.832]	[-4.293, -2.907]	[-4.293, -2.907]	never	1	-
Acid_1996	semi-s. x4 $\rightarrow$ x13	1	1	3.910	3.889 [3.842, 3.936]	[3.812, 5.869]	[3.812, 5.869]	[3.812, 5.869]	[3.812, 5.869]	[3.910, 5.774]	[3.910, 5.774]	never	1	-
Didelez_2010	semi-s. Age $\rightarrow$ HRT	1	1	0.577	0.570 [0.543, 0.596]	[-0.772, 0.596]	[-0.772, 0.596]	[-0.772, 0.596]	[-0.772, 0.596]	[-0.729, 0.577]	[-0.729, 0.577]	1	1	Age $\rightarrow$ Occ
Didelez_2010	semi-s. Age $\rightarrow$ Occ	1	1	1.219	1.212 [1.198, 1.226]	[0.000, 1.226]	[0.000, 1.226]	[0.000, 1.226]	[0.000, 1.226]	[0.000, 1.219]	[0.000, 1.219]	1	1	Age $\rightarrow$ Occ
Didelez_2010	semi-s. Age $\rightarrow$ S	1	1	1.976	1.977 [1.951, 2.003]	[1.112, 2.003]	[1.112, 2.003]	[1.112, 2.003]	[1.112, 2.003]	[1.162, 1.976]	[1.162, 1.976]	never	1	-
Didelez_2010	semi-s. Age $\rightarrow$ Smo	1	1	1.054	1.046 [1.028, 1.065]	[-0.025, 1.065]	[-0.025, 1.065]	[-0.025, 1.065]	[-0.025, 1.065]	[-0.000, 1.054]	[-0.000, 1.054]	1	1	Age $\rightarrow$ Occ
Didelez_2010	semi-s. Age $\rightarrow$ TCI	1	1	-1.991	-1.984 [-2.018, -1.950]	[-2.018, -0.689]	[-2.018, -0.689]	[-2.018, -0.689]	[-2.018, -0.689]	[-1.991, -0.753]	[-1.991, -0.753]	never	1	-
Didelez_2010	semi-s. Age $\rightarrow$ Thist	1	1	0.960	0.959 [0.941, 0.976]	[-0.008, 0.976]	[-0.008, 0.976]	[-0.008, 0.976]	[-0.008, 0.976]	[-0.000, 0.960]	[-0.000, 0.960]	1	1	Age $\rightarrow$ Occ
Didelez_2010	semi-s. Occ $\rightarrow$ HRT	1	1	1.071	1.078 [1.056, 1.100]	[-0.363, 1.100]	[-0.363, 1.100]	[-0.363, 1.100]	[-0.363, 1.100]	[-0.357, 1.071]	[-0.357, 1.071]	1	1	Age $\rightarrow$ Occ
Didelez_2010	semi-s. Occ $\rightarrow$ S	1	1	0.668	0.682 [0.657, 0.706]	[0.217, 1.601]	[0.217, 1.601]	[0.217, 1.601]	[0.217, 1.601]	[0.218, 1.589]	[0.218, 1.589]	never	1	-
Didelez_2010	semi-s. Occ $\rightarrow$ Smo	1	1	0.865	0.864 [0.855, 0.873]	[0.000, 0.879]	[0.000, 0.879]	[0.000, 0.879]	[0.000, 0.879]	[0.000, 0.865]	[0.000, 0.865]	1	1	Age $\rightarrow$ Occ
Didelez_2010	semi-s. Occ $\rightarrow$ TCI	1	1	-1.016	-1.028 [-1.059, -0.997]	[-1.938, 0.167]	[-1.938, 0.167]	[-1.938, 0.167]	[-1.938, 0.167]	[-1.920, 0.166]	[-1.920, 0.166]	1	1	Age $\rightarrow$ Occ
Didelez_2010	semi-s. Occ $\rightarrow$ Thist	1	1	0.788	0.786 [0.777, 0.795]	[0.000, 0.795]	[0.000, 0.795]	[0.000, 0.795]	[0.000, 0.795]	[0.000, 0.788]	[0.000, 0.788]	1	1	Age $\rightarrow$ Occ
Didelez_2010	semi-s. Smo $\rightarrow$ HRT	1	1	1.238	1.236 [1.226, 1.247]	[0.960, 1.245]	[0.960, 1.245]	[0.960, 1.245]	[0.960, 1.245]	[0.970, 1.238]	[0.970, 1.238]	never	1	-
Didelez_2010	semi-s. Smo $\rightarrow$ S	1	1	1.179	1.175 [1.161, 1.189]	[1.145, 1.358]	[1.145, 1.358]	[1.145, 1.358]	[1.145, 1.358]	[1.179, 1.342]	[1.179, 1.342]	never	1	-
Didelez_2010	semi-s. Smo $\rightarrow$ TCI	1	1	-1.793	-1.792 [-1.805, -1.779]	[-1.798, -1.657]	[-1.798, -1.657]	[-1.798, -1.657]	[-1.798, -1.657]	[-1.793, -1.668]	[-1.793, -1.668]	never	1	-
Kampen_2014	semi-s. AFF $\rightarrow$ CDR	3	3	1.443	1.442 [1.434, 1.450]	[0.000, 1.735]	[0.000, 1.735]	[0.000, 1.735]	[0.000, 1.735]	[0.000, 1.724]	[0.000, 1.724]	1	1	AIS $\rightarrow$ AFF
Kampen_2014	semi-s. AFF $\rightarrow$ FTW	3	3	1.351	1.387 [1.346, 1.427]	[0.382, 1.919]	[0.382, 1.919]	[0.382, 1.919]	[0.382, 1.919]	[0.412, 1.844]	[0.412, 1.844]	never	1	-
Kampen_2014	semi-s. AIS $\rightarrow$ ALN	3	3	-0.738	-0.744 [-0.759, -0.728]	[-0.759, 0.035]	[-0.759, 0.035]	[-0.759, 0.035]	[-0.759, 0.035]	[-0.738, 0.546]	[-0.738, 0.546]	1	1	AIS $\rightarrow$ AFF
Kampen_2014	semi-s. AIS $\rightarrow$ DET	3	3	-4.948	-4.940 [-4.997, -4.882]	[-4.997, -1.031]	[-4.997, 0.952]	[-4.997, 0.952]	[-4.997, 0.952]	[-4.948, 0.883]	[-4.948, 0.883]	2	1	AIS $\rightarrow$ AFF / SAN $\rightarrow$ AIS
Kampen_2014	semi-s. AIS $\rightarrow$ HOS	3	3	-4.166	-4.164 [-4.211, -4.117]	[-4.211, -2.994]	[-4.211, -2.220]	[-4.211, -2.220]	[-4.211, -2.220]	[-4.166, -2.283]	[-4.166, -2.283]	never	1	-
Kampen_2014	semi-s. AIS $\rightarrow$ SUS	3	3	1.887	1.888 [1.864, 1.913]	[0.896, 1.913]	[0.224, 1.913]	[0.224, 1.913]	[0.224, 1.913]	[0.255, 1.887]	[0.255, 1.887]	never	1	-
Kampen_2014	semi-s. ALN $\rightarrow$ APA	3	3	0.583	0.592 [0.578, 0.605]	[0.000, 1.305]	[0.000, 1.305]	[0.000, 1.305]	[0.000, 1.305]	[0.000, 1.264]	[0.000, 1.264]	1	1	ALN $\rightarrow$ APA
Kampen_2014	semi-s. ALN $\rightarrow$ EGC	3	3	-0.024	-0.024 [-0.038, -0.011]	[-0.568, 0.521]	[-0.568, 0.521]	[-0.568, 0.521]	[-0.568, 0.521]	[-0.547, 0.506]	[-0.547, 0.506]	1	1	AIS $\rightarrow$ AFF
Kampen_2014	semi-s. ALN $\rightarrow$ PER	3	3	1.473	1.478 [1.468, 1.488]	[0.000, 1.497]	[0.000, 1.497]	[0.000, 1.497]	[0.000, 1.497]	[0.000, 1.473]	[0.000, 1.473]	1	1	AIS $\rightarrow$ AFF
Kampen_2014	semi-s. CDR $\rightarrow$ DET	3	3	1.168	1.173 [1.166, 1.180]	[1.146, 2.184]	[1.146, 2.184]	[1.146, 2.184]	[1.146, 2.184]	[1.168, 2.155]	[1.168, 2.155]	never	1	-
Polzer_2012	semi-s. Alcohol $\rightarrow$ Lipids	5	3	-2.856	-2.839 [-2.881, -2.797]	[-3.374, -2.706]	[-3.374, -2.545]	[-3.374, -2.545]	[-3.374, -2.545]	[-3.348, -2.625]	[-3.348, -2.625]	never	1	-
Polzer_2012	semi-s. Alcohol $\rightarrow$ Peri-odontitis	5	3	-0.060	-0.042 [-0.091, 0.007]	[-2.030, 0.766]	[-2.111, 0.766]	[-2.111, 0.766]	[-2.111, 0.766]	[-2.061, 0.706]	[-2.061, 0.706]	1	1	-
Polzer_2012	semi-s. Alcohol $\rightarrow$ Sport	5	3	0.797	0.800 [0.783, 0.817]	[-0.018, 0.817]	[-0.018, 0.817]	[-0.018, 0.817]	[-0.018, 0.817]	[0.000, 0.799]	[0.000, 0.799]	1	1	Alcohol $\rightarrow$ Smoking
Polzer_2012	semi-s. Caries $\rightarrow$ Mortality	5	3	1.094	1.092 [1.071, 1.113]	[-0.877, 1.162]	[-0.877, 1.162]	[-0.877, 1.162]	[-0.877, 1.162]	[-0.806, 1.094]	[-0.806, 1.094]	1	1	Psychosocial $\rightarrow$ Caries
Polzer_2012	semi-s. Caries $\rightarrow$ Tooth Loss	5	3	0.917	0.916 [0.902, 0.930]	[-0.515, 1.002]	[-0.515, 1.002]	[-0.515, 1.002]	[-0.515, 1.002]	[-0.476, 0.917]	[-0.476, 0.917]	1	1	Psychosocial $\rightarrow$ Caries
Polzer_2012	semi-s. Diabetes $\rightarrow$ Mortality	5	2	0.919	0.922 [0.886, 0.959]	[-0.121, 2.293]	[-0.121, 2.318]	[-0.121, 2.318]	[-0.121, 2.318]	[-0.097, 2.241]	[-0.097, 2.241]	1	1	Obesity $\rightarrow$ Diabetes
Polzer_2012	semi-s. Diabetes $\rightarrow$ Tooth Loss	5	2	1.973	1.979 [1.954, 2.003]	[1.211, 2.023]	[1.211, 2.053]	[1.211, 2.053]	[1.211, 2.053]	[1.225, 1.989]	[1.225, 1.989]	never	1	-

continues on the next page

network	param.	query	$ K $	loc.	true estimate [95 %]				one revision		two revisions		no knowledge		r_0	r_{val}	first breaking claim
Polzer_2012	semi-s.	Hypertension → Mortality	5	2	0.985	0.990	[0.976, 1.004]	[−0.111, 1.427]	[−0.111, 1.427]	[−0.085, 1.395]	1	1	Diabetes→Hypertension				
Polzer_2012	semi-s.	Obesity → Lipids	5	2	0.109	0.117	[0.095, 0.139]	[0.095, 1.296]	[0.095, 1.296]	[0.109, 1.273]	never	1	–				
Polzer_2012	semi-s.	Obesity → Tooth Loss	5	2	0.285	0.294	[0.258, 0.331]	[−1.553, 0.338]	[−1.553, 0.338]	[−1.521, 0.285]	1	1	Diabetes→Hypertension				
Polzer_2012	semi-s.	Psychosocial Diabetes	→	5	3	0.601	0.615	[0.579, 0.650]	[0.553, 2.300]	[0.553, 2.300]	[0.601, 2.258]	never	1	–			
Polzer_2012	semi-s.	Psychosocial Mortality	→	5	3	−2.726	−2.743	[−2.835, −2.651]	[−3.910, 0.687]	[−3.910, 0.687]	[−3.800, 0.592]	1	1	Alcohol→Smoking			
Polzer_2012	semi-s.	Psychosocial Smoking	→	5	3	1.312	1.315	[1.294, 1.336]	[0.000, 1.354]	[0.000, 1.354]	[0.000, 1.312]	1	1	Alcohol→Smoking			
Polzer_2012	semi-s.	Smoking → Hyper-tension	5	3	3.949	3.939	[3.896, 3.982]	[0.132, 3.982]	[0.132, 3.982]	[0.174, 3.949]	never	1	–				
Polzer_2012	semi-s.	Smoking → Obe-sity	5	3	−1.541	−1.542	[−1.561, −1.523]	[−1.561, 0.135]	[−1.561, 0.135]	[−1.541, 0.123]	1	1	Alcohol→Smoking				
Schipf_2010	semi-s.	A → PA	3	3	−1.264	−1.259	[−1.273, −1.245]	[−1.278, 0.000]	[−1.278, 0.000]	[−1.264, 0.000]	1	1	A→PA				
Schipf_2010	semi-s.	A → S	3	3	1.235	1.236	[1.222, 1.250]	[0.000, 1.255]	[0.000, 1.255]	[0.000, 1.235]	1	1	A→S				
Schipf_2010	semi-s.	A → T2DM	3	3	0.363	0.368	[0.338, 0.399]	[−1.924, 1.553]	[−1.924, 1.553]	[−1.931, 1.514]	1	1	A→PA				
Schipf_2010	semi-s.	A → TT	3	3	−2.942	−2.949	[−2.978, −2.921]	[−3.907, −1.660]	[−3.907, −1.660]	[−3.878, −1.685]	never	1	–				
Schipf_2010	semi-s.	A → U	3	3	−1.564	−1.574	[−1.597, −1.550]	[−1.604, 0.870]	[−1.604, 0.870]	[−1.564, 0.867]	1	1	A→PA				
Schipf_2010	semi-s.	A → WC	3	3	−2.428	−2.433	[−2.452, −2.413]	[−2.452, 0.000]	[−2.452, 0.000]	[−2.428, 0.000]	1	1	A→PA				
Schipf_2010	semi-s.	PA → T2DM	3	3	−1.451	−1.433	[−1.452, −1.414]	[−1.454, −0.720]	[−1.454, −0.720]	[−1.451, −0.735]	never	1	–				
Schipf_2010	semi-s.	PA → TT	3	3	−0.160	−0.142	[−0.166, −0.117]	[−0.167, 1.398]	[−0.167, 1.398]	[−0.160, 1.370]	1	1	A→PA				
Schipf_2010	semi-s.	PA → U	3	3	0.979	0.977	[0.957, 0.996]	[−0.028, 1.155]	[−0.043, 1.155]	[−0.021, 1.138]	1	1	PA→WC				
Schipf_2010	semi-s.	PA → WC	3	3	0.977	0.988	[0.974, 1.002]	[0.000, 1.574]	[0.000, 1.574]	[0.000, 1.557]	1	1	PA→WC				
Schipf_2010	semi-s.	S → T2DM	3	3	−0.932	−0.924	[−0.936, −0.912]	[−0.950, −0.173]	[−0.950, −0.173]	[−0.932, −0.192]	never	1	–				
Schipf_2010	semi-s.	S → TT	3	3	−1.018	−1.008	[−1.022, −0.994]	[−1.852, −0.987]	[−1.852, −0.987]	[−1.842, −1.018]	never	1	–				
Sebastiani_2005	semi-s.	ANXA2.8	→	7	3	1.155	1.151	[1.130, 1.173]	[1.104, 1.188]	[1.104, 1.188]	[1.155, 1.155]	never	>3	–			
Sebastiani_2005	semi-s.	ANXA2.7															
Sebastiani_2005	semi-s.	ANXA2.8 CSF2.4	→	7	3	0.782	0.796	[0.774, 0.818]	[−0.070, 0.862]	[−0.070, 0.862]	[0.000, 0.782]	1	1	ANXA2.8→CAT			
Sebastiani_2005	semi-s.	ANXA2.8 SELP.12	→	7	3	1.197	1.193	[1.164, 1.221]	[−0.057, 1.262]	[−0.057, 1.262]	[0.000, 1.197]	1	1	ANXA2.8→CAT			
Sebastiani_2005	semi-s.	BMP6 → BMP6.13	7	3	0.515	0.516	[0.506, 0.527]	[0.501, 0.602]	[0.501, 0.602]	[0.515, 0.515]	never	>3	–				
Sebastiani_2005	semi-s.	CAT → CSF2.4	7	3	0.530	0.541	[0.529, 0.553]	[0.519, 0.575]	[0.519, 0.575]	[0.530, 0.530]	never	>3	–				
Sebastiani_2005	semi-s.	CAT → SELP.12	7	3	0.812	0.806	[0.791, 0.820]	[0.782, 0.836]	[0.782, 0.836]	[0.812, 0.812]	never	>3	–				
Sebastiani_2005	semi-s.	EDN1.9	→	7	1	−0.489	−0.483	[−0.502, −0.464]	[−0.518, −0.452]	[−0.518, −0.452]	[−0.489, −0.489]	never	>3	–			
Sebastiani_2005	semi-s.	ANXA2.12															
Sebastiani_2005	semi-s.	EDN1.6	→	7	3	0.668	0.674	[0.666, 0.683]	[0.666, 0.706]	[0.666, 0.706]	[0.668, 0.668]	never	>3	–			
Sebastiani_2005	semi-s.	EDN1.10															
Sebastiani_2005	semi-s.	Stroke → BMP6.9	7	1	1.756	1.785	[1.757, 1.813]	[1.734, 1.830]	[1.734, 1.830]	[1.756, 1.756]	never	>3	–				
Sebastiani_2005	semi-s.	Stroke → SELP.17	7	1	0.185	0.190	[0.169, 0.210]	[0.117, 0.211]	[0.117, 0.211]	[0.185, 0.185]	never	>3	–				
Shrier_2008	semi-s.	Coach → Fitness Level	2	1	−1.012	−1.018	[−1.032, −1.005]	[−1.043, −0.994]	[−1.043, −0.994]	[−1.012, −1.012]	never	never	–				
Shrier_2008	semi-s.	Coach → IntraGame Proprioception	→	2	1	−2.335	−2.334	[−2.368, −2.301]	[−2.374, −1.433]	[−2.374, −1.433]	[−2.335, −1.491]	never	1	–			
Shrier_2008	semi-s.	Coach → PreGame Proprioception	2	1	−1.235	−1.241	[−1.263, −1.219]	[−1.286, −1.213]	[−1.286, −1.213]	[−1.235, −1.235]	never	never	–				
Shrier_2008	semi-s.	Coach → Team Motivation	2	1	−1.069	−1.071	[−1.085, −1.057]	[−1.085, 0.000]	[−1.085, 0.000]	[−1.069, 0.000]	1	1	Coach→TeamMotivation				
Shrier_2008	semi-s.	ConnectiveTissue Disorder → Injury	2	1	−3.044	−3.022	[−3.057, −2.986]	[−5.041, −2.884]	[−5.041, −2.884]	[−5.042, −3.044]	never	1	–				
Shrier_2008	semi-s.	ConnectiveTissue Disorder → Neuro-muscularFatigue	2	1	1.297	1.294	[1.280, 1.308]	[1.263, 2.188]	[1.263, 2.188]	[1.297, 2.182]	never	1	–				
Shrier_2008	semi-s.	ConnectiveTissue Disorder → Tissue Weakness	2	1	0.838	0.830	[0.822, 0.838]	[0.000, 0.843]	[0.000, 0.843]	[0.000, 0.838]	1	1	Genetics→ConnectiveTissueDisorder				

continues on the next page

network	param. query	K	loc.	true estimate [95 %]				one revision		two revisions		no knowledge		r_0	r_{val}	first breaking claim
Shrier_2008	semi-s. Genetics $\rightarrow$ ConnectiveTissueDisorder	2	1	1.365	1.368	[1.354,	1.382]	[0.000,	1.382]	[0.000,	1.382]	[0.000,	1.365]	1	1	Genetics $\rightarrow$ ConnectiveTissueDisorder
Shrier_2008	semi-s. Genetics $\rightarrow$ Injury	2	1	-8.345	-8.344	[-8.416,	-8.272]	[-8.425,	-4.137]	[-8.425,	-4.137]	[-8.345,	-4.191]	never	1	-
Shrier_2008	semi-s. Genetics $\rightarrow$ Neuro-muscularFatigue	2	1	3.626	3.632	[3.607,	3.657]	[1.840,	3.658]	[1.840,	3.658]	[1.855,	3.626]	never	1	-
Shrier_2008	semi-s. Genetics $\rightarrow$ TissueWeakness	2	1	1.144	1.137	[1.119,	1.155]	[-0.021,	1.155]	[-0.021,	1.155]	[-0.000,	1.144]	1	1	Genetics $\rightarrow$ ConnectiveTissueDisorder
Shrier_2008	semi-s. TeamMotivation $\rightarrow$ Injury	2	1	1.056	1.042	[1.019,	1.064]	[0.855,	2.478]	[0.855,	2.478]	[1.056,	2.437]	never	1	-
Shrier_2008	semi-s. TeamMotivation $\rightarrow$ PreviousInjury	2	1	0.648	0.647	[0.638,	0.657]	[0.633,	0.678]	[0.633,	0.678]	[0.648,	0.648]	never	never	-
Thoemmes_2013	semi-s. e0 $\rightarrow$ s1	1	1	0.813	0.802	[0.786,	0.818]	[-0.058,	0.812]	[-0.058,	0.812]	[0.000,	0.813]	1	1	e0 $\rightarrow$ x
Thoemmes_2013	semi-s. e0 $\rightarrow$ s2	1	1	0.509	0.496	[0.479,	0.513]	[-0.097,	0.503]	[-0.097,	0.503]	[0.000,	0.509]	1	1	e0 $\rightarrow$ x
Thoemmes_2013	semi-s. e0 $\rightarrow$ s3	1	1	0.652	0.637	[0.611,	0.663]	[-0.120,	0.647]	[-0.120,	0.647]	[-0.000,	0.652]	1	1	e0 $\rightarrow$ x
Thoemmes_2013	semi-s. e0 $\rightarrow$ x	1	1	-1.368	-1.356	[-1.370,	-1.342]	[-1.370,	0.000]	[-1.370,	0.000]	[-1.368,	0.000]	1	1	e0 $\rightarrow$ x
Thoemmes_2013	semi-s. e0 $\rightarrow$ y	1	1	1.262	1.239	[1.210,	1.267]	[-0.188,	1.243]	[-0.188,	1.243]	[-0.000,	1.262]	1	1	e0 $\rightarrow$ x
Thoemmes_2013	semi-s. e0 $\rightarrow$ z	1	1	-0.577	-0.578	[-0.596,	-0.560]	[-0.590,	0.045]	[-0.590,	0.045]	[-0.577,	0.000]	1	1	e0 $\rightarrow$ x
Thoemmes_2013	semi-s. e0 $\rightarrow$ z2	1	1	-0.275	-0.278	[-0.295,	-0.262]	[-0.287,	0.037]	[-0.287,	0.037]	[-0.275,	0.000]	1	1	e0 $\rightarrow$ x
Thoemmes_2013	semi-s. e0 $\rightarrow$ z3	1	1	1.380	1.355	[1.321,	1.389]	[-0.189,	1.361]	[-0.189,	1.361]	[-0.000,	1.380]	1	1	e0 $\rightarrow$ x
Thoemmes_2013	semi-s. x $\rightarrow$ s1	1	1	-0.594	-0.591	[-0.600,	-0.583]	[-0.620,	-0.576]	[-0.620,	-0.576]	[-0.594,	-0.594]	never	never	-
Thoemmes_2013	semi-s. x $\rightarrow$ s2	1	1	-0.373	-0.365	[-0.375,	-0.355]	[-0.416,	-0.348]	[-0.416,	-0.348]	[-0.373,	-0.373]	never	never	-
Thoemmes_2013	semi-s. x $\rightarrow$ s3	1	1	-0.477	-0.467	[-0.482,	-0.453]	[-0.528,	-0.440]	[-0.528,	-0.440]	[-0.477,	-0.477]	never	never	-
Thoemmes_2013	semi-s. x $\rightarrow$ y	1	1	-0.923	-0.913	[-0.928,	-0.898]	[-1.002,	-0.871]	[-1.002,	-0.871]	[-0.923,	-0.923]	never	never	-
Thoemmes_2013	semi-s. x $\rightarrow$ z	1	1	0.422	0.424	[0.414,	0.434]	[0.407,	0.448]	[0.407,	0.448]	[0.422,	0.422]	never	never	-
Thoemmes_2013	semi-s. x $\rightarrow$ z2	1	1	0.201	0.198	[0.188,	0.208]	[0.178,	0.219]	[0.178,	0.219]	[0.201,	0.201]	never	never	-
Thoemmes_2013	semi-s. x $\rightarrow$ z3	1	1	-1.009	-0.994	[-1.012,	-0.975]	[-1.084,	-0.947]	[-1.084,	-0.947]	[-1.009,	-1.009]	never	never	-
alarm	semi-s. ANAPHYLAXIS $\rightarrow$ BP	4	1	0.108	0.096	[0.076,	0.116]	[-0.068,	0.125]	[-0.068,	0.125]	[-0.000,	0.108]	1	1	ANAPHYLAXIS $\rightarrow$ TPR
alarm	semi-s. ANAPHYLAXIS $\rightarrow$ HRBP	4	1	-0.886	-0.902	[-0.932,	-0.872]	[-1.103,	0.122]	[-1.103,	0.122]	[-0.886,	0.000]	1	1	ANAPHYLAXIS $\rightarrow$ TPR
alarm	semi-s. LVFAILURE $\rightarrow$ CO	4	1	1.421	1.447	[1.427,	1.468]	[1.322,	1.537]	[1.322,	1.537]	[1.421,	1.421]	never	>3	-
alarm	semi-s. LVFAILURE $\rightarrow$ PCWP	4	1	-0.651	-0.649	[-0.665,	-0.632]	[-0.700,	-0.629]	[-0.700,	-0.629]	[-0.651,	-0.651]	never	>3	-
alarm	semi-s. MINVOLSET $\rightarrow$ CATECHOL	4	1	-0.608	-0.591	[-0.629,	-0.552]	[-0.675,	0.193]	[-0.675,	0.193]	[-0.608,	-0.000]	1	1	MINVOLSET $\rightarrow$ VENTMACH
alarm	semi-s. MINVOLSET $\rightarrow$ HRBP	4	1	0.835	0.804	[0.749,	0.860]	[-0.270,	0.930]	[-0.270,	0.930]	[0.000,	0.835]	1	1	MINVOLSET $\rightarrow$ VENTMACH
alarm	semi-s. MINVOLSET $\rightarrow$ PRESS	4	1	1.360	1.355	[1.326,	1.385]	[-0.056,	1.369]	[-0.056,	1.369]	[0.000,	1.360]	1	1	MINVOLSET $\rightarrow$ VENTMACH
alarm	semi-s. MINVOLSET $\rightarrow$ VENTLUNG	4	1	0.681	0.678	[0.659,	0.697]	[-0.084,	0.702]	[-0.084,	0.702]	[0.000,	0.681]	1	1	MINVOLSET $\rightarrow$ VENTMACH
alarm	semi-s. PULMEMBOLUS $\rightarrow$ HR	4	1	2.287	2.281	[2.229,	2.333]	[2.070,	2.396]	[2.070,	2.396]	[2.287,	2.287]	never	>3	-
alarm	semi-s. PULMEMBOLUS $\rightarrow$ PAP	4	1	0.578	0.581	[0.567,	0.594]	[0.000,	0.594]	[0.000,	0.594]	[0.000,	0.578]	1	1	PULMEMBOLUS $\rightarrow$ PAP
alarm	semi-s. TPR $\rightarrow$ BP	4	1	-0.117	-0.105	[-0.120,	-0.091]	[-0.120,	-0.004]	[-0.120,	-0.004]	[-0.117,	-0.117]	never	>3	-
alarm	semi-s. TPR $\rightarrow$ HRBP	4	1	0.952	0.977	[0.958,	0.997]	[0.889,	1.137]	[0.889,	1.137]	[0.952,	0.952]	never	>3	-
alarm	semi-s. VENTMACH $\rightarrow$ BP	4	1	0.295	0.292	[0.274,	0.311]	[0.273,	0.386]	[0.273,	0.386]	[0.295,	0.295]	never	>3	-
alarm	semi-s. VENTMACH $\rightarrow$ HR	4	1	-0.781	-0.753	[-0.791,	-0.715]	[-0.977,	-0.712]	[-0.977,	-0.712]	[-0.781,	-0.781]	never	>3	-
alarm	semi-s. VENTMACH $\rightarrow$ MINVOL	4	1	-0.445	-0.443	[-0.456,	-0.431]	[-0.482,	-0.430]	[-0.482,	-0.430]	[-0.445,	-0.445]	never	>3	-
andes	semi-s. GIVEN_1 $\rightarrow$ SNode_100	10	1	0.187	0.189	[0.137,	0.240]	[-0.749,	1.045]	[-0.749,	1.045]	[-0.000,	0.187]	1	1	-
andes	semi-s. RApp2 $\rightarrow$ GOAL_153	10	1	0.218	-0.026	[-0.376,	0.324]	[-1.053,	0.974]	[-1.053,	0.974]	[0.218,	0.218]	never	>3	-

continues on the next page

network	param. query	K	loc.	true estimate [95 %]				one revision		two revisions		no knowledge		r ₀	r _{val}	first breaking claim
andes	semi-s. RApp2 → SNode_43	10	1	0.504	0.506	[0.493, 0.519]	[0.459, 0.595]	[0.459, 0.595]	[0.504, 0.504]	never	>3	–				
andes	semi-s. TRY11 → GOAL_81	10	4	−3.566	−3.632	[−3.956, −3.307]	[−4.525, −2.636]	[−4.525, −2.636]	[−3.566, −3.566]	>3	>3	–				
andes	semi-s. TRY11 → SNode_43	10	4	0.011	0.009	[−0.010, 0.027]	[−0.084, 0.035]	[−0.084, 0.035]	[0.011, 0.011]	>3	>3	–				
andes	semi-s. TRY12 → GOAL_150	10	4	−43.982	−45.462	[−50.673, −40.250]	[−62.203, 14.089]	[−62.203, 14.089]	[−43.982, −0.000]	1	1	TRY12→TRY11				
andes	semi-s. TRY12 → SNode_134	10	4	10.027	10.267	[9.155, 11.380]	[−2.760, 14.674]	[−2.760, 14.674]	[−0.000, 10.027]	1	1	TRY12→TRY11				
andes	semi-s. TRY24 → GOAL_113	10	2	−0.352	−0.481	[−0.684, −0.278]	[−0.906, 0.808]	[−0.906, 0.808]	[−0.352, −0.352]	never	>3	–				
andes	semi-s. TRY24 → SNode_151	10	2	−7.307	−8.164	[−9.509, −6.819]	[−14.574, 9.027]	[−14.574, 9.027]	[−7.307, −7.307]	never	>3	–				
andes	semi-s. TRY25 → RApp8	10	2	−0.723	−1.412	[−1.939, −0.884]	[−3.841, −0.422]	[−3.841, −0.422]	[−0.723, −0.000]	1	1	–				
asia	semi-s. asia → dysp	3	1	−0.743	−0.758	[−0.786, −0.730]	[−0.790, 0.068]	[−0.790, 0.068]	[−0.743, 0.000]	1	1	asia→tub				
asia	semi-s. asia → either	3	1	0.536	0.547	[0.529, 0.565]	[−0.046, 0.565]	[−0.046, 0.565]	[−0.000, 0.536]	1	1	asia→tub				
asia	semi-s. asia → tub	3	1	0.667	0.676	[0.662, 0.689]	[0.000, 0.689]	[0.000, 0.689]	[0.000, 0.667]	1	1	asia→tub				
asia	semi-s. asia → xray	3	1	0.418	0.425	[0.405, 0.445]	[−0.044, 0.442]	[−0.044, 0.442]	[−0.000, 0.418]	1	1	asia→tub				
asia	semi-s. bronc → dysp	3	2	1.065	1.063	[1.052, 1.074]	[−0.142, 1.116]	[−0.142, 1.116]	[−0.138, 1.065]	1	1	smoke→bronc				
asia	semi-s. lung → dysp	3	2	−1.809	−1.794	[−1.811, −1.777]	[−1.844, −1.227]	[−1.844, −1.227]	[−1.809, −1.264]	never	1	–				
asia	semi-s. lung → either	3	2	1.305	1.300	[1.291, 1.308]	[1.281, 1.328]	[1.281, 1.328]	[1.305, 1.305]	never	never	–				
asia	semi-s. lung → xray	3	2	1.017	1.016	[1.006, 1.027]	[0.999, 1.045]	[0.999, 1.045]	[1.017, 1.017]	never	never	–				
asia	semi-s. smoke → bronc	3	2	1.067	1.058	[1.044, 1.072]	[0.000, 1.088]	[0.000, 1.088]	[0.000, 1.067]	1	1	smoke→bronc				
asia	semi-s. smoke → dysp	3	2	−1.274	−1.271	[−1.309, −1.234]	[−2.440, 1.226]	[−2.440, 1.226]	[−2.410, 1.136]	1	1	smoke→lung				
asia	semi-s. smoke → either	3	2	1.738	1.732	[1.710, 1.755]	[−0.065, 1.761]	[−0.065, 1.761]	[−0.000, 1.738]	1	1	smoke→lung				
asia	semi-s. smoke → lung	3	2	1.332	1.334	[1.320, 1.347]	[0.000, 1.359]	[0.000, 1.359]	[0.000, 1.332]	1	1	smoke→lung				
asia	semi-s. smoke → xray	3	2	1.354	1.354	[1.331, 1.376]	[−0.062, 1.385]	[−0.062, 1.385]	[−0.000, 1.354]	1	1	smoke→lung				
barley	semi-s. dg25 → aks_m2	7	2	−1.188	−1.159	[−1.185, −1.134]	[−1.671, −0.372]	[−1.671, −0.372]	[−1.188, −0.626]	never	1	–				
barley	semi-s. dg25 → s2225	7	2	−1.774	−1.723	[−1.764, −1.683]	[−2.497, −0.555]	[−2.497, −0.555]	[−1.774, −0.950]	never	1	–				
barley	semi-s. frspdag → spndx	7	2	−0.457	−0.519	[−0.567, −0.470]	[−1.862, 0.773]	[−1.862, 0.773]	[−0.457, 0.056]	1	1	–				
barley	semi-s. jordtype → bgbyg	7	1	1.585	1.577	[1.540, 1.613]	[−0.029, 1.618]	[−0.029, 1.618]	[0.000, 1.585]	1	1	jordtype→rokap				
barley	semi-s. jordtype → nopt	7	1	0.931	0.946	[0.921, 0.971]	[0.910, 1.022]	[0.910, 1.022]	[0.931, 0.931]	never	>3	–				
barley	semi-s. komm → aks_m2	7	1	−8.425	−8.406	[−8.558, −8.254]	[−8.951, −3.573]	[−8.951, −3.573]	[−8.425, −3.643]	never	1	–				
barley	semi-s. komm → ntilg	7	1	5.735	5.729	[5.626, 5.832]	[2.453, 6.110]	[2.453, 6.110]	[2.480, 5.735]	never	1	–				
barley	semi-s. nedbarea → slt22	7	1	4.186	4.196	[4.100, 4.291]	[3.545, 6.231]	[3.545, 6.231]	[4.186, 5.986]	never	1	–				
barley	semi-s. rokap → keraks	7	1	−3.015	−3.031	[−3.061, −3.000]	[−10.350, −2.804]	[−10.350, −2.804]	[−9.983, −3.015]	never	1	–				
barley	semi-s. rokap → s2225	7	1	−3.018	−3.022	[−3.053, −2.990]	[−16.911, −2.572]	[−16.911, −2.572]	[−16.480, −3.018]	never	1	–				
barley	semi-s. saatid → jordinf	7	2	−0.382	−0.378	[−0.393, −0.362]	[−0.399, 0.028]	[−0.399, 0.028]	[−0.382, 0.000]	1	1	saatid→frspdag				
barley	semi-s. sort → aks_m2	7	3	−1.165	−1.160	[−1.182, −1.139]	[−2.204, 0.290]	[−2.204, 0.290]	[−1.165, 0.000]	1	1	sort→sorttkv				
barley	semi-s. sort → udb	7	3	−0.309	−0.312	[−0.336, −0.288]	[−1.419, 0.292]	[−1.419, 0.292]	[−0.309, 0.000]	1	1	sort→sorttkv				
barley	semi-s. sorttkv → tkv	7	3	1.748	1.763	[1.735, 1.790]	[0.571, 2.846]	[0.571, 2.846]	[1.748, 1.748]	never	>3	–				
child	semi-s. BirthAsphyxia → CardiacMixing	2	2	1.061	1.064	[1.045, 1.083]	[−0.027, 1.083]	[−0.027, 1.083]	[0.000, 1.061]	1	1	BirthAsphyxia→Disease				
child	semi-s. BirthAsphyxia → LungFlow	2	2	1.461	1.463	[1.440, 1.485]	[−0.015, 1.485]	[−0.015, 1.485]	[0.000, 1.461]	1	1	BirthAsphyxia→Disease				
child	semi-s. Disease → CardiacMixing	2	2	0.948	0.947	[0.938, 0.956]	[0.000, 0.963]	[0.000, 0.963]	[0.000, 0.948]	1	1	BirthAsphyxia→Disease				
child	semi-s. Disease → LungParench	2	2	0.708	0.706	[0.697, 0.715]	[0.000, 0.748]	[0.000, 0.748]	[0.000, 0.708]	1	1	BirthAsphyxia→Disease				
child	semi-s. LungFlow → ChestXray	2	2	0.597	0.601	[0.593, 0.609]	[0.587, 1.012]	[0.587, 1.012]	[0.597, 1.000]	never	1	–				
child	semi-s. LungParench → Grunting	2	2	0.790	0.793	[0.781, 0.805]	[0.778, 1.607]	[0.778, 1.607]	[0.790, 1.583]	never	1	–				
child	semi-s. Sick → Age	2	2	−1.103	−1.111	[−1.125, −1.097]	[−1.736, 0.000]	[−1.736, 0.000]	[−1.723, 0.000]	1	1	Sick→Age				
diabetes	semi-s. bg_0 → basal_bal_0	26	2	−2.412	−2.428	[−2.477, −2.379]	[−2.495, −0.101]	[−2.495, −0.101]	[−2.412, −0.203]	never	1	–				
diabetes	semi-s. cho_bal_0 → ins_dep_10	26	1	3.339	3.344	[3.283, 3.406]	[3.090, 3.841]	[3.090, 3.841]	[3.339, 3.671]	never	1	–				

continues on the next page

network	param. query	$ K $	loc.	true estimate [95 %]		one revision		two revisions		no knowledge		r_0	r_{val}	first breaking claim	
diabetes	semi-s. cho_bal_12 → endo_bal_14	26	1	3.030	3.057 [3.001, 3.113]	[2.541, 5.993]	[2.541, 5.993]	[3.030, 3.332]	never	1	–				
diabetes	semi-s. cho_bal_15 → glu_prod_22	26	1	−1.068	−1.068 [−1.106, −1.029]	[−1.566, 1.660]	[−1.566, 1.660]	[−1.068, −0.213]	never	1	–				
diabetes	semi-s. cho_bal_2 → bg_6	26	1	3.273	3.284 [3.244, 3.324]	[2.693, 3.636]	[2.693, 3.636]	[2.791, 3.273]	never	1	–				
diabetes	semi-s. cho_bal_3 → cho_bal_17	26	1	0.009	0.010 [−0.001, 0.020]	[−0.037, 0.139]	[−0.037, 0.139]	[0.009, 0.009]	never	≥ 2	–				
diabetes	semi-s. cho_bal_4 → ins_indep_util_8	26	1	−1.243	−1.242 [−1.260, −1.224]	[−2.804, −0.449]	[−2.804, −0.449]	[−1.737, −1.243]	never	1	–				
diabetes	semi-s. cho_bal_6 → ins_dep_13	26	1	−42.307	−42.167 [−42.479, −41.854]	[−45.240, −40.832]	[−45.240, −40.832]	[−42.307, −41.042]	never	1	–				
diabetes	semi-s. cho_bal_8 → gut_abs_10	26	1	3.356	3.367 [3.353, 3.382]	[3.310, 3.434]	[3.310, 3.434]	[3.356, 3.356]	never	≥ 2	–				
diabetes	semi-s. gut_abs_0 → endo_bal_3	26	1	−6.742	−6.923 [−7.134, −6.712]	[−7.103, −0.862]	[−7.103, −0.862]	[−6.742, −1.214]	never	1	–				
diabetes	semi-s. gut_abs_1 → ins_indep_21	26	1	4.276	4.225 [3.929, 4.521]	[2.411, 4.293]	[2.411, 4.293]	[3.399, 4.276]	never	1	–				
diabetes	semi-s. gut_abs_11 → tot_bal_18	26	1	−0.465	−0.645 [−1.024, −0.266]	[−5.184, 0.966]	[−5.184, 0.966]	[−0.465, 0.643]	1	1	gut_abs_11→cho_bal_11				
diabetes	semi-s. gut_abs_14 → tot_bal_19	26	1	−4.780	−5.317 [−5.880, −4.754]	[−9.102, 10.428]	[−9.102, 10.428]	[−4.780, 1.191]	1	1	gut_abs_14→cho_bal_14				
diabetes	semi-s. gut_abs_19 → ins_indep_23	26	1	30.328	30.762 [30.132, 31.392]	[−9.521, 33.208]	[−9.521, 33.208]	[2.660, 30.328]	never	1	gut_abs_19→cho_bal_19				
diabetes	semi-s. gut_abs_3 → basal_bal_5	26	1	1.012	0.972 [0.861, 1.084]	[−5.581, 1.701]	[−5.581, 1.701]	[−3.011, 1.012]	1	1	–				
diabetes	semi-s. gut_abs_4 → ins_dep_util_11	26	1	−0.493	−0.364 [−0.879, 0.151]	[−0.835, 2.065]	[−0.835, 2.065]	[−0.493, 0.498]	1	1	–				
diabetes	semi-s. gut_abs_6 → endo_bal_10	26	1	19.736	19.386 [18.355, 20.418]	[−6.422, 22.114]	[−6.422, 22.114]	[−3.960, 19.736]	1	1	gut_abs_6→cho_bal_6				
diabetes	semi-s. gut_abs_8 → cho_17	26	1	−0.013	−0.013 [−0.040, 0.014]	[−0.032, 0.055]	[−0.032, 0.055]	[−0.013, 0.000]	1	1	–				
diabetes	semi-s. ins_indep_util_0 → endo_bal_17	26	2	−28.237	−28.389 [−30.667, −26.111]	[−59.114, −23.979]	[−59.114, −23.979]	[−53.027, −28.237]	never	1	–				
hailfinder	semi-s. Date → AMCINIn Scen	1	1	1.407	1.400 [1.377, 1.422]	[−0.024, 1.424]	[−0.024, 1.424]	[0.000, 1.407]	1	1	Date→Scenario				
hailfinder	semi-s. Date → WindAloft	1	1	−1.607	−1.614 [−1.636, −1.593]	[−1.636, 0.018]	[−1.636, 0.018]	[−1.607, −0.000]	1	1	Date→Scenario				
hailfinder	semi-s. Scenario → R5Fcst	1	1	−0.275	−0.261 [−0.276, −0.247]	[−0.888, 0.905]	[−0.888, 0.905]	[−0.817, 0.807]	1	1	Date→Scenario				
hepar2	semi-s. choledocholithotomy → consciousness	9	5	1.911	1.916 [1.898, 1.933]	[1.829, 1.948]	[1.829, 1.948]	[1.911, 1.911]	>3	>3	–				
hepar2	semi-s. choledocholithotomy → irregular_liver	9	5	−4.500	−4.520 [−4.554, −4.485]	[−4.587, −4.366]	[−4.587, −4.366]	[−4.500, −4.500]	>3	>3	–				
hepar2	semi-s. diabetes → alcohol	9	1	0.584	0.579 [0.559, 0.599]	[−0.077, 0.669]	[−0.077, 0.669]	[−0.000, 0.584]	1	1	diabetes→obesity				
hepar2	semi-s. diabetes → itching	9	1	−0.890	−0.895 [−0.925, −0.865]	[−0.997, 0.087]	[−0.997, 0.087]	[−0.890, 0.000]	1	1	diabetes→obesity				
hepar2	semi-s. gallstones → alt	9	5	−0.382	−0.408 [−0.431, −0.385]	[−0.601, 0.070]	[−0.601, 0.070]	[−0.382, −0.000]	1	1	gallstones→choledocholithotomy				
hepar2	semi-s. gallstones → ggtp	9	5	2.868	2.887 [2.849, 2.926]	[−0.039, 3.055]	[−0.039, 3.055]	[−0.000, 2.868]	1	1	gallstones→choledocholithotomy				
hepar2	semi-s. gallstones → spleen	9	5	3.776	3.800 [3.749, 3.851]	[−0.017, 3.971]	[−0.017, 3.971]	[0.000, 3.776]	1	1	gallstones→choledocholithotomy				
hepar2	semi-s. hepatotoxic phosphatase	→	9	1	−2.367	−2.368 [−2.398, −2.339]	[−2.418, −0.969]	[−2.418, −0.969]	[−2.367, −1.015]	never	1	–			
hepar2	semi-s. obesity → edema	9	1	−0.486	−0.482 [−0.494, −0.470]	[−0.542, −0.410]	[−0.542, −0.410]	[−0.486, −0.486]	never	>3	–				
hepar2	semi-s. obesity → triglycerides	9	1	−0.952	−0.942 [−0.957, −0.926]	[−0.965, −0.893]	[−0.965, −0.893]	[−0.952, −0.952]	never	>3	–				
insurance	semi-s. Age → Accident	3	3	−1.139	−1.126 [−1.169, −1.084]	[−2.384, 1.514]	[−2.384, 1.514]	[−2.332, 1.448]	1	1	Age→SocioEcon				
insurance	semi-s. Age → MedCost	3	3	−1.809	−1.781 [−1.912, −1.651]	[−5.303, 4.682]	[−5.303, 4.682]	[−5.159, 4.599]	1	1	Age→SocioEcon				
insurance	semi-s. DrivingSkill → OtherCarCost	→	3	3	−0.759	−0.760 [−0.771, −0.749]	[−0.924, 0.702]	[−0.924, 0.702]	[−0.880, 0.667]	1	1	SocioEcon→RiskAversion			
insurance	semi-s. MakeModel → Car Value	3	3	−1.248	−1.247 [−1.255, −1.238]	[−2.241, −1.204]	[−2.241, −0.027]	[−2.206, −0.028]	never	1	–				
insurance	semi-s. MakeModel → RuggedAuto	→	3	3	−1.295	−1.294 [−1.302, −1.285]	[−2.256, −1.250]	[−2.256, −0.108]	[−2.229, −0.107]	never	1	–			

continues on the next page

network	param. query		K	loc.	true estimate [95 %]				one revision		two revisions		no knowledge		r ₀	r _{val}	first breaking claim
insurance	semi-s.	RiskAversion DrivHist	→	3	3	0.701	0.699	[0.680, 0.718]	[0.184, 2.223]	[−0.398, 2.223]	[−0.366, 2.201]	2	1	Age→SocioEcon / SocioEcon→RiskAversion			
insurance	semi-s.	SeniorTrain DrivQuality	→	3	3	−1.200	−1.188	[−1.211, −1.165]	[−1.979, 0.476]	[−1.979, 0.476]	[−1.967, 0.468]	1	1	SocioEcon→RiskAversion			
insurance	semi-s.	SocioEcon → Driv- ingSkill	→	3	3	−0.595	−0.574	[−0.595, −0.552]	[−0.620, 1.805]	[−0.970, 1.805]	[−0.957, 1.732]	1	1	Age→SocioEcon			
insurance	semi-s.	SocioEcon → This CarCost	→	3	3	0.468	0.522	[0.441, 0.602]	[−2.435, 1.411]	[−2.435, 2.463]	[−2.376, 2.382]	1	1	Age→SocioEcon			
mediator	semi-s.	I → Y		3	3	1.360	1.356	[1.344, 1.369]	[1.343, 1.928]	[0.000, 2.170]	[0.000, 2.161]	2	1	Z→I / Z→X			
mediator	semi-s.	X → I		3	3	−1.087	−1.083	[−1.097, −1.069]	[−1.097, 0.000]	[−1.097, 0.342]	[−1.087, 0.324]	1	1	X→I			
mediator	semi-s.	X → Y		3	3	−2.603	−2.600	[−2.623, −2.576]	[−2.623, −1.109]	[−2.623, 0.000]	[−2.603, 0.000]	2	1	Z→I / Z→X			
mediator	semi-s.	Z → I		3	3	0.642	0.632	[0.612, 0.653]	[−0.672, 0.653]	[−0.672, 0.653]	[−0.645, 0.642]	1	1	Z→X			
mediator	semi-s.	Z → X		3	3	−1.185	−1.184	[−1.197, −1.170]	[−1.197, 0.000]	[−1.197, 0.000]	[−1.185, 0.000]	1	1	Z→X			
mediator	semi-s.	Z → Y		3	3	2.206	2.197	[2.154, 2.240]	[−0.917, 2.240]	[−0.917, 2.240]	[−0.877, 2.206]	1	1	Z→X			
munin1	semi-s.	R_LNLBE_ MED_PATHO → R_LNLBE_ APB_DENERV		6	4	−1.235	−1.255	[−1.270, −1.241]	[−1.307, −1.208]	[−1.307, −1.208]	[−1.235, −1.235]	>3	>3	−			
munin1	semi-s.	R_LNLBE_ MED_PATHO → R_MED_AMP_ WA		6	4	−2.329	−2.308	[−2.370, −2.246]	[−2.619, −2.034]	[−2.619, −2.034]	[−2.329, −2.329]	>3	>3	−			
munin1	semi-s.	R_LNLW_MED_ PATHO → R_ APB_SPONT_ INS_ACT		6	2	−1.695	−1.689	[−1.762, −1.615]	[−2.108, −1.405]	[−2.108, −1.405]	[−1.695, −1.695]	never	>3	−			
munin1	semi-s.	R_LNLW_MED_ PATHO → R_ MED_ALLDEL_ WA		6	2	2.990	2.998	[2.962, 3.033]	[1.528, 3.107]	[1.528, 3.107]	[1.619, 2.990]	never	1	−			
munin1	semi-s.	R_MEDD2_ RD_WD → R_MEDD2_ LSLOW_WD		6	2	−1.330	−1.328	[−1.335, −1.321]	[−1.345, −1.177]	[−1.345, −1.177]	[−1.330, −1.203]	never	1	−			
paths	semi-s.	10 → 4		1	1	0.591	0.585	[0.567, 0.603]	[−0.038, 0.615]	[−0.038, 0.615]	[−0.000, 0.591]	1	1	15→14			
paths	semi-s.	12 → 1		1	1	0.715	0.717	[0.669, 0.766]	[−0.064, 0.802]	[−0.064, 0.802]	[0.000, 0.715]	1	1	15→14			
paths	semi-s.	12 → 8		1	1	0.353	0.351	[0.338, 0.364]	[−0.024, 0.364]	[−0.024, 0.364]	[0.000, 0.353]	1	1	15→14			
paths	semi-s.	13 → 4		1	1	−0.319	−0.321	[−0.347, −0.295]	[−0.367, 0.034]	[−0.367, 0.034]	[−0.319, 0.000]	1	1	15→14			
paths	semi-s.	14 → 13		1	1	0.801	0.802	[0.791, 0.814]	[0.000, 0.816]	[0.000, 0.816]	[0.000, 0.801]	1	1	15→14			
paths	semi-s.	15 → 1		1	1	−0.354	−0.304	[−0.381, −0.226]	[−0.381, 0.147]	[−0.381, 0.147]	[−0.354, 0.000]	1	1	15→14			
paths	semi-s.	15 → 8		1	1	−0.175	−0.168	[−0.190, −0.146]	[−0.190, 0.036]	[−0.190, 0.036]	[−0.175, 0.000]	1	1	15→14			
paths	semi-s.	4 → 1		1	1	1.929	1.916	[1.905, 1.927]	[−0.027, 1.941]	[−0.027, 1.941]	[−0.000, 1.929]	1	1	15→14			
paths	semi-s.	5 → 3		1	1	1.831	1.824	[1.812, 1.836]	[−0.015, 1.855]	[−0.015, 1.855]	[−0.000, 1.831]	1	1	15→14			
paths	semi-s.	7 → 1		1	1	−2.080	−2.044	[−2.075, −2.013]	[−2.090, 0.066]	[−2.090, 0.066]	[−2.080, −0.000]	1	1	15→14			
paths	semi-s.	8 → 3		1	1	−1.573	−1.561	[−1.590, −1.532]	[−1.596, 0.027]	[−1.596, 0.027]	[−1.573, 0.000]	1	1	15→14			
sachs	semi-s.	Mek → Akt		8	6	1.229	1.223	[1.210, 1.236]	[1.196, 1.738]	[1.196, 1.779]	[−0.047, 1.773]	3	1	PKC→Mek / PKC→PKA / Raf→Mek			
sachs	semi-s.	PKA → Akt		8	6	−5.107	−5.129	[−5.159, −5.098]	[−5.175, −1.651]	[−5.175, −1.651]	[−5.107, 0.000]	3	1	PKC→Mek / PKC→PKA / Raf→Mek			
sachs	semi-s.	PKA → Mek		8	6	−2.800	−2.813	[−2.832, −2.793]	[−2.845, 0.000]	[−2.845, 0.000]	[−2.800, 0.135]	1	1	PKA→Raf			
sachs	semi-s.	PKA → Raf		8	6	1.315	1.323	[1.309, 1.336]	[−0.101, 1.692]	[−0.101, 1.857]	[−0.085, 1.839]	1	1	PKA→Raf			
sachs	semi-s.	PKC → Jnk		8	6	−1.315	−1.305	[−1.325, −1.285]	[−1.472, 0.000]	[−1.472, 0.000]	[−1.462, 0.000]	1	1	PKA→Jnk			
sachs	semi-s.	PKC → PKA		8	6	−0.755	−0.749	[−0.763, −0.735]	[−0.900, 0.093]	[−0.900, 0.093]	[−0.894, 0.084]	1	1	PKA→Raf			
sachs	semi-s.	Plcg → PIP3		8	2	0.587	0.586	[0.572, 0.600]	[−0.309, 0.600]	[−0.309, 0.600]	[−0.287, 0.587]	1	1	PIP3→PIP2			
water	semi-s.	CKNI_12_00 → CBODD_12_15	→	2	1	0.672	0.668	[0.654, 0.682]	[0.581, 0.677]	[0.581, 0.677]	[0.672, 0.672]	never	never	−			
water	semi-s.	CKNI_12_00 → CKND_12_15	→	2	1	1.372	1.369	[1.355, 1.383]	[1.337, 1.412]	[1.337, 1.412]	[1.372, 1.372]	never	never	−			
water	semi-s.	CKNI_12_00 → CKNI_12_45	→	2	1	−0.814	−0.811	[−0.834, −0.787]	[−0.834, 0.026]	[−0.834, 0.026]	[−0.814, 0.000]	1	1	CKNI_12_00→CKNI_12_15			
water	semi-s.	CKNI_12_00 → CNON_12_45	→	2	1	−1.385	−1.387	[−1.417, −1.356]	[−1.691, −1.325]	[−1.691, −1.325]	[−1.385, −1.385]	never	never	−			

continues on the next page

network	param. query	$ K $	loc.	true estimate [95 %]	one revision	two revisions	no knowledge	r_0	r_{val}	first breaking claim
water	semi-s. CKNI_12_15 → 2 CBODN_12_45	1	1	-1.200 -1.194 [-1.207, -1.181]	[-1.269, -0.995]	[-1.269, -0.995]	[-1.211, -1.200]	never	1	-
water	semi-s. CKNI_12_15 → 2 CKNI_12_30	1	1	-0.779 -0.772 [-0.782, -0.762]	[-0.782, 0.000]	[-0.782, 0.000]	[-0.779, 0.000]	1	1	CKNI_12_00→CKNI_12_15
water	semi-s. CKNI_12_15 → 2 CNOD_12_45	1	1	-1.671 -1.672 [-1.688, -1.656]	[-1.807, -1.587]	[-1.807, -1.587]	[-1.743, -1.671]	never	1	-
water	semi-s. C_NI_12_00 → 2 CBODD_12_30	1	1	-1.391 -1.397 [-1.418, -1.375]	[-1.429, -0.739]	[-1.429, -0.739]	[-1.391, -0.831]	never	1	-
water	semi-s. C_NI_12_00 → 2 CNOD_12_45	1	1	-0.885 -0.880 [-0.908, -0.851]	[-0.868, -0.016]	[-0.868, -0.016]	[-0.885, -0.226]	never	1	-
water	semi-s. C_NI_12_15 → 2 C_NI_12_45	1	1	-0.662 -0.659 [-0.674, -0.645]	[-0.674, 0.024]	[-0.674, 0.024]	[-0.662, -0.000]	1	1	C_NI_12_00→C_NI_12_15
win95pts	semi-s. AppDtGnTm → 9 DeskPrntSpd	2	9	-1.226 -1.230 [-1.240, -1.220]	[-1.517, -1.214]	[-1.517, -1.214]	[-1.485, -1.226]	never	1	-
win95pts	semi-s. AvlblVrtlMmry → 9 IncmlptPS	3	9	-1.148 -1.144 [-1.156, -1.132]	[-1.174, -1.067]	[-1.176, -1.067]	[-1.148, -1.148]	never	>3	-
win95pts	semi-s. PrtMem → Desk 9 PrntSpd	1	9	1.022 1.018 [1.004, 1.032]	[0.963, 1.092]	[0.963, 1.092]	[1.022, 1.022]	never	>3	-
win95pts	semi-s. PrtMem → Nt 9 Grbld	1	9	-1.115 -1.111 [-1.125, -1.097]	[-1.171, -1.033]	[-1.171, -1.033]	[-1.115, -1.115]	never	>3	-
win95pts	semi-s. PrtMem → Prob- 9 lem5	1	9	2.084 2.069 [2.046, 2.093]	[2.006, 2.169]	[2.006, 2.169]	[2.084, 2.084]	never	>3	-
win95pts	semi-s. PrtOn → PrtStat 9 Off	1	9	1.011 1.012 [0.998, 1.026]	[0.000, 1.026]	[0.000, 1.026]	[0.000, 1.011]	1	1	PrtOn→PrtStatOff
win95pts	semi-s. PrtPScript → 9 Problem6	3	9	-1.881 -1.892 [-1.922, -1.862]	[-2.183, -1.099]	[-2.183, -1.099]	[-2.143, -1.141]	never	1	-
win95pts	semi-s. PrtSpool → 9 GDIIN	2	9	1.037 1.042 [1.028, 1.056]	[0.848, 1.114]	[0.848, 1.114]	[1.037, 1.037]	never	>3	-
win95pts	semi-s. PrtSpool → Prob- 9 lem2	2	9	1.219 1.208 [1.184, 1.232]	[0.232, 1.239]	[0.232, 1.239]	[0.328, 1.219]	never	1	-
win95pts	semi-s. TnrSpply → Prt 9 StatToner	1	9	0.647 0.643 [0.630, 0.657]	[0.000, 0.657]	[0.000, 0.657]	[0.000, 0.647]	1	1	TnrSpply→PrtStatToner

6.1 The 234 rows with no adjustment set

Under the same condition, 234 of the 537 rows return no set at all: on the analyst's own graph the outcome cannot descend from the treatment, so the effect is zero by construction and there is nothing for a sensitivity report to be about. They are listed here by network so that the 537 rows of the sweep are fully accounted for: $303 + 234 = 537$.

network	queries	verdict on the analyst's own graph
Acid_1996	1	the outcome cannot descend from the treatment
Didelez_2010	6	the outcome cannot descend from the treatment
Kampen_2014	10	the outcome cannot descend from the treatment
Polzer_2012	5	the outcome cannot descend from the treatment
Schipf_2010	8	the outcome cannot descend from the treatment
Sebastiani_2005	10	the outcome cannot descend from the treatment
Shrier_2008	7	the outcome cannot descend from the treatment
Thoemmes_2013	1	the outcome cannot descend from the treatment
alarm	5	the outcome cannot descend from the treatment
andes	10	the outcome cannot descend from the treatment
arth150	18	the outcome cannot descend from the treatment
asia	7	the outcome cannot descend from the treatment
barley	6	the outcome cannot descend from the treatment
child	13	the outcome cannot descend from the treatment
diabetes	1	the outcome cannot descend from the treatment
ecoli70	12	the outcome cannot descend from the treatment
hailfinder	17	the outcome cannot descend from the treatment
hepar2	10	the outcome cannot descend from the treatment
insurance	11	the outcome cannot descend from the treatment
magic-irri	7	the outcome cannot descend from the treatment
magic-niab	6	the outcome cannot descend from the treatment
mediator	6	the outcome cannot descend from the treatment
munin1	15	the outcome cannot descend from the treatment
paths	9	the outcome cannot descend from the treatment
sachs	13	the outcome cannot descend from the treatment
water	10	the outcome cannot descend from the treatment
win95pts	10	the outcome cannot descend from the treatment
total	234	