

Chris Hanretty<sup>1</sup> and Mustrum Ridcully<sup>2</sup>

## Abstract

This document is a template for the sagej extension. It also documents the extension itself, and discusses common usage options.

## Keywords

template, demo

## Introduction

SAGE Publishing publishes more than 1,000 journals. The company has developed a  $\text{\LaTeX}$  template for its journals. This template can be found at [the official site](#) or via [Overleaf](#). Although the provision of a  $\text{\LaTeX}$  template can reduce the time spent preparing a manuscript, this template needs to be reworked in order to work with other document production systems which sit on top of  $\text{\LaTeX}$  and make  $\text{\LaTeX}$  more user-friendly. Quarto is one such system. This document describes a SAGE template for Quarto which builds upon the existing  $\text{\LaTeX}$  template.

I have produced this template for my own use, and I cannot make any guarantees about its reliability or suitability for your needs. I have tested it for a submission I am preparing, but have not tested it beyond that. I note some limitations below, some of which relate to the underlying  $\text{\LaTeX}$  template, and some of which are specific to the interaction of Quarto and  $\text{\LaTeX}$ .

## What you need to know

When creating a document you will typically want to list a title and one or more authors. Although the specification of author details in Quarto can be complicated, this template does not use all of that complexity, and uses only the `affiliations` and `email` fields. “Corresponding authors”, for whom a full contact details are printed, have an additional `note` attribute.

Other common fields (`abstract`, `thanks`, `keywords` and `bibliography`) are also supported. Thanks appear at the end of the document.

## Class options

The default class options will work for many journals. However, some journals may require further customization. The SAGE journal class allows for several different options relating to paper size and formatting style. The options for paper size are:

- `shortAfour` [210 x 280mm, 10pt, two-column]
- `Afour` [210 x 297mm, 10pt, , two-column]
- `MCfour` [189 x 246mm, 10pt, , two-column]

- `PCfour` [170 x 242mm, 10pt, , two-column]
- `Royal` [156 x 234mm, 10pt, single-column]
- `Crown` [7.25 x 9.5in, 10pt, single-column]
- `Review` [156 x 234mm, 12pt, single-column]

The options for bibliography are:

- `sageh` (SAGE Harvard style (author-year))
- `sagev` (SAGE Vancour style (superscript numbers))
- `sageapa` (APA style (author-year))

The default options are `Afour` and `sageh`. The document class options shown in the template also specify `times`, which sets the main font to Times New Roman and the section font to Helvetica. Note that the double column option layout can be very cramped, and so authors who use tables or figures may wish to take particular care in formatting these. At the moment the default `longtable` environment (used by Quarto to set most tables) is turned into a figure, following a trick used for the Elsevier journals template.\* This can lead to sections of content disappeared as they are obscured by the figure environment. This is a particular risk where tables appear on the first page.

## Details of implementation

The template follows some of the restrictions which apply to the existing Sage template. The  $\text{\LaTeX}$  engine is set to `pdflatex` rather than the more modern `xelatex`, and so some font features may not be available. Similarly, `natbib` and bibliography style files (`.bst`) are used to process references rather than more modern systems which use CSL. References are otherwise unaffected ([Cameron and Trivedi 2013](#); [Hanretty 2022](#)).

<sup>1</sup> Royal Holloway, University of London, Department of Politics, International Relations and Philosophy

<sup>2</sup> Unseen University, Arch-Chancellory

## Corresponding author:

Dept. of Politics, International Relations and Philosophy, Royal Holloway, University of London. McCrea 1-08, Egham TW20 0EX, United Kingdom.  
Email: [chris.hanretty@rhul.ac.uk](mailto:chris.hanretty@rhul.ac.uk)

\*See <https://github.com/quarto-journals/elsevier>

Table 1. Modelsummary output

|             | OLS                    | Poisson          |
|-------------|------------------------|------------------|
| (Intercept) | 7948.667<br>(2078.276) | 8.241<br>(0.006) |
| Literacy    | −39.121<br>(37.052)    | 0.003<br>(0.000) |
| Clergy      | 15.257<br>(25.735)     |                  |
| Commerce    |                        | 0.011<br>(0.000) |
| Num.Obs.    | 86                     | 86               |
| R2          | 0.020                  |                  |
| R2 Adj.     | −0.003                 |                  |
| AIC         | 1740.8                 | 274 160.8        |
| BIC         | 1750.6                 | 274 168.2        |
| Log.Lik.    | −866.392               | −137 077.401     |
| F           | 0.866                  | 18 294.559       |
| RMSE        | 5740.99                | 5491.61          |

Cameron AC and Trivedi PK (2013) *Regression Analysis of Count Data*. 2nd edition. Cambridge: Cambridge University Press.  
Hanretty C (2022) Party system polarization and the effective number of parties. *Electoral Studies* 76: 102459.

Acknowledgements

This document based on the sagej.cls documentation prepared by Alistair Smith and Hendrik Wittkopf.

Some features of the L<sup>A</sup>T<sub>E</sub>X template – author biographies, declarations of competing interests, and funding declarations – are not supported.

Example table

Often authors want to use Quarto because it allows for literate programming, and articles which change when the analysis changes. Here’s an example table put together with the modelsummary package (Arel-Bundock 2022).

Table support in two column layouts is extremely brittle, and you may find that portions of content disappear when you are trying to fit multiple tables in a single page.

Example figure

I also include an example figure, Figure 1. This figure comes in one column output. This is achieved by setting the fig.env option in the relevant R chunk. If you have a beautiful gem of a figure which looks good in two-column mode, you need only delete this line in the source code.

TO-DO


- Handle running headers
- Handle blinding (comment out for the moment)
- Handle other sections (funding, etc.,)

Copyright statement

The original L<sup>A</sup>T<sub>E</sub>X class file is ©2016 SAGE Publications Ltd, 1 Oliver’s Yard, 55 City Road, London, EC1Y 1SP, UK. All rights reserved. Class files and bibliographic style files are included for this non-commercial use. This template may not be used on a commercial basis.

References

Arel-Bundock V (2022) modelsummary: Data and model summaries in R. *Journal of Statistical Software* 103(1): 1–23.  
DOI:10.18637/jss.v103.i01.

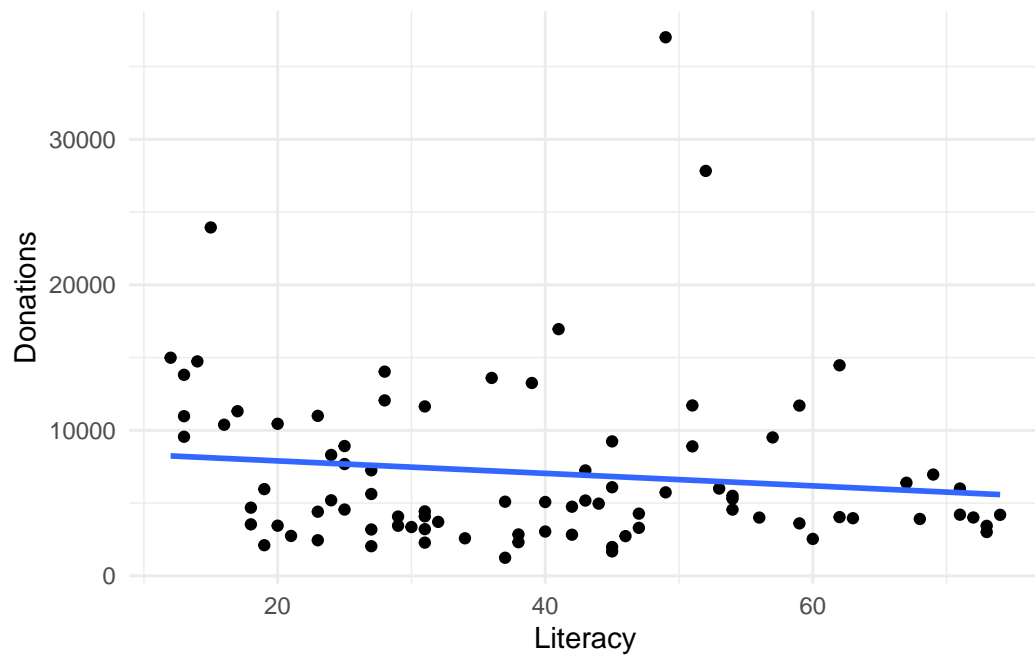

**Figure 1.** Example figure using the same data