

# Self-Driving Car Engineer Nanodegree

## Deep Learning

### Project: Build a Traffic Sign Recognition Classifier

In this notebook, a template is provided for you to implement your functionality in stages, which is required to successfully complete this project. If additional code is required that cannot be included in the notebook, be sure that the Python code is successfully imported and included in your submission if necessary.

**Note:** Once you have completed all of the code implementations, you need to finalize your work by exporting the iPython Notebook as an HTML document. Before exporting the notebook to html, all of the code cells need to have been run so that reviewers can see the final implementation and output. You can then export the notebook by using the menu above and navigating to `\n`, **"File -> Download as -> HTML (.html)"**. Include the finished document along with this notebook as your submission.

In addition to implementing code, there is a writeup to complete. The writeup should be completed in a separate file, which can be either a markdown file or a pdf document. There is a [write up template](https://github.com/udacity/CarND-Traffic-Sign-Classifier-Project/blob/master/writeup_template.md) ([https://github.com/udacity/CarND-Traffic-Sign-Classifier-Project/blob/master/writeup\\_template.md](https://github.com/udacity/CarND-Traffic-Sign-Classifier-Project/blob/master/writeup_template.md)) that can be used to guide the writing process. Completing the code template and writeup template will cover all of the [rubric points](https://review.udacity.com/#!/rubrics/481/view) (<https://review.udacity.com/#!/rubrics/481/view>) for this project.

The [rubric](https://review.udacity.com/#!/rubrics/481/view) (<https://review.udacity.com/#!/rubrics/481/view>) contains "Stand Out Suggestions" for enhancing the project beyond the minimum requirements. The stand out suggestions are optional. If you decide to pursue the "stand out suggestions", you can include the code in this iPython notebook and also discuss the results in the writeup file.

**Note:** Code and Markdown cells can be executed using the **Shift + Enter** keyboard shortcut. In addition, Markdown cells can be edited by typically double-clicking the cell to enter edit mode.

---

## Step 0: Load The Data

```
In [1]: # Load pickled data
import pickle

# TODO: Fill this in based on where you saved the training and testing data

training_file = "traffic-signs-data/train.p"
validation_file="traffic-signs-data/valid.p"
testing_file = "traffic-signs-data/test.p"

with open(training_file, mode='rb') as f:
    train = pickle.load(f)
with open(validation_file, mode='rb') as f:
    valid = pickle.load(f)
with open(testing_file, mode='rb') as f:
    test = pickle.load(f)

X_train, y_train = train['features'], train['labels']
X_valid, y_valid = valid['features'], valid['labels']
X_test, y_test = test['features'], test['labels']

#print(X_train.shape)
#print(X_train)
```

## Step 1: Dataset Summary & Exploration

The pickled data is a dictionary with 4 key/value pairs:

- 'features' is a 4D array containing raw pixel data of the traffic sign images, (num examples, width, height, channels).
- 'labels' is a 1D array containing the label/class id of the traffic sign. The file `signnames.csv` contains id -> name mappings for each id.
- 'sizes' is a list containing tuples, (width, height) representing the original width and height the image.
- 'coords' is a list containing tuples, (x1, y1, x2, y2) representing coordinates of a bounding box around the sign in the image. **THESE COORDINATES ASSUME THE ORIGINAL IMAGE. THE PICKLED DATA CONTAINS RESIZED VERSIONS (32 by 32) OF THESE IMAGES**

Complete the basic data summary below. Use python, numpy and/or pandas methods to calculate the data summary rather than hard coding the results. For example, the [pandas shape method](http://pandas.pydata.org/pandas-docs/stable/generated/pandas.DataFrame.shape.html) (<http://pandas.pydata.org/pandas-docs/stable/generated/pandas.DataFrame.shape.html>) might be useful for calculating some of the summary results.

### Provide a Basic Summary of the Data Set Using Python, Numpy and/or Pandas

```
In [2]: ### Replace each question mark with the appropriate value.
### Use python, pandas or numpy methods rather than hard coding the results
import numpy as np

# TODO: Number of training examples
n_train = train['features'].shape[0]

# TODO: Number of validation examples
n_validation = valid['features'].shape[0]

# TODO: Number of testing examples.
n_test = test['features'].shape[0]

# TODO: What's the shape of an traffic sign image?
image_shape = [train['features'].shape[1], train['features'].shape[2], train['fea

# TODO: How many unique classes/labels there are in the dataset.
n_classes = len(np.unique(train['labels']))

print("Number of training examples =", n_train)
print("Number of validation examples =", n_test)
print("Number of testing examples =", n_test)
print("Image data shape =", image_shape)
print("Number of classes =", n_classes)
```

```
Number of training examples = 34799
Number of validation examples = 12630
Number of testing examples = 12630
Image data shape = [32, 32, 3]
Number of classes = 43
```

## Include an exploratory visualization of the dataset

Visualize the German Traffic Signs Dataset using the pickled file(s). This is open ended, suggestions include: plotting traffic sign images, plotting the count of each sign, etc.

The [Matplotlib](http://matplotlib.org/) (<http://matplotlib.org/>) [examples](http://matplotlib.org/examples/index.html) (<http://matplotlib.org/examples/index.html>) and [gallery](http://matplotlib.org/gallery.html) (<http://matplotlib.org/gallery.html>) pages are a great resource for doing visualizations in Python.

**NOTE:** It's recommended you start with something simple first. If you wish to do more, come back to it after you've completed the rest of the sections. It can be interesting to look at the distribution of classes in the training, validation and test set. Is the distribution the same? Are there more examples of some classes than others?

```
In [3]: ### Data exploration visualization code goes here.
### Feel free to use as many code cells as needed.
import matplotlib.pyplot as plt
# Visualizations will be shown in the notebook.
%matplotlib inline
import random


def printSignAndClass(x, idx=-1):
    if(idx==-1):
        index = random.randint(0, len(x))
    else:
        index = idx
    image = x[index].squeeze()

    print(y_train[index])
    plt.figure(figsize=(2,2))
    plt.imshow(image, cmap="gray")
    return index

printSignAndClass(X_train)
```

13

Out[3]: 23034



```
In [4]: index,counts = np.unique(y_train, return_counts=True)
print(index, "\n", counts)
```

```
[ 0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42]
[ 180 1980 2010 1260 1770 1650  360 1290 1260 1320 1800 1170 1890 1920  690
 540  360  990 1080  180  300  270  330  450  240 1350  540  210  480  240
 390  690  210  599  360 1080  330  180 1860  270  300  210  210]
```

## Step 2: Design and Test a Model Architecture

Design and implement a deep learning model that learns to recognize traffic signs. Train and test your model on the [German Traffic Sign Dataset \(http://benchmark.ini.rub.de/?section=gtsrb&subsection=dataset\)](http://benchmark.ini.rub.de/?section=gtsrb&subsection=dataset).

The LeNet-5 implementation shown in the [classroom \(https://classroom.udacity.com/nanodegrees/nd013/parts/fbf77062-5703-404e-b60c-95b78b2f3f9e/modules/6df7ae49-c61c-4bb2-a23e-6527e69209ec/lessons/601ae704-1035-4287-](https://classroom.udacity.com/nanodegrees/nd013/parts/fbf77062-5703-404e-b60c-95b78b2f3f9e/modules/6df7ae49-c61c-4bb2-a23e-6527e69209ec/lessons/601ae704-1035-4287-)

[8b11-e2c2716217ad/concepts/d4aca031-508f-4e0b-b493-e7b706120f81](#)) at the end of the CNN lesson is a solid starting point. You'll have to change the number of classes and possibly the preprocessing, but aside from that it's plug and play!

With the LeNet-5 solution from the lecture, you should expect a validation set accuracy of about 0.89. To meet specifications, the validation set accuracy will need to be at least 0.93. It is possible to get an even higher accuracy, but 0.93 is the minimum for a successful project submission.

There are various aspects to consider when thinking about this problem:

- Neural network architecture (is the network over or underfitting?)
- Play around preprocessing techniques (normalization, rgb to grayscale, etc)
- Number of examples per label (some have more than others).
- Generate fake data.

Here is an example of a [published baseline model on this problem](#) (<http://yann.lecun.com/exdb/publis/pdf/sermanet-ijcnn-11.pdf>). It's not required to be familiar with the approach used in the paper but, it's good practice to try to read papers like these.

## Pre-process the Data Set (normalization, grayscale, etc.)

Minimally, the image data should be normalized so that the data has mean zero and equal variance. For image data,  $(\text{pixel} - 128) / 128$  is a quick way to approximately normalize the data and can be used in this project.

Other pre-processing steps are optional. You can try different techniques to see if it improves performance.

Use the code cell (or multiple code cells, if necessary) to implement the first step of your project.

```
In [5]: ### Preprocess the data here. It is required to normalize the data. Other preproc
### converting to grayscale, etc.
### Feel free to use as many code cells as needed.
from sklearn.utils import shuffle
import tensorflow as tf


# convert color image to grayscale
# the trick for np.dot product to keep the same shape as X_train is to dot with a
def rgb2gray(x):
    return np.dot(x, [[0.299], [0.587], [0.144]])

gray_train = rgb2gray(X_train)
gray_valid = rgb2gray(X_valid)
gray_test = rgb2gray(X_test)

image_shape = gray_train.shape
print(gray_train.shape)

index = printSignAndClass(gray_train, 17904)
```


```
(34799, 32, 32, 1)
10
```



```
In [6]: printSignAndClass(X_train, 17904)
```

```
10
```

```
Out[6]: 17904
```



```
In [7]: #normalize gray_train to 0to1 base on 256 color pixels
        gray_train = gray_train/256

        #shuffle dataset to improve randomization
        X_train, y_train = shuffle(gray_train, y_train)

        #apply gray scale to valid and test dataset
        X_valid = gray_valid
        X_test  = gray_test
```

## Model Architecture

```

In [8]: ### Define your architecture here.
### Feel free to use as many code cells as needed.
from tensorflow.contrib.layers import flatten

EPOCHS = 10
BATCH_SIZE = 128

def LeNet(x, keep_prob=1):
    # Arguments used for tf.truncated_normal, randomly defines variables for the weights and biases
    mu = 0
    sigma = 0.1
    color_chn = image_shape[3]

    #define weight for conv1, size of weight = [filter width, filter height, input depth, filter depth]
    w1 = tf.Variable(tf.truncated_normal([5,5,color_chn,64], mean = mu, stddev = sigma))
    #define bias for conv1, size of bias = [1d array with weight of (output depth)]
    b1 = tf.Variable(tf.zeros(64))

    # TODO: Layer 1: Convolutional. Input = 32x32x3. Output = 28x28x64.
    #tf.nn.conv2d(inputs=x, weight, stride=[1,1,1,1] (stride of 1), padding="same")
    conv1 = tf.nn.conv2d(x, w1, [1,1,1,1], "VALID")
    #tf.nn.bias_add(value=tensor, bias=1d tensor)
    conv1 = tf.nn.bias_add(conv1, b1)
    # TODO: Activation.
    conv1 = tf.nn.relu(conv1)
    # add dropout to balance the oversample on high samplly count items
    conv1 = tf.nn.dropout(conv1, keep_prob)
    print('size of conv1=', conv1)

    # TODO: Pooling. Input = 28x28x64. Output = 14x14x64.
    #tf.nn.maxpool(inputs=conv1, filter size=[1,2,2,1], strides size=[1,2,2,1], padding="same")
    pool1 = tf.nn.max_pool(conv1, [1,2,2,1], [1,2,2,1], "VALID")
    print('size of pool1=', pool1)

    #define weight for conv2, size of weight = [filter width, filter height, input depth, filter depth]
    w2 = tf.Variable(tf.truncated_normal([5,5,64,128], mean = mu, stddev = sigma))
    #define bias for conv2, size of bias = [1d array with weight of (output depth)]
    b2 = tf.Variable(tf.zeros(128))

    # TODO: Layer 2: Convolutional. input 14x14x64, Output = 10x10x128.
    conv2 = tf.nn.conv2d(pool1, w2, [1,1,1,1], "VALID")
    #tf.nn.bias_add(value=tensor, bias=1d tensor)
    conv2 = tf.nn.bias_add(conv2, b2)
    # TODO: Activation.
    conv2 = tf.nn.relu(conv2)
    # add dropout to balance the oversample on high samplly count items
    conv2 = tf.nn.dropout(conv2, keep_prob)
    print('size of conv2=', conv2)

    # TODO: Pooling. Input = 10x10x128. Output = 5x5x128.
    #tf.nn.maxpool(inputs=conv1, filter size=[1,2,2,1], strides size=[1,2,2,1], padding="same")
    pool2 = tf.nn.max_pool(conv2, [1,2,2,1], [1,2,2,1], "VALID")
    print('size of pool2=', pool2)

```



```

#define weight for flatten and fully connected layer fco, size of weight = [input depth, output depth]
w3 = tf.Variable(tf.truncated_normal([5*5*128, 256], mean = mu, stddev = sigma))
#define bias for fco, size of bias = [1d array with weight of (output depth)]
b3 = tf.Variable(tf.zeros(256))

# TODO: Flatten. Input = 5x5x16. Output = 3200.
#flat = tf.reshape(pool2, [-1, w3.get_shape().as_list()[0]])
flat = flatten(pool2)
print('size of flat=', flat)
# TODO: Layer 3: Fully Connected. Input = 3200. Output = 256.
fcon = tf.add(tf.matmul(flat, w3), b3)
# TODO: Activation.
fcon = tf.nn.relu(fcon)
# add dropout to balance the oversample on high sample count items
fcon = tf.nn.dropout(fcon, keep_prob)
print('size of fcon=', fcon)

#define weight for fully connected layer fco1, size of weight = [input depth, output depth]
w4 = tf.Variable(tf.truncated_normal([256, 84], mean = mu, stddev = sigma))
#define bias for fco1, size of bias = [1d array with weight of (output depth)]
b4 = tf.Variable(tf.zeros(84))

# TODO: Layer 4: Fully Connected. Input = 256. Output = 84.
fco1 = tf.add(tf.matmul(fcon, w4), b4)
# TODO: Activation.
fco1 = tf.nn.relu(fco1)
# add dropout to balance the oversample on high sample count items
fco1 = tf.nn.dropout(fco1, keep_prob)
print('size of fco1=', fco1)

#there are 43 unique output(n_classes)
#define weight for fully connected layer fco1, size of weight = [input depth, output depth]
w5 = tf.Variable(tf.truncated_normal([84, n_classes], mean = mu, stddev = sigma))
#define bias for fco1, size of bias = [1d array with weight of (output depth)]
b5 = tf.Variable(tf.zeros(n_classes))

# TODO: Layer 5: Fully Connected. Input = 84. Output = 43.
logits = tf.add(tf.matmul(fco1, w5), b5)
print('size of logits=', logits)

return logits

```

## Train, Validate and Test the Model

A validation set can be used to assess how well the model is performing. A low accuracy on the training and validation sets imply underfitting. A high accuracy on the training set but low accuracy on the validation set implies overfitting.

```

In [9]: ### Train your model here.
### Calculate and report the accuracy on the training and validation set.
### Once a final model architecture is selected,
### the accuracy on the test set should be calculated and reported as well.
### Feel free to use as many code cells as needed.

#training pipeline
x = tf.placeholder(tf.float32, (None, image_shape[1], image_shape[2], image_shape[3]))
y = tf.placeholder(tf.int32, (None))
one_hot_y = tf.one_hot(y, n_classes)
keep_probs = tf.placeholder(tf.float32)

#Learning rate
rate = 0.005
train_prob = 0.7

logits = LeNet(x, keep_probs)
cross_entropy = tf.nn.softmax_cross_entropy_with_logits(labels=one_hot_y, logits=logits)
print("cross_entropy=", cross_entropy)
loss_operation = tf.reduce_mean(cross_entropy)
print("loss_operation=", loss_operation)
optimizer = tf.train.AdamOptimizer(learning_rate = rate)
training_operation = optimizer.minimize(loss_operation)
print("training_operation=", training_operation)

#evaluation
print("tf.argmax(logits, 1)=", tf.argmax(logits, 1))
correct_prediction = tf.equal(tf.argmax(logits, 1), tf.argmax(one_hot_y, 1))
accuracy_operation = tf.reduce_mean(tf.cast(correct_prediction, tf.float32))
saver = tf.train.Saver()

def evaluate(X_data, y_data, keep_prob=1):
    num_examples = X_data.shape[0]
    total_accuracy = 0
    sess = tf.get_default_session()
    for offset in range(0, num_examples, BATCH_SIZE):
        batch_x, batch_y = X_data[offset:offset+BATCH_SIZE], y_data[offset:offset+BATCH_SIZE]
        accuracy = sess.run(accuracy_operation, feed_dict={x: batch_x, y: batch_y})
        total_accuracy += (accuracy * len(batch_x))
    return total_accuracy / num_examples

#Training
with tf.Session() as sess:
    sess.run(tf.global_variables_initializer())
    num_examples = X_train.shape[0]

    print("Training...")
    print()
    for i in range(EPOCHS):
        X_train, y_train = shuffle(X_train, y_train)
        for offset in range(0, num_examples, BATCH_SIZE):
            end = offset + BATCH_SIZE
            batch_x, batch_y = X_train[offset:end], y_train[offset:end]

```

```

sess.run(training_operation, feed_dict={x:batch_x, y:batch_y, keep_prob:keep_prob})

validation_accuracy = evaluate(X_valid, y_valid)
print("EPOCH {} ...".format(i+1))
print("Validation Accuracy = {:.3f}".format(validation_accuracy))
print()

saver.save(sess, './lenet')
print("Model saved")

```

```

size of conv1= Tensor("dropout/mul:0", shape=(?, 28, 28, 64), dtype=float32)
size of pool1= Tensor("MaxPool:0", shape=(?, 14, 14, 64), dtype=float32)
size of conv2= Tensor("dropout_1/mul:0", shape=(?, 10, 10, 128), dtype=float32)
size of pool2= Tensor("MaxPool_1:0", shape=(?, 5, 5, 128), dtype=float32)
size of flat= Tensor("Flatten/Reshape:0", shape=(?, 3200), dtype=float32)
size of fcon= Tensor("dropout_2/mul:0", shape=(?, 256), dtype=float32)
size of fco1= Tensor("dropout_3/mul:0", shape=(?, 84), dtype=float32)
size of logits= Tensor("Add_2:0", shape=(?, 43), dtype=float32)
cross_entropy= Tensor("Reshape_2:0", shape=(?,), dtype=float32)
loss_operation= Tensor("Mean:0", shape=(), dtype=float32)
training_operation= name: "Adam"
op: "NoOp"
input: "^Adam/update_Variable/ApplyAdam"
input: "^Adam/update_Variable_1/ApplyAdam"
input: "^Adam/update_Variable_2/ApplyAdam"
input: "^Adam/update_Variable_3/ApplyAdam"
input: "^Adam/update_Variable_4/ApplyAdam"
input: "^Adam/update_Variable_5/ApplyAdam"
input: "^Adam/update_Variable_6/ApplyAdam"
input: "^Adam/update_Variable_7/ApplyAdam"
input: "^Adam/update_Variable_8/ApplyAdam"
input: "^Adam/update_Variable_9/ApplyAdam"
input: "^Adam/Assign"
input: "^Adam/Assign_1"

tf.argmax(logits, 1)= Tensor("ArgMax:0", shape=(?,), dtype=int64)
Training...

```

```

EPOCH 1 ...
Validation Accuracy = 0.841

```

```

EPOCH 2 ...
Validation Accuracy = 0.881

```

```

EPOCH 3 ...
Validation Accuracy = 0.932

```

```

EPOCH 4 ...
Validation Accuracy = 0.941

```

```

EPOCH 5 ...
Validation Accuracy = 0.949

```

```

EPOCH 6 ...
Validation Accuracy = 0.945

```

EPOCH 7 ...  
Validation Accuracy = 0.936

EPOCH 8 ...  
Validation Accuracy = 0.951

EPOCH 9 ...  
Validation Accuracy = 0.949

EPOCH 10 ...  
Validation Accuracy = 0.942

Model saved

```
In [10]: #evaluate the accuracy
with tf.Session() as sess:
    saver.restore(sess, tf.train.latest_checkpoint('.'))

    test_accuracy = evaluate(X_test, y_test)
    print("Test Accuracy = {:.3f}".format(test_accuracy))
```

```
INFO:tensorflow:Restoring parameters from .\lenet
Test Accuracy = 0.914
```

## Step 3: Test a Model on New Images

To give yourself more insight into how your model is working, download at least five pictures of German traffic signs from the web and use your model to predict the traffic sign type.

You may find `signnames.csv` useful as it contains mappings from the class id (integer) to the actual sign name.

## Load and Output the Images

```
In [99]: ### Load the images and plot them here.
### Feel free to use as many code cells as needed.
import glob
import cv2
import numpy as np

new_images = []
new_labels = [0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19]
new_gray = []

for infile in glob.glob("New Images\*.ppm"):
    print(infile)
    image = cv2.imread(infile)
    image = cv2.resize(image, (image_shape[1],image_shape[2])) # 32x32
    #print(image)
    new_images.append(image)

#convert list of new_images to numpy array to be used in our LeNet model
new_images=np.array(new_images)
#print(new_images.shape)
print(new_labels)


#apply gray scale
new_gray = rgb2gray(new_images)

#normalize image to 0to1 base on 256 color pixels
new_gray = new_gray/256
```

```
New Images\00000_00000.ppm
New Images\00001_00000.ppm
New Images\00002_00000.ppm
New Images\00003_00000.ppm
New Images\00004_00000.ppm
New Images\00005_00000.ppm
New Images\00006_00000.ppm
New Images\00007_00000.ppm
New Images\00008_00000.ppm
New Images\00009_00000.ppm
New Images\00010_00024.ppm
New Images\00011_00023.ppm
New Images\00012_00018.ppm
New Images\00013_00015.ppm
New Images\00014_00013.ppm
New Images\00015_00013.ppm
New Images\00016_00024.ppm
New Images\00017_00011.ppm
New Images\00018_00022.ppm
New Images\00019_00020.ppm
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19]
```

```
In [129]: #plot original image  
idx1 = printSignAndClass(new_images,19)
```


36



```
In [130]: #plot grayscale image  
printSignAndClass(new_gray, idx1)
```

36

Out[130]: 19



**Predict the Sign Type for Each Image**

In [55]: *### Run the predictions here and use the model to output the prediction for each  
 ### Make sure to pre-process the images with the same pre-processing pipeline used  
 ### Feel free to use as many code cells as needed.*

```

#assign grayscale images back to new_images array
new_images = new_gray
new_images, new_labels = shuffle(new_images, new_labels)

#Prediction
with tf.Session() as sess:
    saver.restore(sess, tf.train.latest_checkpoint('.'))

    #for i in range (0, 10):
        #print("original result[" + str(i) + "] = ", new_labels[i])
        #cross_ent = sess.run(cross_entropy, feed_dict={x:[new_images[i]], y:[new_labels[i]]})
        #print("cross_entropy [" + str(i) + "] = ", cross_ent)

    result = sess.run(tf.argmax(logits, 1), feed_dict={x:new_images, keep_probs:1})
    print("prediction : ", result)
    print("class labels : ", new_labels)
  
```

```

INFO:tensorflow:Restoring parameters from .\lenet
prediction : [ 5 16 13 15  1 12 17 19  9 10 11  7  2  4 14  8  6 18  3  0]
class labels : [5, 16, 13, 15, 1, 12, 17, 19, 9, 10, 11, 7, 2, 4, 14, 8, 6, 18, 3, 0]
  
```

## Analyze Performance

In [56]: *### Calculate the accuracy for these 5 new images.  
 ### For example, if the model predicted 1 out of 5 signs correctly, it's 20% accurate*

```

with tf.Session() as sess:
    saver.restore(sess, tf.train.latest_checkpoint('.'))

    test_accuracy = evaluate(new_images, new_labels)
    print("Test Accuracy = {:.3f}".format(test_accuracy))
  
```

```

INFO:tensorflow:Restoring parameters from .\lenet
Test Accuracy = 1.000
  
```

## Output Top 5 Softmax Probabilities For Each Image Found on the Web

For each of the new images, print out the model's softmax probabilities to show the **certainty** of the model's predictions (limit the output to the top 5 probabilities for each image). `tf.nn.top_k` ([https://www.tensorflow.org/versions/r0.12/api\\_docs/python/nn.html#top\\_k](https://www.tensorflow.org/versions/r0.12/api_docs/python/nn.html#top_k)) could prove helpful here.



The example below demonstrates how `tf.nn.top_k` can be used to find the top k predictions for each image.

`tf.nn.top_k` will return the values and indices (class ids) of the top k predictions. So if `k=3`, for each sign, it'll return the 3 largest probabilities (out of a possible 43) and the corresponding class ids.

Take this numpy array as an example. The values in the array represent predictions. The array contains softmax probabilities for five candidate images with six possible classes. `tf.nn.top_k` is used to choose the three classes with the highest probability:

```
# (5, 6) array
a = np.array([[ 0.24879643,  0.07032244,  0.12641572,  0.34763842,  0.078
93497,
               0.12789202],
              [ 0.28086119,  0.27569815,  0.08594638,  0.0178669 ,  0.18063401,
0.15899337],
              [ 0.26076848,  0.23664738,  0.08020603,  0.07001922,  0.1134371 ,
0.23892179],
              [ 0.11943333,  0.29198961,  0.02605103,  0.26234032,  0.1351348 ,
0.16505091],
              [ 0.09561176,  0.34396535,  0.0643941 ,  0.16240774,  0.24206137,
0.09155967]])
```

Running it through `sess.run(tf.nn.top_k(tf.constant(a), k=3))` produces:

```
TopKV2(values=array([[ 0.34763842,  0.24879643,  0.12789202],
                    [ 0.28086119,  0.27569815,  0.18063401],
                    [ 0.26076848,  0.23892179,  0.23664738],
                    [ 0.29198961,  0.26234032,  0.16505091],
                    [ 0.34396535,  0.24206137,  0.16240774]]), indices=array([[3, 0,
5],
                    [0, 1, 4],
                    [0, 5, 1],
                    [1, 3, 5],
                    [1, 4, 3]], dtype=int32))
```

Looking just at the first row we get `[ 0.34763842, 0.24879643, 0.12789202]`, you can confirm these are the 3 largest probabilities in `a`. You'll also notice `[3, 0, 5]` are the corresponding indices.

In [97]: *### Print out the top five softmax probabilities for the predictions on the German traffic sign dataset*  
*### Feel free to use as many code cells as needed.*

```
def softmax(x):
    exps = np.exp(x)
    return exps / np.sum(exps)

a = np.array([new_images[0],new_images[1],new_images[2],new_images[3],new_images[4]])
print(a.shape)

with tf.Session() as sess:
    saver.restore(sess, tf.train.latest_checkpoint('.'))

    result = sess.run(logits, feed_dict={x:a, y:new_labels[0:5], keep_probs:1})
    print(softmax(result))
    top5 = sess.run(tf.nn.top_k(softmax(result), k=5))
    print(top5)
```

```
(5, 32, 32, 1)
INFO:tensorflow:Restoring parameters from .\lenet
[[ 2.06457558e-25  3.59999136e-18  4.87679537e-16  1.64791090e-14
  1.02967656e-19  2.47635181e-12  3.08322713e-22  1.12949833e-17
  1.39092786e-17  6.53284953e-21  4.27841437e-17  4.47387531e-22
  1.15607409e-19  7.73222779e-22  1.18797830e-20  7.00114710e-19
  4.74572226e-20  1.49792376e-29  7.25015628e-22  1.02939618e-21
  2.08866828e-22  9.89771345e-23  3.33729224e-27  4.59037914e-25
  1.89859443e-25  3.66084322e-20  1.87945467e-22  1.27415051e-25
  9.89662214e-24  2.94627810e-22  3.14399589e-26  2.60082193e-20
  1.03785665e-23  4.36591597e-23  1.70436199e-24  9.52865592e-23
  4.93850561e-23  1.91098888e-23  5.37560810e-21  7.18714131e-23
  9.87751909e-24  1.20754363e-28  1.30272578e-22]
 [ 1.05693827e-20  1.88219886e-17  2.87239856e-22  8.67156994e-17
  2.42846233e-21  6.51597300e-16  1.92576373e-18  1.26701716e-16
  7.43712878e-18  1.06976903e-17  5.66567796e-19  6.00327322e-17
  6.32073909e-20  1.39503318e-26  1.09402972e-19  6.46770900e-23
  6.15605078e-09  2.12991529e-23  4.12324914e-20  2.84914728e-21
  6.79667248e-21  1.02455492e-25  1.36862751e-30  4.30810256e-23
  1.47013351e-26  5.63026357e-24  9.20782213e-25  4.34744602e-21
  2.17134557e-22  2.24060745e-27  1.89477329e-24  2.14408629e-28
  1.37556323e-19  8.46325159e-21  1.69377963e-21  2.01841824e-21
  5.01684013e-23  1.29778127e-23  3.11659271e-25  4.42937263e-25
  3.04514538e-16  3.91091640e-20  3.29756192e-18]
 [ 3.50673411e-23  8.17478559e-20  5.49730173e-19  4.65323940e-19
  9.59900894e-22  1.70032520e-19  4.67693791e-28  1.03827845e-23
  8.81717729e-20  2.27298376e-19  3.02317833e-21  1.27963468e-21
  2.80259909e-17  6.18758433e-10  1.04925987e-19  5.17210328e-17
  6.39136646e-26  2.00728639e-23  2.57599876e-21  2.50704618e-23
  2.41633725e-22  5.55382210e-22  2.54126075e-22  3.60107669e-26
  7.43886919e-24  9.93876945e-19  7.18514929e-19  9.36377973e-24
  1.81931493e-20  1.33651132e-21  2.23100113e-22  1.19887915e-24
  1.36675491e-22  2.30323934e-20  1.66658178e-19  5.10849475e-17
  4.77868547e-19  2.96367585e-21  5.51461297e-18  1.62817186e-17
  5.97885953e-20  2.59355556e-26  1.19805951e-28]
 [ 2.27209761e-30  4.06136760e-16  5.54273905e-10  1.76150997e-16
  8.48464367e-17  2.41245489e-17  3.47397875e-37  9.34156943e-26
```

```

1.49722147e-20  3.91470253e-15  9.57151067e-26  9.05320911e-30
6.50165867e-16  4.38456163e-20  3.64215234e-18  1.00000000e+00
2.77941423e-29  1.75492020e-38  1.46178578e-24  6.69095026e-28
2.98454273e-34  1.29578993e-27  7.17562048e-31  7.14202185e-26
9.94371112e-29  5.29271741e-27  1.47954643e-18  3.64401293e-29
3.11532158e-32  1.85034646e-22  2.16403127e-37  1.11631970e-29
9.38626543e-24  1.61733951e-28  2.22684386e-29  1.17502779e-25
4.85200464e-29  2.56959198e-29  1.56490999e-15  3.18489764e-27
2.22882443e-25  4.19815226e-34  3.90805606e-39]
[ 1.51703826e-16  4.53066438e-14  3.39941612e-16  6.24360786e-19
 2.00030834e-17  1.08795044e-18  1.01990582e-21  6.36501749e-21
 5.93877526e-19  2.34606415e-21  4.79393473e-22  2.79776290e-19
 1.55634808e-19  3.12806770e-21  8.84371260e-19  3.65152652e-19
 1.12838664e-20  5.42244478e-21  3.10246884e-19  8.42570184e-24
 5.24736521e-21  2.92946923e-21  1.89882725e-24  1.53904364e-22
 4.21408908e-20  6.46501425e-21  5.93237392e-20  6.80522627e-19
 8.88034869e-20  1.17243877e-20  5.78703614e-22  1.19812326e-21
 1.65987264e-20  4.58450443e-20  3.41165775e-23  9.78735207e-21
 1.60241833e-22  3.46359328e-20  1.27664843e-18  1.83427223e-19
 3.69844595e-17  8.22221707e-23  5.41188676e-24]]
TopKV2(values=array([[ 2.47635181e-12,  1.64791090e-14,  4.87679537e-16,
 4.27841437e-17,  1.39092786e-17],
 [ 6.15605078e-09,  6.51597300e-16,  3.04514538e-16,
 1.26701716e-16,  8.67156994e-17],
 [ 6.18758433e-10,  5.17210328e-17,  5.10849475e-17,
 2.80259909e-17,  1.62817186e-17],
 [ 1.00000000e+00,  5.54273905e-10,  3.91470253e-15,
 1.56490999e-15,  6.50165867e-16],
 [ 4.53066438e-14,  3.39941612e-16,  1.51703826e-16,
 3.69844595e-17,  2.00030834e-17]], dtype=float32), indices=array([[
5,  3,  2, 10,  8],
 [16,  5, 40,  7,  3],
 [13, 15, 35, 12, 39],
 [15,  2,  9, 38, 12],
 [ 1,  2,  0, 40,  4]]))

```

## Project Writeup

Once you have completed the code implementation, document your results in a project writeup using this [template \(https://github.com/udacity/CarND-Traffic-Sign-Classifer-Project/blob/master/writeup\\_template.md\)](https://github.com/udacity/CarND-Traffic-Sign-Classifer-Project/blob/master/writeup_template.md) as a guide. The writeup can be in a markdown or pdf file.


**Note:** Once you have completed all of the code implementations and successfully answered each question above, you may finalize your work by exporting the iPython Notebook as an HTML document. You can do this by using the menu above and navigating to "\n", "**File -> Download as -> HTML (.html)**". Include the finished document along with this notebook as your submission.

## Step 4 (Optional): Visualize the Neural Network's State with Test Images

This Section is not required to complete but acts as an additional exercise for understanding the output of a neural network's weights. While neural networks can be a great learning device they are often referred to as a black box. We can understand what the weights of a neural network look like better by plotting their feature maps. After successfully training your neural network you can see what its feature maps look like by plotting the output of the network's weight layers in response to a test stimuli image. From these plotted feature maps, it's possible to see what characteristics of an image the network finds interesting. For a sign, maybe the inner network feature maps react with high activation to the sign's boundary outline or to the contrast in the sign's painted symbol.

Provided for you below is the function code that allows you to get the visualization output of any tensorflow weight layer you want. The inputs to the function should be a stimuli image, one used during training or a new one you provided, and then the tensorflow variable name that represents the layer's state during the training process, for instance if you wanted to see what the [LeNet lab's](https://classroom.udacity.com/nanodegrees/nd013/parts/fbf77062-5703-404e-b60c-95b78b2f3f9e/modules/6df7ae49-c61c-4bb2-a23e-6527e69209ec/lessons/601ae704-1035-4287-8b11-e2c2716217ad/concepts/d4aca031-508f-4e0b-b493-e7b706120f81) (<https://classroom.udacity.com/nanodegrees/nd013/parts/fbf77062-5703-404e-b60c-95b78b2f3f9e/modules/6df7ae49-c61c-4bb2-a23e-6527e69209ec/lessons/601ae704-1035-4287-8b11-e2c2716217ad/concepts/d4aca031-508f-4e0b-b493-e7b706120f81>) feature maps looked like for its second convolutional layer you could enter conv2 as the `tf_activation` variable.

For an example of what feature map outputs look like, check out NVIDIA's results in their paper [End-to-End Deep Learning for Self-Driving Cars](https://devblogs.nvidia.com/paralleforall/deep-learning-self-driving-cars/) (<https://devblogs.nvidia.com/paralleforall/deep-learning-self-driving-cars/>) in the section Visualization of internal CNN State. NVIDIA was able to show that their network's inner weights had high activations to road boundary lines by comparing feature maps from an image with a clear path to one without. Try experimenting with a similar test to show that your trained network's weights are looking for interesting features, whether it's looking at differences in feature maps from images with or without a sign, or even what feature maps look like in a trained network vs a completely untrained one on the same sign image.

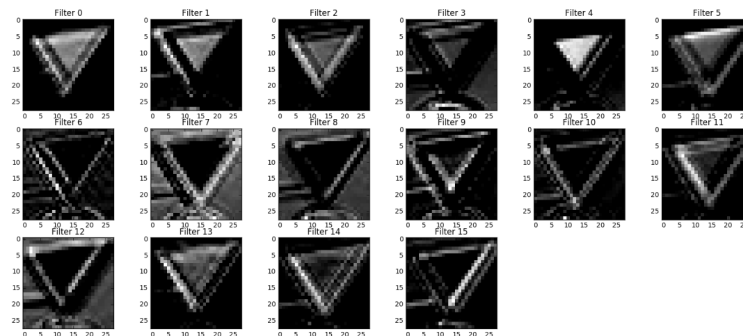

Your output should look something like this (above)

```

In [ ]: ### Visualize your network's feature maps here.
### Feel free to use as many code cells as needed.

# image_input: the test image being fed into the network to produce the feature maps
# tf_activation: should be a tf variable name used during your training procedure
# activation_min/max: can be used to view the activation contrast in more detail,
# plt_num: used to plot out multiple different weight feature map sets on the same figure

def outputFeatureMap(image_input, tf_activation, activation_min=-1, activation_max=1):
    # Here make sure to preprocess your image_input in a way your network expects
    # with size, normalization, ect if needed
    # image_input =
    # Note: x should be the same name as your network's tensorflow data placeholder
    # If you get an error tf_activation is not defined it may be having trouble with the name
    activation = tf_activation.eval(session=sess, feed_dict={x : image_input})
    featuremaps = activation.shape[3]
    plt.figure(plt_num, figsize=(15,15))
    for featuremap in range(featuremaps):
        plt.subplot(6,8, featuremap+1) # sets the number of feature maps to show on the figure
        plt.title('FeatureMap ' + str(featuremap)) # displays the feature map number
        if activation_min != -1 & activation_max != 1:
            plt.imshow(activation[0,:,: , featuremap], interpolation="nearest", cmap=cm.cmap_d[activation_min, activation_max])
        elif activation_max != 1:
            plt.imshow(activation[0,:,: , featuremap], interpolation="nearest", cmap=cm.cmap_d[0, activation_max])
        elif activation_min != -1:
            plt.imshow(activation[0,:,: , featuremap], interpolation="nearest", cmap=cm.cmap_d[activation_min, 0])
        else:
            plt.imshow(activation[0,:,: , featuremap], interpolation="nearest", cmap=cm.cmap_d[0, 0])

```