


MOBILE DEVELOPMENT


One Page System

OPERATING SYSTEM

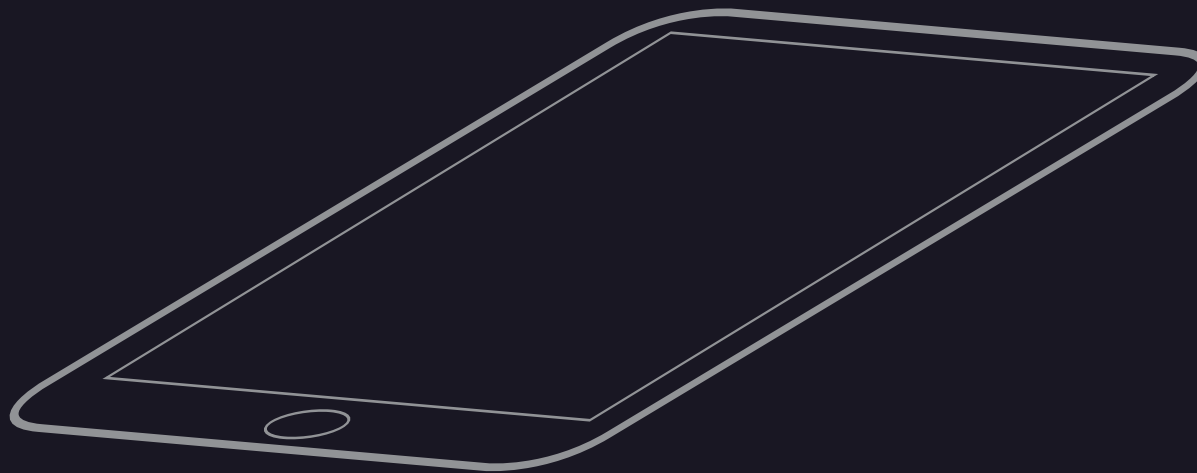

Smartphone/OS


PHONEGAP

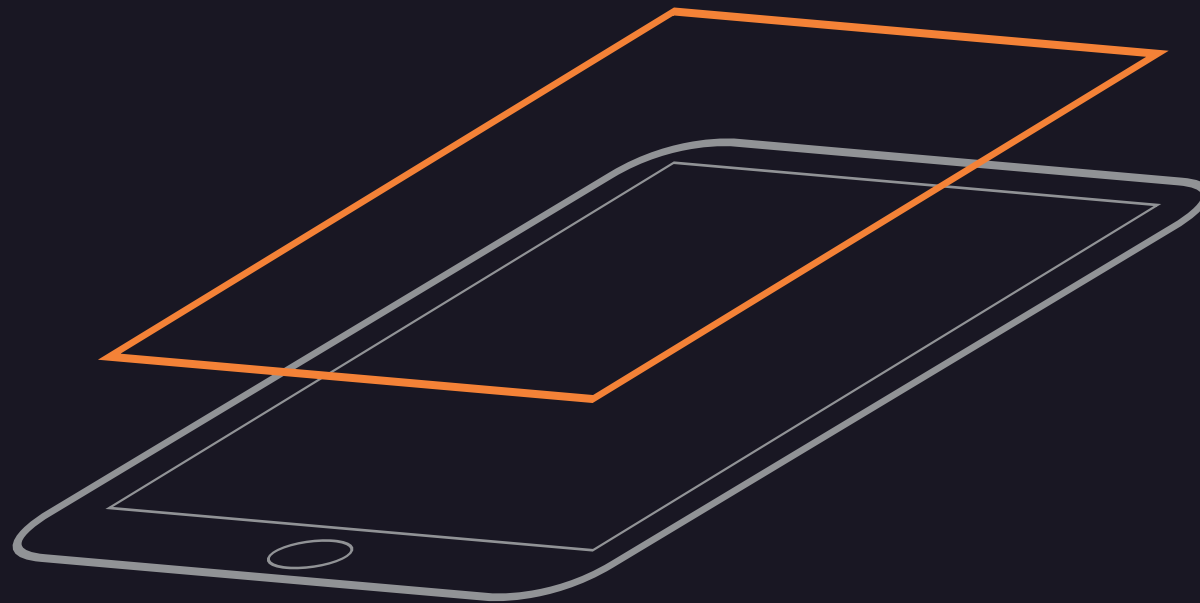

Phonegap

Smartphone/OS

WEBSITE

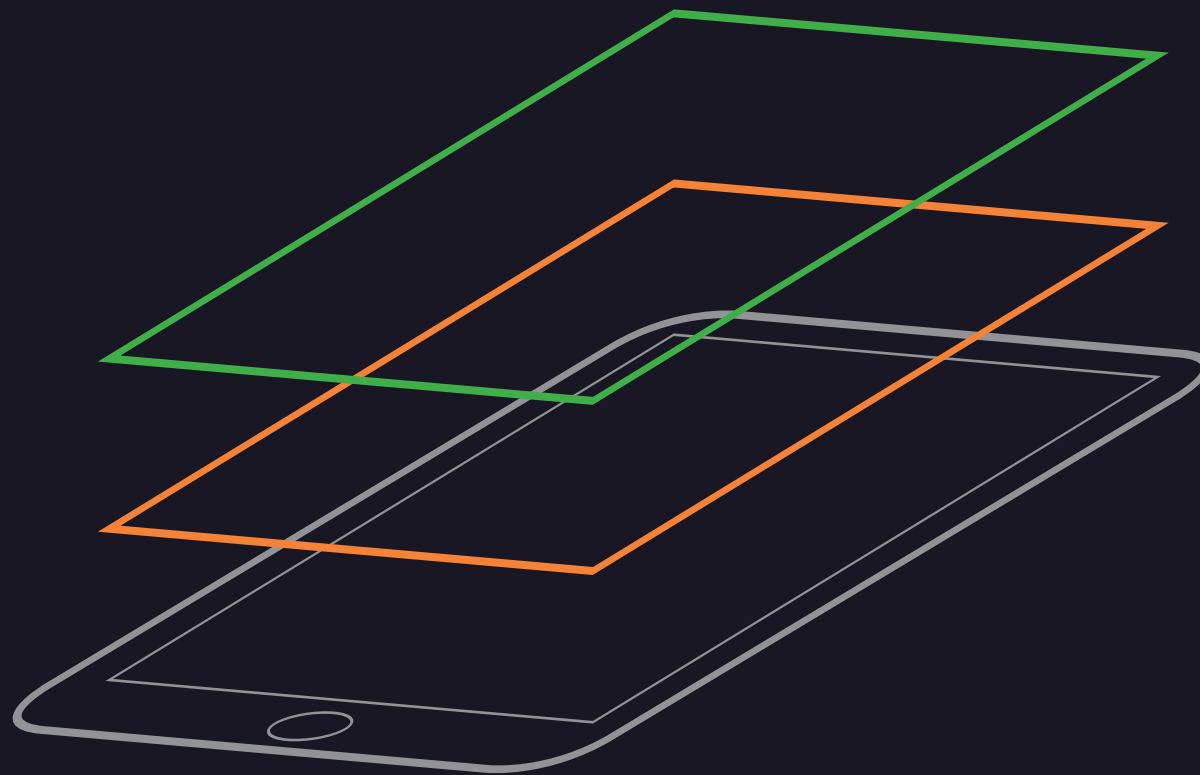


Website

Phonegap

Smartphone/OS

INDEX.HTML

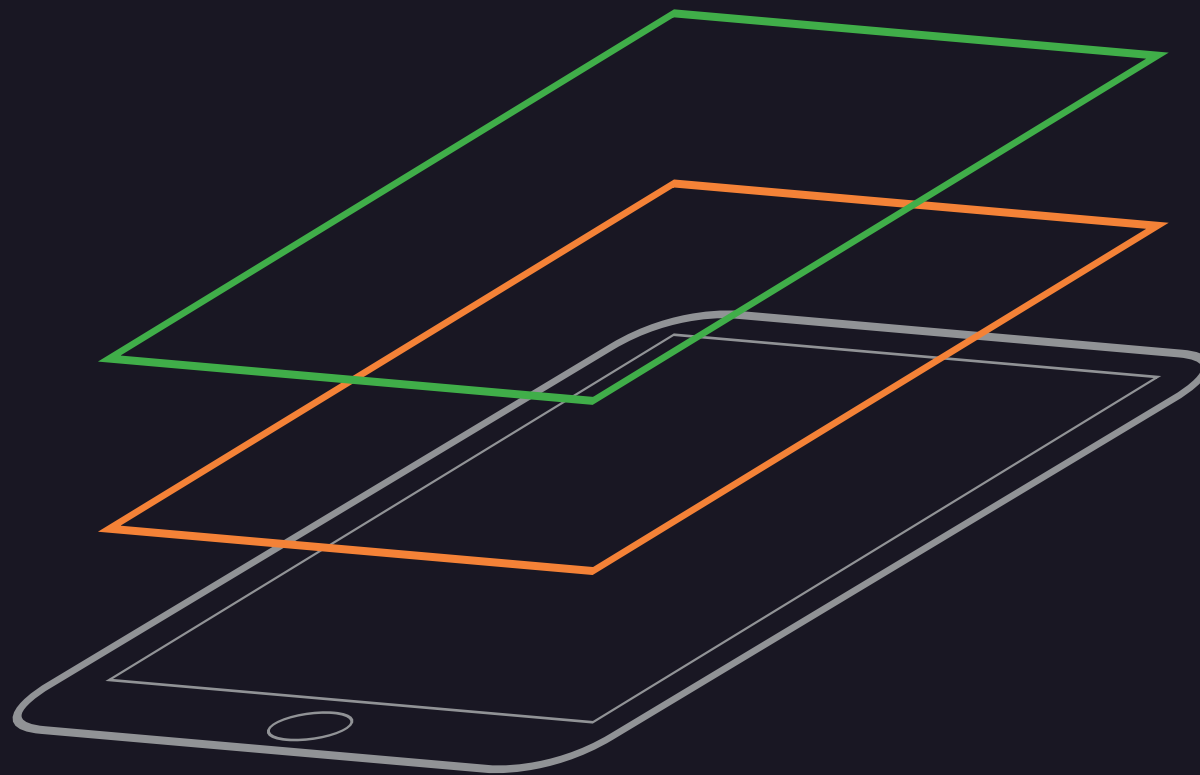

index.html


Phonegap

Smartphone/OS

INDEX.HTML

CSS


JavaScript

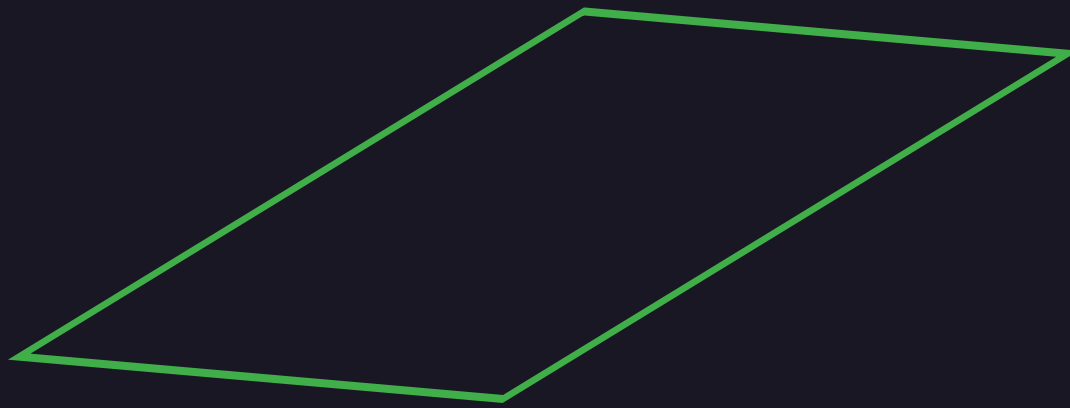

index.html

BUTTON

```
<div class = "pageBtn" data-page = "kontakt"> Kontakt </div>
```

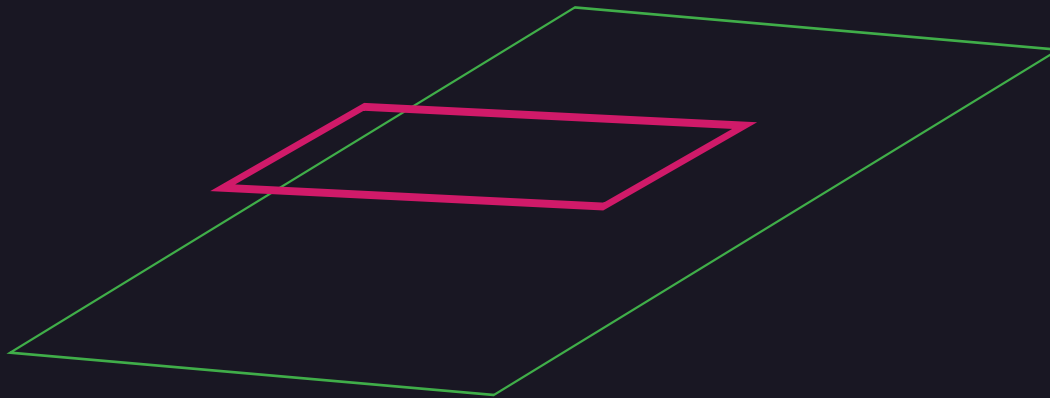

index.html

SYNTAX

Class *Attribute* *Value*



```
<??? class="pageBtn" data-page="kontakt" > Home </???>
```



tpl

├── home.tpl

└── kontakt.tpl

EXAMPLE

```
<!doctype>
<html>
  <head>
    <link rel="stylesheet" href="css/style.css" />
  </head>
  <body>

    <nav>
      <button class="pageBtn" data-page="home" >Home</button>
      <button class="pageBtn" data-page="gallery" >Gallery</button>
      <button class="pageBtn" data-page="location" >Location</button>
    </nav>

    <div id="page"></div>

    <script src="js/jquery.min.js" ></script>
    <script src="js/script.js" ></script>
  </body>
</html>
```

ZUSAMMENFASSUNG

```
class="pageBtn" data-page="name_1"
```

