


MOBILE DEVELOPMENT

ajax Framework

ORNDER STRUKTURE



ORNDER STRUKTURE

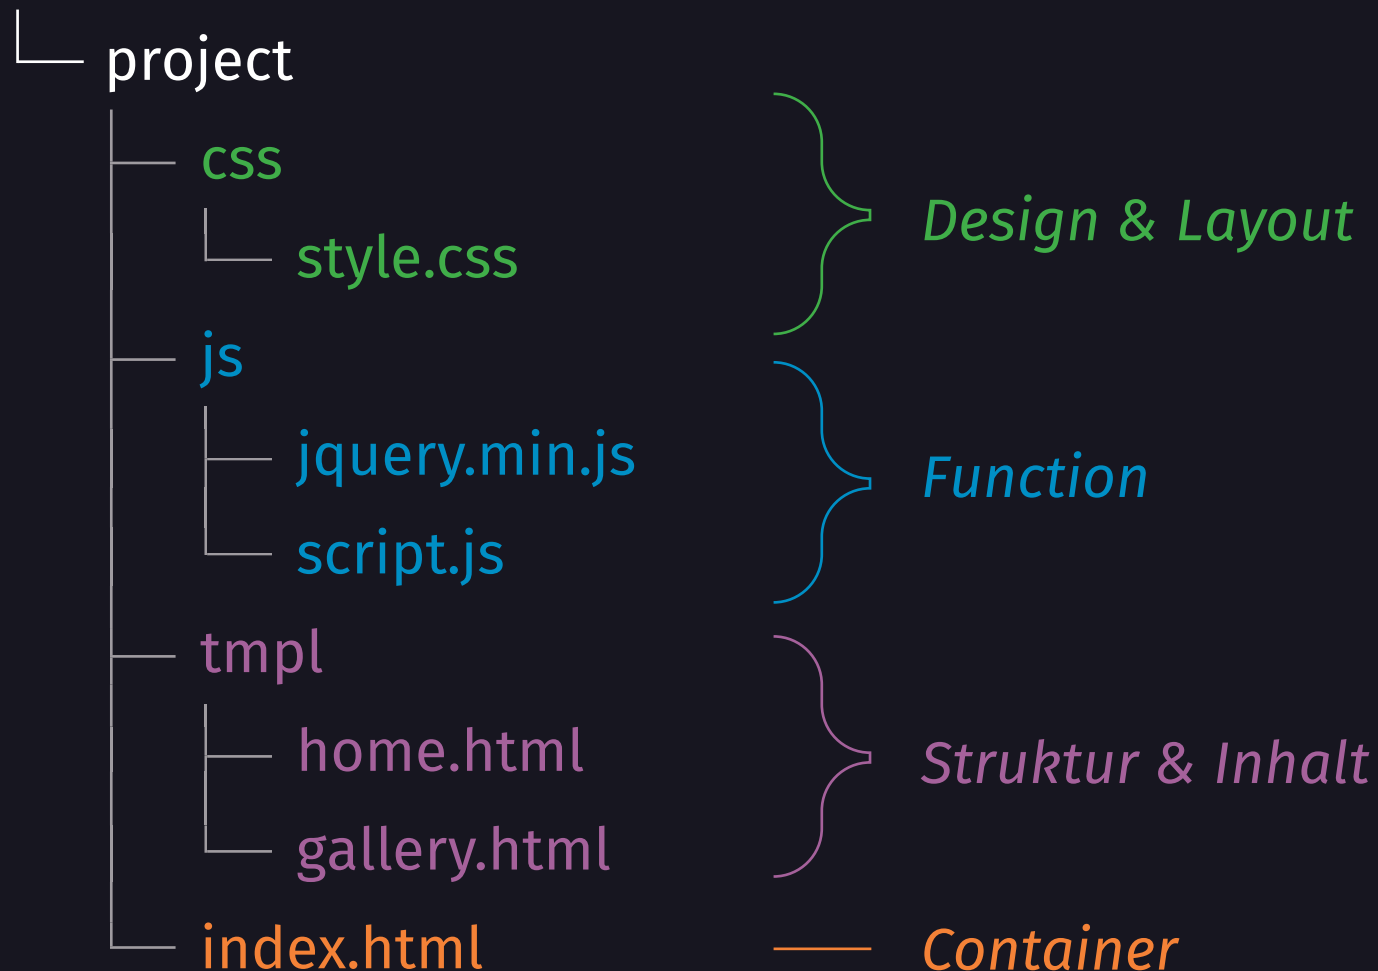

QUELLCODE INDEX.HTML

```
<!doctype>
<html>
  <head>
    <link rel="stylesheet" href="css/style.css" />
  </head>
  <body>

    <nav>
      <button class="pageBtn" data-page="home" >Home</button>
      <button class="pageBtn" data-page="gallery" >Gallery</button>
      <button class="pageBtn" data-page="location" >Location</button>
    </nav>

    <div id="page"></div>

    <script src="js/jquery-2.1.4.min.js" ></script>
    <script src="js/script.js" ></script>
  </body>
</html>
```

QUELLCODE INDEX.HTML

```
<!doctype>
<html>
  <head>
    <link rel="stylesheet" href="css/style.css" />
  </head>
  <body>

    <nav>
      <button class="pageBtn" data-page="home" >Home</button>
      <button class="pageBtn" data-page="gallery" >Gallery</button>
      <button class="pageBtn" data-page="location" >Location</button>
    </nav>

    <div id="page"></div>

    <script src="js/jquery-2.1.4.min.js" ></script>
    <script src="js/script.js" ></script>
  </body>
</html>
```

BUTTON SYNTAX

Class *Attribute* *Value*



```
<??? class="pageBtn" data-page="home" > Home </???>
```



```
tpl  
├── home.html  
└── gallery.html
```

QUELLCODE TMPL FILES

home.html

```
<div>
  <h1>This is the Home</h1>
</div>
```

gallery.html

```
<div>
  <h1>Gallery</h1>

  <ul>

    <li class="pageBtn"
      data-page="home">Home</li>

    <li class="pageBtn"
      data-page="gallery">Gallery</li>


    <li class="pageBtn"
      data-page="location">Location</li>

  </ul>
</div>
```

location.html

```
<div>
  <h1>Location</h1>
  
  What ever!
</div>
```

ToDo

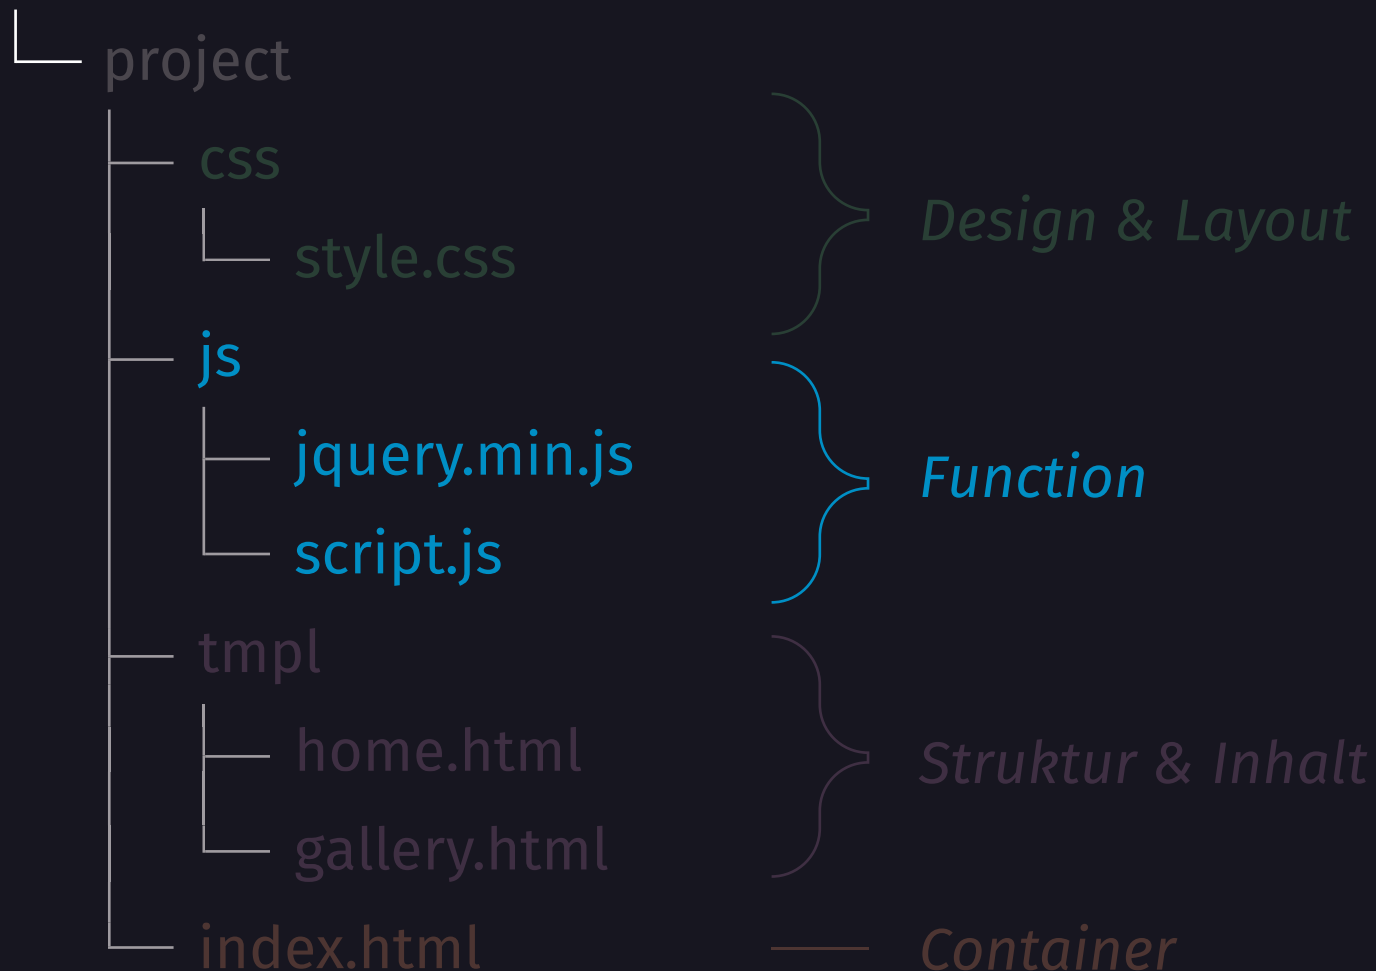

QUELLCODE SCRIPT.JS

```
var _init = function () {  
  
    $("body").on("click", ".pageBtn", function () {  
  
        var page = $(this).data("page");  
  
        $("#page").load("tmpl/"+page+".html");  
  
    });  
  
};  
  
$(document).ready(function () {  
    _init();  
});
```

QUELLCODE SCRIPT.JS

```
var _init = function () {  
  
    $("body").on("click", ".pageBtn", function () {  
  
        var page = $(this).data("page");  
  
        $("#page").load("tmpl/"+page+".html");  
  
    });  
  
};  
  
$(document).ready(function () {  
    _init();  
});
```

- globale Variable als Function

QUELLCODE SCRIPT.JS

```
var _init = function () {  
  
    $("body").on("click", ".pageBtn", function () {  
  
        var page = $(this).data("page");  
  
        $("#page").load("tmpl/"+page+".html");  
  
    });  
  
};  
  
$(document).ready(function () {  
    _init();  
});
```

- globale Variable als Function
- Event Listener für DOM-Notes mit css-class: pageBtn

QUELLCODE SCRIPT.JS

```
var _init = function () {  
  
    $("body").on("click", ".pageBtn", function () {  
  
        var page = $(this).data("page");  
  
        $("#page").load("tmpl/"+page+".html");  
  
    });  
  
};  
  
$(document).ready(function () {  
    _init();  
});
```

- globale Variable als Function
- Event Listener für DOM-Notes mit css-class: pageBtn
- Variable beinhaltet DOM-Note Inhalt des data-page Attributs

QUELLCODE SCRIPT.JS

```
var _init = function () {  
  
    $("body").on("click", ".pageBtn", function () {  
  
        var page = $(this).data("page");  
  
        $("#page").load("tmpl/"+page+".html");  
  
    });  
  
};  
  
$(document).ready(function () {  
    _init();  
});
```

- globale Variable als Function
- Event Listener für DOM-Notes mit css-class: pageBtn
- Variable beinhaltet DOM-Note Inhalt des data-page Attributs
- laden des HTML-Inhalts

QUELLCODE SCRIPT.JS

```
var _init = function () {  
  
    $("body").on("click", ".pageBtn", function () {  
  
        var page = $(this).data("page");  
  
        $("#page").load("tmpl/"+page+".html");  
  
    });  
  
};  
  
$(document).ready(function () {  
    _init();  
});
```

- globale Variable als Function
- Event Listener für DOM-Notes mit css-class: pageBtn
- Variable beinhaltet DOM-Note Inhalt des data-page Attributs
- laden des HTML-Inhalts
- Event Listener für DOM

QUELLCODE SCRIPT.JS

```
var _init = function () {  
  
    $("body").on("click", ".pageBtn", function () {  
  
        var page = $(this).data("page");  
  
        $("#page").load("tmpl/"+page+".html");  
  
    });  
  
};  
  
$(document).ready(function () {  
    _init();  
});
```

- globale Variable als Function
- Event Listener für DOM-Notes mit css-class: pageBtn
- Variable beinhaltet DOM-Note Inhalt des data-page Attributs
- laden des HTML-Inhalts
- Event Listener für DOM
- ausführen der Function

ZUSAMMENFASSUNG

```
class="pageBtn" data-page="name_1"
```

