

Breakout YEAH hours

Brahm Capoor

Road Map

— — —

- Lecture Review
- Using the debugger
- Assignment Overview
- Q&A!

Primitive variables

```
int x = 7;    // declare and initialize a variable
x = 9;        // change the value of x
x = x + 1;    // increment (add 1 to) x.  A.K.A. x++
x = x + 2;    // add 2 to x.                A.K.A. x += 2
x /= 2        // divide x by 2, and truncate result
```

```
double d = 3.5;
```

```
boolean isThisTrue = true;
isThisTrue = !isThisTrue; // flip isThisTrue
```

Graphics

```
GRect rect = new GRect(50, 50, 200, 200);  
rect.setFill(true);  
rect.setColor(Color.BLUE);
```

```
G Oval oval = new GOval(0, 0, getWidth(), getHeight());  
oval.setFill(false);  
oval.setColor(Color.GREEN);
```

```
GLabel text = new GLabel("banter", 200, 10);
```

```
add(text);  
add(rect);  
add(oval);
```

Things to remember

- Coordinates are **doubles**
- Coordinates are measured from the **top left** of the screen
- Coordinates of a shape are coordinates of its **top left corner**
- Coordinates of a label are coordinates of its **bottom left corner**
- Remember to **add** objects to the screen!
- Use the [online documentation!](#)
- These are **class variables!**

Methods, parameters and variables



```
private returnType methodName(type parameter1, type parameter2,...)
```

```
private int returnsInt() {...}
```

```
private void drawsRect(int width, int length) {...} //void is no type
```


```
public boolean frontIsClear() {...} //look familiar?
```

Parameters and a return value are both optional!

Example: Methods and Parameters

```
public void run() {  
    println("Choose 2 numbers!");  
    int n1 = readInt("Enter n1"); //5  
    int n2 = readInt("Enter n2"); //7  
  
    int total = addNumbers(n1, n2);  
    println ("The total is " + total);  
}
```

```
private int addNumbers(int num1, int num2) {  
    int sum = num1 + num2; //12  
    return sum;  
}
```

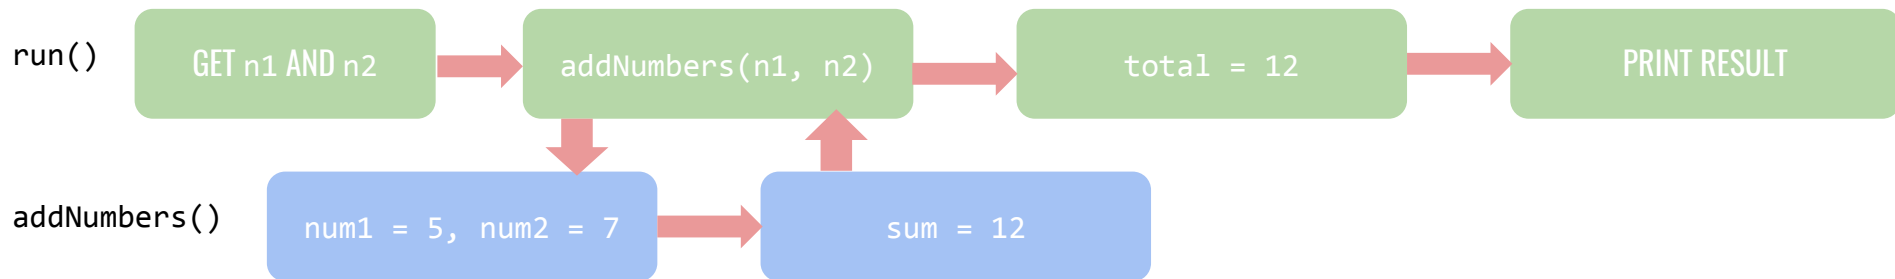

Variable scope

Variables live inside the block in which they're declared

Scope for i

```
    for (int i = 0; i < 5; i++) {  
Scope for y    int y = i * 4;  
    }  
    i = 3; // Error!  
    y = 2; // Error!
```

Scope for y

```
    ... // in some code far, far away  
    int y = 0;  
    for (int i = 0; i < 5; i++) {  
        y = i * 4;  
    }  
    y = 2; // Ayy!
```


Instance variables

— — —

```
private int x; // belongs to the instance  
of the program
```

```
public void run() {  
    x = 2;  
    addTwo();  
    println(x); // prints 4  
}
```

```
private void addTwo() {  
    x += 2;  
}
```

Should you use an instance variable?

YES

- You **access & change** the variable everywhere
- You use it in `MouseListener` methods
- You have literally no other choice

NO

- It makes information flow more annoying to visualize (parameters are easier)
- Poor style to build up unnecessary instance variables

The opposite of an instance variable is a **local variable**

Returning in different places

```
private int multipleReturns(int x) {  
  
    if (x == 5) {  
        return 0;  
    }  
  
    return 1; // this only happens if x != 5  
    return 5; // never gets to this line  
}
```

// note: every path through the method ends
with a **single** return statement

// note: a function ends **immediately** after it
returns

— — —

Mouse Movement

— — —

`addMouseListeners();` // this needs to happen before the program can respond to the mouse!

```
public void mouseMoved(MouseEvent e) { // remember to make this public!
    double mouseX = e.getX(); // get the x-coordinate of where the mouse moves to
    double mouseY = e.getY(); // get the x-coordinate of where the mouse moves to
    ...
}
```


Things to remember:

- Other things you can do with the mouse: `mouseClicked(MouseEvent e)`, `mouseDragged(MouseEvent e)`
 - Check the textbook and the [online documentation](#) for more!
- `mouseListeners` are called parallel to your code, they happen as soon as you move the mouse
 - as long as you've called `addMouseListeners()` already!

Live demo: Using the debugger

Mouse Reporter

(A Sandcastle)

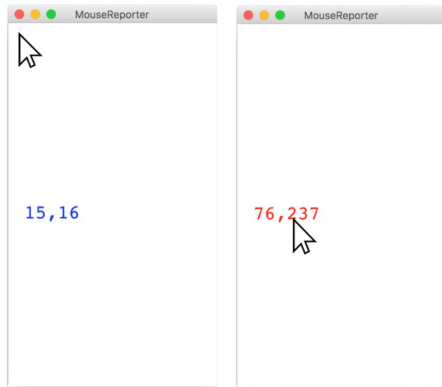

Tips and tricks


- The starter code stores the label as an **instance variable**
- `getElementAt` might be useful here!

— — —

Breakout!

Due Wednesday, February 7th

What we're making

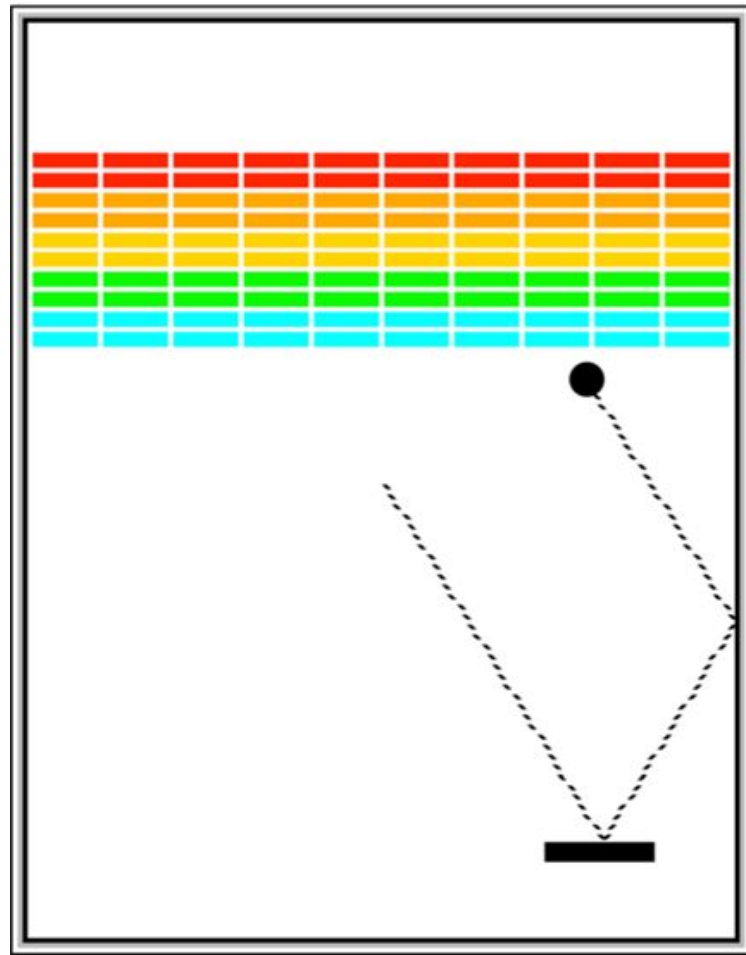

What you're given

- These are **constants**
- Use `getWidth()` and `getHeight()` for dimensions of window, not the ones in the constants!
- You might need to add more instance variables...

```
/**
 * Width and height of application window, in pixels.
 * These should be used when setting up the initial size of the game,
 * but in later calculations you should use getWidth() and getHeight()
 * rather than these constants for accurate size information.
 */
public static final int APPLICATION_WIDTH = 420;
public static final int APPLICATION_HEIGHT = 600;

/** Dimensions of game board (usually the same), in pixels */
public static final int BOARD_WIDTH = APPLICATION_WIDTH;
public static final int BOARD_HEIGHT = APPLICATION_HEIGHT;

/** Number of bricks in each row */
public static final int NBRICKS_PER_ROW = 10;

/** Number of rows of bricks */
public static final int NBRICK_ROWS = 10;

/** Separation between neighboring bricks, in pixels */
public static final int BRICK_SEP = 4;

/** Width of each brick, in pixels */
public static final double BRICK_WIDTH =
    (BOARD_WIDTH - (NBRICKS_PER_ROW + 1.0) * BRICK_SEP) / NBRICKS_PER_ROW;

/** Height of each brick, in pixels */
public static final int BRICK_HEIGHT = 8;

/** Offset of the top brick row from the top, in pixels */
public static final int BRICK_Y_OFFSET = 70;

/** Dimensions of the paddle */
public static final int PADDLE_WIDTH = 60;
public static final int PADDLE_HEIGHT = 10;

/** Offset of the paddle up from the bottom */
public static final int PADDLE_Y_OFFSET = 30;

/** Radius of the ball in pixels */
public static final int BALL_RADIUS = 10;

/** initial random velocity that you should choose */
public static final double VELOCITY_MIN = 1.0;
public static final double VELOCITY_MAX = 3.0;


/** Animation delay or pause time between ball moves (ms) */
public static final int DELAY = 1000 / 60;

/** Number of turns */
public static final int NTURNS = 3;
```


MILESTONE 1: BRICKS

— — —

- Similar to pyramid!
- Drawing multiple rows
 - Figure out how to draw one row first
 - Bricks should be **centered horizontally**
- Reasonable coloring for any number of rows

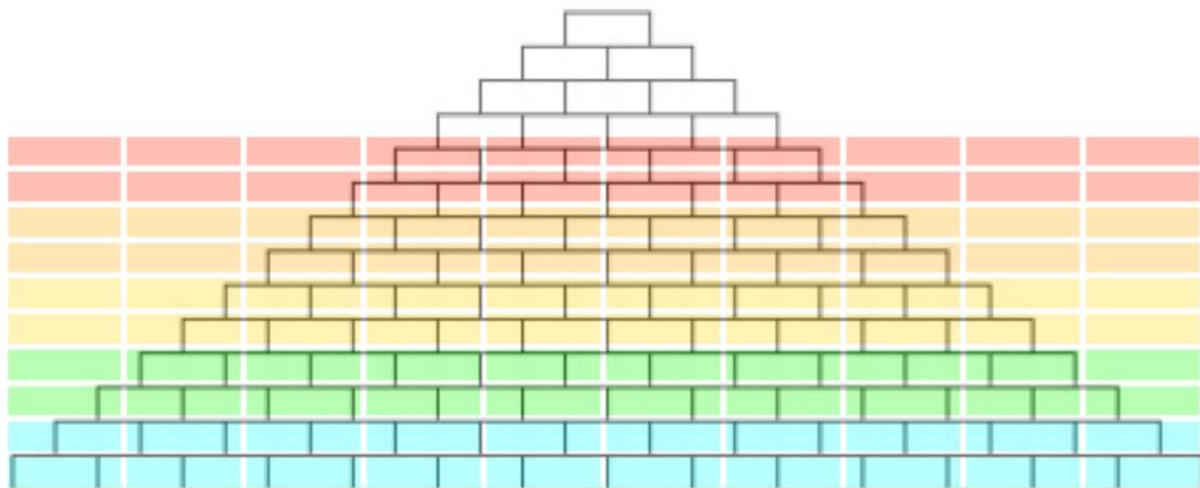

MILESTONE 2: PADDLE

— — —


- How do you make the mouse control the paddle?
- Chapter 9: **GObject Methods**
- Chapter 10: **Event Driven Programs**
(responding to mouse events)
- Things to consider:
 - Paddle only needs to move in the x direction
 - Paddle can't move off the screen



Milestone 3: Play Ball!

— — —

- How do we move the ball?
- How do you choose the direction of the ball?
- What information do we need in the GOval constructor?

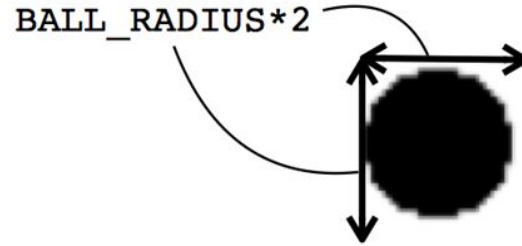

Animation

```
while(executing condition) {  
    // update graphics  
    obj.move(dx, dy);  
    pause(PAUSE_TIME_MILLISEC);  
}
```

— — —

Moving the ball

```
double vx;  
double vy;  
...  
  
while(existing condition) {  
    // update graphics  
    ball.move(vx, vy);  
    pause(PAUSE_TIME_MILLISEC);  
}
```

— — —

Choosing the direction of the ball

— — —

```
//make a random generator instance variable
private RandomGenerator rgen = RandomGenerator.getInstance();


//give the ball an initial direction
vx = rgen.nextDouble(1.0, 3.0); // choose speed
if(rgen.nextBoolean(0.5)) vx = -vx; // choose left or right

//wait until player clicks the screen
waitForClick();
```

MILESTONE 4: COLLISIONS

— — —

Main idea: Check if there's anything at each of the 4 corners and **return one GObject**

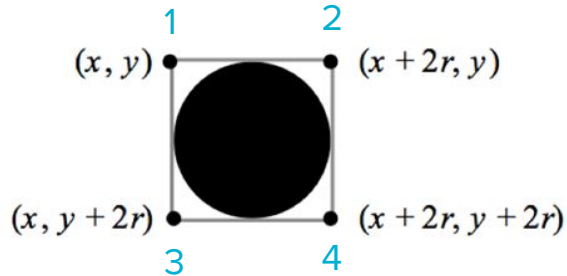

Useful method: `public GObject getElementAt(double x, double y);`

Handling collisions redux

— — —


```
private GObject getCollidingObject() {  
    // sick code  
    // return a GObject  
}
```

...

```
GObject collider = getCollidingObject();  
// only need to bounce vertically for collisions with brick, top wall and paddle  
// only need to bounce horizontally for collisions with side walls
```

Things to think about: what direction needs to be flipped when?


This is just like the bouncing ball example in lecture!

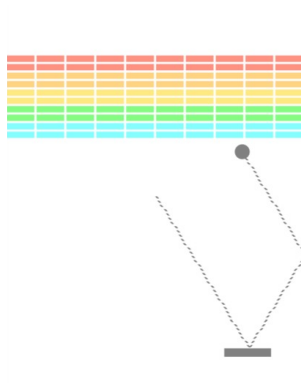

Ending the game

- Remove the ball when it goes off the screen
 - `remove(obj);`
- Winning and losing
 - How? Bricks!

— — —

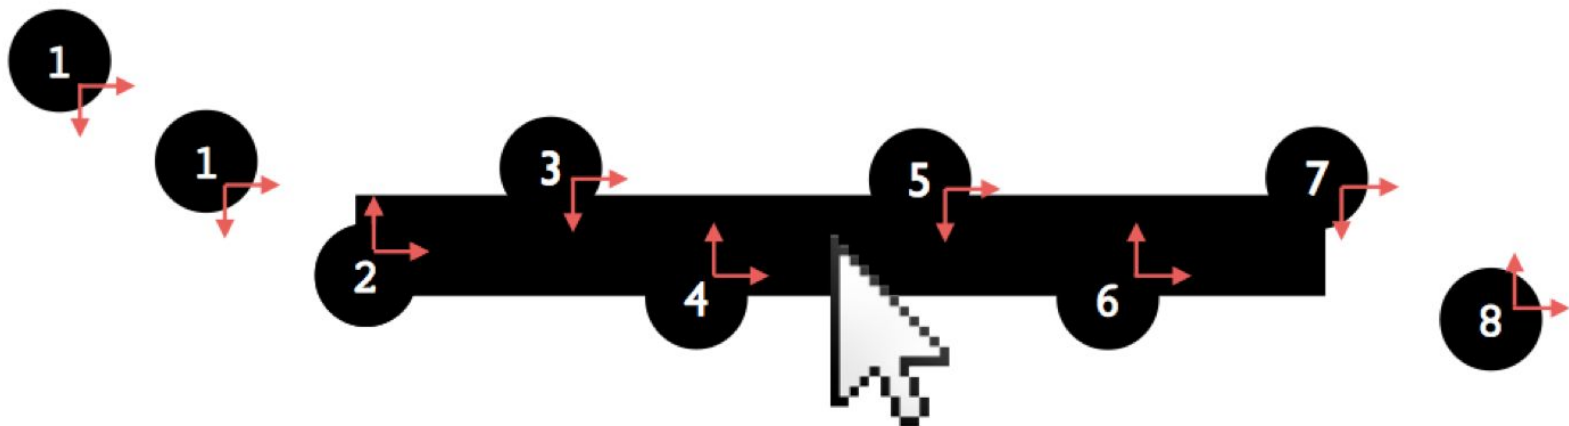

The sticky paddle 🙄

Testing your program

- Check if it deals with changed constants
- Mega paddle
- Sticky paddle
- Crazy random player

Wrapping up

- Read the spec!
- Extensions!
- Commenting!
- Ask for help!
- Incorporate IG feedback!