

# Hosting a WordPress Application on ECS Fargate with RDS, Parameter Store, and Secrets Manager

Chris Samugana

## Introduction

In this project you will deploy a WordPress application using modern AWS services, including Amazon ECS (Fargate), Amazon RDS (MySQL), AWS Systems Manager Parameter Store, AWS Secrets Manager, Amazon ECR, and an Application Load Balancer (ALB). This architecture promotes containerized workloads, managed databases, secure secret management, and efficient scaling through serverless infrastructure.

## Solution


Log in to the AWS Management Console using the credentials provided. Ensure you're operating in the us-east-1 Region.

### Step 1: Verify Existing Infrastructure

Before proceeding, confirm the existence of the following resources:

| Resource Type             | Resource Name              |
|---------------------------|----------------------------|
| Application Load Balancer | OurApplicationLoadBalancer |
| Security Group            | ALBAllowHttp               |
| Cloud9 Environment        | OurCloud9Environment       |
| IAM Role                  | OurEcsTaskExecutionRole    |
| IAM Role                  | OurEcsTaskRole             |

If any of these are missing, exit and restart the lab.

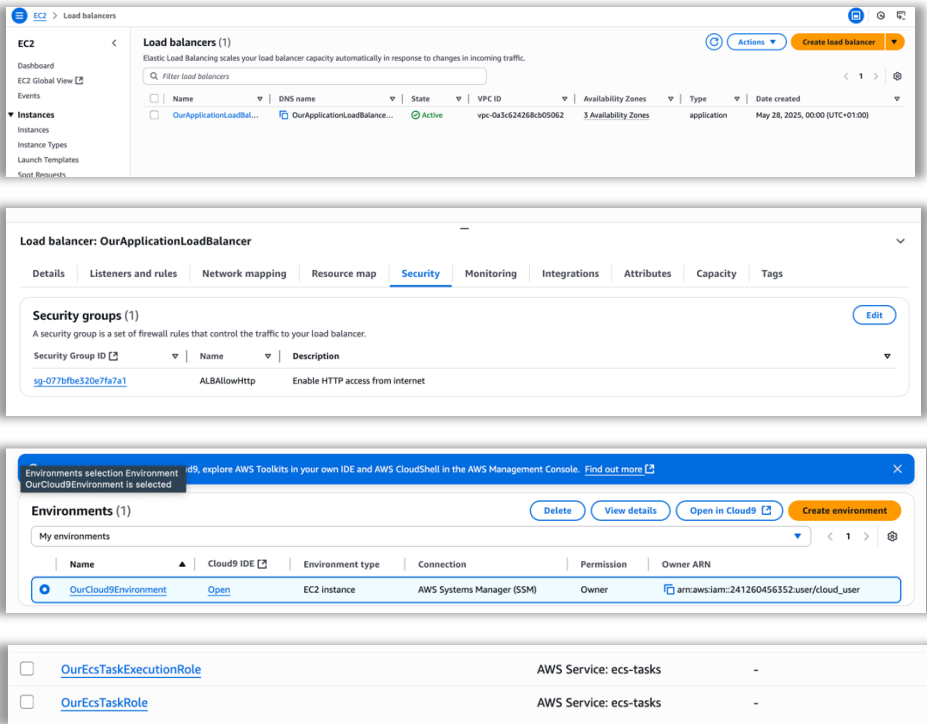

## Step 2: Create a Database Subnet Group

1. Navigate to the Amazon RDS console.
2. Select Subnet groups → Create DB subnet group.
3. Set:
  - Name: database-subnet-group
  - Description: (Your choice)
  - VPC: Select *Your Custom VPC*
4. Add the following subnets:
  - 10.0.20.0/24 (us-east-1a)
  - 10.0.21.0/24 (us-east-1b)
  - 10.0.22.0/24 (us-east-1c)
5. Click Create.

### Create DB subnet group

To create a new subnet group, give it a name and a description, and choose an existing VPC. You will then be able to add subnets related to that VPC.

#### Subnet group details

**Name**  
You won't be able to modify the name after your subnet group has been created.

Must contain from 1 to 255 characters. Alphanumeric characters, spaces, hyphens, underscores, and periods are allowed.

**Description**

**VPC**  
Choose a VPC identifier that corresponds to the subnets you want to use for your DB subnet group. You won't be able to choose a different VPC identifier after your subnet group has been created.

Your Custom VPC (vpc-0a3c624268cb05062)  
9 Subnets, 3 Availability Zones

#### Add subnets

**Availability Zones**  
Choose the Availability Zones that include the subnets you want to add.

Choose an availability zone

us-east-1a × us-east-1b × us-east-1c ×

**Subnets**  
Choose the subnets that you want to add. The list includes the subnets in the selected Availability Zones.

Select subnets

Database Subnet AZ B  
Subnet ID: subnet-06a15de712dbae5f4 CIDR: 10.0.21.0/24 ×

Database Subnet AZ A  
Subnet ID: subnet-08a963475a94f7df4 CIDR: 10.0.20.0/24 ×

Database Subnet AZ C ×

Successfully created database-subnet-group. View subnet group

#### Subnet groups (1)

Filter by subnet group

| <input type="checkbox"/> | Name                                  | Description     | Status   | VPC                   |
|--------------------------|---------------------------------------|-----------------|----------|-----------------------|
| <input type="checkbox"/> | <a href="#">database-subnet-group</a> | Our RDS Subnets | Complete | vpc-0a3c624268cb05062 |

Create DB subnet group

### Step 3: Create Amazon RDS Instance (MySQL)

1. Navigate to RDS > Databases > Create database.
2. Choose:
  - Engine: MySQL (MySQL Community)
  - Template: Free Tier
  - DB Cluster Identifier: wordpress
  - Master username: admin
  - Enable: *Manage master credentials in Secrets Manager*
  - Instance class: db.t4g.micro
  - Storage: General Purpose SSD (gp3), 20 GiB
  - VPC: Your Custom VPC
  - Subnet group: database-subnet-group
  - Public access: No
  - VPC security group: Create new database-sg
  - Initial DB name: wordpress
3. Click Create database.

#### Modify Security Group:

- Navigate to EC2 > Security Groups > database-sg.
- Edit Inbound Rules:
  - Type: MYSQL/Aurora
  - Port: 3306
  - Source: Custom 10.0.0.0/16
- Save changes.

### Create database [Info](#)

**Choose a database creation method**

☒ **Standard create**  
You set all of the configuration options, including ones for availability, security, backups, and maintenance.

☐ **Easy create**  
Use recommended best-practice configurations. Some configuration options can be changed after the database is created.

**Engine options**

**Engine type** [Info](#)

☐ Aurora (MySQL Compatible)  


☐ Aurora (PostgreSQL Compatible)  


☒ MySQL  


☐ PostgreSQL  


☐ MariaDB  


☐ Oracle  


☐ Microsoft SQL Server  


☐ IBM Db2  


**Edition**

☒ MySQL Community

## Templates

Choose a sample template to meet your use case.

☐ Production

Use defaults for high availability and fast, consistent performance.

☐ Dev/Test

This instance is intended for development use outside of a production environment.

☒ Free tier

Use RDS Free Tier to develop new applications, test existing applications, or gain hands-on experience with Amazon RDS. [Info](#)

## Availability and durability


### Deployment options [Info](#)

Choose the deployment option that provides the availability and durability needed for your use case. AWS is committed to a certain level of uptime depending on the deployment option you choose. Learn more in the [Amazon RDS service level agreement \(SLA\)](#).

#### ☐ Multi-AZ DB cluster deployment (3 instances)

Creates a primary DB instance with two readable standbys in separate Availability Zones. This setup provides:


- 99.95% uptime
- Redundancy across Availability Zones
- Increased read capacity
- Reduced write latency

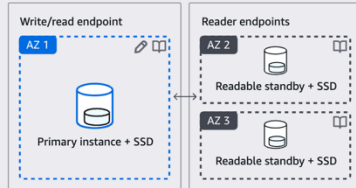

#### ☐ Multi-AZ DB instance deployment (2 instances)

Creates a primary DB instance with a non-readable standby instance in a separate Availability Zone. This setup provides:


- 99.95% uptime
- Redundancy across Availability Zones

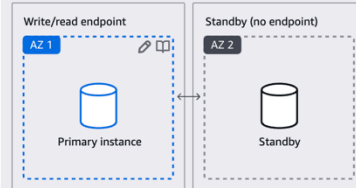

#### ☒ Single-AZ DB instance deployment (1 instance)

Creates a single DB instance without standby instances. This setup provides:

- 99.5% uptime
- No data redundancy



## Settings

### DB instance identifier [Info](#)

Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.

wordpress

The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

### ▼ Credentials Settings

#### Master username [Info](#)

Type a login ID for the master user of your DB instance.

admin

1 to 16 alphanumeric characters. The first character must be a letter.

#### Credentials management

You can use AWS Secrets Manager or manage your master user credentials.



Managed in AWS Secrets Manager - most secure

RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.



Self managed

Create your own password or have RDS create a password that you manage.



If you manage the master user credentials in AWS Secrets Manager, additional charges apply. See [AWS Secrets Manager pricing](#). Additionally, some RDS features aren't supported. See limitations [here](#).

### Select the encryption key [Info](#)

You can encrypt using the KMS key that Secrets Manager creates or a customer managed KMS key that you create.

aws/secretsmanager (default)



[Add new key](#)

db.t4g.micro

2 vCPUs 1 GiB RAM Network: Up to 2,085 Mbps

## Storage

### Storage type [Info](#)

Provisioned IOPS SSD (io2) storage volumes are now available.

General Purpose SSD (gp3)

Performance scales independently from storage

### Allocated storage [Info](#)

20

GiB

Minimum: 20 GiB. Maximum: 6,144 GiB

### Provisioned IOPS [Info](#)

3000

IOPS

Baseline IOPS of 3,000 IOPS is included for allocated storage less than 400 GiB.

### Storage throughput [Info](#)

125

MiBps

Baseline storage throughput of 125 MiBps is included for allocated storage less than 400 GiB.

Connectivity [Info](#)

Compute resource

Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.

☒ Don't connect to an EC2 compute resource

Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.

☐ Connect to an EC2 compute resource

Set up a connection to an EC2 compute resource for this database.

Network type [Info](#)

To use dual-stack mode, make sure that you associate an IPv6 CIDR block with a subnet in the VPC you specify.

☒ IPv4

Your resources can communicate only over the IPv4 addressing protocol.

☐ Dual-stack mode

Your resources can communicate over IPv4, IPv6, or both.

Virtual private cloud (VPC) [Info](#)

Choose the VPC. The VPC defines the virtual networking environment for this DB instance.

Your Custom VPC (vpc-0a3c624268cb05062)

9 Subnets, 3 Availability Zones

Only VPCs with a corresponding DB subnet group are listed.

ⓘ After a database is created, you can't change its VPC.

DB subnet group [Info](#)

Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.

database-subnet-group

3 Subnets, 3 Availability Zones

New VPC security group name

database-sg

Availability Zone [Info](#)

No preference

Certificate authority - optional [Info](#)

Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.

rds-ca-rsa2048-g1 (default)

Expiry: May 26, 2061

If you don't select a certificate authority, RDS chooses one for you.

▼ Additional configuration

Database options, encryption turned on, backup turned on, backtrack turned off, maintenance, CloudWatch Logs, delete protection turned off.

Database options

Initial database name [Info](#)

wordpress

If you do not specify a database name, Amazon RDS does not create a database.

DB parameter group [Info](#)

default.mysql8.0

Option group [Info](#)

default:mysql-8-0

EC2

Dashboards

EC2 Global View

Events

▼ Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

▼ Images

AMIs

AMI Catalog

sg-07a7fa4b23d2b1fd6 - database-sg

Actions

Details

Security group name

database-sg

Owner

241260456352

Security group ID

sg-07a7fa4b23d2b1fd6

Inbound rules count

1 Permission entry

Description

Created by RDS management console

Outbound rules count

1 Permission entry

VPC ID

vpc-0a3c624268cb05062

Inbound rules

Outbound rules

Sharing - new

VPC associations - new

Tags

Inbound rules (1)

Manage tags

Edit inbound rules

| Name | Security group rule ID | IP version | Type         | Protocol | Port range | Source          |
|------|------------------------|------------|--------------|----------|------------|-----------------|
| -    | sgr-0b8cf47daf14e9780  | IPv4       | MySQL/Aurora | TCP      | 3306       | 84.65.97.240/32 |

Edit inbound rules [Info](#)

Inbound rules control the incoming traffic that's allowed to reach the instance.

Inbound rules [Info](#)

Security group rule ID

-

Type [Info](#)

MySQL/Aurora

Protocol [Info](#)

TCP

Port range [Info](#)

3306

Source [Info](#)

Custom

10.0.0.0/16

10.0.0.0/16

Description - optional [Info](#)

Add rule

Cancel

Preview changes

Save rules

## Step 4: Create Parameter Store Parameters

Navigate to **Systems Manager > Parameter Store** and create:

1. /dev/WORDPRESS\_DB\_HOST
  - **Type:** String
  - **Value:** <RDS-ENDPOINT>:3306
2. /dev/WORDPRESS\_DB\_NAME
  - **Type:** SecureString
  - **Value:** wordpress

**Parameter details**

Name

When naming a parameter, you can use forward slashes (/) to organize it into a hierarchy. [Learn more about hierarchies](#)

Description — *Optional*

Tier

Parameter Store offers standard and advanced parameters.

☒ **Standard**

Store up to 10,000 standard parameters. Store parameter values up to 4 KB. Parameter policies and sharing with other AWS accounts are not available. No additional charge.

☐ **Advanced**

Store up to 100,000 advanced parameters. Store parameter values up to 8 KB. Add parameter policies. Share with other AWS accounts. Charges apply.

☐ Standard parameters cannot be shared with other AWS accounts. [Learn more](#)

Type

☒ **String**

Any string value.

Value

Maximum length 4096 characters.

Name

When naming a parameter, you can use forward slashes (/) to organize it into a hierarchy. [Learn more about hierarchies](#)

Description — *Optional*

Tier

Parameter Store offers standard and advanced parameters.

☒ **Standard**

Store up to 10,000 standard parameters. Store parameter values up to 4 KB. Parameter policies and sharing with other AWS accounts are not available. No additional charge.

☐ **Advanced**

Store up to 100,000 advanced parameters. Store parameter values up to 8 KB. Add parameter policies. Share with other AWS accounts. Charges apply.

☐ Standard parameters cannot be shared with other AWS accounts. [Learn more](#)

Type

☐ **String**

Any string value.

☐ **StringList**

Separate strings using commas.

☒ **SecureString**

Encrypt sensitive data using KMS keys from your account or another account.

KMS key source - [Learn more](#)

☒ **My current account**

Use the default KMS key for this account or specify a customer-managed key for this account.

☐ **Another account**

Use a KMS key from another account

KMS Key ID

## Step 5: Verify Secrets Manager Secret

- Open Secrets Manager and confirm a new secret with a name similar to: rds!db-<uuid>
- Click Retrieve secret value to confirm the admin credentials.
- Ensure only one version is marked AWSCURRENT

| Secrets                                                                                                                |                                                                                                         |                      |
|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|----------------------|
| <input type="text" value="Filter secrets by name, description, tag key, tag value, owning service or primary Region"/> |                                                                                                         |                      |
| Secret name                                                                                                            | Description                                                                                             | Last retrieved (UTC) |
| rds!db-4ae0ca56-fc90-4767-8866-3a509f480090                                                                            | The secret associated with the primary RDS DB instance: arn:aws:rds:us-east-1:241260456352:db:wordpress | -                    |

### General settings

**Repository name**  
Enter a concise name. Repositories support namespaces, which you can use to group similar repositories.

241260456352.dkr.ecr.us-east-1.amazonaws.com/

9 out of 256 characters maximum (2 minimum). The name must start with a letter and can only contain lowercase letters, numbers and special characters .\_-/.

**Image tag mutability**  
Choose the tag mutability setting.

☒ **Mutable**  
Image tags can be overwritten

☐ **Immutable**  
Image tags can't be overwritten.

## Step 6: Create ECR Repository and Push WordPress Image



### Create Repository:

1. Navigate to Amazon ECR > Repositories > Create repository.
2. Set:
  - Name: wordpress
  - Visibility: Private
  - Enable: *Scan on push*
3. Click Create repository.

### Authenticate and Push Image:

1. Open AWS Cloud9, select OurCloud9Environment.
2. Open the terminal and run:

| Environments (1)                           |                      |                  |                           |            |                                           |  |
|--------------------------------------------|----------------------|------------------|---------------------------|------------|-------------------------------------------|--|
| <div>My environments</div>                 |                      |                  |                           |            |                                           |  |
| Name                                       | Cloud9 IDE           | Environment type | Connection                | Permission | Owner ARN                                 |  |
| <input type="radio"/> OurCloud9Environment | <a href="#">Open</a> | EC2 instance     | AWS Systems Manager (SSM) | Owner      | arn:aws:iam::241260456352:user/cloud_user |  |

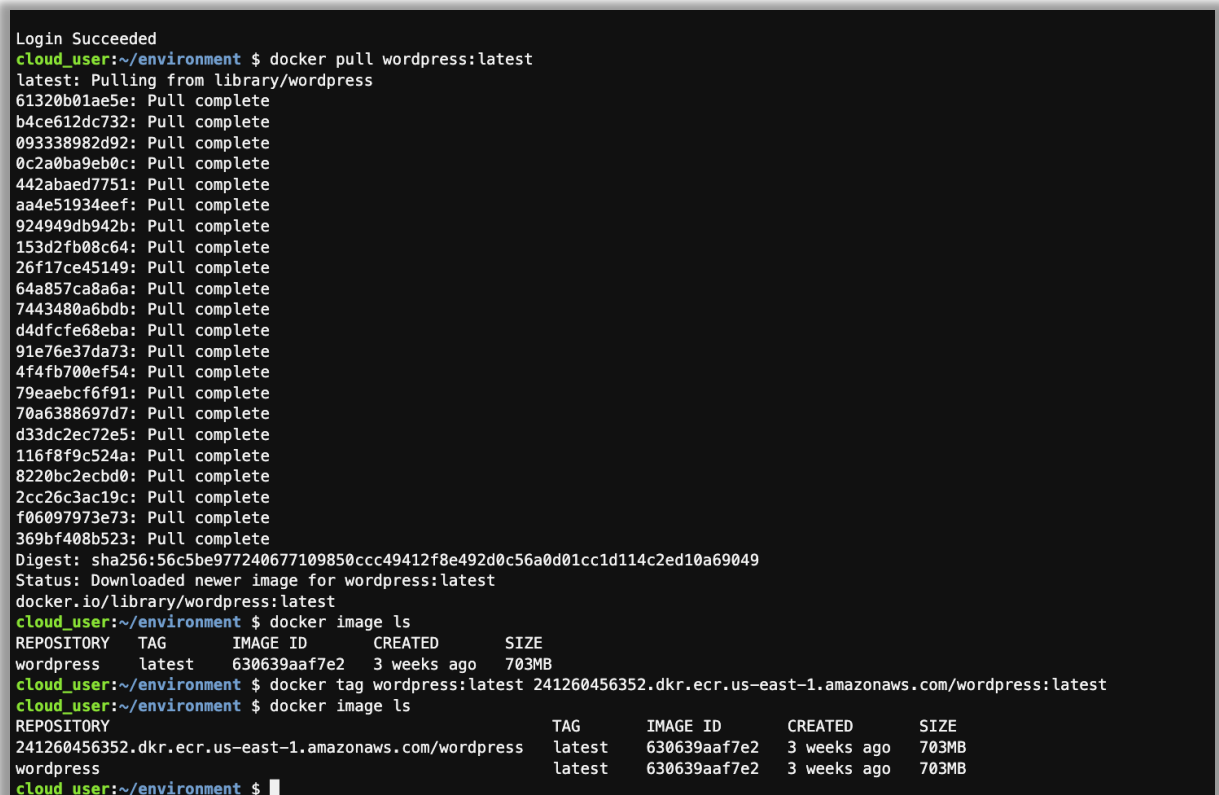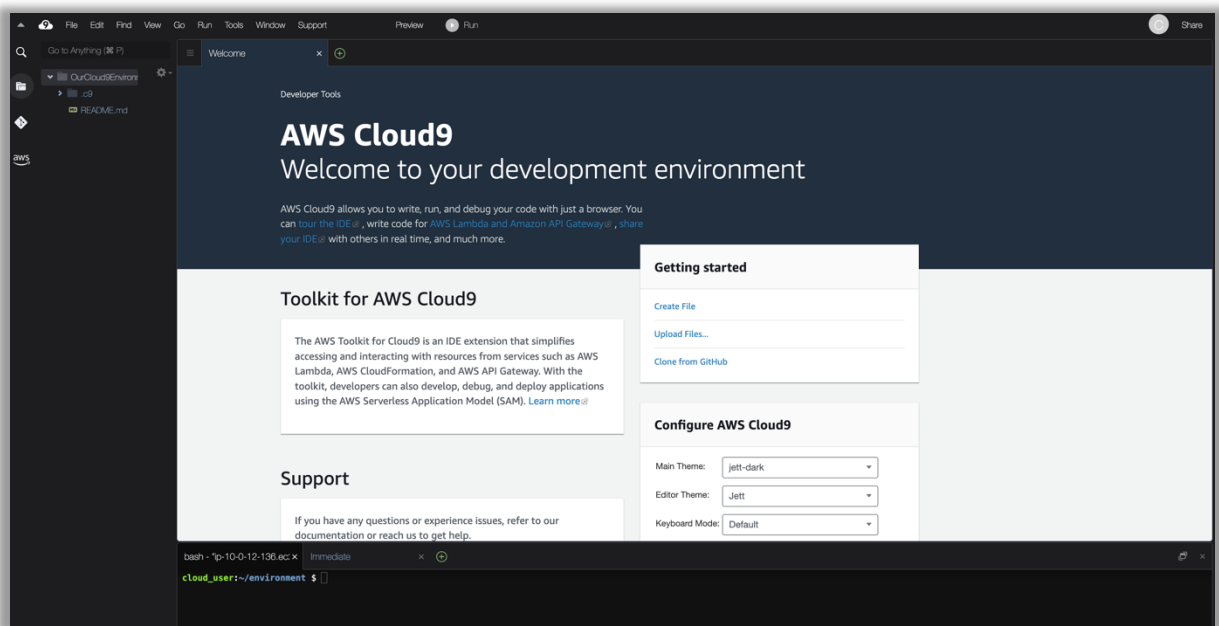

| Images (1)                                    |           |               |                                |                        |                          |                                          |                                    |
|-----------------------------------------------|-----------|---------------|--------------------------------|------------------------|--------------------------|------------------------------------------|------------------------------------|
| <input type="text" value="Search artefacts"/> |           |               |                                | <a href="#">Delete</a> | <a href="#">Details</a>  | <a href="#">Scan</a>                     | <a href="#">View push commands</a> |
| <div>&lt; 1 &gt; ⚙</div>                      |           |               |                                |                        |                          |                                          |                                    |
| <input type="checkbox"/>                      | Image tag | Artifact type | Pushed at                      | Size (MB)              | Image URI                | Digest                                   | Last recorded pull time            |
| <input type="checkbox"/>                      | latest    | Image         | 28 May 2025, 02:54:31 (UTC+01) | 248.51                 | <a href="#">Copy URI</a> | <a href="#">sha256:299115e2cc12da...</a> | -                                  |



## Step 7: Create ECS Task Definition

Navigate to **ECS > Task Definitions > Create new task definition**.

- **Family:** wordpress-td
- **Launch type:** AWS Fargate
- **Task Role:** OurEcsTaskRole
- **Task Execution Role:** OurEcsTaskExecutionRole

**Container:**

- **Name:** wordpress
- **Image URI:** ECR image you pushed
- **Essential:** Yes

**Environment Variables:**

| Key                   | Value Type | Value (ARN or Secret)                   |
|-----------------------|------------|-----------------------------------------|
| WORDPRESS_DB_HOST     | ValueFrom  | ARN of /dev/WORDPRESS_DB_HOST parameter |
| WORDPRESS_DB_NAME     | ValueFrom  | ARN of /dev/WORDPRESS_DB_NAME parameter |
| WORDPRESS_DB_USER     | ValueFrom  | Secrets ARN ending with :username::     |
| WORDPRESS_DB_PASSWORD | ValueFrom  | Secrets ARN ending with :password::     |

Click **Create**.

### Create new task definition [Info](#)

#### Task definition configuration

**Task definition family** [Info](#)  
Specify a unique task definition family name.

Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed.

▼ **Task roles - conditional**

**Task role** [Info](#)  
A task IAM role allows containers in the task to make API requests to AWS services. You can create a task IAM role from the [IAM console](#).

**Task execution role** [Info](#)  
A task execution IAM role is used by the container agent to make AWS API requests on your behalf. If you don't already have a task execution IAM role created, we can create one for you.

▼ **Container - 1** [Info](#) Essential container [Remove](#)

**Container details**  
Specify a name, container image and whether the container should be marked as essential. Each task definition must have at least one essential container.

|                                        |                                                                                            |                                                    |
|----------------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------------------|
| <b>Name</b>                            | <b>Image URI</b>                                                                           | <b>Essential container</b>                         |
| <input type="text" value="wordpress"/> | <input type="text" value="241260456352.dkr.ecr.us-east-1.amazonaws.com/wordpress:latest"/> | <div><input checked="" type="checkbox"/> Yes</div> |

Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed.

▼ **Environment variables - optional**

**Environment variables** [Info](#)

**Add individually**  
Add a key-value pair to specify an environment variable.

| Key                   | Value type  | Value                       |                        |
|-----------------------|-------------|-----------------------------|------------------------|
| WORDPRESS_DB_HOST     | ValueFrom ▼ | arn:aws:ssm:us-east-1:24126 | <a href="#">Remove</a> |
| WORDPRESS_DB_NAME     | ValueFrom ▼ | arn:aws:ssm:us-east-1:24126 | <a href="#">Remove</a> |
| WORDPRESS_DB_USER     | ValueFrom ▼ | arn:aws:secretsmanager:us-e | <a href="#">Remove</a> |
| WORDPRESS_DB_PASSWORD | ValueFrom ▼ | arn:aws:secretsmanager:us-e | <a href="#">Remove</a> |

[Add environment variable](#)

[Overview](#) [Rotation](#) [Versions](#) [Replication](#) [Tags](#)

**Secret value** [Info](#) [Close](#) [Edit](#)

Retrieve and view the secret value.

Key/value [Plaintext](#)

```
{"username":"admin","password":"7ABrch54!my8c33sq3{67})(8~.W"}
```

✔ **Task definition successfully created**  
wordpress-td:1 has been successfully created. You can use this task definition to deploy a service or run a task. [View task definition](#) ✕

**wordpress-td:1** [Deploy](#) [Actions](#) [Create new revision](#)

**Overview** [Info](#)

|                                                                                                 |                                                                       |                                                        |                                   |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------|-----------------------------------|
| <b>ARN</b><br><a href="#">arn:aws:ecs:us-east-1:241260456352:task-definition/wordpress-td:1</a> | <b>Status</b><br>ACTIVE                                               | <b>Time created</b><br>28 May 2025 at 03:08 (UTC+1:00) | <b>App environment</b><br>Fargate |
| <b>Task role</b><br><a href="#">OurEcsTaskRole</a>                                              | <b>Task execution role</b><br><a href="#">OurEcsTaskExecutionRole</a> | <b>Operating system/Architecture</b><br>Linux/X86_64   | <b>Network mode</b><br>awsvpc     |
| <b>Fault injection</b><br>Turned off                                                            |                                                                       |                                                        |                                   |

[Containers](#) [JSON](#) [Task placement](#) [Volumes \(0\)](#) [Requires attributes](#) [Tags](#)

**Task size**

**Task CPU**  
1,024 units (1 vCPU)

**Task CPU maximum allocation for containers**

CPU (unit)

■ wordpress ■ Shared task CPU

**Task memory**  
3,072 MiB (3 GB)

**Task memory maximum allocation for container memory reservation**

Memory (MiB)

■ wordpress ■ Shared task memory

## Step 8: Create ECS Cluster and Service

### Create Cluster:

1. Navigate to **ECS > Clusters > Create Cluster**.
2. Name: **Wordpress-Cluster**
3. Infrastructure: **AWS Fargate**
4. Click **Create**

### Create Service:

1. Go to **Wordpress-Cluster > Services > Create**
2. Launch Type: **FARGATE**

3. Task Definition: wordpress-td:latest
4. Service Name: wordpress-service
5. Desired Tasks: 1

#### Networking:

- **VPC:** Your Custom VPC
- **Subnets:** Select *Private Subnets*
- **Security Group:** Create new app-sg
  - Inbound Rule:
    - **Type:** HTTP
    - **Port:** 80
    - **Source:** ALBAllowHttp Security Group

#### Load Balancing:

- Type: **Application Load Balancer**
- Use existing: OurApplicationLoadBalancer
- Health Check Grace: 30 sec
- **Target Group Name:** wordpress-tg
- **Health Check Path:** /wp-admin/images/wordpress-logo.svg

Click **Create** and wait for deployment.

### Create cluster [Info](#)

An Amazon ECS cluster groups together tasks and services, and allows for shared capacity and common configurations. All of your tasks, services and capacity must belong to a cluster.

#### Cluster configuration

**Cluster name**

Cluster name must be 1 to 255 characters. Valid characters are a-z, A-Z, 0-9, hyphens (-), and underscores (\_).

#### ▼ Networking

**VPC** [Info](#)  
Select a VPC to use for your Amazon ECS resources.

Your Custom VPC

Create a new VPC

**Subnets**  
Choose the subnets within the VPC that the task scheduler should consider for placement.

Choose subnets

Clear current selection

subnet-0e7eaa583745a8e69  
Private Subnet AZ B  
us-east-1b 10.0.11.0/24

subnet-0773fe7941f412a43  
Private Subnet AZ C  
us-east-1c 10.0.12.0/24

subnet-09ebd1ef9acc2ba1b  
Private Subnet AZ A  
us-east-1a 10.0.10.0/24

**Security group** [Info](#)  
Choose an existing security group or create a new security group.

☐ Use an existing security group

☒ Create a new security group

**Security group details**  
Specify the configuration to use when creating the new security group.

**Security group name**

Security group name must be 1 to 255 characters. Valid characters are a-z, A-Z, 0-9, underscores (\_), hyphens (-), colons (:), forward slashes (/), parentheses (()), hashtags (#), commas (,), at signs (@), brackets ([]), plus signs (+), equal signs (=), ampersands (&), semicolons (;), brackets ({}), exclamation points (!), dollar signs (\$), asterisks (\*).

**Security group description**

Security group description must be 1 to 255 characters. Valid characters are a-z, A-Z, 0-9, underscores (\_), hyphens (-), colons (:), forward slashes (/), parentheses (()), hashtags (#), commas (,), at signs (@), brackets ([]), plus signs (+), equal signs (=), ampersands (&), semicolons (;), brackets ({}), exclamation points (!), dollar signs (\$), asterisks (\*).

**Inbound rules for security groups**  
Add one or more ingress rules for your security group.

| Type | Protocol | Port range | Source       | Values               |        |
|------|----------|------------|--------------|----------------------|--------|
| HTTP | TCP      | 80         | Source group | sg-077bfbe320e7fa7a1 | Delete |

Enter a valid port or port range between 0 and 65535. For example:

Environment

AWS Fargate

Existing cluster

Wordpress-Cluster

▼ Compute configuration (advanced)

Compute options

Info

To ensure task distribution across your compute types, use appropriate compute options.

☐ Capacity provider strategy
 

Specify a launch strategy to distribute your tasks across one or more capacity providers.

☒ Launch type
 

Launch tasks directly without the use of a capacity provider strategy.

Launch type

Info

Select either managed capacity (Fargate), or custom capacity (EC2 or user-managed, External instances). External instances are registered to your cluster using the ECS Anywhere capability.

FARGATE

Platform version

Info

Specify the platform version on which to run your service.

LATEST

Create service

Info

Service details

Task definition family

Select an existing task definition. To create a new task definition, go to [Task definitions](#).

wordpress-td

Task definition revision

Latest

Select the task definition revision from the 100 most recent entries, or enter a revision. Leave the field blank to use the latest revision.

1

Service name

Assign a service name that is unique for this cluster.

wordpress-service

Up to 255 letters (uppercase and lowercase), numbers, underscores and hyphens are allowed. Service names must be unique within a cluster.

Clusters (1)

Info

Last updated 28 May 2025 at 03:22 (UTC+1:00)

Create cluster

Search clusters

| Cluster                           | Services | Tasks            | Container instances | CloudWatch monitoring | Capacity provider strategy |
|-----------------------------------|----------|------------------|---------------------|-----------------------|----------------------------|
| <a href="#">Wordpress-Cluster</a> | 0        | No tasks running | 0 EC2               | Default               | No default found           |

## Step 9: Connect to the WordPress Application

- Go to EC2 > Load Balancers.
- Find OurApplicationLoadBalancer.
- Copy the DNS Name.
- Paste it into a new browser tab using HTTP (not HTTPS).
- You should see the WordPress setup page.

**Amazon Elastic Container Service** > Clusters > Wordpress-Cluster > Tasks

**Wordpress-Cluster** (Last updated: 28 May 2025 at 04:50 (UTC+1:00))

**Cluster overview**

- ARN: [arn:aws:ecs:us-east-1:605705171400:cluster/Wordpress-Cluster](#)
- Status: **Active**
- CloudWatch monitoring: **Default**
- Registered container instances: **-**
- Services: **Draining: -**, **Active: 1**
- Tasks: **Pending: -**, **Running: 1**

**Tasks (1)**

| Task                                     | Last status    | Desired st...  | T...          | Health sta...  | Created at   | Started by             | Started at   | Group                     |
|------------------------------------------|----------------|----------------|---------------|----------------|--------------|------------------------|--------------|---------------------------|
| <a href="#">2dcf00f9e3464c4db59c8...</a> | <b>Running</b> | <b>Running</b> | <b>wor...</b> | <b>Unknown</b> | 1 minute ago | ecs-svc/70563389567... | 1 minute ago | <a href="#">servicevo</a> |

**EC2** > Target groups > wordpress-tg

**wordpress-tg**

**Details**

- ARN: [arn:aws:elasticloadbalancing:us-east-1:605705171400:targetgroup/wordpress-tg/f8fb3a937e366e58](#)
- Target type: **IP**
- Protocol : Port: **HTTP: 80**
- Protocol version: **HTTP1**
- VPC: [vpc-0983b47a3061c765d](#)
- IP address type: **IPv4**
- Load balancer: [OurApplicationLoadBalancer](#)

**1** Total targets

**1** Healthy, **0** Unhealthy, **0** Anomalous

**0** Unused, **0** Initial, **0** Draining

**Distribution of targets by Availability Zone (AZ)**

Select values in this table to see corresponding filters applied to the Registered targets table below.

**Targets** | Monitoring | Health checks | Attributes | Tags

**Registered targets (1)**

Target groups route requests to individual registered targets using the protocol and port number specified. Health checks are performed on all registered targets according to the target group's health check settings. Anomaly detection is automatically applied to HTTP/HTTPS target groups with at least 3 healthy targets.

**Filter targets**

| IP address | Port | Zone             | Health status  | Health status details | Administrative override | Overri...    | Anomaly detection... |
|------------|------|------------------|----------------|-----------------------|-------------------------|--------------|----------------------|
| 10.0.10.8  | 80   | us-east-1a (...) | <b>Healthy</b> | -                     | <b>No override</b>      | No overri... | <b>Normal</b>        |

## Conclusion

Successfully deployed a WordPress application using ECS Fargate, backed by Amazon RDS, with parameters stored securely in Parameter Store and Secrets Manager. This architecture is scalable, secure, and highly available — aligning with modern cloud-native best practices.



English (United States)

Afrikaans

አማርኛ

Aragonés

العربية

العربية المغربية

অসমীয়া

گۆنئی آذربایجان

Azərbaycan dili

Беларуская мова

Български

বাংলা

བོད་སྐད་

Bosanski

Català

Cebuano

Čeština

Cymraeg

Dansk

Deutsch (Schweiz)

Deutsch (Schweiz, Du)

Deutsch

Deutsch (Sie)

Deutsch (Österreich)

Dolnoserbšćina



## Welcome

Welcome to the famous five-minute WordPress installation process! Just fill in the information below and you'll be on your way to using the most extendable and powerful personal publishing platform in the world.

### Information needed

Please provide the following information. Do not worry, you can always change these settings later.

Site Title

Username

Username can have only alphanumeric characters, spaces, underscores, hyphens, periods, and the @ symbol.

Password

7LV&eA!oocug!j9Cfe

Hide

Strong

**Important:** You will need this password to log in. Please store it in a secure location.

Your Email

Double-check your email address before continuing.

Search engine  
visibility

☐ Discourage search engines from indexing this site

It is up to search engines to honor this request.

[Install WordPress](#)