

Written examination in Computer Networks

February 19th 2020

Last name: _____

First name: _____

Student number: _____

I confirm with my signature that I will process the written examination alone and that I feel healthy and capable to participate this examination.
I am aware, that from the moment, when I receive the written examination, I am a participant of this examination and I will be graded.

Signature: _____

- Use the provided sheets. Own paper must *not* be used.
- You are allowed to use a *self prepared, single sided DIN-A4 sheet* in the exam. Only *handwritten originals* are allowed, but no copies.
- You are allowed to use a non-programmable calculator.
- Do *not* use a red pen.
- Time limit: *90 minutes*
- Turn off your mobile phones!

Result:

Question:	1	2	3	4	5	6	7	8	9	Σ	Grade
Maximum points:	17	13	8	7	14	9	8	9	5	90	—
Achieved points:											

1.0: 90.0-85.5, **1.3:** 85.0-81.0, **1.7:** 80.5-76.5, **2.0:** 76.0-72.0, **2.3:** 71.5-67.5,
2.7: 67.0-63.0, **3.0:** 62.5-58.5, **3.3:** 58.0-54.0, **3.7:** 53.5-49.5, **4.0:** 49.0-45.0, **5.0:** <45

Last name:

First name:

Student number:

Question 1)

Points:

Maximum points: $12.5+0.5+4=17$

- a) Fill out all empty fields. (*Only one correct answer per field!*)

Hybrid Reference Model

	Layer	Protocol	Device	Sort of Data (data unit)	Addresses
5					
4					
3					
2					
1					

- b) Do computer networks usually implement parallel or serial data transmission?

- c) Calculate the first and last host addresses, the network address and the broadcast address of the subnet.

IP Address: 153.213.11.213 10011001.11010101.00001011.11010101
Subnet mask: 255.255.255.224 11111111.11111111.11111111.11100000

Network address? ____ . ____ . ____ . ____ ____ . ____ . ____ . ____

First host address? ____ . ____ . ____ . ____ ____ . ____ . ____ . ____

Last host address? ____ . ____ . ____ . ____ ____ . ____ . ____ . ____

Broadcast address? ____ . ____ . ____ . ____ ____ . ____ . ____ . ____

binary representation	decimal representation	binary representation	decimal representation
10000000	128	11111000	248
11000000	192	11111100	252
11100000	224	11111110	254
11110000	240	11111111	255

Last name:

First name:

Student number:

Question 2)

Points:

Maximum points: 2+2+2+2+5=13

- a) Simplify this IPv6 address:

21da:00d3:0000:0000:02aa:00ff:fe28:9c5a

- b) Simplify this IPv6 address:

2001:0db8:0000:0000:5a6b:0000:0001:678a


- c) Provide all positions of this simplified IPv6 address:

2001:db8:84a2::8a2e:70:4

- d) Provide all positions of this simplified IPv6 address:

2001:cdba::18:2

- e) This signal curve is encoded with NRZI and 4B5B. Decode the data.



Label	4B	5B	Function
0	0000	11110	0 hexadecimal
1	0001	01001	1 hexadecimal
2	0010	10100	2 hexadecimal
3	0011	10101	3 hexadecimal
4	0100	01010	4 hexadecimal
5	0101	01011	5 hexadecimal
6	0110	01110	6 hexadecimal
7	0111	01111	7 hexadecimal

Label	4B	5B	Function
8	1000	10010	8 hexadecimal
9	1001	10011	9 hexadecimal
A	1010	10110	A hexadecimal
B	1011	10111	B hexadecimal
C	1100	11010	C hexadecimal
D	1101	11011	D hexadecimal
E	1110	11100	E hexadecimal
F	1111	11101	F hexadecimal

Last name:

First name:

Student number:

Question 3)

Points:

Maximum points: 4+4=8

- a) Error detection via CRC: Calculate the frame to be transferred.

Generator polynomial: 100101

Payload: 110100110110

- b) Error detection via CRC: Check, if the received frame was transmitted correctly.

Transferred frame: 1011010110100

Generator polynomial: 100101

Last name:

First name:

Student number:

Question 4)

Points:

Maximum points: 3+4=7

- a) Error Correction via simplified Hamming Distance (Hamming ECC method). Calculate the message, that will be transmitted (payload inclusive parity bits).

Payload: 10111110

- b) Error Correction via simplified Hamming Distance (Hamming ECC method). Verify, if the received message was transmitted correctly.

Received message: 101110100010

Last name:

First name:

Student number:


Question 5)

Points:

Maximum points: 4+5+5=14


- a) The diagram shows the establishment of a TCP connection. Complete the table.

Message	ACK flag	SYN flag	FIN flag	Payload length	Seq number	Ack number
1					30	
2					150	
3						

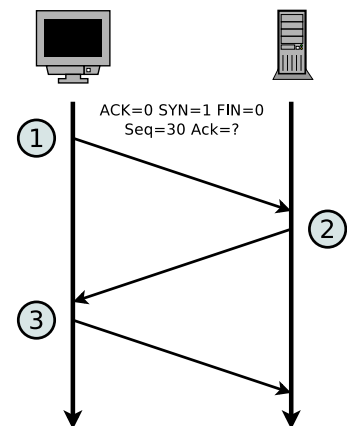


- b) The diagram shows an excerpt of the transmission phase of a TCP connection. Complete the table.

Message	ACK flag	SYN flag	FIN flag	Payload length	Seq number	Ack number
4				250	2200	850
5				150		
6						
7						

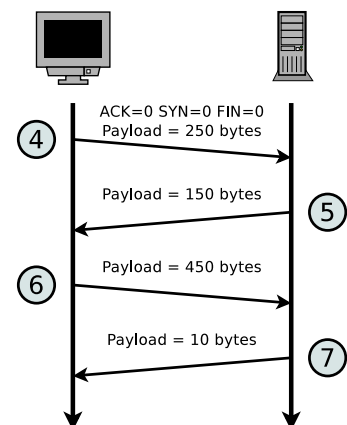

- c) The diagram shows the termination of a TCP connection. Complete the table.

Message	ACK flag	SYN flag	FIN flag	Payload length	Seq number	Ack number
8			1	0	2800	4200
9						
10						
11						

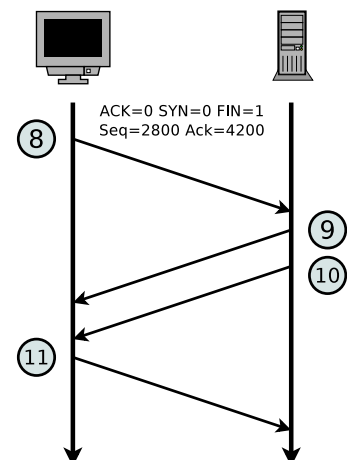

Last name:

First name:


Student number:

Question 6)

Points:

Maximum points: 9

6500 bytes payload need to be transmitted via the IP protocol.



The payload must be fragmented, because it is transmitted over multiple physical networks, whose MTU is < 6500 bytes.

	LAN A	LAN B	LAN C
Network technology	WLAN	Ethernet	PPPoE
MTU [bytes]	2312	1500	1492
IP header [bytes]	20	20	20
max. payload [bytes]	2292	1480	1472

Hint: In practice, the fragment offset is counted in 8-byte increments; therefore, the payload in a fragment must be a multiple of 8. However, for the sake of simplicity, you can also create fragments that are not multiples of 8 in this task.

Display graphically the way, the payload is fragmented, and how many bytes of payload each fragment contains.

Last name:

First name:


Student number:

Question 7)

Points:

Maximum points: 8

- a) Fill the missing IP addresses and port numbers into the figure that describes a NAT scenario where device E sends a request for an email to an email server process that runs on device X and can be accessed on device X via port number 25.

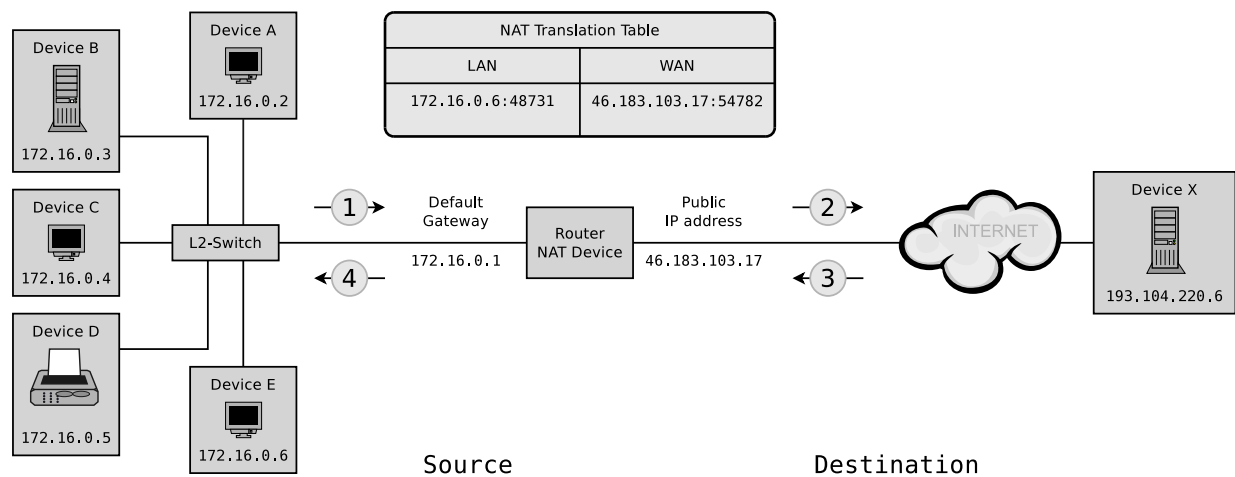

(Message 1) ____ . ____ . ____ . ____ : ____ --> ____ . ____ . ____ . ____ : ____

(Message 2) ____ . ____ . ____ . ____ : ____ --> ____ . ____ . ____ . ____ : ____

(Message 3) ____ . ____ . ____ . ____ : ____ --> ____ . ____ . ____ . ____ : ____

(Message 4) ____ . ____ . ____ . ____ : ____ --> ____ . ____ . ____ . ____ : ____

Last name:

First name:


Student number:

Question 8)


Points:

Maximum points: 9

a) Sketch in the diagram of the network topology all collision domains.

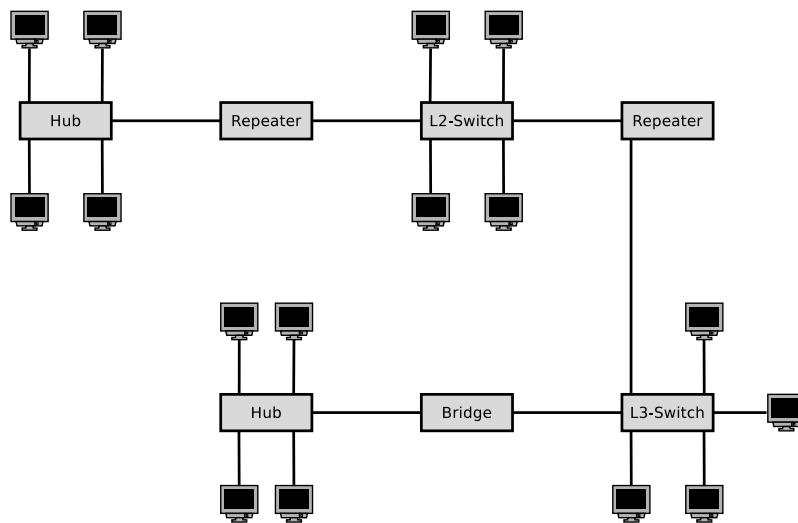

b) Sketch in the diagram of the network topology all broadcast domains.

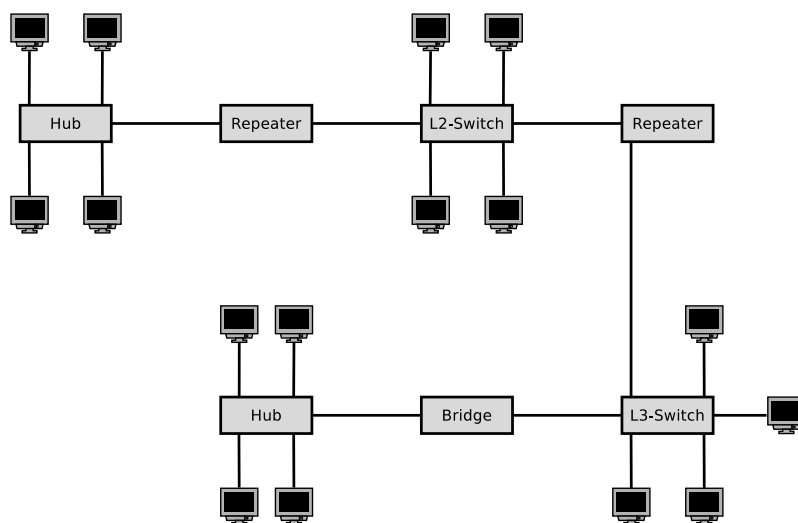

Last name:

First name:

Student number:

Question 9)

Points:

Maximum points: 5

Encode the bit sequence with 5B6B and NRZ and draw the signal curve.

Bit sequence: 11010 11110 01001 00010 01110

A grid of 20 vertical dashed lines, intended for drawing the signal curve for the bit sequence.

5B	6B neutral	6B positive	6B negative
00000		001100	110011
00001	101100		
00010		100010	101110
00011	001101		
00100		001010	110101
00101	010101		
00110	001110		
00111	001011		
01000	000111		
01001	100011		
01010	100110		
01011		000110	111001
01100		101000	010111
01101	011010		
01110		100100	011011
01111	101001		

5B	6B neutral	6B positive	6B negative
10000		000101	111010
10001	100101		
10010		001001	110110
10011	010110		
10100	111000		
10101		011000	100111
10110	011001		
10111		100001	011110
11000	110001		
11001	101010		
11010		010100	101011
11011	110100		
11100	011100		
11101	010011		
11110		010010	101101
11111	110010		