

Plots with Feature Values

20/02/2024

Load libraries

If the libraries are not installed yet, you need to install them using, for example, the command: `install.packages("ggplot2")`.

```
library(stringr)
library(ggplot2)
library(ggrepel)
library(dplyr)
```

```
##
## Attaching package: 'dplyr'

## The following objects are masked from 'package:stats':
##
##   filter, lag

## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union
```

```
library(ggExtra)
library(gridExtra)
```

```
##
## Attaching package: 'gridExtra'

## The following object is masked from 'package:dplyr':
##
##   combine
```

```
library(ggpubr)
```

Load Data

Load csv file with quantitative feature values for sign sequences per object. Comparative sample: A comparative sample of feature values for languages across the world, as well as other symbolic and non-symbolic sign sequences, is loaded here too. Note that the feature values were calculated as part of another Github project on “Natural Language Fingerprints” (NaLaFi), and published in Bentz (2023).

```
# load signbase estimations for strings on objects
sign.data <- read.csv("~/Github/UpperPalCombinatorics/results/signBase_features.csv")

# select columns for direct comparison with NaLaFi sample
sign.data <- select(sign.data, c('archaeological_unit', 'num.char', 'huni.chars', 'hrate.chars',
                                'ttr.chars', 'rm.chars'))

# change column names
```

```
colnames(sign.data) <- c('subcorpus', 'num.char', 'huni.chars', 'hrate.chars',
                        'ttr.chars', 'rm.chars')

# read feature values for languages and other sign systems
nalafi <- read.csv("~/Github/NaLaFi/results/features.csv")
# select columns
nalafi <- select(nalafi, c('subcorpus', 'num.char', 'huni.chars', 'hrate.chars',
                        'ttr.chars', 'rm.chars'))
```

Preprocessing

```
# select only data with 100 chars
nalafi <- nalafi[nalafi$num.char == 100, ]


# combine the data frames
estimations.df <- rbind(sign.data, nalafi)
nrow(estimations.df)

## [1] 3505

# select only certain subcorpora for plotting
estimations.df.selected <- estimations.df[estimations.df$subcorpus == "Aurignacien"|
                                           #estimations.df$subcorpus == "Aurignacien/Gravettian"/
                                           estimations.df$subcorpus == "procunei"|
                                           estimations.df$subcorpus == "udhr", ]
```


Entropy rate vs. unigram entropy

```
huni.hrate.chars.plot <- ggplot(estimations.df.selected, aes(x = huni.chars, y = hrate.chars,
                                                            colour = subcorpus, fill = subcorpus)) +
  geom_point(alpha = 0.3, size = 1.5) +
  labs(x = "Unigram entropy for characters", y = "Entropy rate for characters") +
  theme(legend.position = c(.8, .2))
#facet_wrap(~subcorpus)
huni.hrate.chars.plot <- ggMarginal(huni.hrate.chars.plot, groupFill = T, groupColour = T,
                                   type = "density")
huni.hrate.chars.plot
```

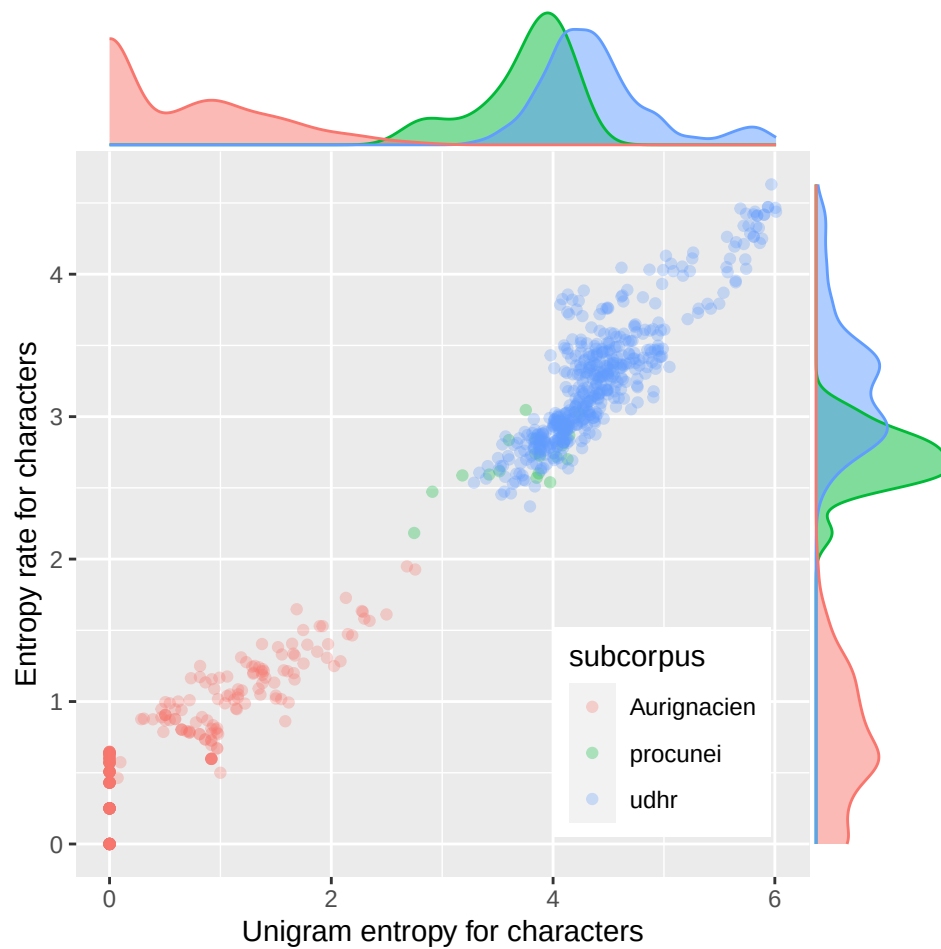


TTR vs. repetition rate

```
ttr.rm.chars.plot <- ggplot(estimations.df.selected, aes(x = ttr.chars, y = rm.chars,
                                                         colour = subcorpus)) +
  geom_point(alpha = 0.3, size = 1.5) +
  labs(x = "TTR for characters", y = "Repetition rate for characters") +
  theme(legend.position = "none")
  #facet_wrap(~subcorpus)
ttr.rm.chars.plot <- ggMarginal(ttr.rm.chars.plot, groupFill = T, groupColour = T,
                                type = "density")
ttr.rm.chars.plot
```

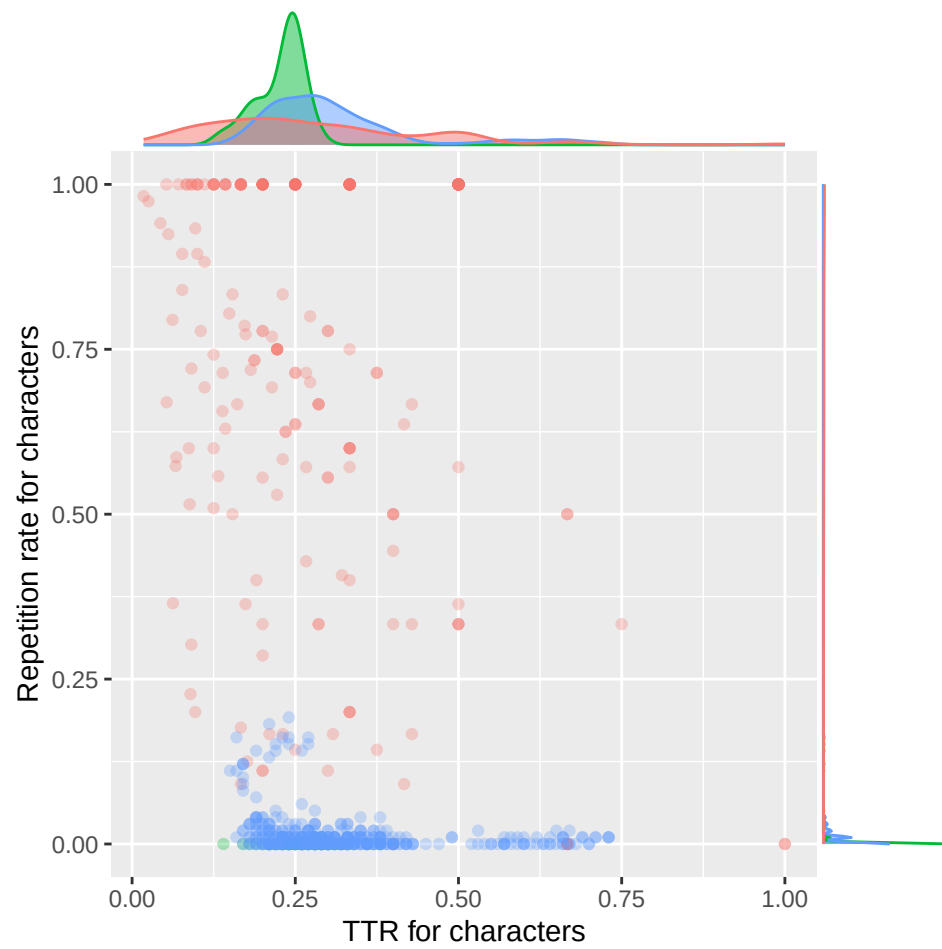

Combine figures.

```
combined.plot <- grid.arrange(huni.hrate.chars.plot, ttr.rm.chars.plot, ncol = 2)
```

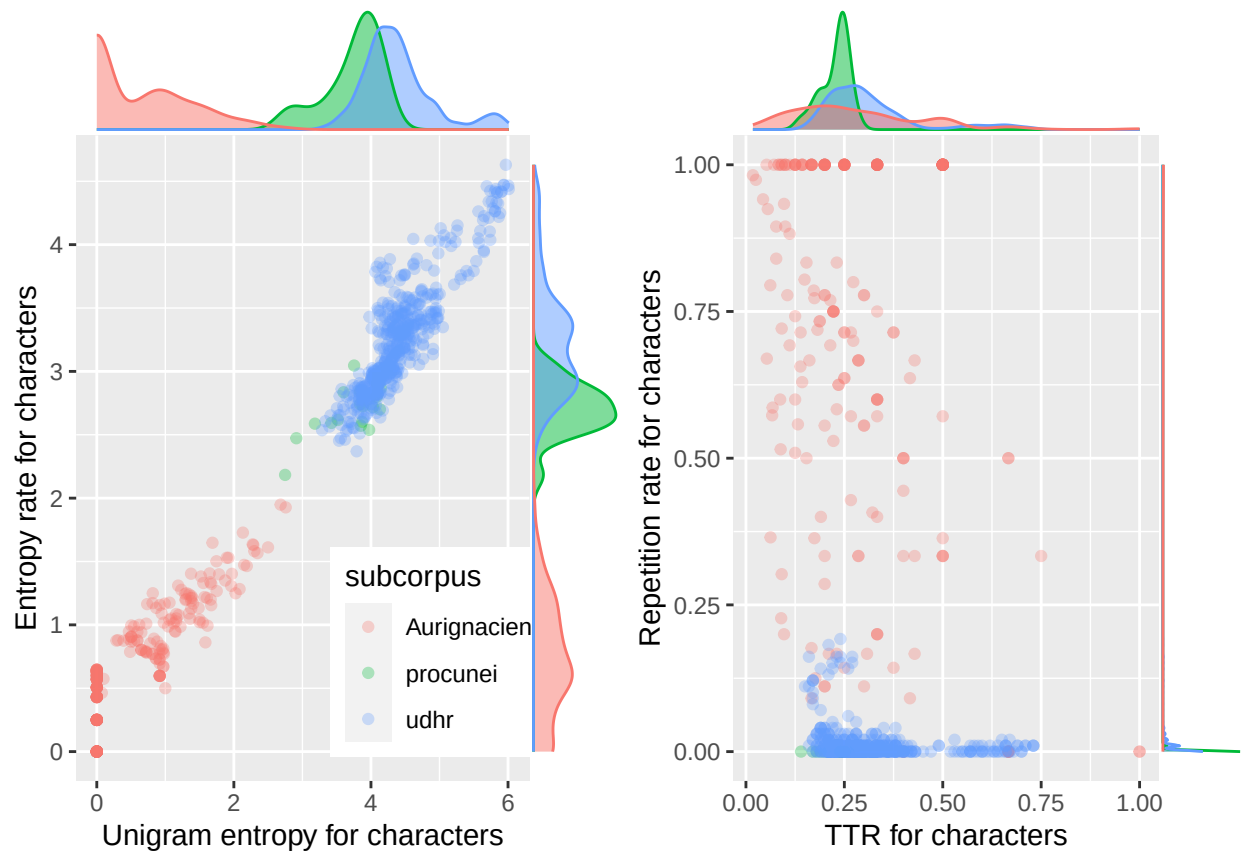

Safe complete figure to file

```
ggsave("~/Github/UpperPalCombinatorics/figures/combinedPlot_chars.pdf", combined.plot, dpi = 300, width
```