



CCE107L INTERMEDIATE PROGRAMMING

CAFÉ ORDERING SYSTEM

An Undergraduate Course Requirement

RANDY F ARDEÑA
Teacher

**BAI FATIMA ANDONG
CHRISTIAN JAMES CAHILIG
FIONNAH KEIZ COYOCA
KARYLLE MISH GELICA
JAN LOREN ODIONG**
Students

Department of Computer Science
College of Computing Education
University of Mindanao

March 2024

TABLE OF CONTENTS

Page No.

I.	INTRODUCTION	1
II.	FLOWCHART	1
III.	DATA TYPES	2
IV.	SWING GUI AND FILE HANDLING	2 - 4
V.	LEARNINNGS	4 - 5
VI.	JAVA PROGRAM CODES	5 – 31
VII.	SYSTEM OUTPUT	32 - 36

I] INTRODUCTION


As technology continues to evolve, people have also become increasingly threatened by its risks and harm, but have you ever experienced waiting in a long line to order a food item you've been craving for days? Have you ever had to endure even longer waiting times due to slow service? These issues can be mitigated or avoided with the help of a Transaction Process System (TPS).

"Brewed and Blended Co." is a café that offers a variety of coffees, desserts, and non-coffee beverages. This establishment utilizes a Java-based platform and features a Graphical User Interface (GUI) to enhance the user experience. Upon entering the café, customers will receive a welcoming message before being directed to the menu, where they can input their orders by clicking the up and down buttons below each product. By pressing the plus button, the selected item will be added to the cart, allowing customers to monitor their orders.

If a customer decides to change their mind, the system enables them to delete the unwanted item from their order. Once the customer has completed their order, the system will store the data and forward it to the receipt area, where the customer can obtain a printed copy of their order.

The program is designed to improve service and order management, enhance customer satisfaction, increase sales, simplify the payment process, and provide the shop with valuable insights in tracking sales and trends.

II] FLOWCHART

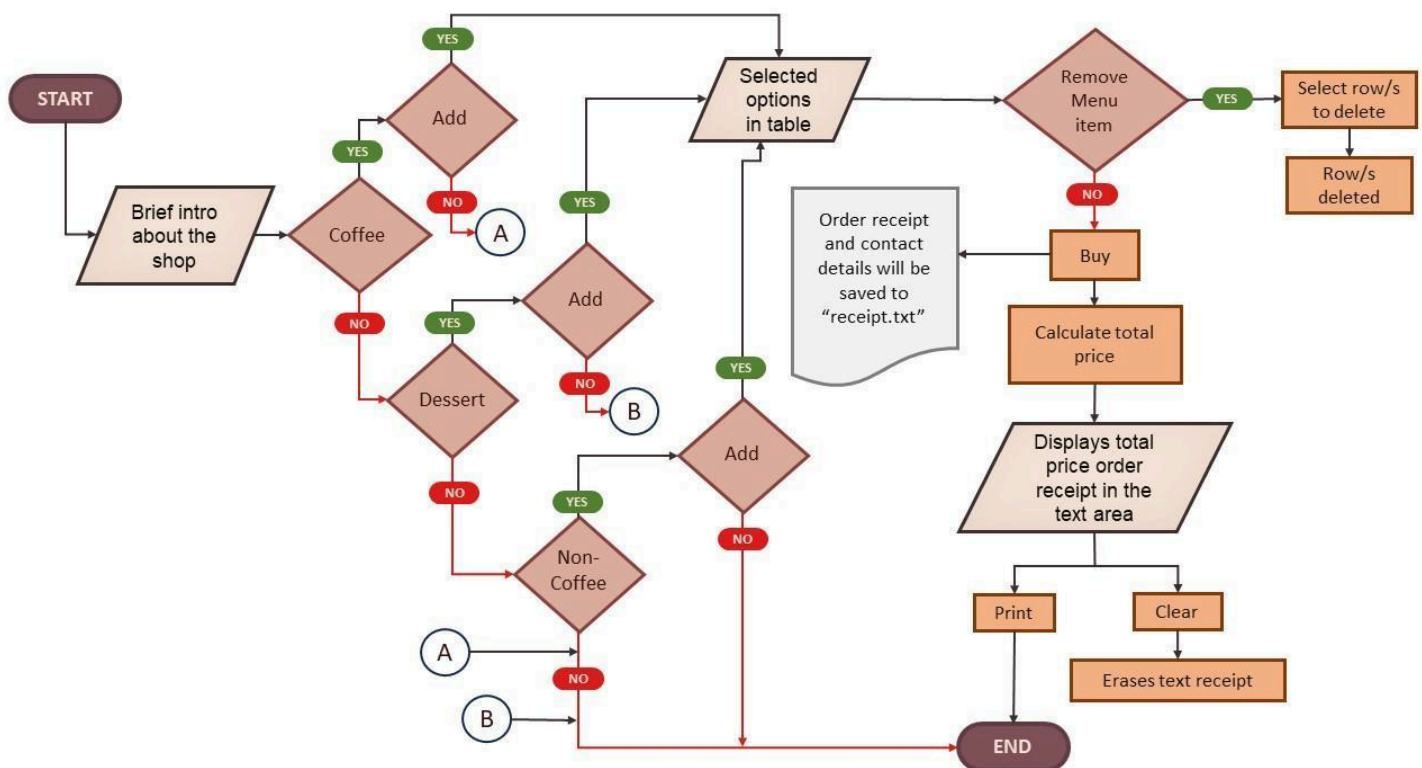

III] DATA TYPES

These are the primitive data types we used in this project:

1. **Integer** – This data type is used to provide the value of the product's price and this is also used to display the quantity of what product you want to buy.
2. **Double** – Double in this code is used to represent and manipulate the prices with decimals and accurately calculate the total price of the products you've purchased, which may involve decimals.
3. **Boolean** – This data type is used in this code to effectively store and handle editability information for different columns in a table. This allows the program to regulate which cells users can modify and to ensure data integrity in certain columns. We used this data type to ensure that the user can't resize the frame and to make sure it's visible.

These are the non-primitive data types we used in this project:

1. **String** – This program utilizes strings to extract information from a receipt and store it in a text file. Additionally, strings are employed to retrieve the selected quantity from the spinner, representing the desired number of products for purchase by using the `getText()` command. This data type is also used for storing the text or characters of the product.

IV] SWING GRAPHICAL USER INTERFACES AND FILE HANDLING Listed below are the swing components and file-handling methods we used for this project:

CafeMenu Class:

1. JTextArea:

- a. `areaReceipt` = Used for displaying the receipt.

2. JTextField:

- a. `areaTotalPrice` = Used for displaying the total price.

3. JButton:

- a. `pBtn1 to pBtn9` = JButtons associated with different products in the menu.
- b. `btnBuy` = Button for buying items.
- c. `btnClear` = Button for clearing the receipt.
- d. `btnDelete` = Button for deleting items from the cart.
- e. `btnPrint` = Button for printing the receipt.
- f. `btnExit` = Button for exiting the program.

4. JLabel:

- a. `pName1 to pName9` = JLabels representing names of products.
- b. `pPrice1 to pPrice9` = JLabels representing prices of products.
- c. `lblCart` = Label for the cart.
- d. `lblLogo` = Label for the logo.
- e. `lblMenu` = Label for the menu.
- f. `lblReceipt` = Label for the receipt.

5. JSpinner:

- a. ``pQty1 to pQty9`` = JSpinners associated with the quantity of items in the menu.

6. JPanel:

- a. ``pnlAll`, `pnlLeft`, `pnlMenu`, and `pnlRight`` = Used for organizing and structuring the layout.

7. JScrollPane:

- a. ``scrlCart` and `scrlReceipt`` = Used for scrolling through the cart and receipt.

8. JTable:

- a. ``tblCart`` = Used for displaying the items in the cart.

9. Print Method:

- a. ``btnPrintActionPerformed`` = An action event method associated with the printing button (btnPrint). It attempts to print the contents of ``areaReceipt`` using the `print()` method.

10. Buy Method:

- a. ``btnBuyActionPerformed`` = Calculates total items sold, total price, and displays a receipt.

11. Clear Method:

- a. ``btnClearActionPerformed`` = Clears the contents of ``areaReceipt``.

12. Delete Method:

- a. ``btnDeleteActionPerformed`` = Deletes the selected row from the ``tblCart`` JTable.

13. Exit Method:

- a. ``btnExitActionPerformed`` = Exits the the program.

14. Add to Cart Method:

- a. ``addToCart`` = Custom method for adding items to the cart.

15. Design Components Method:

- a. ``designComponents`` = Customizes the design of Swing components, like centering the window and setting table header properties.

CafeWelcome class:

1. JFrame:

- a. **CafeWelcome class** = Represents the main JFrame for the welcome screen.

2. JLabel:

- a. ``welcomeBg`` = Label for the background image.
- b. ``welcomeLogo`` = Label for the logo image.
- c. ``sidelImage`` = Label for the image displayed on the side of the window.
- d. ``welcomeMessage`` = Label for welcome message.
- e. ``lblMessage1 to lblMessage4`` = Label for the other welcome messages.
- f. ``lblContact1 to lblContact4`` = Label for the contact details.

3. JButton:

- a. ``btnEnter`` = Opens the main frame of the program.

4. Button Action Method:

- a. **jButton1ActionPerformed** = An action event method associated with a button (jButton1). It creates an instance of the CafeMenu class, makes it visible, and disposes of the current welcome screen.

5. Design Components Method:

- a. **designComponents** = Used for customizing the design of Swing components, specifically for centering the window when running.

V] LEARNINGS

Embarking on the journey of building our cafe ordering system using Java Swing components has been an incredibly enriching experience, offering us a multitude of valuable learnings and insights. Let us share a breakdown of the significant learnings we derived from our code snippets:

- **Swing Components and GUI Design:**

Mastering the handling of Swing components such as buttons, labels, text areas, spinners, and tables showcases our proficiency in GUI design. We take pride in our ability to structure and design a visually appealing graphical user interface for our cafe menu system.

- **Event Handling:**

Implementing action event methods like `btnBuyActionPerformed` and `btnDeleteActionPerformed` demonstrates our understanding of event handling. Our capability to respond to user interactions, especially button clicks, showcases our ability to execute appropriate actions seamlessly.

- **Table Manipulation and DefaultTableModel:**

The use of `DefaultTableModel` and methods like `model.addRow` and `model.removeRow` indicates our grasp of dynamic table manipulation. This skill is crucial for effectively managing and displaying data within our cafe menu system.

- **File Handling (Printing):**

The presence of the `btnPrintActionPerformed` method suggests our proficiency in file handling, specifically for printing purposes. Being able to print the contents of the `areaReceipt` showcases our knowledge of basic file manipulation.

- **Dynamic GUI Updates:**

The dynamic updating of the `areaReceipt` based on user actions, such as adding items to the cart, signifies our understanding of real-time GUI updates. This feature enhances the user experience by providing immediate feedback.

- **Input Validation and User Feedback:**

Our use of `JOptionPane` for error messages, like notifying the user when attempting to print with an empty cart, demonstrates our awareness of input validation and the importance of providing user-friendly feedback for a smoother interaction.

- **Date Handling:**

Incorporating the transaction date in the receipt (`Date obj = new Date();`) indicates our proficiency in handling date and time within the program. This skill is essential for accurate record-keeping and transaction tracking.

- **Layout and Design:**

The inclusion of the `designComponents` method for centering the window and customizing Swing component appearances highlights our understanding of GUI layout and design principles. This contributes to an aesthetically pleasing and well-organized user interface.

- **Array and Looping:**

Recognizing repetitive patterns, especially in the action event methods for various buttons, suggests our use of arrays and loops. Leveraging these programming constructs enhances code efficiency and maintainability.

- **Collaborative Programming:**

If this project involved collaboration, the experience has provided us with insights into the challenges and benefits of working together on a coding project. Effective communication, version control, and task distribution are key aspects of collaborative programming.

- **Debugging and Troubleshooting:**

The inevitable process of dealing with bugs and issues during system development has honed our skills in identifying, debugging, and troubleshooting code. This enhances our problem-solving abilities and contributes to overall code quality.

- **Documentation and Comments:**

The inclusion of comments or documentation in our code reflects our understanding of the importance of providing clear explanations. This practice aids in understanding the codebase and facilitates future maintenance.

Each coding project indeed provides unique learning experiences, and the skills acquired in developing our cafe ordering system are valuable assets that we can apply to future programming endeavors.

VII] JAVA PROGRAM CODES

We implemented two classes in our program: one for the welcome frame and another for the main frame. The classes are highlighted below for better distinction, respectively.

WELCOME FRAME – CafeWelcome.java

```
import java.awt.Dimension;
import java.awt.Toolkit;
import javax.swing.ImageIcon;

public class CafeWelcome extends javax.swing.JFrame {

    /**
     * Creates new form CafeWelcome
     */
    public CafeWelcome() {
        initComponents();
        designComponents();
    }

    /**
     * This method is called from within the constructor to initialize the form.
```

```
* WARNING: Do NOT modify this code. The content of this method is always
* regenerated by the Form Editor.
*/
```

```
@SuppressWarnings("unchecked")
```

```
// <editor-fold defaultstate="collapsed" desc="Generated Code">
```

```
private void initComponents() {
```

```
    javax.swing.JPanel pnlAll = new javax.swing.JPanel();
    javax.swing.JLabel welcomeMessage1 = new javax.swing.JLabel();
    javax.swing.JLabel lblMessage4 = new javax.swing.JLabel();
    javax.swing.JLabel lblMessage3 = new javax.swing.JLabel();
    javax.swing.JLabel lblMessage2 = new javax.swing.JLabel();
    javax.swing.JLabel lblMessage1 = new javax.swing.JLabel();
    javax.swing.JLabel lblContact1 = new javax.swing.JLabel();
    javax.swing.JLabel lblContact2 = new javax.swing.JLabel();
    javax.swing.JLabel lblContact3 = new javax.swing.JLabel();
    javax.swing.JLabel lblContact4 = new javax.swing.JLabel();
    javax.swing.JButton btnEnter = new javax.swing.JButton();
    javax.swing.JLabel sidelImage = new javax.swing.JLabel();
    javax.swing.JLabel welcomeLogo = new javax.swing.JLabel();
    javax.swing.JLabel welcomeBg = new javax.swing.JLabel();
```

```
    setDefaultCloseOperation(javax.swing.WindowConstants.EXIT_ON_CLOSE);
    setTitle("Brewed & Blended");
    setMaximumSize(new java.awt.Dimension(750, 416));
    setMinimumSize(new java.awt.Dimension(750, 416));
    setName(""); // NOI18N
    setResizable(false);
```

```
    pnlAll.setBackground(new java.awt.Color(219, 173, 157));
    pnlAll.setMaximumSize(new java.awt.Dimension(750, 416));
    pnlAll.setMinimumSize(new java.awt.Dimension(750, 416));
    pnlAll.setName(""); // NOI18N
    pnlAll.setPreferredSize(new java.awt.Dimension(750, 416));
    pnlAll.setLayout(new org.netbeans.lib.awtextra.AbsoluteLayout());
```

```
    welcomeMessage1.setFont(new java.awt.Font("Segoe UI Black", 1, 16)); // NOI18N
    welcomeMessage1.setForeground(new java.awt.Color(127, 81, 89));
    welcomeMessage1.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
    welcomeMessage1.setText("Welcome to a delightful experience at our cafe!");
    welcomeMessage1.setVerticalAlignment(javax.swing.SwingConstants.TOP);
    pnlAll.add(welcomeMessage1, new org.netbeans.lib.awtextra.AbsoluteConstraints(240, 180,
470, 30));
```

```
    lblMessage4.setFont(new java.awt.Font("Segoe UI", 1, 12)); // NOI18N
    lblMessage4.setForeground(new java.awt.Color(127, 81, 89));
    lblMessage4.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
    lblMessage4.setText("where every sip and bite becomes a cherished memory. ");
    lblMessage4.setVerticalAlignment(javax.swing.SwingConstants.TOP);
    pnlAll.add(lblMessage4, new org.netbeans.lib.awtextra.AbsoluteConstraints(240, 300, 470,
30));
```

```
    lblMessage3.setFont(new java.awt.Font("Segoe UI", 1, 12)); // NOI18N
```

```

lblMessage3.setForeground(new java.awt.Color(127, 81, 89));
lblMessage3.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
lblMessage3.setText("your enjoyment. Embrace the perfect blend of ambiance and taste - ");
lblMessage3.setVerticalAlignment(javax.swing.SwingConstants.TOP);
pnlAll.add(lblMessage3, new org.netbeans.lib.awtextra.AbsoluteConstraints(240, 280, 470,
30));

lblMessage2.setFont(new java.awt.Font("Segoe UI", 1, 12)); // NOI18N
lblMessage2.setForeground(new java.awt.Color(127, 81, 89));
lblMessage2.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
lblMessage2.setText("From rich, aromatic brews to delectable bites, each moment is crafted
for");
lblMessage2.setVerticalAlignment(javax.swing.SwingConstants.TOP);
pnlAll.add(lblMessage2, new org.netbeans.lib.awtextra.AbsoluteConstraints(240, 260, 470,
30));

lblMessage1.setFont(new java.awt.Font("Segoe UI", 1, 12)); // NOI18N
lblMessage1.setForeground(new java.awt.Color(127, 81, 89));
lblMessage1.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
lblMessage1.setText("Discover a haven of flavor and warmth at Brewed&Blended.");
lblMessage1.setVerticalAlignment(javax.swing.SwingConstants.TOP);
pnlAll.add(lblMessage1, new org.netbeans.lib.awtextra.AbsoluteConstraints(240, 220, 470,
30));

lblContact1.setFont(new java.awt.Font("Segoe UI", 1, 12)); // NOI18N
lblContact1.setForeground(new java.awt.Color(244, 227, 214));
lblContact1.setText("Contact Us:");
pnlAll.add(lblContact1, new org.netbeans.lib.awtextra.AbsoluteConstraints(10, 330, 200, 50));

lblContact2.setForeground(new java.awt.Color(244, 227, 214));
lblContact2.setText("09088184444");
pnlAll.add(lblContact2, new org.netbeans.lib.awtextra.AbsoluteConstraints(10, 360, 200, 20));

lblContact3.setForeground(new java.awt.Color(244, 227, 214));
lblContact3.setText("Juna Subdivision, Camachilli St.");
pnlAll.add(lblContact3, new org.netbeans.lib.awtextra.AbsoluteConstraints(10, 370, 200, 30));

lblContact4.setForeground(new java.awt.Color(244, 227, 214));
lblContact4.setText("Corner Acacia, Matina, Davao City");
pnlAll.add(lblContact4, new org.netbeans.lib.awtextra.AbsoluteConstraints(10, 390, 200, 20));

btnEnter.setBackground(new java.awt.Color(244, 227, 214));
btnEnter.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
btnEnter.setForeground(new java.awt.Color(127, 81, 89));
btnEnter.setText("Enter Shop");
btnEnter.setBorderPainted(false);
btnEnter.setCursor(new java.awt.Cursor(java.awt.Cursor.HAND_CURSOR));
btnEnter.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        btnEnterActionPerformed(evt);
    }
});
pnlAll.add(btnEnter, new org.netbeans.lib.awtextra.AbsoluteConstraints(400, 350, 150, 40));

```

```

        sidelImage.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
        sidelImage.setIcon(new javax.swing.ImageIcon(getClass().getResource("/welcomeimg.png")));
// NOI18N
        sidelImage.setText("sidelImage");
        pnlAll.add(sidelImage, new org.netbeans.lib.awtextra.AbsoluteConstraints(0, 0, 210, 420));

        welcomeLogo.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
        welcomeLogo.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/welcomeLogo.png"))); // NOI18N
        pnlAll.add(welcomeLogo, new org.netbeans.lib.awtextra.AbsoluteConstraints(290, 30, 370,
120));

        welcomeBg.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/welcomeBg.png"))); // NOI18N
        welcomeBg.setName(""); // NOI18N
        pnlAll.add(welcomeBg, new org.netbeans.lib.awtextra.AbsoluteConstraints(0, 0, 750, -1));

        javax.swing.GroupLayout layout = new javax.swing.GroupLayout(getContentPane());
        getContentPane().setLayout(layout);
        layout.setHorizontalGroup(
            layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
                .addComponent(pnlAll, javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, javax.swing.GroupLayout.PREFERRED_SIZE)
        );
        layout.setVerticalGroup(
            layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
                .addComponent(pnlAll, javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, javax.swing.GroupLayout.PREFERRED_SIZE)
        );

        pack();
    } // </editor-fold>

    private void btnEnterActionPerformed(java.awt.event.ActionEvent evt) {
        new CafeMenu().setVisible(true);
        this.dispose();
    }

    private void designComponents() {
        //Icon Image
        ImageIcon img = new ImageIcon("src/icon.png");
        this.setIconImage(img.getImage());
        //Center window when running
        Dimension dimension = Toolkit.getDefaultToolkit().getScreenSize();
        int x = (int) ((dimension.getWidth() - this.getWidth()) / 2);
        int y = (int) ((dimension.getHeight() - this.getHeight()) / 2 - 25);
        this.setLocation(x, y);
    }

    /**
     * @param args the command line arguments
     */

```

```

public static void main(String args[]) {
    /* Set the Nimbus look and feel */
    //<editor-fold defaultstate="collapsed" desc=" Look and feel setting code (optional) ">
    /* If Nimbus (introduced in Java SE 6) is not available, stay with the default look and feel.
    * For details see http://download.oracle.com/javase/tutorial/uiswing/lookandfeel/plaf.html
    */
    try {
        for (javax.swing.UIManager.LookAndFeelInfo info :
javax.swing.UIManager.getInstalledLookAndFeels()) {
            if ("Nimbus".equals(info.getName())) {
                javax.swing.UIManager.setLookAndFeel(info.getClassName());
                break;
            }
        }
    } catch (ClassNotFoundException ex) {

java.util.logging.Logger.getLogger(CafeWelcome.class.getName()).log(java.util.logging.Level.SEVERE
, null, ex);
    } catch (InstantiationException ex) {

java.util.logging.Logger.getLogger(CafeWelcome.class.getName()).log(java.util.logging.Level.SEVERE
, null, ex);
    } catch (IllegalAccessException ex) {

java.util.logging.Logger.getLogger(CafeWelcome.class.getName()).log(java.util.logging.Level.SEVERE
, null, ex);
    } catch (javax.swing.UnsupportedLookAndFeelException ex) {

java.util.logging.Logger.getLogger(CafeWelcome.class.getName()).log(java.util.logging.Level.SEVERE
, null, ex);
    }

        java.awt.EventQueue.invokeLater(new Runnable() {
            public void run() {
                new CafeWelcome().setVisible(true);
            }
        });
    }

    // Variables declaration - do not modify
    // End of variables declaration
}

```

MAIN FRAME – CafeMenu.java

```

import java.awt.Color;
import java.awt.Dimension;
import java.awt.Font;
import java.awt.Toolkit;
import java.awt.print.PrinterException;
import java.io.File;
import java.io.FileWriter;

```

```

import java.io.IOException;
import java.util.Date;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.swing.ImageIcon;
import javax.swing.JOptionPane;
import javax.swing.SwingConstants;
import javax.swing.table.DefaultTableCellRenderer;
import javax.swing.table.DefaultTableModel;

public class CafeMenu extends javax.swing.JFrame {

    /**
     * Creates new form CafeMenu
     */
    public CafeMenu() {
        initComponents();
        designComponents();
    }

    /**
     * This method is called from within the constructor to initialize the form.
     * WARNING: Do NOT modify this code. The content of this method is always
     * regenerated by the Form Editor.
     */
    @SuppressWarnings("unchecked")
    // <editor-fold defaultstate="collapsed" desc="Generated Code">
    private void initComponents() {

        pnlAll = new javax.swing.JPanel();
        javax.swing.JPanel pnlLeft = new javax.swing.JPanel();
        javax.swing.JLabel lblLogo = new javax.swing.JLabel();
        javax.swing.JLabel lblCart = new javax.swing.JLabel();
        scr1Cart = new javax.swing.JScrollPane();
        tblCart = new javax.swing.JTable();
        javax.swing.JButton btnDelete = new javax.swing.JButton();
        javax.swing.JButton btnClear = new javax.swing.JButton();
        javax.swing.JButton btnBuy = new javax.swing.JButton();
        javax.swing.JLabel lblReceipt = new javax.swing.JLabel();
        scr1Receipt = new javax.swing.JScrollPane();
        areaReceipt = new javax.swing.JTextArea();
        javax.swing.JButton btnPrint = new javax.swing.JButton();
        areaTotalPrice = new javax.swing.JTextField();
        javax.swing.JButton btnExit = new javax.swing.JButton();
        javax.swing.JPanel pnlRight = new javax.swing.JPanel();
        javax.swing.JPanel pnlMenu = new javax.swing.JPanel();
        javax.swing.JLabel lblDessert = new javax.swing.JLabel();
        javax.swing.JLabel lblCoffee = new javax.swing.JLabel();
        javax.swing.JLabel lblNoncoffee = new javax.swing.JLabel();
        pBtn2 = new javax.swing.JButton();
        pQty2 = new javax.swing.JSpinner();
        pPrice2 = new javax.swing.JLabel();
        pPrice3 = new javax.swing.JLabel();
    }

```

```

pQty3 = new javax.swing.JSpinner();
pBtn3 = new javax.swing.JButton();
pQty1 = new javax.swing.JSpinner();
pBtn1 = new javax.swing.JButton();
pPrice1 = new javax.swing.JLabel();
pPrice4 = new javax.swing.JLabel();
pQty4 = new javax.swing.JSpinner();
pBtn4 = new javax.swing.JButton();
pQty5 = new javax.swing.JSpinner();
pBtn5 = new javax.swing.JButton();
pPrice5 = new javax.swing.JLabel();
pQty6 = new javax.swing.JSpinner();
pPrice6 = new javax.swing.JLabel();
pBtn6 = new javax.swing.JButton();
pPrice7 = new javax.swing.JLabel();
pQty7 = new javax.swing.JSpinner();
pBtn7 = new javax.swing.JButton();
pQty8 = new javax.swing.JSpinner();
pBtn8 = new javax.swing.JButton();
pPrice8 = new javax.swing.JLabel();
pQty9 = new javax.swing.JSpinner();
pPrice9 = new javax.swing.JLabel();
pBtn9 = new javax.swing.JButton();
pName2 = new javax.swing.JLabel();
pName3 = new javax.swing.JLabel();
pName6 = new javax.swing.JLabel();
pName9 = new javax.swing.JLabel();
pName8 = new javax.swing.JLabel();
pName5 = new javax.swing.JLabel();
pName4 = new javax.swing.JLabel();
pName7 = new javax.swing.JLabel();
pName1 = new javax.swing.JLabel();
javax.swing.JLabel jLabel1 = new javax.swing.JLabel();
javax.swing.JLabel jLabel2 = new javax.swing.JLabel();
javax.swing.JLabel jLabel3 = new javax.swing.JLabel();
javax.swing.JLabel jLabel4 = new javax.swing.JLabel();
javax.swing.JLabel jLabel5 = new javax.swing.JLabel();
javax.swing.JLabel jLabel6 = new javax.swing.JLabel();
javax.swing.JLabel jLabel7 = new javax.swing.JLabel();
javax.swing.JLabel jLabel8 = new javax.swing.JLabel();
javax.swing.JLabel jLabel9 = new javax.swing.JLabel();
javax.swing.JLabel lblMenu = new javax.swing.JLabel();
javax.swing.JLabel wdwBg = new javax.swing.JLabel();

setDefaultCloseOperation(javax.swing.WindowConstants.DO_NOTHING_ON_CLOSE);
setTitle("Brewed & Blended");
setResizable(false);
addWindowListener(new java.awt.event.WindowAdapter() {
    public void windowClosing(java.awt.event.WindowEvent evt) {
        formWindowClosing(evt);
    }
});
getContentPane().setLayout(new org.netbeans.lib.awtextra.AbsoluteLayout());

```

```

pnlAll.setBackground(new java.awt.Color(229, 195, 183));
pnlAll.setMaximumSize(new java.awt.Dimension(1359, 750));
pnlAll.setMinimumSize(new java.awt.Dimension(1359, 750));
pnlAll.setPreferredSize(new java.awt.Dimension(1359, 750));
pnlAll.setLayout(new org.netbeans.lib.awtextra.AbsoluteLayout());

```

```

pnlLeft.setBackground(new java.awt.Color(219, 173, 157));
pnlLeft.setOpaque(false);

```

```

lblLogo.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
lblLogo.setIcon(new javax.swing.ImageIcon(getClass().getResource("/menuLogo.png"))); //

```

NOI18N

```

lblCart.setBackground(new java.awt.Color(255, 255, 255));
lblCart.setFont(new java.awt.Font("Hug Me Tight", 0, 24)); // NOI18N
lblCart.setForeground(new java.awt.Color(127, 81, 89));
lblCart.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
lblCart.setText("- cart -");

```

```

tblCart.setAutoCreateRowSorter(true);
tblCart.setBackground(new java.awt.Color(219, 173, 157));
tblCart.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
tblCart.setForeground(new java.awt.Color(255, 255, 255));
tblCart.setModel(new javax.swing.table.DefaultTableModel(
    new Object [][] {

    },
    new String [] {
        "QTY", "Product", "Price"
    }
) {
    Class[] types = new Class [] {
        java.lang.Integer.class, java.lang.String.class, java.lang.Double.class
    };
    boolean[] canEdit = new boolean [] {
        false, false, false
    };

    public Class getColumnClass(int columnIndex) {
        return types [columnIndex];
    }

    public boolean isCellEditable(int rowIndex, int columnIndex) {
        return canEdit [columnIndex];
    }
});
tblCart.setFocusable(false);
tblCart.setGridColor(new java.awt.Color(255, 255, 255));
tblCart.setInheritsPopupMenu(true);
tblCart.setRowHeight(25);
tblCart.setSelectionBackground(new java.awt.Color(127, 81, 89));
tblCart.setShowGrid(true);

```

```

scr1Cart.setViewportView(tblCart);
if (tblCart.getColumnModel().getColumnCount() > 0) {
    tblCart.getColumnModel().getColumn(0).setResizable(false);
    tblCart.getColumnModel().getColumn(1).setResizable(false);
    tblCart.getColumnModel().getColumn(2).setResizable(false);
}

btnDelete.setBackground(new java.awt.Color(244, 227, 214));
btnDelete.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
btnDelete.setForeground(new java.awt.Color(127, 81, 89));
btnDelete.setIcon(new javax.swing.ImageIcon(getClass().getResource("/delete.png"))); //

```

NOI18N

```

btnDelete.setText("Delete");
btnDelete.setToolTipText("Deletes a selected row in the Cart.");
btnDelete.setBorder(null);
btnDelete.setBorderPainted(false);
btnDelete.setCursor(new java.awt.Cursor(java.awt.Cursor.HAND_CURSOR));
btnDelete.setFocusCycleRoot(true);
btnDelete.setFocusPainted(false);
btnDelete.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        btnDeleteActionPerformed(evt);
    }
});

```

```

btnClear.setBackground(new java.awt.Color(244, 227, 214));
btnClear.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
btnClear.setForeground(new java.awt.Color(127, 81, 89));
btnClear.setIcon(new javax.swing.ImageIcon(getClass().getResource("/clear.png"))); //

```

NOI18N

```

btnClear.setText("Clear");
btnClear.setToolTipText("Clears the Cart, the Receipt, and the Receipt textfile.");
btnClear.setBorder(null);
btnClear.setBorderPainted(false);
btnClear.setCursor(new java.awt.Cursor(java.awt.Cursor.HAND_CURSOR));
btnClear.setFocusCycleRoot(true);
btnClear.setFocusPainted(false);
btnClear.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        btnClearActionPerformed(evt);
    }
});

```

```

btnBuy.setBackground(new java.awt.Color(244, 227, 214));
btnBuy.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
btnBuy.setForeground(new java.awt.Color(127, 81, 89));
btnBuy.setIcon(new javax.swing.ImageIcon(getClass().getResource("/buy.png"))); // NOI18N
btnBuy.setText("Buy");
btnBuy.setToolTipText("Finalizes the item/s in the Cart.");
btnBuy.setBorder(null);
btnBuy.setBorderPainted(false);
btnBuy.setCursor(new java.awt.Cursor(java.awt.Cursor.HAND_CURSOR));
btnBuy.setFocusCycleRoot(true);

```

```

btnBuy.setFocusPainted(false);
btnBuy.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        btnBuyActionPerformed(evt);
    }
});

```

```

lblReceipt.setBackground(new java.awt.Color(255, 255, 255));
lblReceipt.setFont(new java.awt.Font("Hug Me Tight", 0, 24)); // NOI18N
lblReceipt.setForeground(new java.awt.Color(127, 81, 89));
lblReceipt.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
lblReceipt.setText("- Receipt -");

```

```

sclReceipt.setVerticalScrollBarPolicy(javax.swing.ScrollPaneConstants.VERTICAL_SCROLLBAR_ALWAYS);

```

```

areaReceipt.setEditable(false);
areaReceipt.setColumns(20);
areaReceipt.setRows(5);
areaReceipt.setFocusable(false);
sclReceipt.setViewportViewView(areaReceipt);

```

```

btnPrint.setBackground(new java.awt.Color(244, 227, 214));
btnPrint.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
btnPrint.setForeground(new java.awt.Color(127, 81, 89));
btnPrint.setIcon(new javax.swing.ImageIcon(getClass().getResource("/print.png"))); // NOI18N
btnPrint.setText("Print");
btnPrint.setToolTipText("Prints the Receipt.");
btnPrint.setBorder(null);
btnPrint.setBorderPainted(false);
btnPrint.setCursor(new java.awt.Cursor(java.awt.Cursor.HAND_CURSOR));
btnPrint.setFocusCycleRoot(true);
btnPrint.setFocusPainted(false);
btnPrint.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        btnPrintActionPerformed(evt);
    }
});

```

```

areaTotalPrice.setEditable(false);
areaTotalPrice.setBackground(new java.awt.Color(255, 255, 255));
areaTotalPrice.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
areaTotalPrice.setForeground(new java.awt.Color(127, 81, 89));
areaTotalPrice.setText("P");
areaTotalPrice.setFocusable(false);

```

```

btnExit.setBackground(new java.awt.Color(244, 227, 214));
btnExit.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
btnExit.setForeground(new java.awt.Color(127, 81, 89));
btnExit.setIcon(new javax.swing.ImageIcon(getClass().getResource("/exit.png"))); // NOI18N
btnExit.setText("Exit");
btnExit.setToolTipText("Exits the Shop.");

```

```
btnExit.setBorder(null);  
btnExit.setBorderPainted(false);  
btnExit.setCursor(new java.awt.Cursor(java.awt.Cursor.HAND_CURSOR));  
btnExit.setFocusCycleRoot(true);  
btnExit.setFocusPainted(false);  
btnExit.addActionListener(new java.awt.event.ActionListener() {  
    public void actionPerformed(java.awt.event.ActionEvent evt) {  
        btnExitActionPerformed(evt);  
    }  
});  
  
javax.swing.GroupLayout pnlLeftLayout = new javax.swing.GroupLayout(pnlLeft);  
pnlLeft.setLayout(pnlLeftLayout);  
pnlLeftLayout.setHorizontalGroup(  
    pnlLeftLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)  
        .addGroup(pnlLeftLayout.createSequentialGroup()  
.addGroup(pnlLeftLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)  
            .addGroup(pnlLeftLayout.createSequentialGroup()  
                .addGap(122, 122, 122)  
                .addComponent(lblReceipt, javax.swing.GroupLayout.PREFERRED_SIZE, 178,  
                    javax.swing.GroupLayout.PREFERRED_SIZE))  
            .addGroup(pnlLeftLayout.createSequentialGroup()  
                .addGap(69, 69, 69)  
                .addComponent(lblLogo))  
            .addGroup(pnlLeftLayout.createSequentialGroup()  
                .addGap(31, 31, 31).addGroup(pnlLeftLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.TRAILING)  
            .addComponent(areaTotalPrice, javax.swing.GroupLayout.PREFERRED_SIZE,  
                108, javax.swing.GroupLayout.PREFERRED_SIZE)            .addGroup(pnlLeftLayout.createSequentialGroup()  
                .addComponent(btnDelete, javax.swing.GroupLayout.PREFERRED_SIZE,  
                    102, javax.swing.GroupLayout.PREFERRED_SIZE)  
                .addGap(27, 27, 27)  
                .addComponent(btnClear, javax.swing.GroupLayout.PREFERRED_SIZE,  
                    102, javax.swing.GroupLayout.PREFERRED_SIZE)  
                .addGap(29, 29, 29)  
                .addComponent(btnBuy, javax.swing.GroupLayout.PREFERRED_SIZE, 102,  
                    javax.swing.GroupLayout.PREFERRED_SIZE))  
            .addGroup(pnlLeftLayout.createSequentialGroup()  
                .addComponent(scrlCart, javax.swing.GroupLayout.PREFERRED_SIZE, 362,  
                    javax.swing.GroupLayout.PREFERRED_SIZE)  
                .addGroup(pnlLeftLayout.createSequentialGroup()  
                    .addGap(93, 93, 93)  
                    .addComponent(lblCart, javax.swing.GroupLayout.PREFERRED_SIZE, 162,  
                        javax.swing.GroupLayout.PREFERRED_SIZE)))            .addGroup(pnlLeftLayout.createSequentialGroup()  
                .addComponent(btnPrint, javax.swing.GroupLayout.PREFERRED_SIZE,  
                    102, javax.swing.GroupLayout.PREFERRED_SIZE)
```

```

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
        .addComponent(btnExit, javax.swing.GroupLayout.PREFERRED_SIZE,
102, javax.swing.GroupLayout.PREFERRED_SIZE))
        .addComponent(scr1Receipt, javax.swing.GroupLayout.PREFERRED_SIZE,
362, javax.swing.GroupLayout.PREFERRED_SIZE))))
        .addContainerGap(37, Short.MAX_VALUE))
    );

    pnlLeftLayout.linkSize(javax.swing.SwingConstants.HORIZONTAL, new java.awt.Component[]
{lblCart, lblReceipt});

    pnlLeftLayout.linkSize(javax.swing.SwingConstants.HORIZONTAL, new java.awt.Component[]
{btnBuy, btnClear, btnDelete, btnPrint});

    pnlLeftLayout.setVerticalGroup(
        pnlLeftLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
        .addGroup(pnlLeftLayout.createSequentialGroup()
            .addGap(39, 39, 39)
            .addComponent(lblLogo)
            .addGap(18, 18, 18)

.addGroup(pnlLeftLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING, false)
            .addComponent(lblCart, javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
            .addComponent(areaTotalPrice, javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, javax.swing.GroupLayout.PREFERRED_SIZE))
            .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)
            .addComponent(scr1Cart, javax.swing.GroupLayout.PREFERRED_SIZE, 188,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)

.addGroup(pnlLeftLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.BASELINE)
            .addComponent(btnDelete, javax.swing.GroupLayout.PREFERRED_SIZE, 40,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addComponent(btnBuy, javax.swing.GroupLayout.PREFERRED_SIZE, 30,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addComponent(btnClear, javax.swing.GroupLayout.PREFERRED_SIZE, 30,
javax.swing.GroupLayout.PREFERRED_SIZE))
            .addGap(12, 12, 12)
            .addComponent(lblReceipt)
            .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)
            .addComponent(scr1Receipt, javax.swing.GroupLayout.PREFERRED_SIZE, 154,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)

.addGroup(pnlLeftLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.BASELINE)
            .addComponent(btnPrint, javax.swing.GroupLayout.DEFAULT_SIZE, 30,
Short.MAX_VALUE)
            .addComponent(btnExit))
            .addContainerGap(94, Short.MAX_VALUE))
    );

```

```

        pnlLeftLayout.linkSize(javax.swing.SwingConstants.VERTICAL, new java.awt.Component[]
{btnBuy, btnClear, btnDelete, btnExit, btnPrint});

        pnlAll.add(pnlLeft, new org.netbeans.lib.awtextra.AbsoluteConstraints(20, 20, 430, 760));

        pnlRight.setBackground(new java.awt.Color(219, 173, 157));
        pnlRight.setOpaque(false);

        pnlMenu.setBackground(new java.awt.Color(219, 173, 157));
        pnlMenu.setOpaque(false);
        pnlMenu.setLayout(new org.netbeans.lib.awtextra.AbsoluteLayout());

        lblDessert.setFont(new java.awt.Font("Hug Me Tight", 1, 24)); // NOI18N
        lblDessert.setForeground(new java.awt.Color(128, 80, 71));
        lblDessert.setText("Dessert");
        pnlMenu.add(lblDessert, new org.netbeans.lib.awtextra.AbsoluteConstraints(360, 20, -1, -1));

        lblCoffee.setFont(new java.awt.Font("Hug Me Tight", 1, 24)); // NOI18N
        lblCoffee.setForeground(new java.awt.Color(128, 80, 71));
        lblCoffee.setText("Coffee");
        pnlMenu.add(lblCoffee, new org.netbeans.lib.awtextra.AbsoluteConstraints(90, 20, -1, -1));

        lblNoncoffee.setFont(new java.awt.Font("Hug Me Tight", 1, 24)); // NOI18N
        lblNoncoffee.setForeground(new java.awt.Color(128, 80, 71));
        lblNoncoffee.setText("Non-coffee");
        pnlMenu.add(lblNoncoffee, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 20, -1,
-1));

        pBtn2.setBackground(new java.awt.Color(161, 96, 84));
        pBtn2.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
        pBtn2.setForeground(new java.awt.Color(255, 255, 255));
        pBtn2.setText("+");
        pBtn2.setToolTipText("Adds item to Cart.");
        pBtn2.setBorder(null);
        pBtn2.setBorderPainted(false);
        pBtn2.setFocusPainted(false);
        pBtn2.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEvent evt) {
                pBtn2ActionPerformed(evt);
            }
        });
        pnlMenu.add(pBtn2, new org.netbeans.lib.awtextra.AbsoluteConstraints(170, 350, 36, 30));

        pQty2.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
        pQty2.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
        pnlMenu.add(pQty2, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 350, 109, -1));

        pPrice2.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
        pPrice2.setForeground(new java.awt.Color(192, 108, 52));
        pPrice2.setText("₹160");
        pnlMenu.add(pPrice2, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 320, -1, 28));

```

```

pPrice3.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
pPrice3.setForeground(new java.awt.Color(192, 108, 52));
pPrice3.setHorizontalAlignment(javax.swing.SwingConstants.LEFT);
pPrice3.setText("P145");
pnlMenu.add(pPrice3, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 500, 150, 28));

pQty3.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pQty3.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
pnlMenu.add(pQty3, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 530, 109, -1));

pBtn3.setBackground(new java.awt.Color(161, 96, 84));
pBtn3.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
pBtn3.setForeground(new java.awt.Color(255, 255, 255));
pBtn3.setText("+");
pBtn3.setToolTipText("Adds item to Cart.");
pBtn3.setBorder(null);
pBtn3.setBorderPainted(false);
pBtn3.setFocusPainted(false);
pBtn3.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        pBtn3ActionPerformed(evt);
    }
});
pnlMenu.add(pBtn3, new org.netbeans.lib.awtextra.AbsoluteConstraints(170, 530, 36, 30));

pQty1.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pQty1.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
pnlMenu.add(pQty1, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 180, 109, -1));

pBtn1.setBackground(new java.awt.Color(161, 96, 84));
pBtn1.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
pBtn1.setForeground(new java.awt.Color(255, 255, 255));
pBtn1.setText("+");
pBtn1.setToolTipText("Adds item to Cart.");
pBtn1.setBorder(null);
pBtn1.setBorderPainted(false);
pBtn1.setFocusPainted(false);
pBtn1.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        pBtn1ActionPerformed(evt);
    }
});
pnlMenu.add(pBtn1, new org.netbeans.lib.awtextra.AbsoluteConstraints(170, 180, 36, 30));

pPrice1.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
pPrice1.setForeground(new java.awt.Color(192, 108, 52));
pPrice1.setText("P120");
pnlMenu.add(pPrice1, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 150, 89, 28));

pPrice4.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
pPrice4.setForeground(new java.awt.Color(192, 108, 52));
pPrice4.setText("P75");
pnlMenu.add(pPrice4, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 150, 151, 28));

```

```

pQty4.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pQty4.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
pnlMenu.add(pQty4, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 180, 109, -1));

pBtn4.setBackground(new java.awt.Color(161, 96, 84));
pBtn4.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
pBtn4.setForeground(new java.awt.Color(255, 255, 255));
pBtn4.setText("+");
pBtn4.setToolTipText("Adds item to Cart.");
pBtn4.setBorder(null);
pBtn4.setBorderPainted(false);
pBtn4.setFocusPainted(false);
pBtn4.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        pBtn4ActionPerformed(evt);
    }
});
pnlMenu.add(pBtn4, new org.netbeans.lib.awtextra.AbsoluteConstraints(450, 180, 36, 30));

pQty5.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pQty5.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
pnlMenu.add(pQty5, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 350, 109, -1));

pBtn5.setBackground(new java.awt.Color(161, 96, 84));
pBtn5.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
pBtn5.setForeground(new java.awt.Color(255, 255, 255));
pBtn5.setText("+");
pBtn5.setToolTipText("Adds item to Cart.");
pBtn5.setBorder(null);
pBtn5.setBorderPainted(false);
pBtn5.setFocusPainted(false);
pBtn5.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        pBtn5ActionPerformed(evt);
    }
});
pnlMenu.add(pBtn5, new org.netbeans.lib.awtextra.AbsoluteConstraints(450, 350, 36, 30));

pPrice5.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
pPrice5.setForeground(new java.awt.Color(192, 108, 52));
pPrice5.setText("₹95");
pnlMenu.add(pPrice5, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 320, 151, 28));

pQty6.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pQty6.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
pnlMenu.add(pQty6, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 530, 109, -1));

pPrice6.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
pPrice6.setForeground(new java.awt.Color(192, 108, 52));
pPrice6.setText("₹45");
pnlMenu.add(pPrice6, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 500, 151, 28));

```

```

pBtn6.setBackground(new java.awt.Color(161, 96, 84));
pBtn6.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
pBtn6.setForeground(new java.awt.Color(255, 255, 255));
pBtn6.setText("+");
pBtn6.setToolTipText("Adds item to Cart.");
pBtn6.setBorder(null);
pBtn6.setBorderPainted(false);
pBtn6.setFocusPainted(false);
pBtn6.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        pBtn6ActionPerformed(evt);
    }
});
pnlMenu.add(pBtn6, new org.netbeans.lib.awtextra.AbsoluteConstraints(450, 530, 36, 30));

pPrice7.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
pPrice7.setForeground(new java.awt.Color(192, 108, 52));
pPrice7.setText("₹215");
pnlMenu.add(pPrice7, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 150, 151, 28));

pQty7.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pQty7.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
pnlMenu.add(pQty7, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 180, 109, -1));

pBtn7.setBackground(new java.awt.Color(161, 96, 84));
pBtn7.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
pBtn7.setForeground(new java.awt.Color(255, 255, 255));
pBtn7.setText("+");
pBtn7.setToolTipText("Adds item to Cart.");
pBtn7.setBorder(null);
pBtn7.setBorderPainted(false);
pBtn7.setFocusPainted(false);
pBtn7.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        pBtn7ActionPerformed(evt);
    }
});
pnlMenu.add(pBtn7, new org.netbeans.lib.awtextra.AbsoluteConstraints(720, 180, 36, 30));

pQty8.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pQty8.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
pnlMenu.add(pQty8, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 350, 109, -1));

pBtn8.setBackground(new java.awt.Color(161, 96, 84));
pBtn8.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
pBtn8.setForeground(new java.awt.Color(255, 255, 255));
pBtn8.setText("+");
pBtn8.setToolTipText("Adds item to Cart.");
pBtn8.setBorder(null);
pBtn8.setBorderPainted(false);
pBtn8.setFocusPainted(false);
pBtn8.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {

```

```

        pBtn8ActionPerformed(evt);
    }
});
pnlMenu.add(pBtn8, new org.netbeans.lib.awtextra.AbsoluteConstraints(720, 350, 36, 30));

pPrice8.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
pPrice8.setForeground(new java.awt.Color(192, 108, 52));
pPrice8.setText("P185");
pnlMenu.add(pPrice8, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 320, 151, 28));

pQty9.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pQty9.setModel(new javax.swing.SpinnerNumberModel(0, 0, 10, 1));
pnlMenu.add(pQty9, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 530, 109, -1));

pPrice9.setFont(new java.awt.Font("Segoe UI", 1, 14)); // NOI18N
pPrice9.setForeground(new java.awt.Color(192, 108, 52));
pPrice9.setText("P205");
pnlMenu.add(pPrice9, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 500, 151, 28));

pBtn9.setBackground(new java.awt.Color(161, 96, 84));
pBtn9.setFont(new java.awt.Font("Hug Me Tight", 0, 18)); // NOI18N
pBtn9.setForeground(new java.awt.Color(255, 255, 255));
pBtn9.setText("+");
pBtn9.setToolTipText("Adds item to Cart.");
pBtn9.setBorder(null);
pBtn9.setBorderPainted(false);
pBtn9.setFocusPainted(false);
pBtn9.addActionListener(new java.awt.event.ActionListener() {
    public void actionPerformed(java.awt.event.ActionEvent evt) {
        pBtn9ActionPerformed(evt);
    }
});
pnlMenu.add(pBtn9, new org.netbeans.lib.awtextra.AbsoluteConstraints(720, 530, 36, 30));

pName2.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName2.setForeground(new java.awt.Color(128, 80, 71));
pName2.setText("Caramel Latte");
pnlMenu.add(pName2, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 300, 120, 28));

pName3.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName3.setForeground(new java.awt.Color(128, 80, 71));
pName3.setHorizontalAlignment(javax.swing.SwingConstants.LEFT);
pName3.setText("Hot Oat Capuccino");
pnlMenu.add(pName3, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 480, 150, 28));

pName6.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName6.setForeground(new java.awt.Color(128, 80, 71));
pName6.setText("Fudgy Brownies");
pnlMenu.add(pName6, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 480, 151,
28));

pName9.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName9.setForeground(new java.awt.Color(128, 80, 71));

```

```

pName9.setText("Matcha Green Tea");
pnlMenu.add(pName9, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 480, 151,
28));

pName8.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName8.setForeground(new java.awt.Color(128, 80, 71));
pName8.setText("Strawberry Milkshake");
pnlMenu.add(pName8, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 300, 170,
28));

pName5.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName5.setForeground(new java.awt.Color(128, 80, 71));
pName5.setText("Chocolate Fudge Cake");
pnlMenu.add(pName5, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 300, 180,
28));

pName4.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName4.setForeground(new java.awt.Color(128, 80, 71));
pName4.setText("Belgian Waffle");
pnlMenu.add(pName4, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 130, 151,
28));

pName7.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName7.setForeground(new java.awt.Color(128, 80, 71));
pName7.setText("Hot Chocolate");
pnlMenu.add(pName7, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 130, 151,
28));

pName1.setFont(new java.awt.Font("Hug Me Tight", 0, 14)); // NOI18N
pName1.setForeground(new java.awt.Color(128, 80, 71));
pName1.setText("Espresso (Single)");
pnlMenu.add(pName1, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 130, 170, 28));

jLabel1.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel1.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p2.png"))); // NOI18N
pnlMenu.add(jLabel1, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 220, 150, 80));

jLabel2.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel2.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p1.png"))); // NOI18N
pnlMenu.add(jLabel2, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 56, 150, 70));

jLabel3.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel3.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p3.png"))); // NOI18N
pnlMenu.add(jLabel3, new org.netbeans.lib.awtextra.AbsoluteConstraints(60, 400, 150, 80));

jLabel4.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel4.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p9.png"))); // NOI18N
pnlMenu.add(jLabel4, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 383, 150, -1));

jLabel5.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel5.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p8.png"))); // NOI18N
pnlMenu.add(jLabel5, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 210, 150, 90));

```

```

jLabel6.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel6.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p7.png"))); // NOI18N
pnlMenu.add(jLabel6, new org.netbeans.lib.awtextra.AbsoluteConstraints(610, 50, 150, 80));

jLabel7.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel7.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p4.png"))); // NOI18N
pnlMenu.add(jLabel7, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 60, 150, 70));

jLabel8.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel8.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p5.png"))); // NOI18N
pnlMenu.add(jLabel8, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 220, 150, 80));

jLabel9.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
jLabel9.setIcon(new javax.swing.ImageIcon(getClass().getResource("/p6.png"))); // NOI18N
pnlMenu.add(jLabel9, new org.netbeans.lib.awtextra.AbsoluteConstraints(340, 400, 150, 80));

lblMenu.setBackground(new java.awt.Color(255, 255, 255));
lblMenu.setFont(new java.awt.Font("Hug Me Tight", 0, 44)); // NOI18N
lblMenu.setForeground(new java.awt.Color(244, 227, 214));
lblMenu.setHorizontalAlignment(javax.swing.SwingConstants.CENTER);
lblMenu.setText("- Menu -");

javax.swing.GroupLayout pnlRightLayout = new javax.swing.GroupLayout(pnlRight);
pnlRight.setLayout(pnlRightLayout);
pnlRightLayout.setHorizontalGroup(
    pnlRightLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
        .addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
pnlRightLayout.createSequentialGroup()
            .addContainerGap(316, Short.MAX_VALUE)
            .addComponent(lblMenu, javax.swing.GroupLayout.PREFERRED_SIZE, 201,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addGap(313, 313, 313))
        .addGroup(pnlRightLayout.createSequentialGroup()
            .addContainerGap()
            .addComponent(pnlMenu, javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
            .addContainerGap())
);
pnlRightLayout.setVerticalGroup(
    pnlRightLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
        .addGroup(pnlRightLayout.createSequentialGroup()
            .addContainerGap()
            .addComponent(lblMenu)
            .addGap(36, 36, 36)
            .addComponent(pnlMenu, javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, javax.swing.GroupLayout.PREFERRED_SIZE)
            .addContainerGap(114, Short.MAX_VALUE))
);

pnlAll.add(pnlRight, new org.netbeans.lib.awtextra.AbsoluteConstraints(480, 30, 830, 770));

wdwBg.setIcon(new javax.swing.ImageIcon(getClass().getResource("/menuBg.png"))); //
NOI18N

```

```

        wdwBg.setVerticalAlignment(javax.swing.SwingConstants.TOP);
        pnlAll.add(wdwBg, new org.netbeans.lib.awtextra.AbsoluteConstraints(0, 0, -1, -1));

        getContentPane().add(pnlAll, new org.netbeans.lib.awtextra.AbsoluteConstraints(0, 0, -1,
750));

        pack();
    } // </editor-fold>

    private void btnPrintActionPerformed(java.awt.event.ActionEvent evt) {
        if (areaReceipt.getText().equals("")){
            JOptionPane.showMessageDialog(this,"You have no receipt yet! \nPlease add item/s to
Cart and click Buy.", "No Receipt", JOptionPane.ERROR_MESSAGE);
        } else {
            try{
                areaReceipt.print();
            } catch (PrinterException e){
                System.out.print("Print Fail");
            }
        }
    }

    private void btnBuyActionPerformed(java.awt.event.ActionEvent evt) {
        if (tblCart.getRowCount() == 0){
            JOptionPane.showMessageDialog(this,"You have no item/s on your cart! \nPlease add
product/s from the Menu on the right.", "No Items on Cart", JOptionPane.ERROR_MESSAGE);
        } else {
            areaReceipt.setText("=====\n");
            areaReceipt.setText(areaReceipt.getText()+"\t"+"-+ BREWED & BLENDED +-\n");

areaReceipt.setText(areaReceipt.getText()+"=====\n");

            //Instantiate total items sold and total price
            int qtyTotal = 0;
            int qty1;
            double priceTotal = 0;
            double price1;

            //Lists down purchased items in Cart
            DefaultTableModel cartModel = (DefaultTableModel)tblCart.getModel();
            areaReceipt.setText(areaReceipt.getText()+"QTY"+"\\t"+"PRODUCT NAME"+"
\\t"+"PRICE\\n");
            for(int i = 0; i<tblCart.getRowCount(); i++){
                String qty = tblCart.getValueAt(i,0).toString();
                String name = tblCart.getValueAt(i,1).toString();
                String price = tblCart.getValueAt(i,2).toString();

                qty1 = Integer.parseInt(qty);
                qtyTotal += qty1;
                price1 = Double.parseDouble(price);
                priceTotal += price1;
                areaReceipt.setText(areaReceipt.getText()+qty+"\\t"+name+"  \\t"+price+"\\n");

```



```

//Clears the Total Price
areaTotalPrice.setText("");
//Clears the textfile
File receipt = new File("receipt.txt");
FileWriter writer;
try {
    //Clear receipt.txt file
    writer = new FileWriter(receipt);
    writer.write("");
} catch (IOException ex) {
    Logger.getLogger(CafeMenu.class.getName()).log(Level.SEVERE, null, ex);
}
}

private void btnDeleteActionPerformed(java.awt.event.ActionEvent evt) {
    int row = tblCart.getSelectedRow();
    DefaultTableModel model = (DefaultTableModel) tblCart.getModel();
    if (row < 0) {
        JOptionPane.showMessageDialog(this,"No item selected! \nPlease select item from the
table above.", "Select Row",JOptionPane.ERROR_MESSAGE);
    } else {
        while(row != -1) {
            int rowModelId = tblCart.convertRowIndexToModel(tblCart.getSelectedRow());
            model.removeRow(rowModelId);
            break;
        }
    }
}

private void pBtn9ActionPerformed(java.awt.event.ActionEvent evt) {
    int qty = (int)pQty9.getValue();
    if (qty == 0){
        JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
    } else {
        String name = pName9.getText();
        String strPrice = pPrice9.getText().substring(1);
        int intPrice = Integer.parseInt(strPrice)*qty;
        double price = Double.valueOf(intPrice);

        addToCart(qty,name,price);
    }
}

private void pBtn8ActionPerformed(java.awt.event.ActionEvent evt) {
    int qty = (int)pQty8.getValue();
    if (qty == 0){
        JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
    } else {
        String name = pName8.getText();
        String strPrice = pPrice8.getText().substring(1);

```

```

        int intPrice = Integer.parseInt(strPrice)*qty;
        double price = Double.valueOf(intPrice);

        addToCart(qty,name,price);
    }
}

private void pBtn7ActionPerformed(java.awt.event.ActionEvent evt) {
    int qty = (int)pQty7.getValue();
    if (qty == 0){
        JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
    } else {
        String name = pName7.getText();
        String strPrice = pPrice7.getText().substring(1);
        int intPrice = Integer.parseInt(strPrice)*qty;
        double price = Double.valueOf(intPrice);

        addToCart(qty,name,price);
    }
}

private void pBtn6ActionPerformed(java.awt.event.ActionEvent evt) {
    int qty = (int)pQty6.getValue();
    if (qty == 0){
        JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
    } else {
        String name = pName6.getText();
        String strPrice = pPrice6.getText().substring(1);
        int intPrice = Integer.parseInt(strPrice)*qty;
        double price = Double.valueOf(intPrice);

        addToCart(qty,name,price);
    }
}

private void pBtn5ActionPerformed(java.awt.event.ActionEvent evt) {
    int qty = (int)pQty5.getValue();
    if (qty == 0){
        JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
    } else {
        String name = pName5.getText();
        String strPrice = pPrice5.getText().substring(1);
        int intPrice = Integer.parseInt(strPrice)*qty;
        double price = Double.valueOf(intPrice);

        addToCart(qty,name,price);
    }
}

private void pBtn4ActionPerformed(java.awt.event.ActionEvent evt) {

```

```

int qty = (int)pQty4.getValue();
if (qty == 0){
    JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
} else {
    String name = pName4.getText();
    String strPrice = pPrice4.getText().substring(1);
    int intPrice = Integer.parseInt(strPrice)*qty;
    double price = Double.valueOf(intPrice);

    addToCart(qty,name,price);
}
}

```

```

@SuppressWarnings("empty-statement")
private void pBtn1ActionPerformed(java.awt.event.ActionEvent evt) {
    int qty = (int)pQty1.getValue();
    if (qty == 0){
        JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
    } else {
        String name = pName1.getText();
        String strPrice = pPrice1.getText().substring(1);
        int intPrice = Integer.parseInt(strPrice)*qty;
        double price = Double.valueOf(intPrice);

        addToCart(qty,name,price);
    }
}

```

```

private void pBtn3ActionPerformed(java.awt.event.ActionEvent evt) {
    int qty = (int)pQty3.getValue();
    if (qty == 0){
        JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
    } else {
        String name = pName3.getText();
        String strPrice = pPrice3.getText().substring(1);
        int intPrice = Integer.parseInt(strPrice)*qty;
        double price = Double.valueOf(intPrice);

        addToCart(qty,name,price);
    }
}

```

```

private void pBtn2ActionPerformed(java.awt.event.ActionEvent evt) {
    int qty = (int)pQty2.getValue();
    if (qty == 0){
        JOptionPane.showMessageDialog(this,"No quantity specified! \nPlease select
amount.", "Select Quantity",JOptionPane.ERROR_MESSAGE);
    } else {
        String name = pName2.getText();
        String strPrice = pPrice2.getText().substring(1);

```

```

        int intPrice = Integer.parseInt(strPrice)*qty;
        double price = Double.valueOf(intPrice);

        addToCart(qty,name,price);
    }
}

private void formWindowClosing(java.awt.event.WindowEvent evt) {
    if (JOptionPane.showConfirmDialog(null, "Are you sure?", "Exit
Shop?",JOptionPane.YES_NO_OPTION) == JOptionPane.YES_OPTION) {
        dispose();
    }
}

private void btnExitActionPerformed(java.awt.event.ActionEvent evt) {
    if (JOptionPane.showConfirmDialog(null, "Are you sure?", "Exit
Shop?",JOptionPane.YES_NO_OPTION) == JOptionPane.YES_OPTION) {
        dispose();
    }
}

/**
 * @param args the command line arguments
 */

private void designComponents() {
    //Icon Image
    ImageIcon img = new ImageIcon("src/icon.png");
    this.setIconImage(img.getImage());
    //Cart design
    DefaultTableCellRenderer renderer =
(DefaultTableCellRenderer)tblCart.getDefaultRenderer(Object.class);
    renderer.setHorizontalAlignment( SwingConstants.CENTER );

    tblCart.getTableHeader().setOpaque(false);
    tblCart.getTableHeader().setBackground(new Color(127,81,89));
    tblCart.getTableHeader().setForeground(new Color(127,81,89));
    tblCart.getTableHeader().setFont(new Font("Segoe UI", Font.BOLD , 14));
    tblCart.getColumnModel().getColumn(0).setMaxWidth(50);
    tblCart.getColumnModel().getColumn(1).setMaxWidth(350);
    tblCart.getColumnModel().getColumn(2).setMaxWidth(100);

    //Center window when running
    Dimension dimension = Toolkit.getDefaultToolkit().getScreenSize();
    int x = (int) ((dimension.getWidth() - this.getWidth()) / 2);
    int y = (int) ((dimension.getHeight() - this.getHeight()) / 2 - 25);
    this.setLocation(x, y);

    //Full screen Window
    //setExtendedState(JFrame.MAXIMIZED_BOTH);
}

private void addToCart(int qty, String name, double price) {

```

```

DefaultTableModel model = (DefaultTableModel) tblCart.getModel();

if (model.getRowCount() == 0){
    model.addRow(new Object[] {qty, name, price});
} else {
    //Checks if item is already in Cart
    for(int r = 0; r < model.getRowCount();r++){
        if (name.equals(model.getValueAt(r, 1))){
            model.removeRow(r);
            model.addRow(new Object[] {qty, name, price});
            break;
        } else if (r == (model.getRowCount()-1)){
            model.addRow(new Object[] {qty, name, price});
            break;
        }
    }
}

}

}

}

public static void main(String args[]) {
    /* Set the Nimbus look and feel */
    //<editor-fold defaultstate="collapsed" desc=" Look and feel setting code (optional) ">
    /* If Nimbus (introduced in Java SE 6) is not available, stay with the default look and feel.
    * For details see http://download.oracle.com/javase/tutorial/uiswing/lookandfeel/plaf.html
    */
    try {
        for (javax.swing.UIManager.LookAndFeelInfo info :
javax.swing.UIManager.getInstalledLookAndFeels()) {
            if ("Nimbus".equals(info.getName())) {
                javax.swing.UIManager.setLookAndFeel(info.getClassName());
                break;
            }
        }
    } catch (ClassNotFoundException ex) {

java.util.logging.Logger.getLogger(CafeMenu.class.getName()).log(java.util.logging.Level.SEVERE,
null, ex);
    } catch (InstantiationException ex) {

java.util.logging.Logger.getLogger(CafeMenu.class.getName()).log(java.util.logging.Level.SEVERE,
null, ex);
    } catch (IllegalAccessException ex) {

java.util.logging.Logger.getLogger(CafeMenu.class.getName()).log(java.util.logging.Level.SEVERE,
null, ex);
    } catch (javax.swing.UnsupportedLookAndFeelException ex) {

java.util.logging.Logger.getLogger(CafeMenu.class.getName()).log(java.util.logging.Level.SEVERE,
null, ex);
    }
}
//</editor-fold>

    /* Create and display the form */

```

```

        java.awt.EventQueue.invokeLater(new Runnable() {
            @Override
            public void run() {
                new CafeWelcome().setVisible(true);
            }
        });
    }

    // Variables declaration - do not modify
    private javax.swing.JTextArea areaReceipt;
    private javax.swing.JTextField areaTotalPrice;
    private javax.swing.JButton pBtn1;
    private javax.swing.JButton pBtn2;
    private javax.swing.JButton pBtn3;
    private javax.swing.JButton pBtn4;
    private javax.swing.JButton pBtn5;
    private javax.swing.JButton pBtn6;
    private javax.swing.JButton pBtn7;
    private javax.swing.JButton pBtn8;
    private javax.swing.JButton pBtn9;
    private javax.swing.JLabel pName1;
    private javax.swing.JLabel pName2;
    private javax.swing.JLabel pName3;
    private javax.swing.JLabel pName4;
    private javax.swing.JLabel pName5;
    private javax.swing.JLabel pName6;
    private javax.swing.JLabel pName7;
    private javax.swing.JLabel pName8;
    private javax.swing.JLabel pName9;
    private javax.swing.JLabel pPrice1;
    private javax.swing.JLabel pPrice2;
    private javax.swing.JLabel pPrice3;
    private javax.swing.JLabel pPrice4;
    private javax.swing.JLabel pPrice5;
    private javax.swing.JLabel pPrice6;
    private javax.swing.JLabel pPrice7;
    private javax.swing.JLabel pPrice8;
    private javax.swing.JLabel pPrice9;
    private javax.swing.JSpinner pQty1;
    private javax.swing.JSpinner pQty2;
    private javax.swing.JSpinner pQty3;
    private javax.swing.JSpinner pQty4;
    private javax.swing.JSpinner pQty5;
    private javax.swing.JSpinner pQty6;
    private javax.swing.JSpinner pQty7;
    private javax.swing.JSpinner pQty8;
    private javax.swing.JSpinner pQty9;
    private javax.swing.JPanel pnlAll;
    private javax.swing.JScrollPane scrlCart;
    private javax.swing.JScrollPane scrlReceipt;
    private javax.swing.JTable tblCart;
    // End of variables declaration
}

```

VII] SYSTEM OUTPUT

When the program starts, this is what the user sees first. The frame shows a welcome message to the user, the shop's contact details along with the button at the bottom which when pressed, will lead to the main frame of the program.

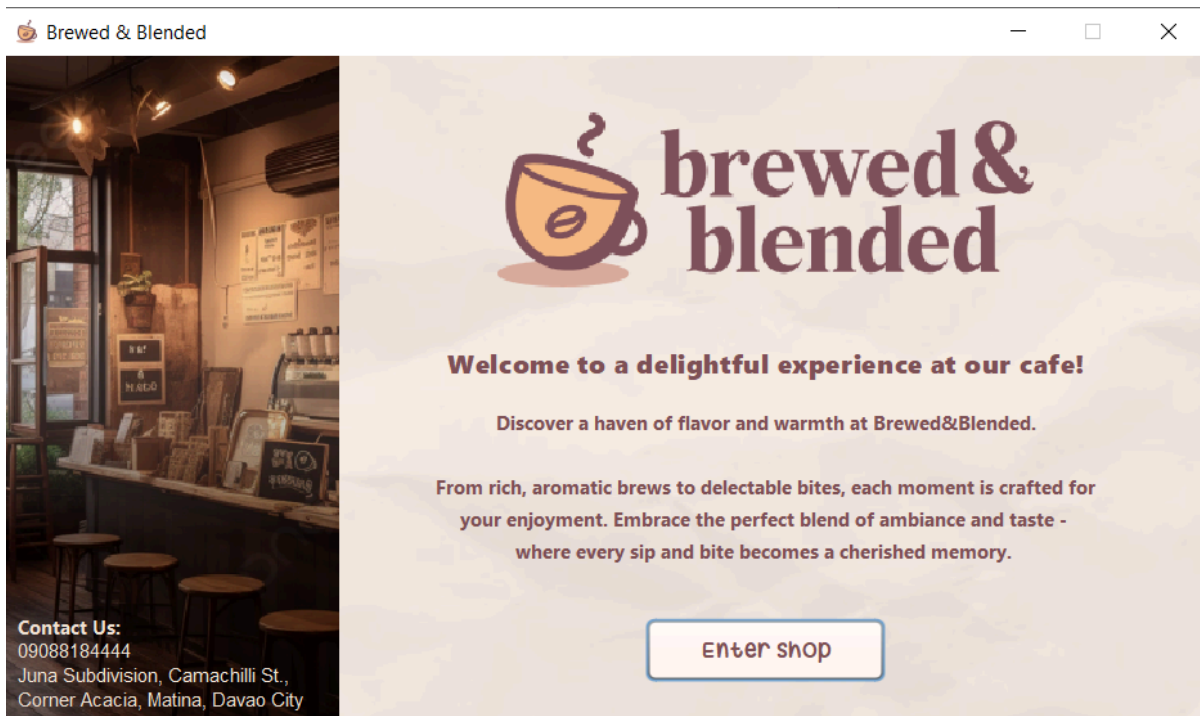


Figure 1. Welcome Frame

This is the main frame of the program. It consists of the menu of the cafe showing the products and their respective buttons that the user may utilize to add their choices to the Cart section.

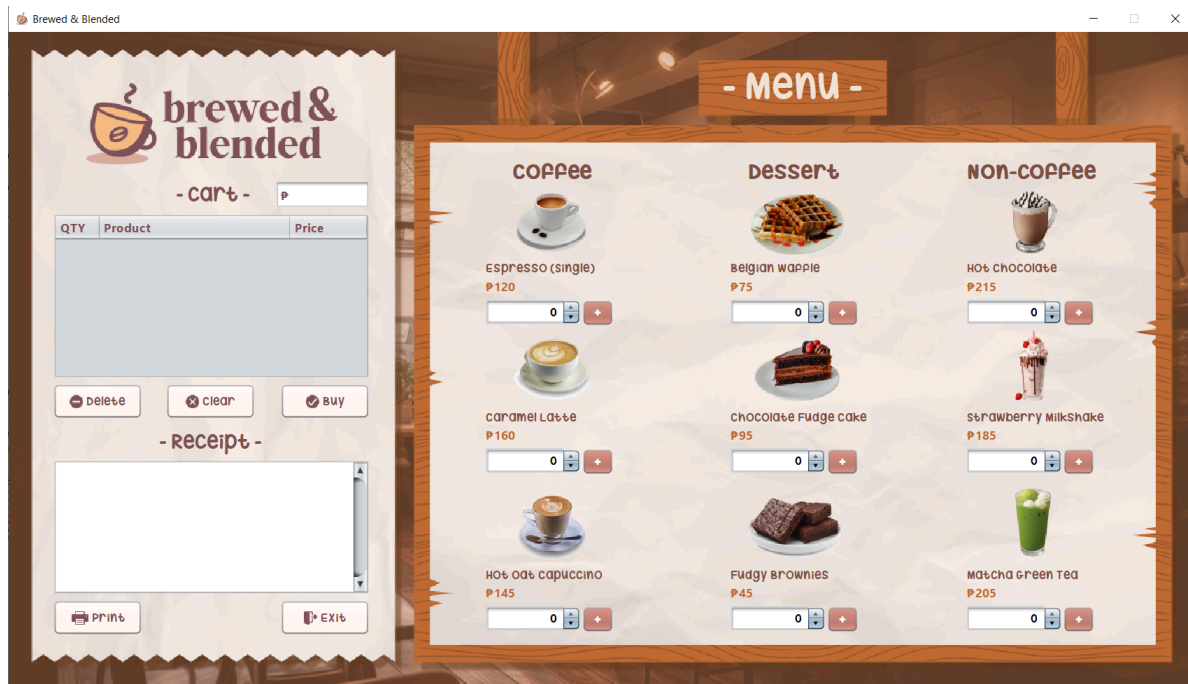


Figure 2. Main Frame

After the frame opens, the user may then choose among the array of choices in the menu and indicate the quantity they want their order in by ticking the spinner field.

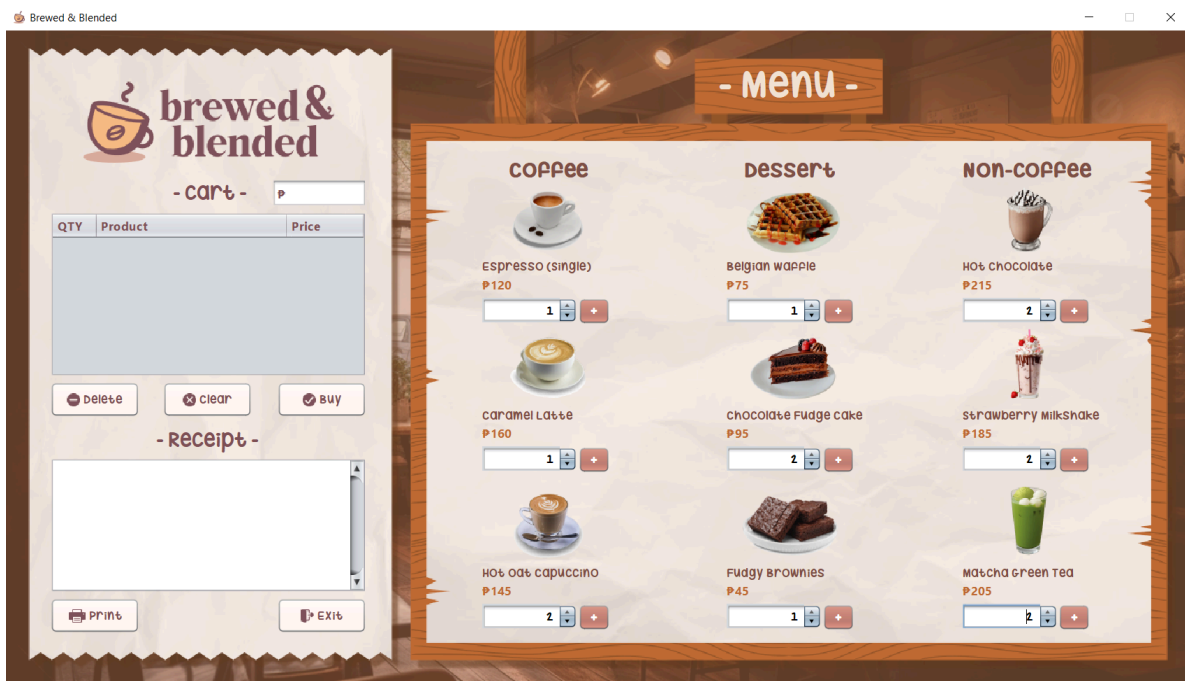


Figure 3. Quantity using Spinner

When the user is done indicating the quantity of their chosen products, they may then tap the plus [+] button next to the spinner to finalize their order in the cart section. This button adds the product above it to the Cart on the left.

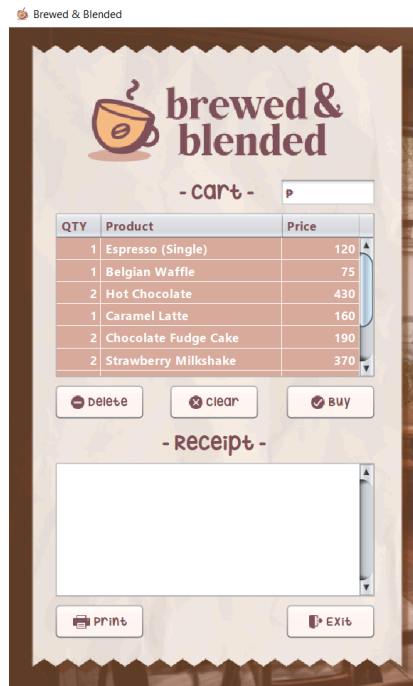


Figure 4. Orders in Cart

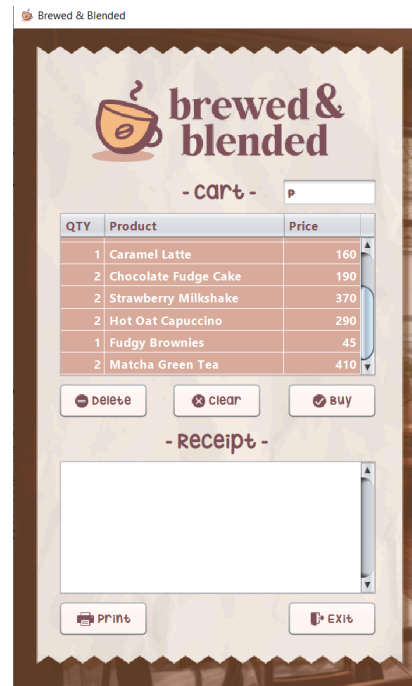


Figure 5. Orders in Cart

If by chance the user wants to remove an item from their Cart, they can do so by selecting the product/s and then pressing the Delete button below it.



Figure 6. Selecting Item to Delete


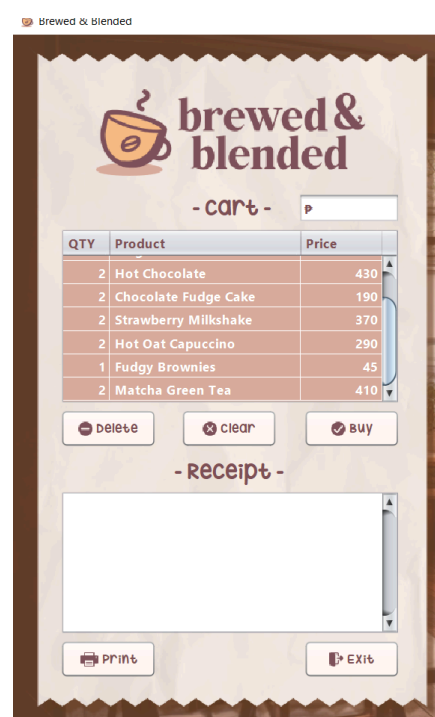


Figure 7. Item Removed

The user can also sort the items in either ascending or descending order in each column by clicking each column's header respectively.

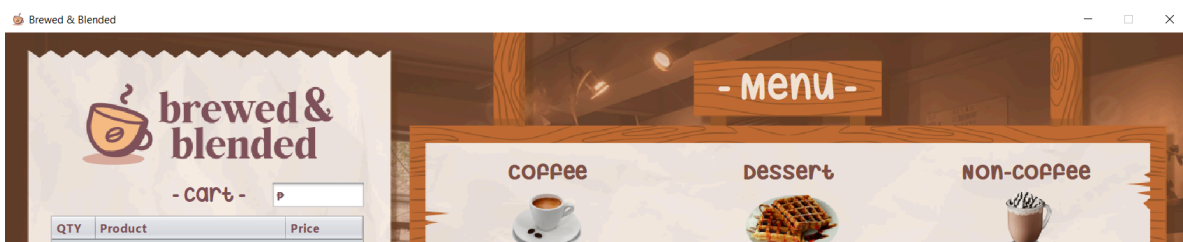

The user can also clear all the Cart, as well as the Receipt area by clicking the Clear button.



Figure 8. Qty Column Sorted

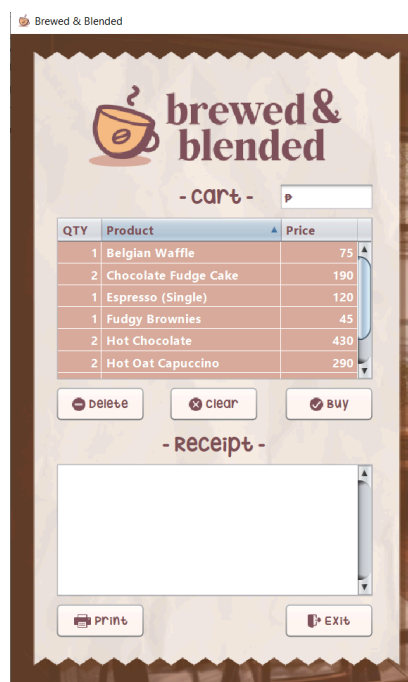


Figure 9. Product Column Sorted

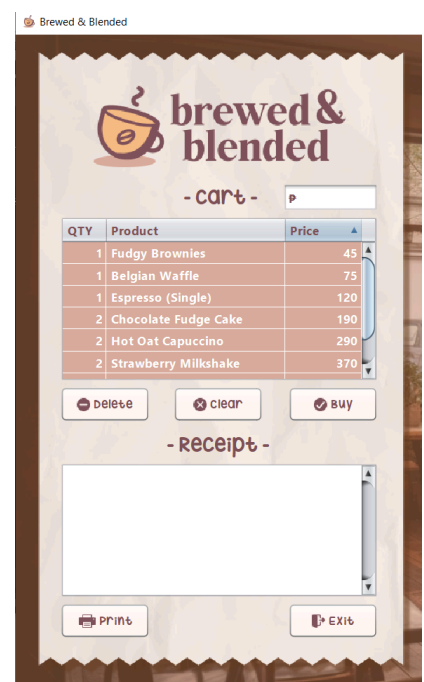


Figure 10. Price Column Sorted

Once the user is certain about their order, they can tap the Buy button to have their order displayed in the Receipt section. In this section, they can find what product they ordered, the quantity of their order, and the prices along with the total amount. This button also writes the receipt onto a text file.



Figure 11. Receipt (1/3)

Figure 12. Receipt (2/3)

Figure 13. Receipt (3/3)

This is what the text file looks like. Its content is taken directly from the Receipt in the window. When the user decides to print the receipt by tapping on the Print button, this action will pop up:

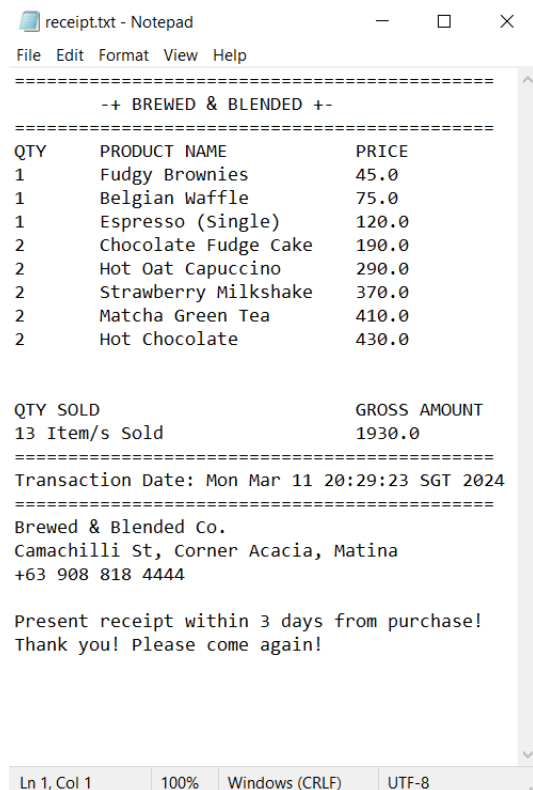


Figure 14. Receipt text file

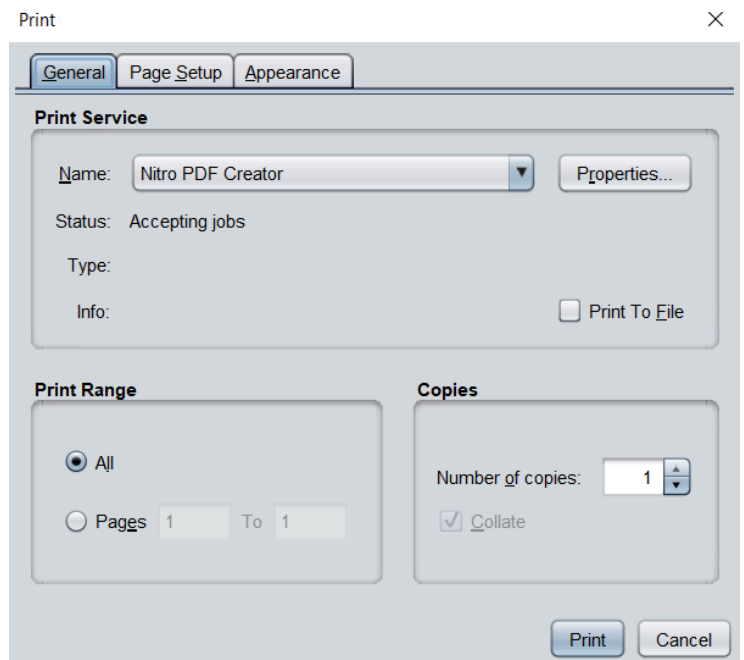


Figure 15. Print Action

This is what the entirety of the frame looks like with all the functions conducted.

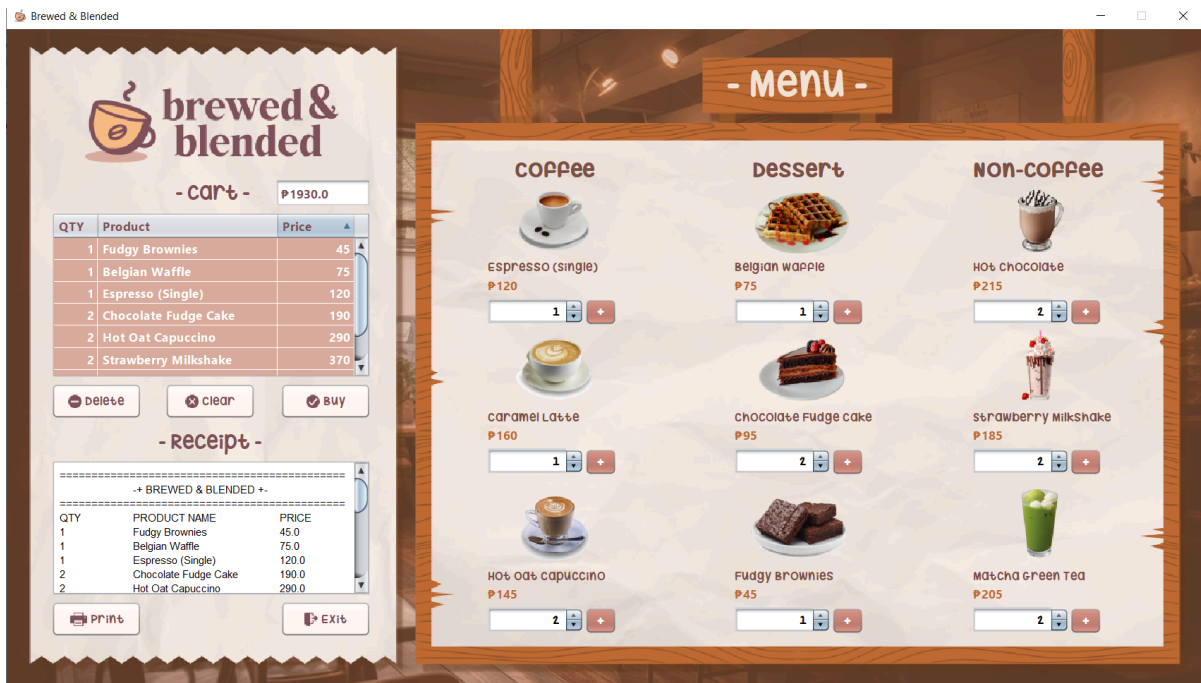


Figure 16. Whole frame

Finally, when the user decides to exit the shop, they can do so by clicking the Exit button or by clicking the [X] button on the top-right corner of the window. Upon clicking, a dialog box may appear confirming the exit action.



Figure 17. Exit