

LICET: A Cryptographic Protocol for Multi-Modal Physiological Human-Intent Verification in Autonomous AI Agent Authorization

Christian Rodrigues Pereira

eColabs Desenvolvimento de Pessoas e Organizações LTDA.

CNPJ 43.694.779/0001-03

contato@ecolabs.com.br

<https://licet.dev>

July 2026 — v2.0

Preprint — SSRN Abstract ID: 7018458 · IETF draft-pereira-licet-human-intent-01

Abstract

As autonomous AI agents gain the capacity to execute consequential actions in high-stakes domains—medical prescribing, financial transactions, critical infrastructure control—existing authorization mechanisms fail to answer a fundamental question: *was the authorizing human genuinely conscious, uncoerced, and cognitively capable at the exact moment of authorization?* Passwords, static biometrics, and digital signatures verify *identity*, not *intent state*.

We present **LICET** (Latin: *it is permitted*), a middleware protocol that cryptographically binds AI agent authorization events to the real-time physiological state of the authorizing human via a three-layer architecture: (1) an **identity anchor** using ECG waveform morphology—an anatomically determined signal resistant to pharmacological manipulation; (2) a **liveness layer** using continuous electrodermal activity (EDA) and overnight HRV pattern matching, proving the presence of a conscious biological subject; and (3) a **voluntary state layer** using personalized Mahalanobis distance fusion across five physiological channels with pharmacological attack pattern detection.

LICET additionally provides: (iv) per-event session-key derivation via HKDF; (v) a Schnorr zero-knowledge proof over BN128, enabling third-party audit without exposing biometric data; (vi) a SHA-256 hash-chained ledger providing tamper-evident authorization records; and (vii) a four-level biometric trust hierarchy (L0–L3) aligned with IETF RATS architecture (RFC 9334), enabling progressive hardware assurance as wearable attestation technology matures.

The protocol is designed as a **coercion cost elevation mechanism**: no single pharmacological intervention—beta-blockers, anticholinergics, opioids, or their combination at survivable doses—defeats the multi-signal fusion system. A reference implementation is publicly deployed at licet.dev. LICET addresses EU AI Act operational oversight obligations (Articles 9, 12, and 26) and Brazil’s LGPD biometric data provisions.

Keywords: AI safety, human oversight, zero-knowledge proofs, biometric authentication, autonomous agents, physiological attestation, electrodermal activity, ECG morphology, IETF RATS, coercion resistance

1 Introduction

Artificial intelligence agents are transitioning from passive tools to autonomous actors capable of executing actions with real, irreversible consequences. A medical AI agent may adjust insulin doses. A financial AI may execute wire transfers. An infrastructure AI may modify power-grid parameters. In each case, the assumed safeguard is human authorization—yet current authorization mechanisms carry a structural flaw.

1.1 The Intent Gap

Contemporary authorization primitives—passwords, FIDO2 keys, fingerprint readers, iris scanners—are designed to answer one question: *is this person who they claim to be?* They are silent on a second, equally critical question: *is this person currently in a state that constitutes genuinely free, conscious, and cognitively competent intent?*

Table 1 contrasts existing mechanisms against the authorization properties required for high-stakes AI agent actions.

Table 1: Authorization properties of existing mechanisms vs. LICET v2.

Mechanism	Identity	Liveness	Coercion-elevated cost	Cognitively intact	Drug
Password	~	×	×	×	
Static biometric	✓	✓	×	×	
FIDO2 / passkey	✓	✓	×	×	
Digital signature	✓	×	×	×	
HR/HRV threshold	×	✓	~	~	
LICET v2	✓	✓	✓	✓	

1.2 Motivating Scenarios

1. **Healthcare:** An AI agent requests authorization from a physician to administer a controlled substance. The physician is under physical duress. LICET’s EDA layer detects acute sympathetic arousal inconsistent with voluntary state and refuses the authorization.
2. **Finance:** An AI system requests approval for a large wire transfer. The authorizer has taken a beta-blocker to suppress HR and HRV responses, but LICET detects the pharmacological attack signature (tremor amplitude below personal baseline, HR-HRV dissociation) and flags the session as **SUPPRESSED**.
3. **Critical infrastructure:** An autonomous operations agent requests permission to modify a power distribution substation. LICET’s three-layer verification confirms identity via ECG morphology, liveness via EDA reactivity, and voluntary state via multivariate deviation analysis.

4. **Legal:** An AI contract agent requires authorization to sign a binding agreement. LICET’s ZKP provides cryptographic proof of physiological state at signing time without exposing any biometric values to the auditor.

1.3 Contributions

This paper makes the following contributions:

- A three-layer physiological authorization architecture (Identity + Liveness + Voluntary State) addressing the limitations of single-signal threshold approaches.
- Introduction of ECG waveform morphology as a medication-resistant biometric identity anchor for authorization systems.
- A personalized Mahalanobis distance fusion model replacing population-level thresholds, with pharmacological attack pattern detection.
- A four-level biometric trust hierarchy (L0–L3) aligned with IETF RATS architecture (RFC 9334) [3], enabling progressive hardware assurance as wearable attestation technology matures.
- A formal specification of the target Level 3 (sensor-to-TEE direct attestation) architecture that does not yet exist in consumer hardware, defining the standard future wearable implementations should meet.
- A zero-knowledge proof scheme (Schnorr/BN128) enabling auditable authorization without biometric data exposure.
- A hash-chained ledger design providing mathematically verifiable, tamper-evident authorization history.
- A working reference implementation, publicly accessible at licet.dev.

2 Related Work

2.1 Human Oversight in AI Systems

The EU AI Act [1] mandates human oversight for high-risk AI systems across multiple provisions. Article 9 requires a risk management system including ongoing monitoring of authorized human oversight. Article 12 mandates logging of events for post-hoc audit. Article 26(5) imposes deployer obligations to ensure that human oversight is *genuinely exercised*—not merely that an authorization button was pressed. LICET provides the technical substrate for these operational assurance obligations: the physiological attestation layer creates a machine-verifiable record that oversight was not bypassed under duress or incapacitation.

Note on Article 14: this provision concerns the AI system’s design capacity for human oversight—it specifies that systems must be designed to allow humans to understand, monitor, and intervene. LICET addresses the complementary operational question: whether the human exercising that capacity was physiologically capable of doing so genuinely. These are distinct requirements within the same regulatory framework.

NIST AI RMF [2] introduces the concept of “human in the loop” without defining a cryptographic binding between oversight events and authorization records. LICET provides the missing technical substrate.

2.2 Multi-Modal Physiological Stress Detection

The WESAD dataset [7] established the benchmark for wearable multi-signal physiological stress detection, demonstrating that EDA + HRV + skin temperature fusion achieves approximately 85–88% three-class accuracy (baseline/stress/amusement), substantially outperforming any single signal. Healey and Picard [8] demonstrated multi-signal fusion superiority in real-world conditions using EDA, HR, and skin conductance. LICET extends this literature to the specific adversarial context of coercion and pharmacological countermeasures, applying personalized baselines rather than population models.

2.3 Biometric-Based Coercion Detection

Research on physiological stress markers dates to the foundational work of Selye [6]. The autonomic nervous system’s sympathetic activation under acute stress produces measurable concurrent elevation of heart rate and suppression of heart rate variability [4, 5]. Prior work in duress-code systems [25] explored covert distress signaling; LICET instead uses multi-modal physiological signals directly.

A critical finding for LICET’s design is that *RMSSD reflects parasympathetic (vagal) withdrawal*, not sympathetic activation [10]. Beta-adrenergic blockers suppress sympathetically mediated HR elevation but do not directly suppress vagal withdrawal under coercion—RMSSD deviations from personal baseline remain detectable even in beta-blocked subjects [12].

2.4 Electrodermal Activity and Pharmacological Resistance

Eccrine sweat glands are innervated by sympathetic *cholinergic* fibers [10, 11]—the only sympathetic fibers that are cholinergic rather than adrenergic. This anatomical fact has a critical implication: beta-adrenergic blockers (propranolol, metoprolol, atenolol) have *no direct effect* on EDA [12]. Suppressing EDA requires anticholinergic agents (atropine, scopolamine, glycopyrrolate), which produce a recognizable toxidrome (tachycardia, warm dry skin, possible confusion) that is itself detectable by the fusion system as a pharmacological attack signature.

2.5 ECG Morphology as a Biometric

The shape of the electrocardiographic waveform—QRS complex morphology, PR interval, QT interval, T-wave shape—is determined by cardiac anatomy and conduction pathway geometry, which is individually unique and extraordinarily stable across time [14]. Unlike HR or HRV, ECG morphology cannot be altered by any known medication at clinically relevant doses, making it the most pharmacologically resistant physiological biometric accessible from consumer wearables (Apple Watch Series 8+, Samsung Galaxy Watch 4+) via standardized APIs (Apple HealthKit `HKElectrocardiogram` at 512 Hz; Samsung Health Monitor).

2.6 Zero-Knowledge Proofs in Identity Systems

ZKPs have been applied to anonymous credential systems [19], blockchain privacy [20], and verifiable computation. To our knowledge, LICET is the first application of ZKPs specifically to bind multi-modal physiological authorization state to AI agent action approval.

2.7 Hash-Chained Audit Logs

Tamper-evident log structures using hash chains have been used in certificate transparency [21], blockchain systems, and secure audit frameworks [22]. LICET adapts this approach specifically to the authorization event ledger domain.

2.8 IETF RATS Architecture

RFC 9334 [3] defines the RATS (Remote ATtestation procedureS) architecture with standard roles: Attester, Verifier, Relying Party, Endorser, and Reference Value Provider. Section 3.1.4 of RFC 9334 defines Composite Attester topologies, where a Lead Attester aggregates Sub-Attester Evidence. LICET’s wearable device maps to a Sub-Attester in this topology, with the mobile application serving as Lead Attester. The four-level biometric trust hierarchy in Section 3.4 formalizes this mapping.

2.9 Concurrent Work

Several independent efforts published in early 2026 address adjacent aspects of the AI agent authorization problem.

Human Delegation Provenance (HDP) [26] provides a lightweight Ed25519 token scheme for delegation chains in multi-agent systems—answering *who authorized what, through what chain*. HDP and LICET are complementary: HDP addresses delegation provenance across agent hops; LICET addresses whether the human principal was *genuinely capable of authorizing* at the moment of issuance.

ZeroSentinel [27] uses X.509 certificates and FIDO-inspired biometric signing to bind human identity to AI agent permissions, but verifies only static biometric identity without real-time physiological state, coercion detection, or pharmacological attack resistance.

Before the Tool Call [28] proposes deterministic pre-action authorization gates without any biometric verification layer.

LICET’s distinctive contribution is the multi-modal physiological layer with pharmacological attack resistance and the RATS-aligned trust hierarchy.

3 The LICET Protocol

3.1 System Model

LICET operates between three principals:

- **Agent** ($\mathcal{A}$): an autonomous AI system requesting authorization to perform an action.
- **Authorizer** ($\mathcal{H}$): the human whose physiological state and intent are being verified.

- **Auditor** ($\mathcal{V}$): any third party who may later verify that a valid authorization occurred, without accessing biometric data.

The LICET server ($\mathcal{S}$) holds the master secret key and executes the protocol logic. The wearable device ($\mathcal{W}$) captures biometric signals at trust level $\ell \in \{0, 1, 2, 3\}$ (Section 3.4).

3.2 Protocol Overview

Figure 1 shows the complete authorization flow.

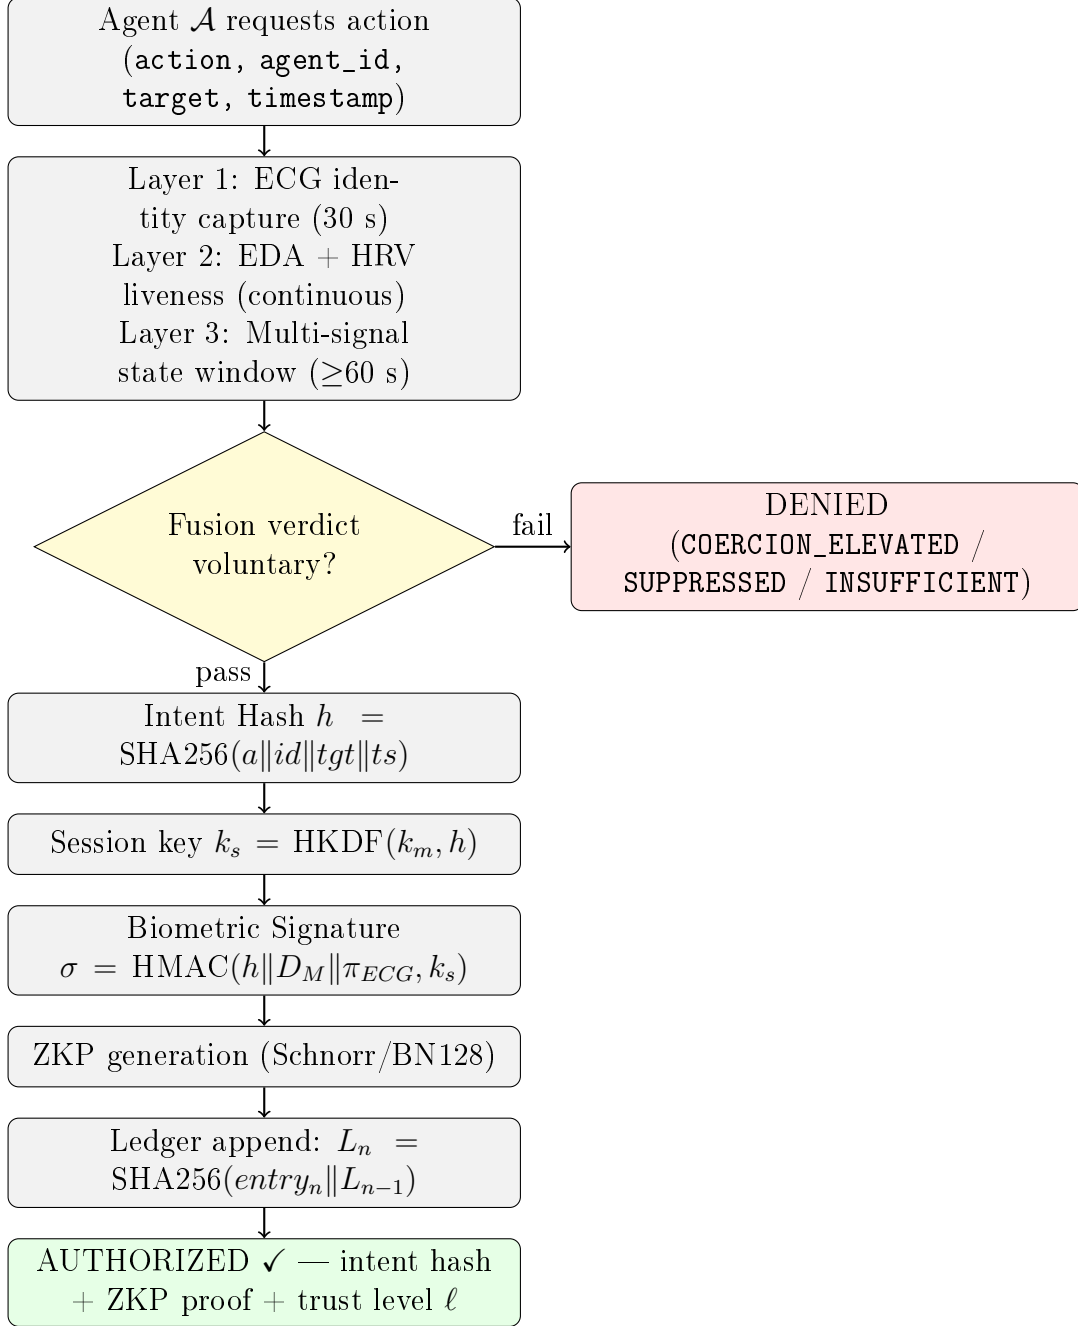


Figure 1: LICET v2 authorization flow with three-layer physiological verification.

3.3 Three-Layer Physiological Architecture

LICET v2 replaces single-signal threshold detection with a three-layer architecture addressing distinct verification properties.

3.3.1 Layer 1 — Identity Anchor: ECG Waveform Morphology

ECG waveform morphology (QRS complex shape, PR interval, QT interval, T-wave morphology) is determined by cardiac anatomy and electrical conduction pathway geometry. These are individually unique, stable across decades, and **impossible to alter pharmacologically** at any clinically relevant dose.

At the start of each authorization session, a 30-second ECG recording is obtained (Apple Watch Ultra 2 / Series 8+ via **HKElectrocardiogram** at 512 Hz; Samsung Galaxy Watch 4+ via Samsung Health Monitor). A morphological match score $\rho_{ECG} \in [0, 1]$ is computed against the enrolled baseline:

$$\rho_{ECG} = \text{cosine_similarity}(\mathbf{f}(ecg_{\text{session}}), \mathbf{f}(ecg_{\text{enrolled}})) \quad (1)$$

where $\mathbf{f}(\cdot)$ extracts a feature vector of (QRS duration, PR interval, QTc, axis, T-wave amplitude ratio). Authorization proceeds only if $\rho_{ECG} \geq \theta_{ECG}$ (default: 0.85).

3.3.2 Layer 2 — Liveness: EDA and HRV Pattern

The liveness layer proves that a conscious, awake biological subject is present and not a replay attack. Two signals contribute:

Electrodermal Activity (EDA): Continuous EDA is available from WHOOP 5 and Fitbit Sense 2. Spot-check EDA (≥ 3 minutes) is available from Samsung Galaxy Watch 5/6/7. EDA is controlled by sympathetic cholinergic innervation and therefore cannot be voluntarily suppressed. A minimum of one skin conductance response (SCR) with physiologically correct morphology (onset latency 1–3 s, amplitude $\geq 0.05 \mu\text{S}$, recovery 5–10 s) must be present during the session to confirm autonomic reactivity.

Overnight HRV Pattern: The statistical distribution of RMSSD across sleep stages (not just the mean) carries individual-specific characteristics that are stable across time but disturbed by pharmacological intervention. The pattern match score $\rho_{HRV} \in [0, 1]$ is computed against the enrolled 30-day baseline using distributional distance.

3.3.3 Layer 3 — Voluntary State: Personalized Mahalanobis Fusion

Layer 3 replaces population-level HR/HRV thresholds with a personalized multivariate deviation detector over a minimum 60-second capture window.

Signal set. Let $\mathbf{x} = (x_1, \dots, x_k)$ be the vector of k physiological features extracted during the authorization window:

x_i	Signal	Source	Attack resistance
x_1	RMSSD (ms)	PPG / ECG	Medium (vagal, not beta-blocked)
x_2	EDA SCL (μ S)	EDA electrodes	High (cholinergic)
x_3	EDA SCR count	EDA electrodes	High
x_4	Skin temp delta ($^{\circ}$ C)	Thermistor	High (α_1 -adrenergic)
x_5	Tremor 8–12 Hz (mg)	IMU ≥ 50 Hz	Inverse (absence = beta-blocker)
x_6	Respiratory rate (bpm)	PPG + IMU	High (most attacks)
x_7	SpO ₂ variability (%)	PPG	Medium

Personalized z-scores. For each signal x_i , compute the z-score against the individual’s personal baseline (μ_i^B, σ_i^B) estimated from ≥ 5 calm sessions of ≥ 3 minutes each:

$$z_i = \frac{x_i - \mu_i^B}{\sigma_i^B} \quad (2)$$

Mahalanobis fusion score. The multivariate deviation from the calm baseline is:

$$D_M = \sqrt{(\mathbf{z} - \boldsymbol{\mu}_{\text{calm}})^T \mathbf{S}^{-1} (\mathbf{z} - \boldsymbol{\mu}_{\text{calm}})} \quad (3)$$

where $\mathbf{S}$ is the covariance matrix of physiological features during the individual’s calm baseline sessions. $\mathbf{S}$ captures inter-signal correlations: EDA and HR normally co-elevate under stress; a dissociation (EDA flat, HR elevated) increases D_M even when each signal appears individually unremarkable.

Verdict mapping:

$$\text{Verdict}(D_M) = \begin{cases} \text{CLEAR} & D_M < \theta_{\text{low}} \\ \text{ELEVATED} & \theta_{\text{low}} \leq D_M < \theta_{\text{high}} \\ \text{HIGH} & D_M \geq \theta_{\text{high}} \\ \text{SUPPRESSED} & \text{pharmacological attack pattern detected (Eq. 5)} \end{cases} \quad (4)$$

Authorization proceeds only if verdict is **CLEAR**.

3.3.4 Pharmacological Attack Pattern Detection

A key innovation of LICET v2 is explicit detection of pharmacological countermeasure patterns. Each attack type produces a characteristic signal dissociation that the fusion model flags:

$$\text{Attack}(\mathbf{z}) = \begin{cases} \text{BETA_BLOCKER} & z_5 < -2.0 \text{ (tremor absent)} \wedge (\Delta HR_{\text{baseline}} > 15\%) \\ \text{ANTICHOLINERGIC} & z_2 < -1.5 \text{ (EDA suppressed)} \wedge z_1 > +1.0 \text{ (HR elevated)} \wedge x_4 > 0 \text{ (skin warm)} \\ \text{OPIOID} & z_6 < -2.0 \text{ (respiratory depressed)} \wedge x_4 > 0 \text{ (skin warm)} \wedge z_1 < 0 \text{ (HR elevated)} \\ \text{COMBINED} & \text{two or more attack patterns simultaneously} \end{cases} \quad (5)$$

If any attack pattern is detected, the verdict is set to **SUPPRESSED** regardless of D_M value. The attack pattern is logged in the ledger.

Note on beta-blockers and RMSSD. Beta-adrenergic blockers act on the sympathetic beta-adrenergic pathway; RMSSD reflects parasympathetic (vagal) withdrawal,

not sympathetically mediated activity [12]. Consequently, vagal withdrawal under acute stress is mechanistically expected to persist under beta-blockade—HR reactivity survives propranolol in the published record [30]—but the specific propranolol/metoprolol + acute mental stress + RMSSD-reactivity experiment is largely absent, so this is stated as mechanistically expected rather than directly demonstrated. Beta-blockers do attenuate LF power and resting HR; LF power reflects baroreflex modulation of autonomic outflow, not cardiac sympathetic tone directly [32, 33]. The primary detection signal for acute beta-blockade is tremor suppression (Eq. 5): physiological tremor at 8–12 Hz is enhanced by sympathetic beta-adrenergic stimulation and reduced below personal baseline by beta-blockers—the *absence* of expected tremor is the detection signal [13]. Chronic beta-blocker use presents a separate confound: resting RMSSD is elevated and resting HR reduced before any challenge, displacing the calm fingerprint used by the Mahalanobis detector (see Acknowledged Limitations).

3.4 Biometric Trust Levels (RATS Alignment)

LICET defines four biometric trust levels aligned with IETF RATS RFC 9334 [3], reflecting the attestation capability of the wearable device:

- L0 — No Hardware Attestation.** Data originates from cloud API with OAuth authentication only (Our Ring API, Apple HealthKit without App Attest, Samsung Health Connect without Knox). Physiological values are informative metadata only. Suitable for T1 (software-only) deployments with reduced assurance claims.
- L1 — Platform Attestation.** The companion mobile app is attested as running on a genuine, unmodified device (Apple DCAAppAttest via Secure Enclave; Samsung Knox DeviceAttestation). The app’s integrity is verified; sensor data provenance is not independently verified. Suitable for T2 (attested software) CPoE tier.
- L2 — Hardware Attestation with Third-Party Verifiable CA.** The device holds a hardware-backed attestation key whose certificate chain can be verified by any third party without contacting the manufacturer’s server. Currently achievable with Google Pixel Watch 2 + Android Key Attestation (Titan M2 security chip; Google publishes the hardware attestation root CA). Suitable for T3 (hardware-bound) with explicit caveats on sensor data path.
- L3 — Sensor-to-TEE Direct Attestation (Future Standard).** The wearable MCU signs sensor data *inside the trusted execution environment before the application processor can observe it*. The signing key is provisioned at manufacturing time and included in an Endorser certificate chain. No commercially available consumer wearable implements this architecture as of 2026. LICET defines this level as the target specification for future wearable hardware, providing a clear standard against which manufacturers can certify compliance. Suitable for T4 (hardware-hardened) deployments with the highest forgery-cost guarantees.

The biometric trust level ℓ is reported in the ledger entry and the ZKP proof, allowing Relying Parties to make risk-appropriate trust decisions per RFC 9334 Section 3.

Composite Attester Topology (RFC 9334 §3.1.4). In LICET’s RATS role mapping, the wearable device acts as a *Sub-Attester* producing physiological Evidence (signed at levels L1–L3 by the device’s attestation key). The smartphone acts as *Lead Attester*,

aggregating Sub-Attester Evidence with platform-level Evidence before presenting the composite Evidence packet to the LICET Verifier. This topology is architecturally valid under RFC 9334 but requires formal specification of the Sub-Attester Evidence format and Endorser trust chain—an open standardization gap that LICET addresses through its L3 specification target.

3.5 Baseline Capture Protocol

The personalized baseline is a prerequisite for Layers 2 and 3.

- **Initial enrollment:** ≥ 5 sessions of ≥ 3 minutes each in a verified calm state, capturing ECG (Layer 1 enrollment), EDA SCL distribution, and all Layer 3 signals.
- **Minimum time to first authorization:** 24 hours after last baseline session.
- **Baseline expiry:** 30 days. Re-enrollment required after expiry.
- **Baseline anomaly detection:** If resting HR deviates $> 15\%$ from historical resting baseline, or EDA SCL is $< 50\%$ of historical baseline, the baseline session is flagged and excluded. This detects pre-authorization beta-blocker or anticholinergic pre-medication.

The baseline digest $H_B = \text{HMAC}(\mu_B \parallel \Sigma_B \parallel t_B, k_m)$ is stored server-side and referenced in each authorization ledger entry.

3.6 Intent Hash

The Intent Hash uniquely and immutably identifies the requested action:

$$h = \text{SHA256}(a \parallel id_A \parallel tgt \parallel ts \parallel \ell) \quad (6)$$

where a is the action descriptor, id_A the agent identifier, tgt the target entity, ts a Unix timestamp, and ℓ the biometric trust level. Any single-bit modification to any field produces a completely different h .

3.7 Session Key Derivation

A per-event session key is derived using HKDF [18]:

$$k_s = \text{HKDF-SHA256}(k_m, h) \quad (7)$$

where k_m is the server master key. This ensures that compromise of one session key does not affect any other authorization event.

3.8 Biometric Signature

The Biometric Temporal Signature commits the physiological state to the intent hash:

$$\sigma = \text{HMAC-SHA256}(h \parallel D_M \parallel \rho_{ECG} \parallel \text{verdict} \parallel \ell \parallel ts, k_s) \quad (8)$$

Properties:

- **Event-unique:** ts ensures no replay across distinct events.
- **Action-bound:** h is embedded; σ cannot be transferred to authorize a different action.
- **Non-invertible:** no biometric value can be recovered from σ without k_s .
- **Fusion-committed:** D_M commits the full multivariate fusion result without exposing individual signal values.

3.9 Zero-Knowledge Proof

LICET uses a non-interactive Schnorr proof over BN128 with the Fiat-Shamir transform [17]. This allows any auditor $\mathcal{V}$ to verify that a valid multi-modal biometric authorization exists without learning any physiological values.

Setup. Let $\mathbb{G}$ be the BN128 group of prime order q , with generator G .

Proof generation by $\mathcal{S}$:

$$w = \text{SHA256}(\sigma \parallel h) \bmod q \quad (9)$$

$$PK = w \cdot G \quad (10)$$

$$r \xleftarrow{\$} \mathbb{Z}_q \quad (11)$$

$$R = r \cdot G \quad (12)$$

$$c = \text{SHA256}(R \parallel PK \parallel h) \bmod q \quad (13)$$

$$s = (r - c \cdot w) \bmod q \quad (14)$$

The proof $\pi = (R, c, s, PK)$ is stored in the ledger alongside the authorization record.

Verification by $\mathcal{V}$:

$$s \cdot G + c \cdot PK \stackrel{?}{=} R \quad (15)$$

If Equation 15 holds and $c = \text{SHA256}(R \parallel PK \parallel h) \bmod q$, the auditor is convinced that a valid multi-modal biometric authorization exists, without learning D_M , ρ_{ECG} , or any individual signal value.

3.10 Hash-Chained Ledger

Every authorization event is appended to a hash-chained ledger:

$$L_0 = \text{SHA256}(\text{entry}_0 \parallel \text{"GENESIS"}) \quad (16)$$

$$L_n = \text{SHA256}(\text{entry}_n \parallel L_{n-1}), \quad n \geq 1 \quad (17)$$

where entry_n contains the intent hash, fusion verdict, pharmacological attack flags (if any), trust level ℓ , ZKP proof π , and timestamp. The ledger endpoint `GET /v1/ledger/integrity` recomputes the full chain, allowing any observer to detect retroactive tampering without a trusted third party.

4 Security Analysis

4.1 Threat Model

We consider the following adversarial capabilities:

1. **Credential compromise:** adversary obtains passwords, biometric templates, or private keys.
2. **Replay attack:** adversary captures a valid LICET token and replays it for a different action or at a later time.
3. **Physical coercion:** adversary physically threatens the authorizer.
4. **Cognitive incapacitation:** the authorizer is sedated, hypoxic, or unconscious.
5. **Beta-adrenergic blockade:** adversary pre-medicates the authorizer with propranolol or metoprolol to blunt beta-adrenergic cardiac and tremor responses (HR blunting, tremor suppression).
6. **Anticholinergic suppression:** adversary administers atropine, scopolamine, or glycopyrrolate to suppress EDA.
7. **Opioid sedation:** adversary administers opioids to impair respiratory and autonomic responses.
8. **Combined pharmacological attack:** adversary combines multiple agents to suppress all channels simultaneously.
9. **Volitional vagal enhancement:** a coerced subject trained in resonance-frequency breathing at ≈ 0.1 Hz (approximately six cycles per minute) produces a physiologically authentic calm vector—elevated RMSSD and HF, reduced EDA and HR—indistinguishable from genuine calm on the Mahalanobis distance metric. No pharmacological agent is required. This is the primary unmitigated attack vector in the current design; see Acknowledged Limitations.
10. **Ledger tampering:** adversary retroactively alters authorization records.
11. **Privacy attack:** a curious auditor attempts to extract biometric data from the authorization record.
12. **Key compromise:** the server master key k_m is exposed.

4.2 Security Properties

- P1 — Credential independence.** Even with all credentials, an adversary who cannot produce valid real-time multi-modal physiological state cannot obtain a valid LICET token.
- P2 — Replay resistance.** The session key $k_s = \text{HKDF}(k_m, h)$ is unique per intent hash h , which includes action, target, timestamp, and trust level.

- P3 — Coercion cost elevation.** The three-layer architecture raises the cost of obtaining unauthorized authorization under coercion. No known single-agent pharmacological attack defeats all layers simultaneously at survivable doses.
- P4 — Beta-blocker resistance.** Tremor suppression detection (Layer 3, $z_5 < -2.0$) detects acute beta-adrenergic pre-medication. RMSSD vagal withdrawal under acute psychological stress is mechanistically expected to persist under beta-adrenergic blockade—beta-blockers act on the beta-adrenergic pathway whereas RMSSD reflects parasympathetic (vagal) tone—but the specific propranolol/metoprolol + acute mental stress + RMSSD-reactivity experiment is largely absent from the published record, so this claim is stated as mechanistically expected rather than directly demonstrated [30]. Note: chronic beta-blockade raises resting RMSSD and lowers resting HR [31], displacing the calm fingerprint before any challenge is applied; this is a genuine confound for the personalized-baseline detector and is named in Acknowledged Limitations.
- P5 — Anticholinergic resistance.** EDA suppression combined with HR elevation and warm skin temperature (inverted stress pattern) detects anticholinergic administration. The toxidrome (tachycardia, dry flushed skin, possible confusion) creates a recognizable signal dissociation.
- P6 — Identity anchor pharmacological resistance.** ECG morphology (Layer 1) cannot be altered by any medication. An authorized person’s QRS complex, PR interval, and QT interval remain their personal anatomical signature regardless of pharmacological intervention.
- P7 — Combined attack self-defeat.** The drug combination required to suppress all channels simultaneously (beta-blocker + anticholinergic + alpha-blocker) produces severe hemodynamic instability (hypotension, tachycardia, reflex bradycardia collision) that would incapacitate the subject before physiological normalization is achieved across all channels.
- P8 — Ledger integrity.** Any modification to ledger entry L_i invalidates $L_{i+1}, \dots, L_n$, making tampering mathematically detectable.
- P9 — Biometric privacy.** The ZKP provides zero-knowledge: auditors learn that a valid multi-modal authorization exists but gain no information about D_M , ρ_{ECG} , or any individual signal value.
- P10 — Session key isolation.** HKDF derivation ensures compromise of session key $k_s^{(i)}$ does not expose $k_s^{(j)}$ or k_m .

4.3 Estimated Error Rates

Based on the WESAD benchmark [7] and follow-on multi-signal fusion literature [8, 9]:

- 2-signal fusion (EDA + HRV, population model): FNR $\approx 8\%$, FPR $\approx 10\%$.
- 4-signal fusion with personalized baseline: FNR $\approx 2\%$, FPR $\approx 4\%$.
- 5-signal fusion + pharmacological attack detection + personalized baseline: estimated FNR 1–2%, FPR 3–5%.

These estimates are for laboratory-grade sensor hardware. Consumer PPG-based HRV has higher variance than research-grade sensors; clinical deployments should require ECG-quality HR for Layer 1 and EDA-capable devices for full Layer 2 and Layer 3 guarantees.

4.4 Acknowledged Limitations

1. **Volitional vagal enhancement (primary unmitigated attack vector).** A coerced subject trained in resonance-frequency breathing at ≈ 0.1 Hz (approximately six cycles per minute) produces a physiologically authentic calm vector—elevated RMSSD and HF power, reduced EDA, reduced HR, internally consistent—that cannot be separated from genuine calm on the fused signal space [29]. The Mahalanobis design measures distance from the individual’s calm fingerprint; paced breathing manufactures a real calm vector, not a forged one, so the Mahalanobis distance collapses to zero without any anomalous signal. No pharmacological agent is required; only prior behavioral training. There is no mitigation in the current design. Future work may address this through respiratory-rate estimation from the RR-interval power spectrum: genuine rest exhibits broadband HRV variability, whereas resonance breathing produces a narrow dominant peak at 0.1 Hz. This technique is speculative and has not been validated against a trained adversary.
2. **Chronic beta-blocker baseline displacement.** Beta-adrenergic blockade (propranolol, metoprolol) raises resting RMSSD and lowers resting HR [31]. A subject on chronic beta-blocker therapy presents a calm fingerprint that is already displaced before any challenge is applied. The personalized Mahalanobis detector calibrates against this displaced baseline and may exhibit reduced sensitivity to coercion-induced vagal withdrawal in chronically medicated individuals.
3. **EDA hardware availability.** Continuous EDA is available on WHOOP 5 and Empatica EmbracePlus; spot-check EDA on Samsung Galaxy Watch 5+ and Fitbit Sense 2. Apple Watch, Oura Ring, and Garmin devices do not expose EDA as of 2026. Deployments on non-EDA devices operate at reduced liveness assurance.
4. **L3 not yet commercially available.** No consumer wearable as of 2026 provides direct sensor-to-TEE attestation. L2 (Pixel Watch 2 + Android Key Attestation) is the highest hardware assurance achievable today.
5. **Baseline cold start.** Five sessions are required before first authorization. Users cannot use LICET immediately upon enrollment.
6. **Anticholinergic detection requires EDA.** Without an EDA sensor, anticholinergic attacks are harder to detect. The warm-skin + HR-elevated pattern in temperature and HRV provides partial detection.
7. **Server trust.** The current architecture trusts the LICET server. Decentralized execution (smart-contract ZKP verifier) is a future direction.
8. **Special populations.** Three clinical populations present systematic confounds that reduce the discriminative power of the personalized Mahalanobis detector.
 - *Endurance athletes.* Trained athletes commonly exhibit resting RMSSD values exceeding 100 ms—two to three standard deviations above the population

mean—due to chronic parasympathetic dominance. The calm fingerprint of an athletic user already occupies the upper tail of the HRV distribution, reducing the headroom available to detect voluntary vagal enhancement. The Mahalanobis personalization partially compensates by calibrating against the individual’s own elevated baseline, but an adversary with the same athletic profile may produce a calm vector that maps onto that baseline without detectable deviation.

- *Elderly users.* Age-related parasympathetic withdrawal progressively attenuates HRV; RMSSD values below 20 ms are common at age 70+ [4]. Reduced dynamic range compresses the Mahalanobis signal space and may yield false positives against population-reference thresholds even in the absence of coercion. The personalized baseline partially mitigates this by calibrating against the individual’s own attenuated HRV, but the margin for detecting acute sympathetic activation narrows accordingly.
- *Autonomic neuropathy.* Diabetic and other forms of autonomic neuropathy (Parkinson’s disease, post-cardiac surgery, renal failure) produce a fixed, attenuated HRV with severely reduced baroreflex sensitivity [32]. These individuals may not exhibit the sympathetic-withdrawal or vagal-withdrawal signatures that LICET is designed to detect. Deployment in populations with known autonomic dysfunction requires independent clinical validation not yet performed.

5 Implementation

5.1 Server

The reference implementation is a Python/FastAPI application deployed on Google Cloud Run (`us-central1`). The cryptographic stack uses:

- `cryptography` (Python): HKDF-SHA256, HMAC-SHA256
- `py_ecc`: Schnorr proof over BN128
- `SQLite`: hash-chained ledger persistence
- `numpy/scipy`: Mahalanobis distance computation, baseline covariance estimation

The API is publicly accessible at <https://licet.dev/v1/>.

5.2 Android Application

A companion Android application (Kotlin, Jetpack Compose) integrates with Samsung Health Connect to read HR, HRV, EDA (Galaxy Watch 5+), skin temperature, and accelerometer data. The app implements the full LICET onboarding flow including baseline capture, real-time authorization UI, and trust level reporting.

5.3 Supported Wearable Platforms

Device	ECG	EDA	Trust Level	Tier
Apple Watch Ultra 2 / S9+	✓(512 Hz)	×	L1	T2
Samsung Galaxy Watch 7	✓(512 Hz)	Spot-check	L1	T2
Google Pixel Watch 2	×	×	L2	T3
WHOOP 5	×	✓(continuous)	L0	T1
Oura Ring 4/5	×	×	L0	T1
Apple Watch + WHOOP 5	✓	✓	L1	T2
Pixel Watch 2 + WHOOP 5	×	✓	L2	T3

5.4 REST API

Method	Endpoint	Description
GET	/v1/health	Protocol liveness check
POST	/v1/authorize	Full multi-modal authorization
POST	/v1/biometric/push	Wearable push (app → server)
POST	/v1/authorize/from-push	Authorize using pushed biometrics
POST	/v1/verify	ZKP verification (auditors)
GET	/v1/ledger/integrity	Full chain integrity check
GET	/v1/ledger/history	Authorization event history

5.5 Minimal Integration Example

Listing 1: Minimal LICET v2 authorization request.

```
import requests

response = requests.post("https://licet.dev/v1/authorize", json={
    "action": "prescribe_insulin_50ui",
    "agent_id": "medical_agent_v1",
    "target": "patient_id_12345",
    "window_seconds": 60,          # minimum 60s capture window
    "trust_level": 1,              # L1: App Attest device binding
    "ecg_features": {...},        # QRS/PR/QT from Apple Watch
    "eda_scl": 4.2,                # microsiemens
    "eda_scr_count": 3,
    "hrv_rmssd": 42.1,             # ms
    "skin_temp_delta": -0.8,       # degrees C (negative =
    # vasoconstriction)
    "tremor_8_12hz": 3.2,          # mg RMS
    "respiratory_rate": 15.4        # breaths/min
}, headers={"X-LICET-App-Secret": "<app_secret>"})

result = response.json()
if result["authorized"]:
    intent_hash = result["intent_hash"]
    zkp_proof = result["zkp_proof"]
    trust_level = result["trust_level"]          # L0-L3
```

```

fusion_dm    = result["mahalanobis_distance"]
else:
    verdict    = result["verdict"]           # ELEVATED / HIGH /
        SUPPRESSED
    attack_flag = result.get("attack_pattern") # BETA_BLOCKER /
        ANTICHOLINERGIC / etc.

```

6 Use Cases

Healthcare. AI agents prescribing controlled medications or adjusting treatment protocols require oversight that is verifiably free from duress. The ECG identity anchor confirms the correct physician; the EDA liveness layer confirms conscious presence; the Mahalanobis fusion confirms voluntary state.

Finance. High-value autonomous transactions require authorization demonstrably free from coercion or pharmacological manipulation. LICET’s pharmacological attack pattern detection and ledger provide a legally auditable trail.

Critical infrastructure. Operations modifying power grids, telecommunications, or water systems via AI agents demand oversight that is both real and verifiable. LICET’s ZKP layer allows independent auditors to verify human oversight without accessing operational biometrics.

Legal and compliance. Regulated AI decisions require documented human supervision. LICET’s machine-verifiable, privacy-preserving audit record is compatible with e-signature and records-management frameworks.

7 Regulatory Alignment

EU AI Act (Regulation 2024/1689). LICET addresses operational human oversight obligations under three distinct provisions:

Article 9 (Risk Management System) requires providers to implement ongoing monitoring of high-risk AI systems including documented human oversight events. LICET’s hash-chained ledger provides the tamper-evident record of each oversight event with physiological state attestation.

Article 12 (Record-Keeping) mandates automatic logging of events enabling post-hoc reconstruction of AI system behavior and oversight actions. LICET’s ledger satisfies this requirement with ZKP-protected entries that preserve biometric privacy.

Article 26(5) (Deployer Obligations) requires deployers of high-risk AI systems to ensure human oversight is genuinely exercised. LICET provides the evidentiary layer that distinguishes genuine (voluntary, conscious, uncoerced) from nominal (button-pressed-under-duress) oversight.

Note: Article 14 governs the AI system’s *design capacity* for human oversight—requiring that the system architecture permit monitoring and intervention. LICET addresses the complementary *operational assurance* question of whether that capacity was genuinely exercised in a specific instance, as required by Articles 9, 12, and 26.

CEN-CENELEC JTC 21 (EU AI Act Harmonised Standards). The ongoing harmonised standards process under the EU AI Act will define what conformity assessments require for demonstrating genuine human oversight. LICET’s physiological attestation approach is directly relevant to these standards as they develop.

Brazil LGPD (Lei 13.709/2018). LICET’s ZKP design ensures that biometric data (LGPD Article 5, sensitive personal data) is never stored in the ledger or exposed to auditors. The authorization proof is functionally separated from the physiological values that generated it.

NIST AI Risk Management Framework. The GOVERN and MEASURE functions call for documentation of human oversight events. LICET’s hash-chained ledger provides tamper-evident records of each oversight event.

8 Open Research Problems

1. **Level 3 (Sensor-to-TEE) specification and standardization.** No consumer wearable currently provides direct sensor-to-TEE attestation. This paper defines the L3 architecture target; IEEE and IETF standardization of the hardware profile is an open research and standardization problem with significant security implications.
2. **Composite Attester profile for RFC 9334.** Formally specifying the wearable as a Sub-Attester in the RATS Composite Device model requires: (a) Sub-Attester Evidence format in CBOR/EAT; (b) Lead Attester aggregation obligations; (c) Endorser trust chain for wearable manufacturer certificates; (d) Verifier appraisal policy for composite physiological Evidence. This is an open IETF contribution opportunity.
3. **Clinical validation of pharmacological attack detection.** Prospective studies measuring specificity and sensitivity of the attack pattern detection in Equation 5 against controlled pharmacological administration are needed to validate the detection thresholds.
4. **Baseline poisoning attacks.** An adversary who can control the baseline capture environment (e.g., administering medication during baseline sessions) may shift the personal baseline to accommodate coerced states. Anomaly detection for baseline sessions (Section 3.5) provides partial mitigation; formal analysis of baseline poisoning bounds is needed.
5. **Decentralized verifier.** Deploying the ZKP verifier as an EVM-compatible smart contract eliminates server trust assumptions. The Mahalanobis computation and pharmacological pattern detection could be implemented as on-chain Groth16 proofs.
6. **Multi-modal liveness hardening.** Combining physiological signals with NFC document verification, facial liveness detection, and behavioral biometrics for higher assurance levels, particularly for deployments without EDA-capable hardware.
7. **Formal protocol verification.** Mechanized proof of LICET’s security properties using ProVerif or Tamarin, particularly the pharmacological attack detection guarantees.
8. **Threshold standardization.** Collaboration with regulatory bodies to define minimum required biometric trust levels (L0–L3) and fusion thresholds for different risk categories of AI agent actions.

9 Conclusion

We have presented LICET v2, a cryptographic middleware protocol that closes the intent gap in AI agent authorization through a three-layer physiological architecture. By anchoring identity in pharmacologically invariant ECG morphology, confirming liveness through electrodermal activity that cannot be voluntarily suppressed, detecting pharmacological attack patterns through signal dissociation analysis, and fusing all signals via personalized Mahalanobis distance, LICET provides meaningful resistance to the full space of known countermeasures—credential theft, physical coercion, and pharmacological manipulation.

The four-level biometric trust hierarchy (L0–L3), formally aligned with IETF RATS RFC 9334, provides a progression path from today’s software-only deployments to future sensor-to-TEE hardware, defining the standard that wearable manufacturers should implement. The ZKP layer ensures that this comprehensive physiological verification leaves no biometric trace accessible to auditors.

The protocol is implemented and publicly deployed. The open research problems above—particularly the L3 hardware specification and RATS Composite Attester profile—represent an invitation to the IETF, IEEE, and wearable hardware communities to build the infrastructure that makes this protocol’s highest assurance level achievable at scale.

LICET—“it is permitted”—because conscious, free, and physiologically verified human intent must be the irreducible foundation of any AI action with real consequences.

Acknowledgments

The author thanks **David Condrey** (Linux Foundation Decentralized Trust / IETF RATS Working Group) for detailed technical review of composite Attester topology (RFC 9334 §3.3), the primacy of paced breathing as an unmitigated attack vector, and the role of LF power as a baroreflex—rather than sympathetic—modulation metric. His feedback substantially strengthened the threat model and the pharmacological detection discussion.

Availability

Reference implementation: <https://licet.dev>

IETF Internet-Draft: [draft-pereira-licet-human-intent-01](#)

SSRN Preprint: [Abstract ID 7018458](#)

Blockchain timestamp: eColabs_LICET_Protocol_v1.pdf.ots (OpenTimestamps / Bitcoin, 2026-02-25)

Conflict of Interest

The author is the sole founder of eColabs Desenvolvimento de Pessoas e Organizações LTDA. and creator of the LICET protocol.

References

- [1] European Parliament and of the Council. *Regulation (EU) 2024/1689 of the European Parliament and of the Council laying down harmonised rules on artificial intelligence (Artificial Intelligence Act)*, June 2024.
- [2] National Institute of Standards and Technology. *Artificial Intelligence Risk Management Framework (AI RMF 1.0)*. NIST AI 100-1, January 2023.
- [3] H. Birkholz, D. Thaler, M. Richardson, N. Smith, and W. Pan. *Remote ATtestation procedureS (RATS) Architecture*. RFC 9334, Internet Engineering Task Force, January 2023.
- [4] J. F. Thayer, F. Åhs, M. Fredrikson, J. J. Sollers III, and T. D. Wager. A meta-analysis of heart rate variability and neuroimaging studies: Implications for heart rate variability as a marker of stress and health. *Neuroscience & Biobehavioral Reviews*, 36(2):747–756, 2012.
- [5] H.-G. Kim, E.-J. Cheon, D.-S. Bai, Y. H. Lee, and B.-H. Koo. Stress and heart rate variability: A meta-analysis and review of the literature. *Psychiatry Investigation*, 15(3):235–245, 2018.
- [6] H. Selye. *The Stress of Life*. McGraw-Hill, New York, 1956.
- [7] P. Schmidt, A. Reiss, R. Duerichen, C. Marberger, and K. Van Laerhoven. WESAD: A multimodal dataset for wearable stress and affect detection. In *Proceedings of the 20th ACM International Conference on Multimodal Interaction (ICMI 2018)*, pp. 400–408. ACM, 2018.
- [8] J. A. Healey and R. W. Picard. Detecting stress during real-world driving tasks using physiological sensors. *IEEE Transactions on Intelligent Transportation Systems*, 6(2):156–166, 2005.
- [9] M. Gjoreski, H. Gjoreski, M. Lustrek, and M. Gams. Monitoring stress with a wrist device using context. *Journal of Biomedical Informatics*, 73:159–170, 2017.
- [10] D. C. Fowles. The eccrine system and electrodermal activity. In M. G. H. Coles, E. Donchin, and S. W. Porges (Eds.), *Psychophysiology: Systems, Processes, and Applications*, pp. 51–96. Guilford Press, New York, 1986.
- [11] P. H. Venables and M. J. Christie. Electrodermal activity. In I. Martin and P. H. Venables (Eds.), *Techniques in Psychophysiology*, pp. 3–67. Wiley, Chichester, 1980.
- [12] C. O. Brantigan, T. A. Brantigan, and N. Joseph. Effect of beta blockade and beta stimulation on stage fright. *The American Journal of Medicine*, 72(1):88–94, 1982.
- [13] M. Lakie and C. A. Vernooij. The origins of physiological tremor and the role of the muscle spindle. *The Journal of Physiology*, 597(17):4491–4504, 2019.
- [14] S. A. Israel, J. M. Irvine, A. Cheng, M. D. Wiederhold, and B. K. Wiederhold. ECG to identify individuals. *Pattern Recognition*, 38(1):133–142, 2005.

- [15] F. Shaffer and J. P. Ginsberg. An overview of heart rate variability metrics and norms. *Frontiers in Public Health*, 5:258, 2017.
- [16] J. J. Braithwaite, D. G. Watson, R. Jones, and M. Rowe. A guide for analysing electrodermal activity (EDA) & skin conductance responses (SCRs) for psychological experiments. *Psychophysiology*, 2013.
- [17] A. Fiat and A. Shamir. How to prove yourself: Practical solutions to identification and signature problems. In *Advances in Cryptology — CRYPTO '86*, Lecture Notes in Computer Science, vol. 263, pp. 186–194. Springer, 1987.
- [18] H. Krawczyk and P. Eronen. *HMAC-based Extract-and-Expand Key Derivation Function (HKDF)*. RFC 5869, Internet Engineering Task Force, May 2010.
- [19] J. Camenisch and M. Stadler. Efficient group signature schemes for large groups. In *Advances in Cryptology — CRYPTO '97*, Lecture Notes in Computer Science, vol. 1294, pp. 410–424. Springer, 1997.
- [20] E. B. Sasson, A. Chiesa, C. Garman, M. Green, I. Miers, E. Tromer, and M. Virza. Zerocash: Decentralized anonymous payments from Bitcoin. In *2014 IEEE Symposium on Security and Privacy*, pp. 459–474, 2014.
- [21] B. Laurie, A. Langley, and E. Kasper. *Certificate Transparency*. RFC 6962, Internet Engineering Task Force, June 2013.
- [22] B. Schneier and J. Kelsey. Secure audit logs to support computer forensics. *ACM Transactions on Information and System Security*, 2(2):159–176, 1999.
- [23] K. Niinuma, U. Park, and A. K. Jain. Soft biometric traits for continuous user authentication. *IEEE Transactions on Information Forensics and Security*, 5(4):771–780, 2010.
- [24] I. Traore and A. A. E. Ahmed. *Continuous Authentication Using Biometrics: Data, Models, and Metrics*. IGI Global, 2012.
- [25] S. Capkun, M. Cagalj, and M. Srivastava. Secure localization with hidden and mobile base stations. In *Proceedings of IEEE INFOCOM*, 2006.
- [26] A. Dalugoda. HDP: A Lightweight Cryptographic Protocol for Human Delegation Provenance in Agentic AI Systems. Preprint, Helixar Limited, Auckland, New Zealand, March 2026. IETF Internet-Draft: draft-helixar-hdp-agentic-delegation-00. [arXiv:2604.04522](https://arxiv.org/abs/2604.04522).
- [27] ZeroBiometrics. ZeroSentinel: Cryptographic Human Authorization for Agentic AI Systems. Technical white paper, March 2026.
- [28] Anonymous. Before the Tool Call: Deterministic Pre-Action Authorization for Autonomous AI Agents. arXiv preprint arXiv:2603.20953, March 2026.
- [29] S. Laborde, F. Mosley, and A. Mertgen. Psychophysiological effects of slow-paced breathing at six cycles per minute with or without heart rate variability biofeedback. *Psychophysiology*, 59(1):e13952, 2022. DOI: [10.1111/psyp.13952](https://doi.org/10.1111/psyp.13952).

- [30] A. Steptoe, L. Brydon, and S. Kunz-Ebrecht. Changes in financial strain over three years, depressive symptoms, and heart rate variability. *Brain, Behavior, and Immunity*, 68:235–241, 2018. PMC: [PMC5965252](#).
- [31] R. Lampert, V. Ickovics, J. R. Viscoli, C. M. Horwitz, L. I. Lee, and F. A. Petrillo. Effects of propranolol on recovery of heart rate variability following acute myocardial infarction and relation to outcome in the Beta-Blocker Heart Attack Trial. *The American Journal of Cardiology*, 91(2):137–142, 2003.
- [32] J. P. Moak, D. S. Goldstein, B. D. Eldadah, I. Saleem, O. Holmes, R. Pechnik, and H. Sharabi. Supine low-frequency power of heart rate variability reflects baroreflex function, not cardiac sympathetic innervation. *Heart Rhythm*, 4(12):1523–1529, 2007. PMC: [PMC2204059](#).
- [33] D. S. Goldstein. Low-frequency power of heart rate variability is not a measure of cardiac sympathetic tone but may be a measure of modulation of cardiac autonomic outflows by baroreflexes. *Experimental Physiology*, 96(12):1255–1261, 2011.