Experiment Setup on Quori & Laptop Control Panel

For setup, ensure Quori and the control UI laptop are connected to the same mobile phone Wi-Fi hotspot. Note the IP addresses (IPv4) for both Quori and the laptop from the Ubuntu settings so you can enter them quickly during configuration. Once this is done, follow the simple instructions below to prepare the system for the user studies.

QUORI SIDE SETUP

ssh quori5@10.23.145.172
(Enter the Quori IP address by connecting a mouse and an HDMI display to the robot and checking the IP on-screen.)
(Enter quori password case sensitive when prompted to do so)
Quori3142
export ROS_MASTER_URI=http://10.23.145.172:11311
export ROS_IP=10.23.145.172
roslaunch quori_interactions quori_controls.launch

LAPTOP SIDE SETUP

OPEN TERMINAL IN < home >> catkin_ws >> src > folder by right click and select "Open Terminal"

./run_quori_setup.sh
(If connected with Quori)
OR
./offline.sh
(If laptop is NOT connected with Quori -- usually for debugging purposes)

For updating Quori's IP and to turn on Vision or Joystick Modes, open the **run_quori_setup.sh** file from < **home >> catkin_ws >> src** > folder. Edit the values as required seen in the screenshot below. Vision and Joystick can be changed to **true or false** as needed and Quori's IP latest address needs to be typed in. Then save the file!

run_quori_setup.sh
~/catkin_ws/src

```
#!/usr/bin/env bash
set -e

# ========================
# User config (EDIT THESE)
# ========================

# Quori ROS master IP (EDIT THIS)
QUORI_IP="10.86.189.172"

# Open 3rd terminal and run vision node?
VISION=false

# Enable joystick nodes inside quori_setup.launch?
JOYSTICK=false

# Workspace + paths
CATKIN_WS="$HOME/catkin_ws"
GROQ_DIR="$HOME/catkin_ws/src/ros_stt/GPT"

# GROQ
GROQ_API_KEY="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"
UVICORN_HOST="0.0.0.0"
UVICORN_PORT="8080"

# ========================
# Derived env vars
# ========================
ROS_MASTER_URI_VALUE="http://${QUORI_IP}:11311"

# Helper: open a terminal and keep it open
open_term () {
  local title="$1"
  local cmd="$2"
  gnome-terminal --title="$title" -- bash -lc "$cmd; echo; echo '[DONE] Terminal will stay open.'; exec bash"
}

```

sh Tab Width: 8 Ln 9, Col 25 INS

DEBUG

In case Quori is not performing the actions as expected after the setup is done, there is another setting which needs to be updated with respect to the IP

1) **For the Laptop**

Open Terminal (Alt+Ctrl+T)
sudo nano /etc/hosts
Update the IP Address on the Quori line (Line 3) to Quori's IP as seen in the screenshot
Ctrl+S (To Save)
Ctrl+X (To Exit)

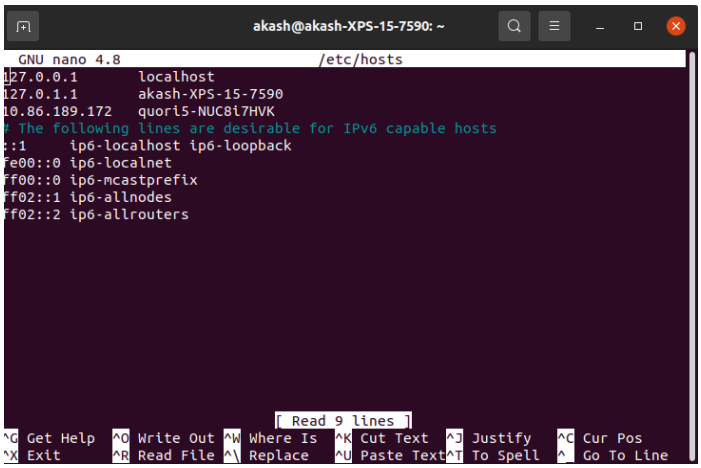

2) **For Quori**

ssh quori5@10.216.54.172
Open Terminal (Alt+Ctrl+T)
sudo nano /etc/hosts
Update the IP Address on the laptop line to the Laptop's IP similar to what was done above
Ctrl+S (To Save)
Ctrl+X (To Exit)