



資料庫介接 API 使用操作說明書

廠商：大數軟體有限公司
聯絡電話：(02)2585-5080

中華民國 108 年 03 月 12 日


一.資料庫介接 API 使用操作說明

進入以下網頁：<https://api.infominer.io/docs>

API TOKEN:

<Step1>

點選 default (圖 1)

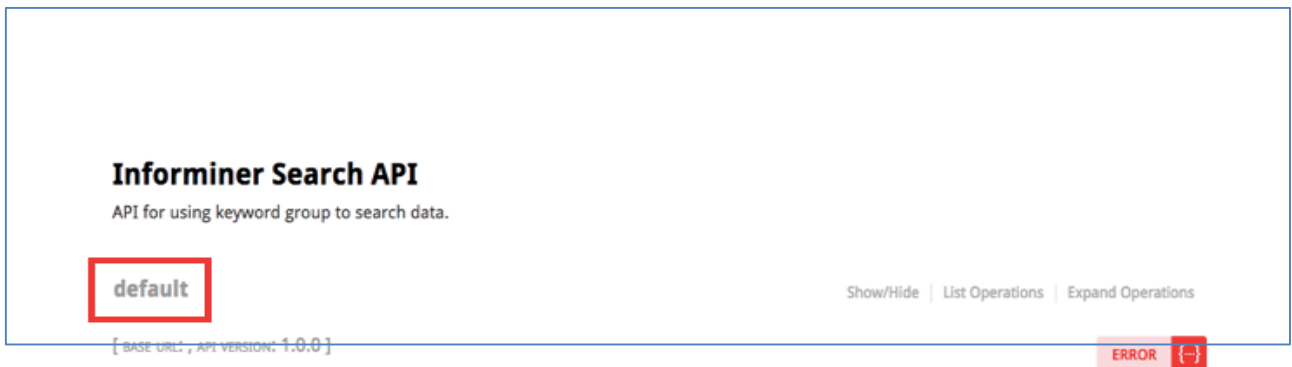

(圖 1)

<Step2>

會跳出以下選單， **Post**/Search, **Post**/Search__metrics, **Post**/querystring_search, **Post**/querystring_search_metrics, **Get**/Keywords, **Post**/Keywords ,**Delete**/ Keywords {id}(圖 2)

Informiner Search API

API for using keyword group to search data.

default

Show/Hide | List Operations | Expand Operations

POST	/search
POST	/search_metrics
POST	/querystring_search
POST	/general_search
POST	/general_search_metrics
POST	/pushs
GET	/keywords
POST	/keywords
DELETE	/keywords/{id}

[BASE URL: , API VERSION: 1.0.0]

ERROR {...}

(圖 2)



<Step3. >

點擊 Get/ Keywords，會看到紅色的訊息  (圖 3 至圖 4)

Informer Search API

API for using keyword group to search data.

default

Show/Hide | List Operations | Expand Operations

POST	/search
POST	/search_metrics
POST	/querystring_search
POST	/general_search
POST	/general_search_metrics
POST	/pushs
GET	/keywords
POST	/keywords
DELETE	/keywords/{id}

[BASE URL: , API VERSION: 1.0.0]

ERROR 

(圖 3)

GET /keywords

Implementation Notes

get all user's keyword groups.

Response Class (Status 200)

success response

Model

Example Value

{}

Response Content Type

application/json

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	unauthorized.		
403	Forbidden		
404	Resource does not exists.		
503	unavailable, you can only send 3 requests per second.		
default	unexpected error.		

Try it out!

(圖 4)

<Step4>

身份驗證，點擊後於 value 欄位輸入 api_key(大數軟體提供)，輸入後點擊 Authorize。(圖 5)

*註：網頁若重新整理，需要再重新作身份驗證。




The image shows a dialog box titled "Available authorizations". Under the "Api key authorization" section, there are fields for "name:" (Auth-Header), "in:" (header), and "value:". The "value:" field is highlighted with a red box and contains the text "(填入大數提供號碼)". A red arrow with the number "1" points to this field. Below the "value:" field is an "Authorize" button, which is also highlighted with a red box and a red arrow with the number "2". At the bottom of the dialog is a "Cancel" button.

(圖 5)

<Step5>

Key 輸入後，原本的  會變成 ，表示授權成功。(圖 6)

*註：若有問題請聯繫業務端解決。

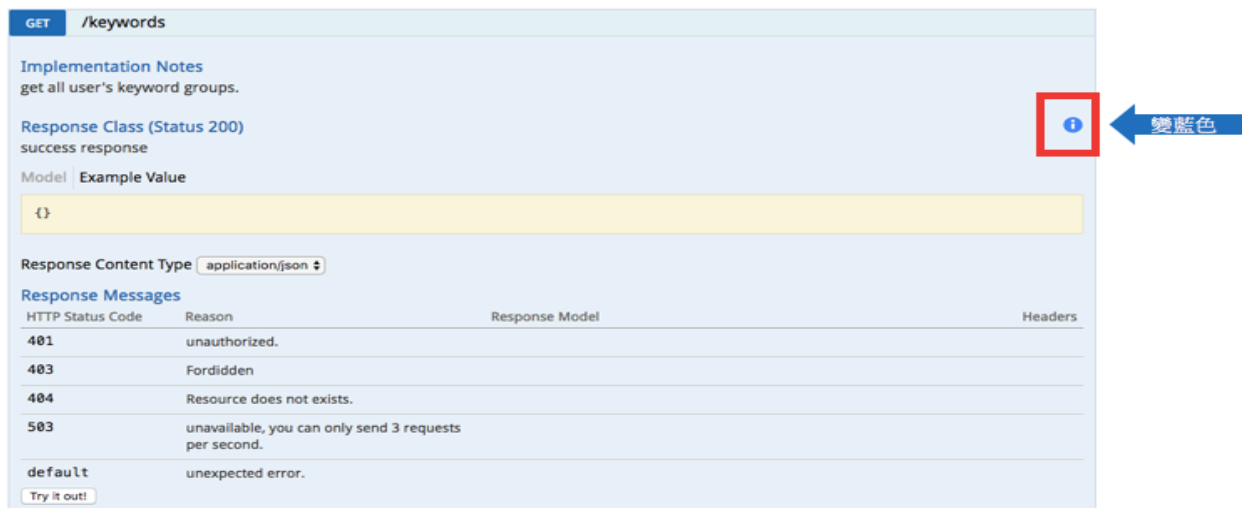


The image shows an API response interface for the endpoint "/keywords". It displays "Implementation Notes" (get all user's keyword groups.), "Response Class (Status 200)" (success response), and "Example Value" ({}). The "Response Content Type" is set to "application/json". Below this is a "Response Messages" table with columns for HTTP Status Code, Reason, Response Model, and Headers. The table lists several error codes: 401 (unauthorized), 403 (Forbidden), 404 (Resource does not exists), 503 (unavailable, you can only send 3 requests per second), and default (unexpected error). A red box highlights a blue information icon (i) in the top right corner, with a blue arrow pointing to it and the text "變藍色" (Change to blue).

HTTP Status Code	Reason	Response Model	Headers
401	unauthorized.		
403	Forbidden		
404	Resource does not exists.		
503	unavailable, you can only send 3 requests per second.		
default	unexpected error.		

(圖 6)

<Step6>

點擊 Get/ Keywords “try it out”，會跳出新的欄位。(圖 7)

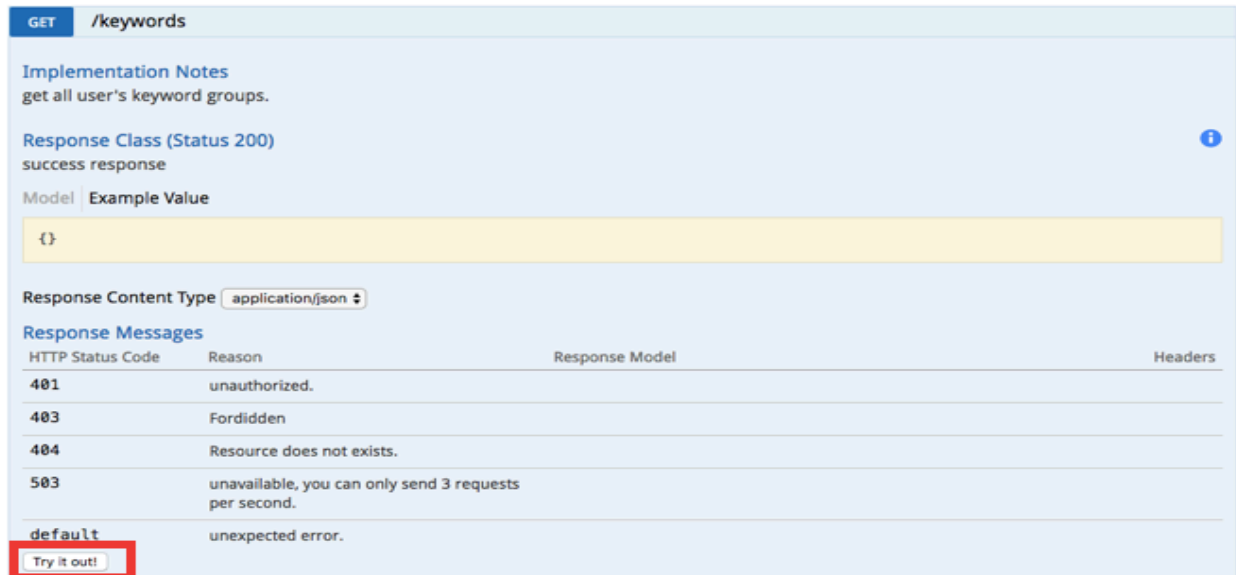

(圖 7)

透過 Response body 內文，可以找到欲搜尋的” Keywords ID”。

以下圖為例：關鍵字群組名稱(柯文哲)的 Keywords ID 為"803ca382-7d8c-439f-9952-29c83669bdaa"

(台哥大)的 Keywords ID 為"0cd06b59-e528-40f6-82ff-b66c34719ba5"

*註：一組關鍵字就會有一個 I D，以此類推，記住欲搜尋的 Keywords ID(圖 8)



(圖 8)

<Step7>

點擊 Post/ Search，會跳出新的欄位。(圖 9)

Informer Search API

API for using keyword group to search data.

default

Show/Hide | List Operations | Expand Operations

POST	/search
POST	/search_metrics
POST	/querystring_search
POST	/general_search
POST	/general_search_metrics
POST	/pushs
GET	/keywords
POST	/keywords
DELETE	/keywords/{id}


[BASE URL : API VERSION: 1.0.0]

ERROR { }

(圖 9)

<Step8>

點擊右邊紅色框框的黃色區塊任意位置，Example Value 會複製到左邊 Search 欄位(圖 10 與 11)：

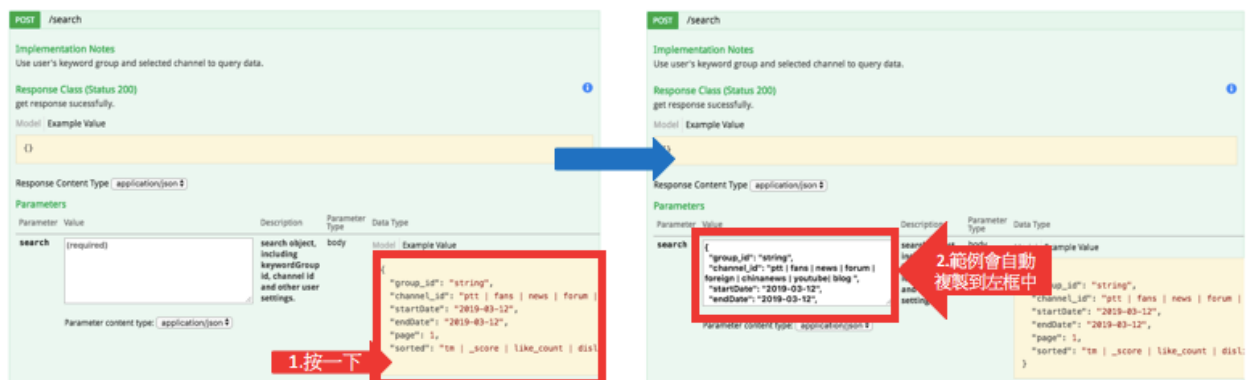

(圖 10)

POST /search

Implementation Notes

Use user's keyword group and selected channel to query data.

Response Class (Status 200)

get response successfully.

Model

Example Value

{}

Response Content Type

application/json

Parameters

Parameter	Value	Description	Parameter Type	Data Type
search	"startDate": "2019-02-1", "endDate": "2019-03-14", "page": 1, "sorted": "tm", "withPushes": false Parameter content type: application/json	search object, including keywordGroup id, channel id and other user settings.	body	Model Example Value

關鍵字群組 ID

"group_id": "string",

頻道來源 ID

"channel_id": "ptt | fans | news | forum |

搜尋起始日期

"startDate": "2019-03-14",

搜尋結束日期

"endDate": "2019-03-14",

資料中第幾頁

"page": 1,

排序方式

"sorted": "tm | _score | like_count | disl

需不需要推文

"withPushes": false

*False(不需要)

*true(需要)

Response Messages

HTTP Status Code	Reason	Response Model	Headers
------------------	--------	----------------	---------

(圖 11)

舉例：若欲抓取關鍵字“柯文哲”在“news”上的資料。(圖 12)

"group_id": "803ca382-7d8c-439f-9952-29c83669bdaa"

"channel_id": "news"

"startDate" "endDate":日期請照範例格式加以自訂

"Page" 預設第一頁（一頁顯示 100 筆資料）

*註：一秒只能發 3 個 Request，若超過會出現 503 error。

Parameter Value

search

{
"group_id": "803ca382-7d8c-439f-9952-29c83669bdaa",
"channel_id": "news",
"startDate": "2019-02-1",
"endDate": "2019-03-14",
"page": 1,
"sorted": "tm",
"withPushes": false
}

Parameter content type: application/json

(圖 12)

<Step 9>

輸入完畢後，點擊 try it out。(圖 13)

Parameters

Parameter	Value	Description	Parameter Type	Data Type
search	<pre>{ "group_id": "803ca382-7d8c-439f-9952-29c83669bdaa", "channel_id": "news", "startDate": "2019-02-1", "endDate": "2019-03-14", "page": 1, "sorted": "tm", "withPushs": false }</pre>	search object, including keywordGroup id, channel id and other user settings.	body	Model Example Value

Parameter content type: application/json

Response Messages

HTTP Status Code	Reason	Response Model	Headers
400	Invalid request query string.		
401	unauthorized.		
403	Forbidden		
404	Resource does not exists.		
503	unavailable, you can only send 3 requests per second.		
default	unexpected error.		

Try it out!

Hide Response

(圖 13)

<Step10>

Response body 就可以直接看到回傳的檔案。(圖 14)

Curl

```
curl -X POST --header 'Content-Type: application/json' --header 'Accept: application/json' --header 'Auth-Header: e:
  "group_id": "803ca382-7d8c-439f-9952-29c83669bdaa", \
  "channel_id": "news", \
  "startDate": "2019-02-1", \
  "endDate": "2019-03-12", \
  "page": 1, \
  "sorted": "tm" \
} https://api.infominer.io/search'
```

Request URL

https://api.infominer.io/search

Response Body

```
{
  "total_count": 55631,
  "data": [
    {
      "url": "https://www.ettoday.net/news/20190312/1397709.htm",
      "title": "市長一任4年說惹議 吳子嘉：韓國瑜百分之百選總統",
      "content": "▲王金平、韓國瑜。（合成圖／記者周惠剛、顏君欣攝）政治中心／綜合報導高雄市長韓國瑜是否參選2020總統大選，備受關注。",
      "tm": 1552385640,
      "author": null,
      "type": [
        "政治"
      ],
      "ctype": [
        "政治"
      ],
      "source": "ettoday",
      "positive_pushs": 0,
      "negative_pushs": 0,
      "neutual_pushs": 0,
    }
  ]
}
```

(圖 14)



二. Informiner Search API Endpoints 功能說明

Informiner Search API

API for using keyword group to search data.

default		Show/Hide	List Operations	Expand Operations
POST	/search	←	用關鍵字群組搜尋 (需配合 G E T /Keywords)	
POST	/search_metrics	←	用關鍵字群組搜尋統計值	
POST	/querystring_search	←	利用querystring搜尋 (如下圖1、圖2)	
POST	/general_search	←	用關鍵字搜尋	
POST	/general_search_metrics	←	用關鍵字搜尋統計值	
POST	/pushs	←	用文章 I D 找文章的推文	
GET	/keywords	←	關鍵字群組列表	
POST	/keywords	←	新增關鍵字群組	
DELETE	/keywords/{id}	←	刪除關鍵字群組	

[BASE URL: , API VERSION: 1.0.0]

ERROR {~}

*註：各表使用的方式步驟與上述範例（Get/ Keywords）作法相同。

QueryString Search API 參數說明

欄位名稱	欄位型態	欄位意義	範例	備註
query String	string	queryString字串	"content: (柯文哲 && 姚文智) && ctype:Gossiping && source:ptt && tm:(>1537200000 && <1537459200)"	1. 以key : value 方式指定某欄位的搜尋條件。 2. 邏輯關鍵字請使用 AND / OR / NOT,亦可使用符號 && / / !。 3. 邏輯關鍵字前後須留空格，欄位條件若含有邏輯關鍵字需加上小括號()。 4. tm欄位為必要欄位，並且為一區間。
page	integer	頁數	1	1.每個requests最多返回100筆資料。
sorted	string	排序方式	tm	1.可使用排序方式為tm, _score, like_count, dislike_count, comment_count, reply_count, share_count。

(圖 1)

querystring使用範例

情境一：在ptt Gossiping板上，搜尋 2018-09-16 - 2018-09-19 內文談論到 柯文哲 和 姚文智 且推文超過50筆以上的文章

```
queryString= "content:(柯文哲 && 姚文智) && source:ptt && ctype:Gossiping && tm: (>=1537027200 && <=1537372800) && comment_count:>50"
```

情境二：在ptt Gossiping和HatePolitics板上，搜尋 2018-09-16 - 2018-09-20 內文談論到 陳水扁或阿扁 和 姚文智 和 軍師或顧問 的文章

```
queryString= "content:((陳水扁 || 阿扁) && 姚文智 && (軍師 || 顧問)) && source:ptt && ctype:(Gossiping || HatePolitics) && tm: (>=1537027200 && <=1537459200)"
```

情境三：在ptt 和 forum頻道中，排除 HelpBuy 和 BuyTogether版，搜尋2018-09-01 - 2018-09-20內文含有 台新 和 信用卡 但排除 新聞 的文章

```
queryString= "content:(台新 && 信用卡 && !新聞) && source:(ptt || forum) && ctype:(!HelpBuy || !BuyTogether) && tm: (>=1535731200 && <=1537459200)"
```

(圖 2)

欄位名稱	欄位說明
"id"	ID
comment_count"	回文數
"sentiment"	文章情緒
"neutual_pushs"	回文情緒
"source"	來源
"type"	類別
"meta_keywords"	文章 TAG
"title"	標題
"content"	內文
"tm_crawler"	入庫時間
"person_list"	提及人名
"author"	作者
"author_id"	作者 ID
"url"	網址
"ik_keywords"	關鍵字熱詞
"ctype"	類別
"place_list"	提及地點
"tm"	文章時間
"datetime"	日期時間
"source_name"	來源名稱
"like_count"	按讚數
"share_count"	分享數
"dislike_count"	噓數