


# wordcloud

drawing wordclouds  
with METAPOST and Lua

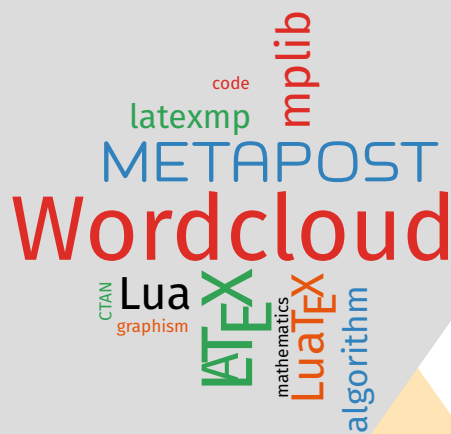

## Contributor

Maxime CHUPIN

[notezik@gmail.com](mailto:notezik@gmail.com)

Version 0.1, 2023, August, 9th

<https://plmlab.math.cnrs.fr/mchupin/wordcloud>

## Abstract

These METAPOST and Lua $\TeX$  packages allows drawing wordclouds from a list of words and weights. The algorithm is implemented with METAPOST whereas Lua is used to parse  $\TeX$  commands, to build the list of words and weights from a text file, and to generate METAPOST code interpreted by `luamplib`.

<https://plmlab.math.cnrs.fr/mchupin/wordcloud>  
<https://github.com/chupinmaxime/wordcloud>

## Contents

<b>1</b>	<b>Installation</b>	<b>2</b>
1.1	With $\TeX$ live under Linux or macOS	3
1.2	With Mik $\TeX$ and Windows	3
1.3	Dependencies	3
<b>2</b>	<b>METAPOST side</b>	<b>3</b>
2.1	Description of the algorithm	3
2.2	Main command	4
2.3	Parameters	5
2.3.1	Colors	5
2.3.2	Scaling	6
2.3.3	Margins	6
<b>3</b>	<b>Lua<math>\TeX</math> side</b>	<b>6</b>
3.1	Main commands	6
3.1.1	Options	7
3.2	Add ignored words	8
<b>4</b>	<b>With pdf<math>\text{totext}</math></b>	<b>8</b>
<b>5</b>	<b>To do</b>	<b>9</b>

*This package is in beta version—do not hesitate to report bugs, as well as requests for improvement, or better: to help me to improve it.*

## 1 Installation

`wordcloud` is on CTAN and can also be installed via the package manager of your distribution.

<https://www.ctan.org/pkg/wordcloud>

## 1.1 With T<sub>E</sub>Xlive under Linux or macOS

To install **wordcloud** with T<sub>E</sub>XLive, you will have to create the directory `texmf` in your home.

```
user $> mkdir ~/texmf
```

Then, you will have to place the **wordcloud**.mp file in

`~/texmf/metapost/wordcloud/`

You will also have to place the **wordcloud**.lua file in

`~/texmf/scripts/wordcloud/`

And finally, you will have to place the **wordcloud**.sty file in

`~/texmf/tex/latex/wordcloud/`

Once this is done, **wordcloud** will be loaded with the classic METAPOST input code

```
input wordcloud
```

And for the LuaT<sub>E</sub>X side, **wordcloud** will be loaded with

```
\usepackage{wordcloud}
```

## 1.2 With MikT<sub>E</sub>X and Windows

These two systems are unknown to the author of **wordcloud**, so we refer you to the MikT<sub>E</sub>X documentation concerning the addition of local packages:

<http://docs.miktex.org/manual/localadditions.html>

## 1.3 Dependencies

**wordcloud** depends, for the METAPOST side, of course on METAPOST [6], but also on **metapost-colorbrewer** [7] and the **latexmp** package [4]. For the LuaT<sub>E</sub>X side [5], **wordcloud** depends on the **luamplib** package [2] and the **xcolor** [3].

## 2 METAPOST side

### 2.1 Description of the algorithm

Given a set of words and weights, we first use a *scale function* of the weights to scale the words. In this beta version of **wordcloud**, we only provide a log-based function<sup>1</sup>.

<sup>1</sup>Other scale options could be provided in the next versions.

Then, we compute a spiral line starting at the center<sup>2</sup>.

Then the algorithm is quite simple:

**Require:** set of words  $(W_i)_{i \in \{1, \dots, N\}}$  and corresponding weight  $(w_i)_{i \in \{1, \dots, N\}}$ , and a spiral line  $S$

```
1: for all  $i \in \{1, \dots, N\}$  do
2:   Place  $W_i$  at the start of  $S$ 
3:   repeat
4:     Set  $b_{\text{draw}} := \text{true}$ 
5:     for all  $j \in 1, \dots, i$  do
6:       if  $W_i \cap W_j \neq \emptyset$  then
7:         Set  $b_{\text{draw}} := \text{false}$ 
8:       end if
9:     end for
10:    if  $b_{\text{draw}} == \text{true}$  then
11:      Draw  $W_i$ 
12:    else
13:      Move  $W_i$  along  $S$ 
14:    end if
15:  until  $W_i$  is drawn
16: end for
```

The hard part is making it perform efficiently! According to Jonathan Feinberg, Wordle<sup>3</sup> uses a combination of hierarchical bounding boxes and quadrees to achieve reasonable speeds. Here, with METAPOST, we compute intersections with the bounding box of the word.

#### Remark

- The words with METAPOST are built with the `texttext()` function of `latexmp` or `luamplib`. We are trying to use the bounding boxes of the letters when we get an intersection between “global” bounding boxes to allow placing words nearer of each other. Unfortunately, this does not work for the moment. Any help is welcomed.
- We first tried to compute intersections between words by decomposing the letter using their contours and compute intersection of contours (with `intersectiontimes`). Unfortunately, this is much too slow.

Some explanations can be found here:

<https://www.jasondavies.com/wordcloud/about/>

## 2.2 Main command

The main command is

`draw_wordcloud(<words>, <weights>, <rotation>, <size>)`

<sup>2</sup>There is variants of the algorithm that use different line: squared spiral, etc.

<sup>3</sup>One of the first web application to build wordcloud.

⟨**words**⟩: array of strings ;  
⟨**weights**⟩: array of numerics ;  
⟨**rotation**⟩: angle for wordcloud drawing;  
⟨**size**⟩: number of elements in arrays.

#### Exemple METAPOST 1

```
input wordcloud
beginfig(0);
string words[];
numeric weights[];
words[1]:="\LaTeX";
words[2]:="\hologo{METAPOST}";
words[3]:="Document";
words[4]:="Lua";
words[5]:="\TeX";
weights[1]:=5;
weights[2]:=4;
weights[3]:=3.5;
weights[4]:=3;
weights[5]:=3;
draw_wordcloud(words,weights,0,5);
endfig;
```



#### Remark

The “unity” of weights is not important because internally, **wordcloud** compute new weights to work with the internal scaling function.

## 2.3 Parameters

There are few parameters.

### 2.3.1 Colors

You can use set of colors to draw the wordcloud. For that, you have to use the following command:

```
wordcloud_use_color(⟨bool⟩)
```

**<bool>**: boolean `true` or `false` (default `false`).

`wordcloud` provides a set of five colors using the METAPOST package `metapost-colorbrewer` [7]. `wordcloud` defines an array of `colors` and a `numeric` to set the colors to use.

```
wordcloud_colors[1]:=Reds[3][3];
wordcloud_colors[2]:=Greens[3][3];
wordcloud_colors[3]:=Blues[3][3];
wordcloud_colors[4]:=Oranges[3][3];
wordcloud_colors[5]:=black;
wordcloud_colors_number:=5;
```

Feel free to modify that variables to customize the colors.

### 2.3.2 Scaling

You can globally scale the picture using the following command:

```
set_wordcloud_scale(<scale>)
```

**<scale>**: `numeric`.

### 2.3.3 Margins

You can adjust the margins of the global bounding boxes of words using the following command:

```
set_box_margin(<dim>)
```

**<dim>**: a dimension with units (default 0.3pt).

## 3 Lua $\text{\TeX}$ side

`wordcloud` provides a Lua $\text{\TeX}$  package. It uses the package `luamplib` to interpret the METAPOST code produced by Lua.

### 3.1 Main commands

The first  $\text{\TeX}$  command provided by `wordcloud` is:

```
\wordcloud[<options>]{<list of words and weights>}
  where
```

**<list of words and weights>**: is a list of couples of the form (word1,weight1)  
; (word2,weight2); (word3,weight3); ...

The second  $\text{\LaTeX}$  command allows to read a text file, to build the list of words and weights and draw the wordcloud up to a certain number of words.

`\wordcloudFile[options]{text file}{number of words}`

where:

**<text file>**: is a text file to analyze and from which the wordcloud is build ;

**<number of words>**: is the number of words composing the wordcloud.

### 3.1.1 Options

Both of these functions (`\wordcloud` and `\wordcloudFile`) have the same options:

**scale=<value>**: to scale the picture<sup>4</sup>;

**margin=<value with units>**: to adjust the margins (default `0.3pt`);

**rotate=<angle>**: to rotate (degrees) the words with  $\pm\langle\textit{angle}\rangle$  alternatively (default `0`);


**usecolor**: to use color for word drawing (boolean, default `false`) as described in section 2.3.1;

**colors=<list of colors>**: to define a new set of colors as described in section 2.3.1<sup>5</sup>.

Here an example:

#### Example $\text{\LaTeX}$ 1

```
\wordcloud[scale=1,rotate=45,margin=0.5pt,usecolor,colors={red
!40,blue!40,green!20!black}]{(Wordcloud,10);(\hologo{
METAPOST},6);(\LaTeX,7);(Lua,4);(algorithm,3);(code,2);(
mathematics,2);(CTAN,2);(mplib,4);(\hologo{LuaTeX},4);(
latexmp,3);(graphism,2)}
```



<sup>4</sup>Beware that scaling increases the computation time and the values manipulated by METAPOST.

<sup>5</sup>This needs `xcolor` because the colors are converted to rgb coding and then transferred to METAPOST.

#### Remark

Because the list of words and weights is given to Lua, we have to escape the `\` to use  $\TeX$  commands.

### 3.2 Add ignored words

The Lua function that builds words and weights from a text file ignores some words (and characters). For the moment, `wordcloud` only includes word lists to ignore for English and French.

However, you can add a list of words to ignore with the following command:

```
\wordcloudIgnoreWords{\word list}
```

**<word list>**: the list of words, separated with commas, to ignore word1, word2, word3, etc.

## 4 With pdftotext

Thanks to `wordcloud` and the program `pdftotext`<sup>6</sup> one can easily produce the wordcloud of the current PDF.

For that, you can produce the text file of the PDF:

```
user $> pdftotext wordcloud-doc-en.pdf
```

and then, you can use the following code:

```
\wordcloudFile[usecolor]{wordcloud-doc-en.txt}{50}
```

This produce the following wordcloud<sup>7</sup>

<sup>6</sup>It should be possible to parse a PDF with Lua $\TeX$ , though. See <https://tex.stackexchange.com/questions/692930/recovering-the-textual-content-of-a-pdf-file-with-luatex>.

<sup>7</sup>Note that, because the wordcloud production is slow, we used a separate file to only produce the PDF of the wordcloud, without any scaling, and we inserted the result scaling it with `graphicx` [1].





## 5 To do

Some things to do:

- Improve intersection of words by using the letters bounding boxes.
- Work on speed of the algorithm.
- Add supported languages (ignored words).
- Improve text file analysis with Lua to build the set of words and weights.
- Build wordcloud inside a shape.
- Add options for rotation of words.

## References

- [1] David Carlisle and The  $\text{\LaTeX}$  Project Team. *The graphicx package. Enhanced support for graphics*. Version 1.2d. Nov. 12, 2021. URL: <https://ctan.org/pkg/graphicx>.

- [2] Hans Hagen et al. *The luamplib package. Use LuaTeX's built-in MetaPost interpreter.* Version 2.23.0. Jan. 12, 2022. URL: <https://ctan.org/pkg/luamplib>.
- [3] Uwe Kern and The  $\text{\LaTeX}$  Project Team. *The xcolor package. Driver-independent color extensions for  $\text{\LaTeX}$  and pdfLaTeX.* Version 2.14. June 12, 2022. URL: <https://ctan.org/pkg/xcolor>.
- [4] Jens-Uwe Morawski. *The latexMP package. Interface for  $\text{\LaTeX}$ -based type-setting in MetaPost.* Version 1.2.1. June 21, 2020. URL: <https://ctan.org/pkg/latexmp>.
- [5] Manuel Pégourié-Gonnard. *The luatex-doc package. A guide to use of  $\text{\LaTeX}$  with LuaTeX.* June 24, 2016. URL: <https://ctan.org/pkg/luatex-doc>.
- [6] The MetaPost Team and John Hobby. *The metapost package. A development of Metafont for creating graphics.* Aug. 26, 2021. URL: <https://ctan.org/pkg/metapost>.
- [7] Toby Thurston. *The metapost-colorbrewer package. An implementation of the colorbrewer2.org colours for MetaPost.* Sept. 25, 2018. URL: <https://ctan.org/pkg/metapost-colorbrewer>.

## Command Index

`\wordcloud`, 6  
`\wordcloudFile`, 7  
`\wordcloudIgnoreWords`, 8

`draw_wordcloud`, 4

`set_box_margin`, 6  
`set_wordcloud_scale`, 6  
`wordcloud_colors`, 6  
`wordcloud_colors_number`, 6  
`wordcloud_use_color`, 5