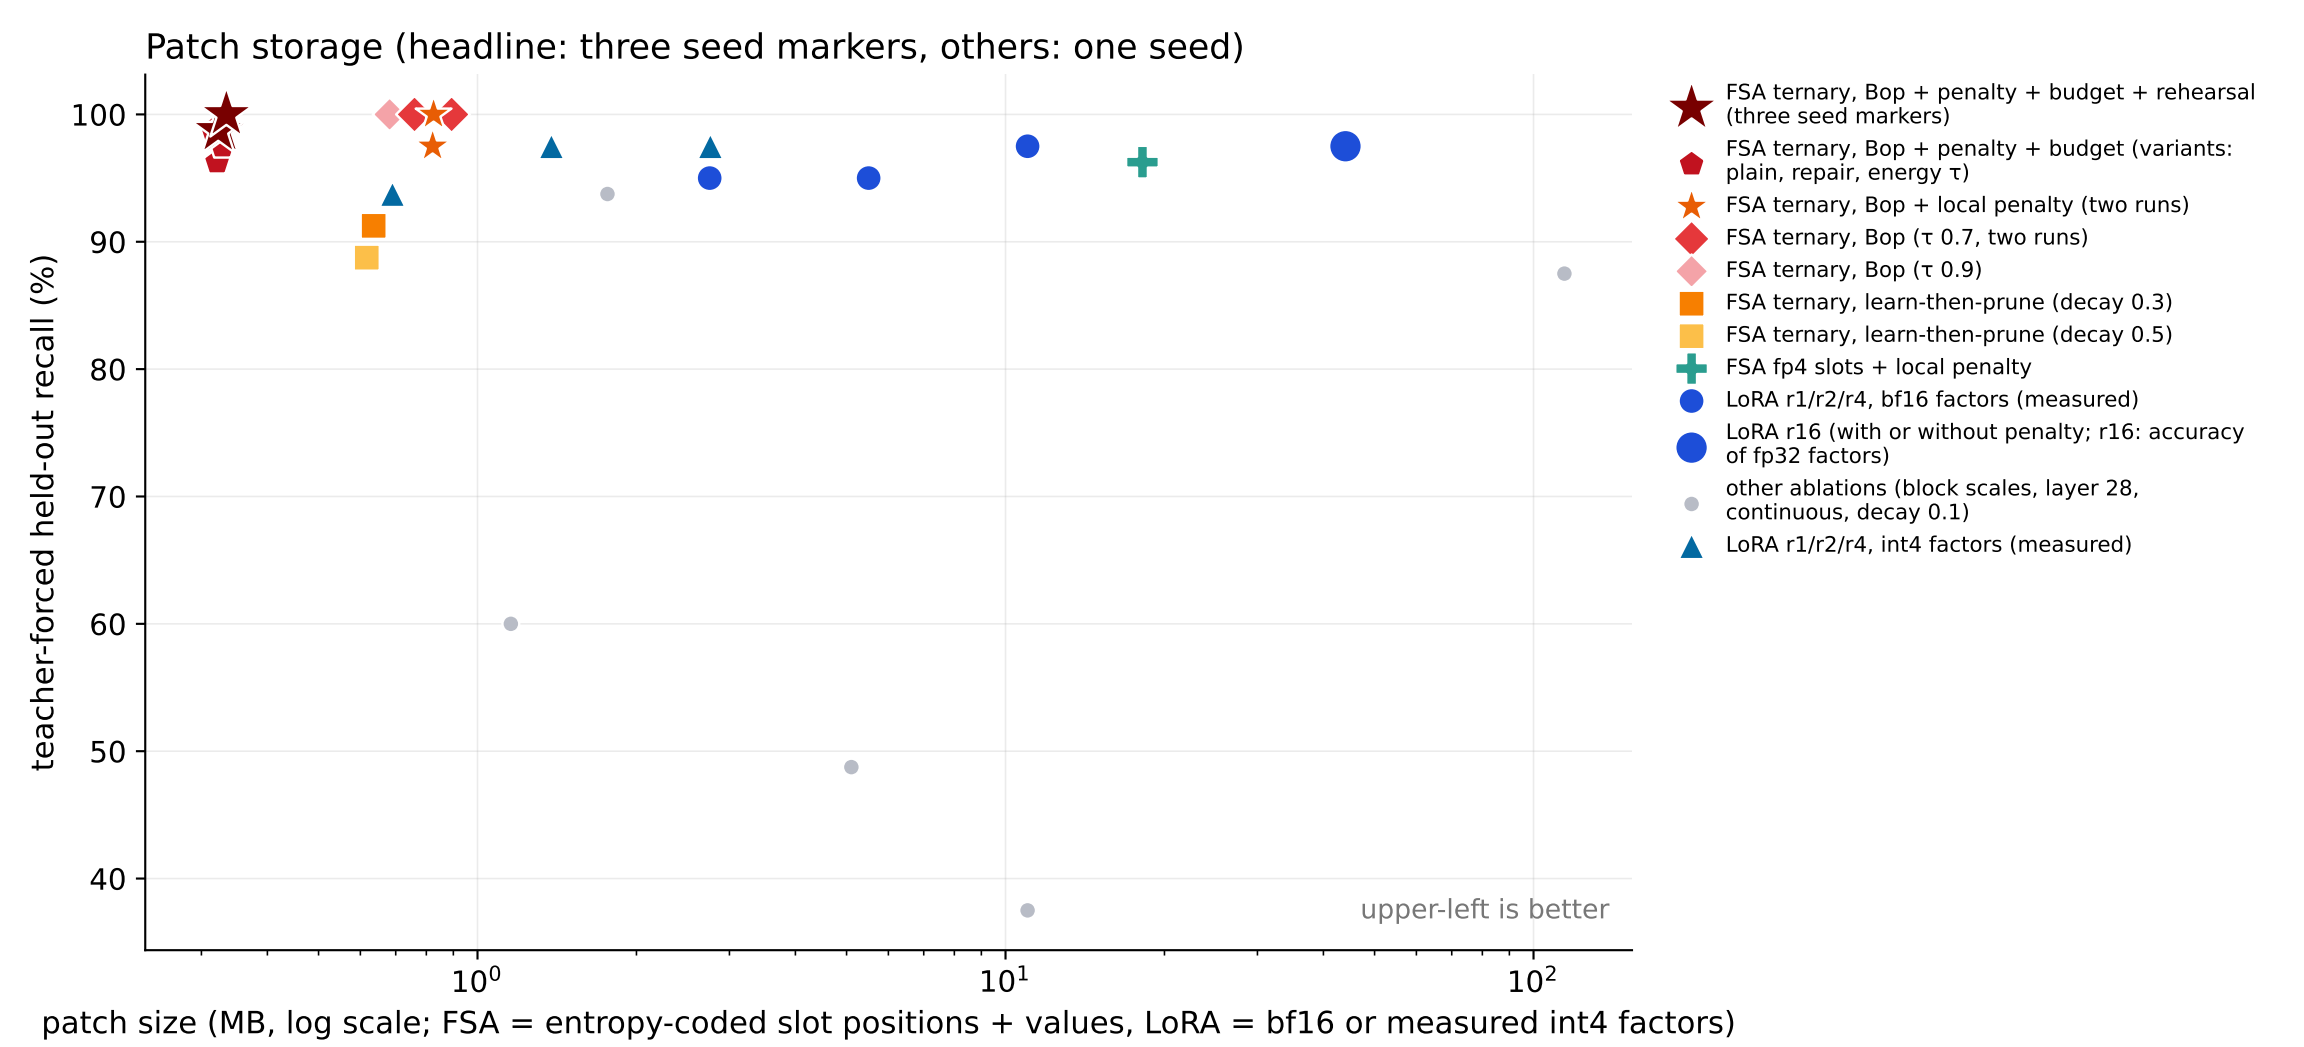
Patch storage (headline: three seed markers, others: one seed)
teacher-forced held-out recall (%)
100
90
80
70
60
50
40
10^0
10^1
10^2
upper-left is better
patch size (MB, log scale; FSA = entropy-coded slot positions + values, LoRA = bf16 or measured int4 factors)
FSA ternary, Bop + penalty + budget + rehearsal (three seed markers)
FSA ternary, Bop + penalty + budget (variants: plain, repair, energy τ)
FSA ternary, Bop + local penalty (two runs)
FSA ternary, Bop (τ 0.7, two runs)
FSA ternary, Bop (τ 0.9)
FSA ternary, learn-then-prune (decay 0.3)
FSA ternary, learn-then-prune (decay 0.5)
FSA fp4 slots + local penalty
LoRA r1/r2/r4, bf16 factors (measured)
LoRA r16 (with or without penalty; r16: accuracy of fp32 factors)
other ablations (block scales, layer 28, continuous, decay 0.1)
LoRA r1/r2/r4, int4 factors (measured)