

Semantic Approximation Based Operator for Reducing Code Bloat in Genetic Programming

Thi Huong Chu^{a,*}


^aFaculty of IT, Le Quy Don Technical University, Hanoi, Vietnam

Supplement 2: Semantic distances over the generations.

Table 1: List of figure in the supplement 2

No	Content	Figure
1	Semantic distances over the generations on the problems: F2 and F3.	Figure 1
2	Semantic distances over the generations on the problems: F4, F5, F7, F9, F10 and F11.	Figure 2
3	Semantic distances over the generations on the problems: F12, F13 and F14.	Figure 3

Figure 1: Semantic distances over the generations on the problems: F2 and F3.

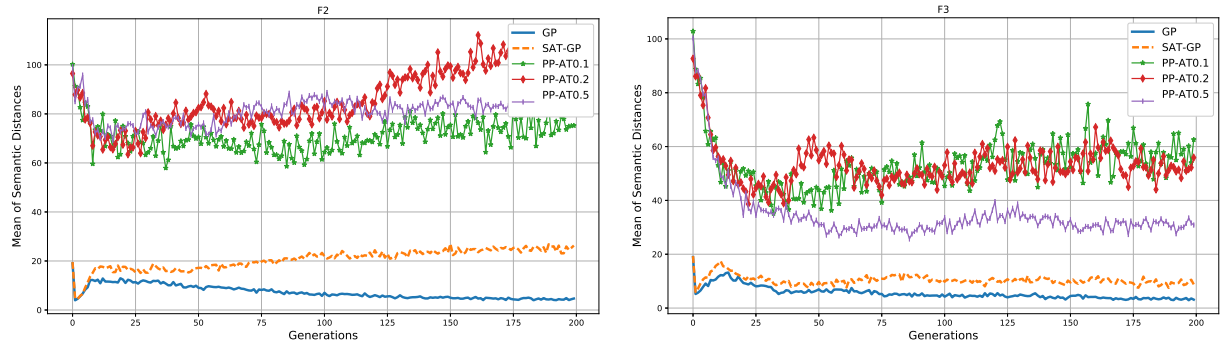

*Thi Huong Chu ; Mobile: 84-973080942

Email address: huongktqs@gmail.com (Thi Huong Chu)

Figure 2: Semantic distances over the generations on the problems: F4, F5, F7, F9, F10 and F11.

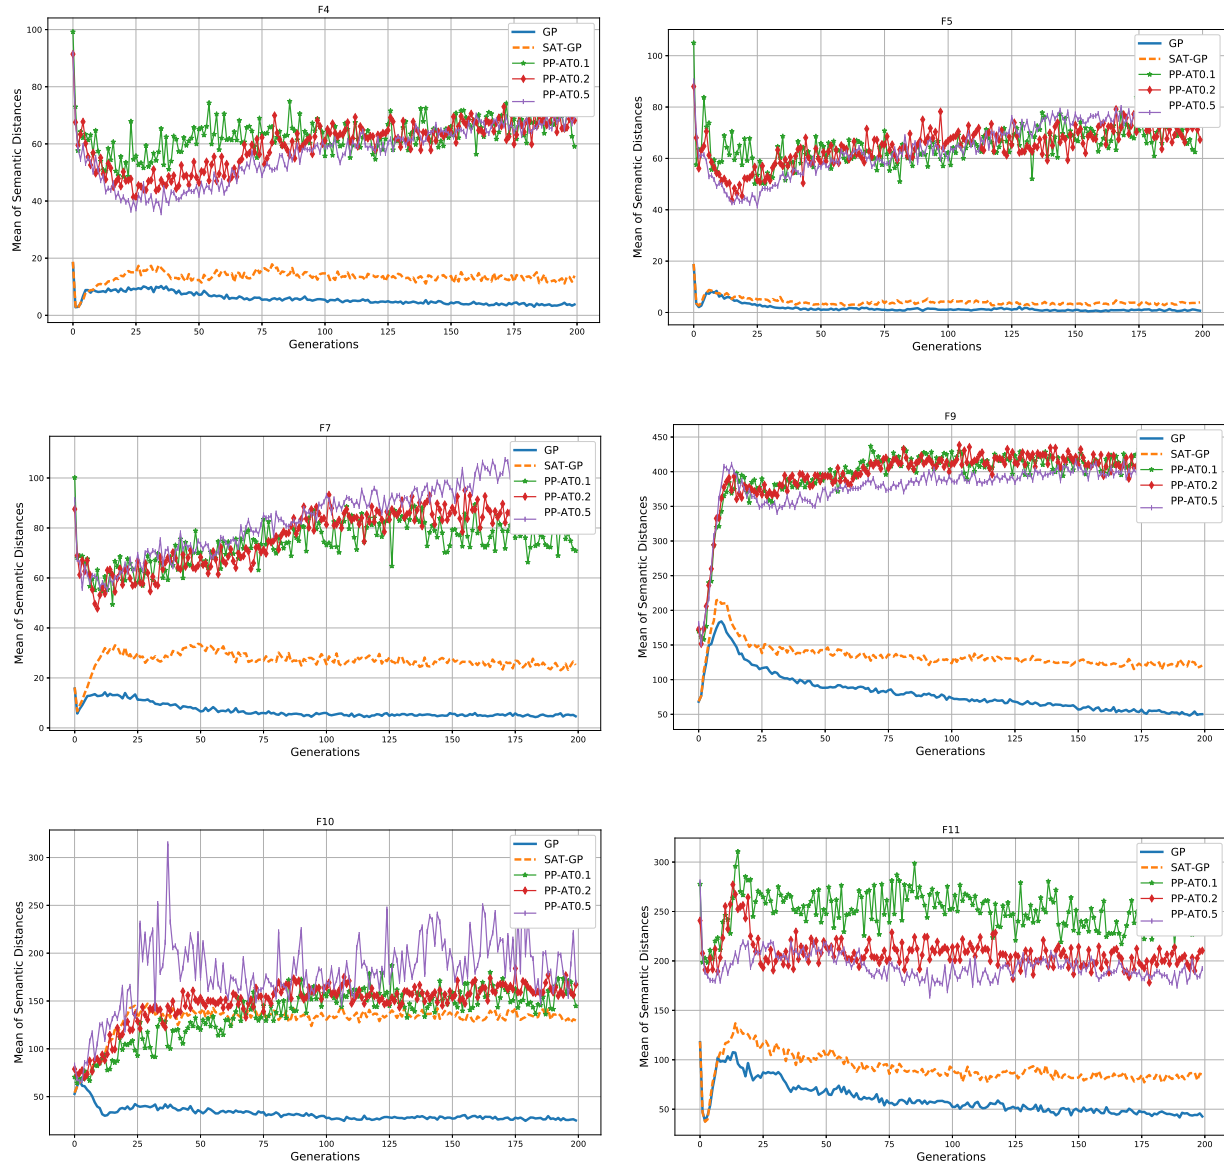


Figure 3: Semantic distances over the generations on the problems: F12, F13 and F14.

