

# Linux Commands End to End Cheat Sheet

## Command: whoami

```
chunduru@chunduru-virtual-machine:~$ whoami
chunduru
chunduru@chunduru-virtual-machine:~$
```

Description: Displays the current user account.

Example: Running whoami in the terminal will show your username, like john\_doe.

## Command: ls

```
chunduru@chunduru-virtual-machine:~$ ls
Desktop  Documents  Downloads  Music  Pictures  Public  snap  Templates  Videos
chunduru@chunduru-virtual-machine:~$
```

Description: Lists files and directories in the current directory.

Example: ls will display files and folders in your current directory, and ls -l provides detailed information.

## Command: ip a

```
chunduru@chunduru-virtual-machine:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: ens33: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:d0:4e:1d brd ff:ff:ff:ff:ff:ff
    altname enp2s1
    inet 192.168.85.128/24 brd 192.168.85.255 scope global dynamic noprefixroute ens33
        valid_lft 944sec preferred_lft 944sec
    inet6 fe80::4a42:37be:c1f7:cac5/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
chunduru@chunduru-virtual-machine:~$
```

Description: Lists your IP address and network interfaces.

Example: ip a show all network interfaces and their IP addresses.

## Command: cat

```
chunduru@chunduru-virtual-machine:~/Desktop$ cat karthik
hello world
chunduru@chunduru-virtual-machine:~/Desktop$
```

Description: Reads the contents of text files.

Example: cat myfile.txt will display the content of myfile.txt.

## Command: passwd

```
chunduru@chunduru-virtual-machine:~/Desktop$ passwd
Changing password for chunduru.
Current password:
New password:
Retype new password:
passwd: password updated successfully
chunduru@chunduru-virtual-machine:~/Desktop$
```

Description: Used to change the password of the user account.

Example: Typing passwd and following the prompts will allow you to change your password.

## Command: touch

```
chunduru@chunduru-virtual-machine:~$ touch karthik
chunduru@chunduru-virtual-machine:~$ ls
Desktop Documents Downloads karthik Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$
```

Description: Creates empty files, mainly useful to test write ability.

Example: touch newfile.txt creates an empty file named newfile.txt.

## Command: pwd


```
chunduru@chunduru-virtual-machine:~$ pwd
/home/chunduru
chunduru@chunduru-virtual-machine:~$
```

Description: Stands for Print Working Directory; shows which directory you are in.

Example: Running pwd might return /home/john\_doe.

## Command: man

```
chunduru@chunduru-virtual-machine:~/Desktop$ man ls
```

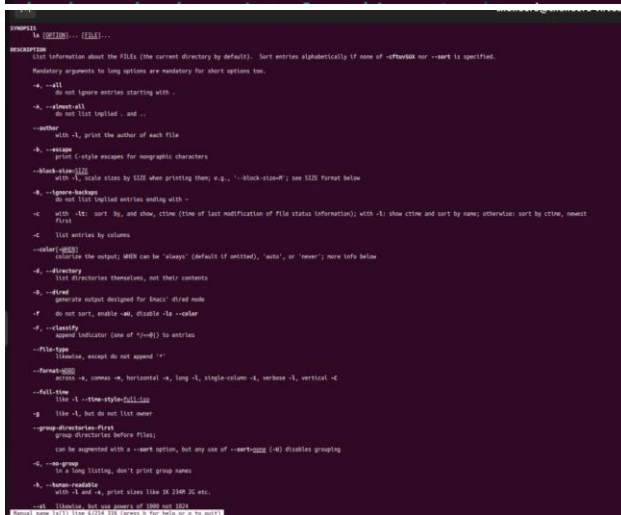

**SYNOPSIS**  
ls [OPTION]... [FILE]...

**DESCRIPTION**  
List information about the FILES (the current directory by default). Sort entries alphabetically if none of -reverse nor --sort is specified.  
Recursive arguments to long options are mandatory for short options too.

**Options**

- a, --all do not ignore entries starting with .
- b, --block-size[=BLOCK\_SIZE] do not list implicit . and ..
- B, --block-size[=BLOCK\_SIZE] print the author of each file
- c, --sort[=TYPE] sort by TYPE: -a, --all print the author of each file
- C, --c-style escapes for non-graphic characters
- d, --directory print C-style escapes for non-graphic characters
- D, --show-versions with -l, scale sizes by SIZE when printing them; e.g., --block-size=M use M1024 format below
- e, --ignore-backups do not list implied entries ending with ~
- F, --classify with -l, sort by, and show, class (type of last modification of file status information); with -l show class and sort by name; otherwise sort by class, name first
- G, --list with columns
- h, --human-readable size can be 'always' (default if omitted), 'auto', or 'never'; more info below
- H, --dereference dereference the output; when can be 'always' (default if omitted), 'auto', or 'never'; more info below
- l, --long list directories themselves, not their contents
- L, --follow generate output designed for Emacs' dired mode
- n, --do-not-sort, enable -u, disable -R --color do not sort, enable -u, disable -R --color
- o, --classify append indicator (one of 'f'/'d') to entries
- p, --file-type filename, except do not append '/'
- q, --format[=FORMAT] format: -a, column -a, long -a, single-column -a, verbose -a, vertical -a
- r, --full-time like -l, --time-style=full-long
- s, --size like -l, but do not list owner
- S, --group-directories-first group directories before files; can be augmented with a --sort option, but any use of --sort[=TYPE] (-H) disables grouping
- t, --reverse in a long listing, don't print group names
- u, --human-readable with -l and -u, print sizes like 1K 220K etc.
- v, --verbose list one version of each non-directory

ct input to this VM, move the mouse pointer inside or press Ctrl+G.

Description: Accesses the system documentation for commands.

Example: man ls will show the manual for the ls command.

## Command: apropos

```
chunduru@chunduru-virtual-machine:~/Desktop$ apropos copy
btrfs-select-super (8) - overwrite primary superblock with a backup copy
clone (3pm) - recursively copy Perl datatypes
cp (1) - copy files and directories
cpgr (8) - copy with locking the given file to the password or group file
cpio (1) - copy files to and from archives
cppw (8) - copy with locking the given file to the password or group file
dd (1) - convert and copy a file
debconf-copydb (1) - copy a debconf database
install (1) - copy files and set attributes
ntfs-3g (8) - copy file to an NTFS volume.
rcp (1) - OpenSSH secure file copy
rsync (1) - a fast, versatile, remote (and local) file-copying tool
scp (1) - OpenSSH secure file copy
ssh-copy-id (1) - use locally available keys to authorise logins on a remote machine
xfs_copy (8) - copy the contents of an XFS filesystem
xfs_metadump (8) - copy XFS filesystem metadata to a file
xfs_rtcp (8) - XFS realtime copy command
chunduru@chunduru-virtual-machine:~/Desktop$
```

Description: Searches commands related to a specific task based on description (equivalent to man -k).

Example: apropos "list files" might return commands related to listing files.

## Command: pinfo

```
File: dir, Node: Top This is the top of the INFO tree

This (the Directory node) gives a menu of major topics.
Typing "q" exits, "H" lists all Info commands, "d" returns here,
"h" gives a primer for first-timers,
"nEnacs-Return" visits the Enacs manual, etc.

In Enacs, you can click mouse button 2 on a menu item or cross reference
to select it.

* Menu:

Basics
* Common options: (coreutils)Common options.
* Coreutils: (coreutils). Core GNU (file, text, shell) utilities.
* Date input formats: (coreutils)Date input formats.
* File permissions: (coreutils)File permissions.
* Ed: (ed). The GNU line editor
* Finding files: (find). Operating on files matching certain criteria.
* Time: (time). time

Compression
* Gzip: (gzip). General (de)compression of files (Lzw).

Development
* SSIP: (ssip). Speech Synthesis Interface Protocol.
* Speech Dispatcher: (speech-dispatcher). Speech Dispatcher.

Editors
* nano: (nano). Small and friendly text editor.

GNU organization
* Maintaining Findutils: (findutils). Maintaining GNU findutils

GNU Utilities
* dirngpr-client: (gnupg). X.509 CRL and OCSP client.
* dirngpr: (gnupg). X.509 CRL and OCSP server.
* gpg-agent: (gnupg). The secret key daemon.

Warning line 48/230, 199
```

Description: Provides additional information, similar to man.

Example: pinfo ls gives detailed information about the ls command.

## Command: tldr

```
chundurur@chundurur-virtual-machine:~$ tldr
tldr - Simplified and community-driven man pages

Usage: tldr [-v|--version]
          ((-u|--update) | [-p|--platform PLATFORM] COMMAND | (-a|--about))
tldr Client program

Available options:
-h,--help          Show this help text
-v,--version       Show version
-u,--update        Update offline cache of tldr pages
-p,--platform PLATFORM
                   Prioritize specific platform while searching. Valid
                   values include linux, osx, windows, sunos
COMMAND           name of the command
-a,--about         About this program
chundurur@chundurur-virtual-machine:~$
```

Description: Shows command line examples, a simplified version of man.

Example: tldr passwd provides quick examples of how to use the passwd

# Essential File Management Tools Commands

## Command: ls

```
chundurur@chundurur-virtual-machine:~$ ls
Desktop Documents Downloads Music Pictures Public snap Templates Videos
chundurur@chundurur-virtual-machine:~$
```

- Example: ls /home/user/Documents
- Description: Lists files and directories within a specified path. This command is used to view the contents of directories.

## Command: cp

```
chunduru@chunduru-virtual-machine:~$ touch source
chunduru@chunduru-virtual-machine:~$ ls
Desktop Documents Downloads Music Pictures Public snap source Templates Videos
chunduru@chunduru-virtual-machine:~$ vi source
chunduru@chunduru-virtual-machine:~$ cp source destination
chunduru@chunduru-virtual-machine:~$ ls
Desktop destination Documents Downloads Music Pictures Public snap source Templates Videos
chunduru@chunduru-virtual-machine:~$ cat destination
hello world
chunduru@chunduru-virtual-machine:~$
```

- Example: cp source.txt destination.txt
- Description: Copies files from one location to another. This command is used to make duplicates of files.

## Command: mkdir

```
chunduru@chunduru-virtual-machine:~$ mkdir karthik
chunduru@chunduru-virtual-machine:~$ ls
Desktop Documents Downloads karthik Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$
```

- Example: mkdir new\_directory
- Description: Creates a new directory. This command is used when you need to make a new folder.

## Command: rmdir

```
chunduru@chunduru-virtual-machine:~$ mkdir karthik
chunduru@chunduru-virtual-machine:~$ ls
Desktop Documents Downloads karthik Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$ rmdir karthik
chunduru@chunduru-virtual-machine:~$ ls
Desktop Documents Downloads Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$
```

- Example: rmdir empty\_directory
- Description: Removes a directory, but only if it's empty. This command is used for deleting empty folders.

## Command: mv

```
chunduru@chunduru-virtual-machine:~$ touch file
chunduru@chunduru-virtual-machine:~$ ls
Desktop Documents Downloads file Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$ mv file file.text
chunduru@chunduru-virtual-machine:~$ ls
Desktop Documents Downloads file.text Music Pictures Public snap Templates Videos
```

- Example: mv oldname.txt newname.txt
- Description: Moves or renames files and directories. This command can change the location or the name of a file.

## Command: rm

```
chundurur@chundurur-virtual-machine:~$ ls
Desktop Documents Downloads file.text Music Pictures Public snap Templates Videos
chundurur@chundurur-virtual-machine:~$ rm file.text
chundurur@chundurur-virtual-machine:~$ ls
Desktop Documents Downloads Music Pictures Public snap Templates Videos
chundurur@chundurur-virtual-machine:~$
```

- Example: `rm filename.txt`
- Description: Removes files or directories. This command deletes files or directories.
- Note: When combined with options `-r` (recursive) and `-f` (force), as in `rm -rf directory_name`, it becomes a powerful command that can delete directories and their contents without asking for confirmation.

## Advanced File Management Tools Commands

**ln:** Used for creating hard and symbolic links.

```
chundurur@chundurur-virtual-machine:~$ ls
Desktop Documents Downloads file.text Music Pictures Public snap Templates Videos
chundurur@chundurur-virtual-machine:~$ ln -s file.text shortcut.text
chundurur@chundurur-virtual-machine:~$ ls
Desktop Documents Downloads file.text Music Pictures Public shortcut.text snap Templates Videos
chundurur@chundurur-virtual-machine:~$
```

- Example: `ln -s source_file symbolic_link` creates a symbolic link to `source_file`.
- Description: Links a file or directory to another location.

**find:** A utility to find files based on various properties.

```
chundurur@chundurur-virtual-machine:~$ find /home -name "*.text"
/home/chundurur/file.text
/home/chundurur/shortcut.text
chundurur@chundurur-virtual-machine:~$
```

- Example: `find /home -name "*.txt"` searches for text files in the `/home` directory.
- Description: Searches for files and directories in a given path.

**locate:** Used for quickly searching the database of system's contents.

```
chundurur@chundurur-virtual-machine:~$ touch file.text
chundurur@chundurur-virtual-machine:~$ locate file.text
/home/chundurur/file.text
chundurur@chundurur-virtual-machine:~$
```

- Example: `locate filename` finds the location of `filename`.
- Description: Fast file searching, requires running `updatedb` for an updated database.

**which:** Finds the location of executables in the PATH.

```
chunduru@chunduru-virtual-machine:~$ which python3
/usr/bin/python3
chunduru@chunduru-virtual-machine:~$
```

- Example: which python shows the path of the Python executable.
- Description: Useful for finding executable files in system's PATH.

**tar:** Archives multiple files into a single file.

```
chunduru@chunduru-virtual-machine:~$ tar -cvf archive.tar file.text file1.text
file.text
file1.text
chunduru@chunduru-virtual-machine:~$ ls
archive.tar Desktop Documents Downloads file1.text file.text Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$ ls -ltr
total 48
drwx----- 3 chunduru chunduru 4096 Aug 4 11:19 snap
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Videos
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Templates
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Public
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Pictures
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Music
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Downloads
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Documents
drwxr-xr-x 2 chunduru chunduru 4096 Aug 6 15:04 Desktop
-rw-rw-r-- 1 chunduru chunduru 6 Aug 6 17:03 file.text
-rw-rw-r-- 1 chunduru chunduru 0 Aug 6 17:11 file1.text
-rw-rw-r-- 1 chunduru chunduru 10240 Aug 6 17:12 archive.tar
chunduru@chunduru-virtual-machine:~$
```

- Example: tar -cvf archive.tar /folder creates an archive of a folder.
- Description: Combines multiple files into a tarball.

**gzip:** Compresses files.

```
chunduru@chunduru-virtual-machine:~$ gzip file.text
chunduru@chunduru-virtual-machine:~$ ls
archive.tar Desktop Documents Downloads file1.text file.text.gz Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$ ls -ltr
total 52
drwx----- 3 chunduru chunduru 4096 Aug 4 11:19 snap
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Videos
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Templates
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Public
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Pictures
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Music
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Downloads
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Documents
drwxr-xr-x 2 chunduru chunduru 4096 Aug 6 15:04 Desktop
-rw-rw-r-- 1 chunduru chunduru 30 Aug 6 17:03 file.text.gz
-rw-rw-r-- 1 chunduru chunduru 0 Aug 6 17:11 file1.text
-rw-rw-r-- 1 chunduru chunduru 10240 Aug 6 17:12 archive.tar
chunduru@chunduru-virtual-machine:~$
```

- Example: gzip file.txt compresses file.txt.
- Description: Reduces the size of files using compression.

**bzip2:** A file compression utility.

```
chunduru@chunduru-virtual-machine:~$ bzip2 file1.text
chunduru@chunduru-virtual-machine:~$ ls
archive.tar Desktop Documents Downloads file1.text.bz2 file.text.gz Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$ ls -ltr
total 56
drwx----- 3 chunduru chunduru 4096 Aug 4 11:19 snap
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Videos
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Templates
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Public
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Pictures
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Music
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Downloads
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Documents
drwxr-xr-x 2 chunduru chunduru 4096 Aug 6 15:04 Desktop
-rw-rw-r-- 1 chunduru chunduru 30 Aug 6 17:03 file.text.gz
-rw-rw-r-- 1 chunduru chunduru 14 Aug 6 17:11 file1.text.bz2
-rw-rw-r-- 1 chunduru chunduru 10240 Aug 6 17:12 archive.tar
chunduru@chunduru-virtual-machine:~$
```

- Example: bzip2 file.txt compresses file.txt.
- Description: Offers better compression ratios than gzip at the cost of speed.

**xz:** High compression utility.

```

chunduru@chunduru-virtual-machine:~$ xz file2.txt
chunduru@chunduru-virtual-machine:~$ ls
archive.tar Desktop Documents Downloads file1.text.bz2 file2.text.xz file.text.gz Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$ ls -ltr
total 60
drwx----- 3 chunduru chunduru 4096 Aug 4 11:19 snap
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Videos
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Templates
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Public
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Pictures
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Music
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Downloads
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Documents
drwxr-xr-x 2 chunduru chunduru 4096 Aug 6 15:04 Desktop
-rw-rw-r-- 1 chunduru chunduru 30 Aug 6 17:03 file.text.gz
-rw-rw-r-- 1 chunduru chunduru 14 Aug 6 17:11 file1.text.bz2
-rw-rw-r-- 1 chunduru chunduru 10240 Aug 6 17:12 archive.tar
-rw-rw-r-- 1 chunduru chunduru 32 Aug 6 17:22 file2.text.xz
chunduru@chunduru-virtual-machine:~$

```

- Example: xz file.txt compresses file.txt.
- Description: Provides the best compression ratio.

**zip:** Used for packaging and compressing (archiving) files.

```

chunduru@chunduru-virtual-machine:~$ zip archive.zip file3.text file4.text
adding: file3.text (stored 0%)
adding: file4.text (stored 0%)
chunduru@chunduru-virtual-machine:~$ ls
archive.tar archive.zip Desktop Documents Downloads file1.text.bz2 file2.text.xz file3.text file4.text file.text.gz Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$ ls -ltr
total 64
drwx----- 3 chunduru chunduru 4096 Aug 4 11:19 snap
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Videos
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Templates
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Public
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Pictures
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Music
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Downloads
drwxr-xr-x 2 chunduru chunduru 4096 Aug 4 11:20 Documents
drwxr-xr-x 2 chunduru chunduru 4096 Aug 6 15:04 Desktop
-rw-rw-r-- 1 chunduru chunduru 30 Aug 6 17:03 file.text.gz
-rw-rw-r-- 1 chunduru chunduru 14 Aug 6 17:11 file1.text.bz2
-rw-rw-r-- 1 chunduru chunduru 10240 Aug 6 17:12 archive.tar
-rw-rw-r-- 1 chunduru chunduru 32 Aug 6 17:22 file2.text.xz
-rw-rw-r-- 1 chunduru chunduru 0 Aug 6 17:25 file3.text
-rw-rw-r-- 1 chunduru chunduru 0 Aug 6 17:26 file4.text
-rw-rw-r-- 1 chunduru chunduru 318 Aug 6 17:26 archive.zip
chunduru@chunduru-virtual-machine:~$

```

- Example: zip archive.zip file1 file2 creates an archive with file1 and file2.
- Description: Commonly used for creating .zip files.

**file:** Determines the type of a file.

```

chunduru@chunduru-virtual-machine:~$ touch image.jpg
chunduru@chunduru-virtual-machine:~$ ls
archive.tar archive.zip Desktop Documents Downloads file1.text.bz2 file2.text.xz file3.text file4.text file.text.gz image.jpg Music Pictures Public snap Templates Videos
chunduru@chunduru-virtual-machine:~$ file image.jpg
image.jpg: empty
chunduru@chunduru-virtual-machine:~$

```

- Example: file image.jpg displays the type of image.jpg.
- Description: Useful for identifying file formats.

**mount:** Attaches a filesystem to a specified directory.

- Example: mount /dev/sdb1 /mnt mounts the device sdb1 to /mnt.
- Description: Used to access filesystems on different storage devices.

**df:** Displays disk space usage of all mounted filesystems.

```

chunduru@chunduru-virtual-machine:~$ df -h
Filesystem      Size  Used Avail Use% Mounted on
tmpfs           193M  1.7M  191M   1% /run
/dev/sda3       20G   12G   6.4G  65% /
tmpfs           961M    0  961M   0% /dev/shm
tmpfs           5.0M  4.0K  5.0M   1% /run/lock
/dev/sda2       512M  6.1M  506M   2% /boot/efi
tmpfs          193M  140K  192M   1% /run/user/1000
/dev/sr1        4.5G  4.5G    0 100% /media/chunduru/Ubuntu 22.04.5 LTS amd64
/dev/sr0        155M  155M    0 100% /media/chunduru/CDROM
chunduru@chunduru-virtual-machine:~$

```

- Example: `df -h` shows disk space in human-readable format.
- Description: Useful for monitoring disk space usage.

**findmnt:** Lists all mounted filesystems.

```
chunduru@chunduru-virtual-machine:~$ findmnt -t ext4
TARGET SOURCE FSTYPE OPTIONS
/ /dev/sda3 ext4 rw,relatime,errors=remount-ro
chunduru@chunduru-virtual-machine:~$
```

- Example: `findmnt -t ext4` lists all ext4 type mounts.
- Description: Displays a tree-like structure of mounts.

**lsblk:** Lists information about block devices.

```
chunduru@chunduru-virtual-machine:~$ lsblk
NAME        MAJ:MIN RM   SIZE RO TYPE MOUNTPOINTS
fd0         2:0    1     4K  0 disk
loop0       7:0    0     4K  1 loop /snap/bare/5
loop1      7:1    0  74.3M  1 loop /snap/core22/1612
loop2      7:2    0 271.2M  1 loop /snap/firefox/4848
loop3      7:3    0 505.1M  1 loop /snap/gnome-42-2204/176
loop4      7:4    0  91.7M  1 loop /snap/gtk-common-themes/1535
loop5      7:5    0  12.9M  1 loop /snap/snap-store/1113
loop6      7:6    0  38.8M  1 loop /snap/snapd/21759
loop7      7:7    0   500K  1 loop /snap/snapd-desktop-integration/178
loop8      7:8    0  12.2M  1 loop /snap/snap-store/1216
loop9      7:9    0   50.1M  1 loop /snap/snapd/27591
sda         8:0    0    20G  0 disk
├─sda1      8:1    0     1M  0 part
├─sda2      8:2    0   513M  0 part /boot/efi
└─sda3      8:3    0   19.5G  0 part /
sr0        11:0    1  154.7M  0 rom  /media/chunduru/CDROM
sr1        11:1    1    4.4G  0 rom  /media/chunduru/Ubuntu 22.04.5 LTS amd64
chunduru@chunduru-virtual-machine:~$
```

- Example: `lsblk` lists all block devices.
- Description: Useful for identifying storage devices and their partitions.