# Common Text Analysis Platform

A Web-Based Tool Supporting Automatic Complexity Analysis

Xiaobin Chen, xiaobin.chen@uni-tuebingen.de Detmar Meurers, dm@sfs.uni-tuebingen.de

Tübingen University

August 24, 2017

## Linguistic analysis of texts

(Automatic) Linguistic analysis has been widely used for:

- assessing text readability
- modeling processing difficulty of sentences
- analyzing/scoring student writings
- comparing language typologies and their historical development
- attributing authorship
- identifying native languages
- detecting plagiarism
- assessing answers to questions
- predicting diseases
- ...

2 / 14

## Existing tools for text analysis

A number of tools have been released in the past few years. e.g.

- Syntactic and Lexical Complexity Analyzers (Lu, 2010)
- Cohmetrix (McNamara et al., 2014)
- Suite of Linguistic Analysis Tools (Crossley et al., 2016a,b), also http://www.kristopherkyle.com/tools.html
- Computerized Propositional Idea Density Rater (Brown et al., 2008, CPIDR).
- ETS's TextEvaluator https://texteval-pilot.ets.org/TextEvaluator/
- Pearson's Reading Maturity Metric
- Text Analysis, Crawling, and interpretation Tool (Dehghani et al., 2016, TACIT)

## Problems with existing tools


- Limited usability of tools and analysis components
  - OS-dependent standalone deployment
  - Source code release hard to use for non-programmers
  - Unfriendly user interface: command line interface, choice of features...
- Limited extensibility
  - Close source commercial systems
  - Non-reusable analysis components
- Collaborative development difficult to implement
  - Significant feature overlap
  - Duplication of efforts
- Feature proliferation, e.g.
  - CohMetrix: 106 metrics
  - Vajjala (2015): >200 features for readability assessment

## System demands


#### A system that is:

- Web-based
- user-friendly, supporting real-life use by ordinary users
- comprehensive set of linguistic features
- freedom to choose extracted features
- modularized and reusable analysis components

# CTAP System Architecture

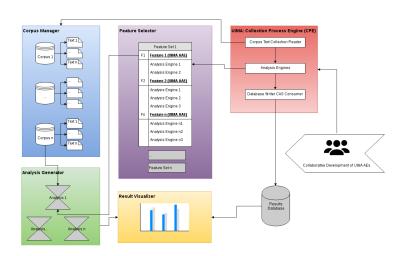


# Corpus Manager



Helps users manage the language materials that need to be analyzed.

- Folders: grouping corpora
- Corpora: holding texts
- Tags: labeling texts based on e.g. document genre, target reader levels, etc.

### Feature Selector




The Feature Selector supports:

- creating feature set to hold selected features
- add/remove features from feature set

Developers are encouraged to participate in in feature development at https://github.com/ctapweb.


### **Analysis Generator**

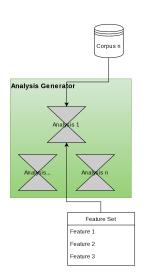

Each analysis extracts a set of features from the designated corpus. The analysis generator is used to:

- create new analyses
- run analyses and monitor their progress
- export analysis results in CSV format

### Result Visualizer

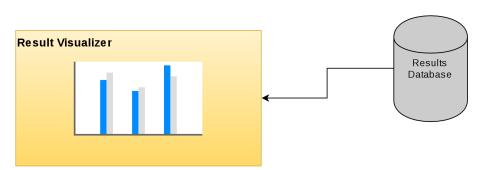

The Result Visualizer is a simple and intuitive module that plots analysis results for the user to visualize preliminary findings from the analysis.

## Design features of CTAP

- Consistent, easy-to-use, friendly user interface
- Modularized, reusable, and collaborative development of analysis components
- Flexible corpus and feature management

### System demo



http://ctapweb.com

### Outlook

- Populating the system with more features
- Replicating studies that involved text analysis to validate the system and identify other function needs
- Model construction functionality (machine learning)
- API supporting analysis of multiple languages (en, de, es, fr...), non-plain text file formats, etc.

#### More details available in the paper:

Chen, X. B., & Meurers, D. (2016). CTAP: A Web-based tool supporting automatic complexity analysis. In D. Brunato, F. Dell'Orletta, G. Venturi, T. François, & P. Blache (Eds.), Proceedings of the Computational Linguistics for Linguistic Complexity Workshop at the 26th International Conference on Computational Linguistics (COLING 2016), Osaka, Japan, 11 December (pp. 113-119). The International Committee on Computational Linguisitcs.

#### References

- Brown, C., Snodgrass, T., Kemper, S. J., Herman, R., and Covington, M. A. (2008). Automatic measurement of propositional idea density from part-of-speech tagging. *Behavior Research Methods*, 40(2):540–545.
- Crossley, S. A., Kyle, K., and McNamara, D. S. (2016a). Sentiment analysis and social cognition engine (seance): An automatic tool for sentiment, social cognition, and social-order analysis. Behavior Research Methods, pages 1–19.
- Crossley, S. A., Kyle, K., and McNamara, D. S. (2016b). The tool for the automatic analysis of text cohesion (taaco): Automatic assessment of local, global, and text cohesion. *Behavior Research Methods*, 48(4):1227–1237.
- Dehghani, M., Johnson, K. M., Garten, J., Boghrati, R., Hoover, J., Balasubramanian, V., Singh, A., Shankar, Y., Pulickal, L., Rajkumar, A., and Parmar, N. J. (2016). Tacit: An open-source text analysis, crawling, and interpretation tool. *Behavior Research Methods*, pages 1–10.
- Housen, A. (2015). L2 complexity—a difficult(y) matter. Oral presentation given at the Measuring Linguistic Complexity: A Multidisciplinary Perspective workshop, Université catholique de Louvain, Louvain-la-Neuve.
- Lu, X. (2010). Automatic analysis of syntactic complexity in second language writing. International Journal of Corpus Linguistics, 15(4):474–496.
- McNamara, D. S., Graesser, A. C., McCarthy, P. M., and Cai, Z. (2014). Automated evaluation of text and discourse with Coh-Metrix. Cambridge University Press, Cambridge, M.A.
- Vajjala, S. (2015). Analyzing Text Complexity and Text Simplification: Connecting Linguistics, Processing and Educational Applications. PhD thesis, University of Tübingen.