



MissingDataGUI: A Graphical User Interface for Exploring Missing Values in Data

Xiaoyue Cheng
Iowa State University

Heike Hofmann
Iowa State University

Dianne Cook
Iowa State University

Abstract

Missing values are common in data, and usually require attention in order to conduct statistical analysis. One of the first steps is to explore the structure of the missing values, and how missingness relates to the other collected variables. This article describes an R package, that provides a graphical user interface (GUI) designed to help explore the missing data structure and examine the results of different imputation methods. The GUI provides numerical and graphical summaries conditional on missingness, and includes imputations using fixed values, multiple imputations and nearest neighbors.

Keywords: missing values, imputation, exploratory data analysis, statistical graphics, data visualization, graphical user interface.

1. Introduction

Missing values are a very common problem affecting data analysis. Many imputation methods are developed but little has been done for exploring the missing value structure visually. Most plotting methods handle missing values by simply removing the incomplete records with or without a warning, especially when the data are continuous. Most statistical functions provide a limited list of handling missing values, such as delete all cases with missing, delete pairwise or on single variables only.

The issue is that in order to decide what to do with the missing values before analyzing the data, we need to understand what the distribution of the missing values is, and how the missingness depends on the other collected variables. Some R packages, **norm** (Novo and Schafer 2010), **Hmisc** (Harrell 2012), which have some routines for summarizing the number of missing by variable, and by case, in preparation for imputing the missing values. To understand the distribution of missings versus non-missings we need to make plots of the data.

Some existing work describing the types of plots needed to explore missing data, and implementations, can be found in [Unwin, Hawkins, Hofmann, and Siegl \(1996\)](#), [Swayne and Buja \(1998\)](#), and [Templ and Filzmoser \(2008\)](#). First two of them use interactive graphics to help with the exploration. MANET implements the methods described in [Unwin *et al.* \(1996\)](#). It presents the segmented barcharts of missing versus non-missing values for each variable. Since it has many plot types like histograms, scatterplots, mosaic plots, MANET encourages the user to select cases that are missing on any variable which highlights these cases in other plots enabling the user to explore the missing status dependence in the distributions of the complete cases of other variables. XGobi, which implements the ideas described in [Swayne and Buja \(1998\)](#) provides more real-valued data tools. It creates a shadow matrix of the original data where entries are 0 (complete) or 1 (missing value). This additional data structure allows the user to explore the multivariate pattern of missing values, and to explore dependence between missing value status and distribution of the complete cases. Again, linked brushing is used, and rudimentary imputation methods are available in GGobi ([Swayne, Temple Lang, Buja, and Cook 2003](#)). R package **VIM** ([Templ, Alfons, Kowarik, and Prantner 2013](#)) provides a graphical user interface to explore the structure of missing values and quality of three imputation methods via several graph types.

This current work describes a new package for R, **MissingDataGUI**, which allows the exploration of missing values structure, and results of imputation, using static graphics and numerical summaries. A graphical user interface (GUI) makes is accessible to novice users. This work builds on the ideas developed in [Unwin *et al.* \(1996\)](#) and [Swayne and Buja \(1998\)](#). This package utilizes routines in **Hmisc** ([Harrell 2012](#)), **norm** ([Novo and Schafer 2010](#)) for some imputation methods. The paper is structured as follows. Section 2 explains what is done in GUI and why. Section 3 describes the design of GUI and gives an example. The last section discusses future work.

2. Functionality

2.1. Overview of missing data GUI

The missing data GUI looks as Figure 2.1. All variables with the classes and the percentages of NA's are listed on the top left (area 1). The categorical variables are shown on the bottom left as the conditions (area 2). The variables having missing values are displayed under "Color.by.the.missing.of" on the top center (area 3). The first row "Missing Any Variables" in the list means whether the case has missing values in any variables, and the second row "Missing on Selected Variables" means whether the case has missings in those variables selected in area 1. "Imputation Method" (area 4) and "Graph Type" (area 5) are two radios interpreted in section 2.2 and 2.3. Five buttons on the top right (area 6) are: "Numeric summary" which will create a window like Figure 2; "plot" which produces the plots in the graphics device on the bottom right of GUI (area 7); "Export the data" which will save the imputed data into a data file or to R console; "Save the plot" which could save the plot in area 7 to a png file; "Quit" which will destroy the main GUI window and the derived child windows.


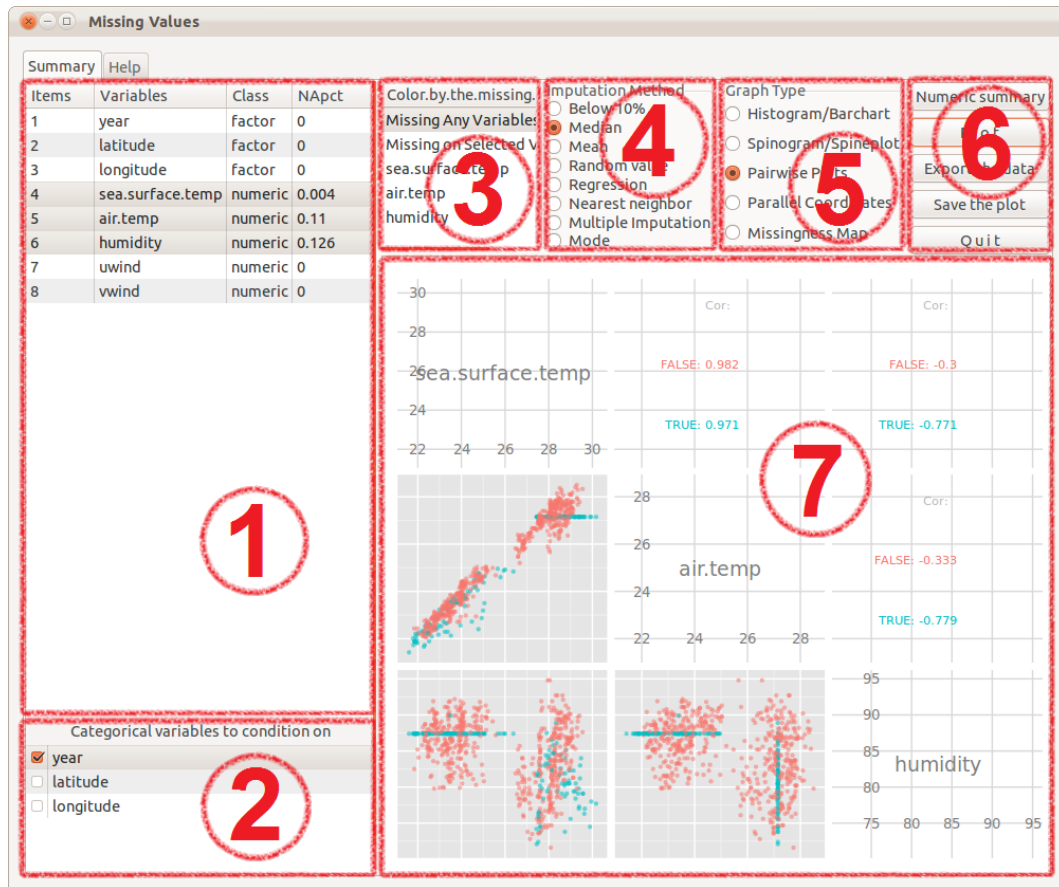


Figure 1: Overview of the missing data GUI. Region 1 contains the list of variables, variable type, and summary of missings on that variable. Region 2 has a list of the categorical variables that can be used to conditionally impute values. Region 3 lists the variables with missing values to enable coloring by different types of missingness in the plots. Region 4 contains a radio button selection of imputation methods. Region 5 has several plot type selections, and section 6 allows selecting numeric or graphical summaries and some output routines. The summaries are displayed in the region 7.

2.2. Summary of missing values

To investigate missingness in a data set, numerical summaries of the missings are initially calculated, as shown in Figure 2. The information at the top of the window contains the percent of the values that are missing, along with the percent of variables that contain missing values and the percent of the cases that have at least one missing value. Below this is a tabulation of the number of values missing per case - here at most 2 cases have 3 missing values, another 2 have 2 missing values, 167 cases have one missing value and there are 565 complete cases. In terms of percentages, 76.8% of the cases are complete. This follows the style of the **norm** package for summarizing missingness.

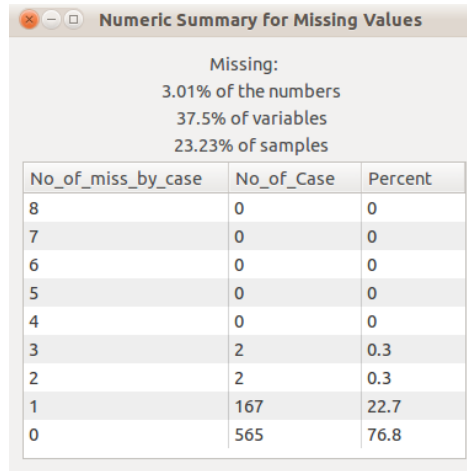

No_of_miss_by_case	No_of_Case	Percent
8	0	0
7	0	0
6	0	0
5	0	0
4	0	0
3	2	0.3
2	2	0.3
1	167	22.7
0	565	76.8

Figure 2: A numerical summary of missing values in the data is shown in a pop-up window. The percentage of missings by total number of data values, by variables and by cases, is shown on the top. This dataset has 8 variables and the missing values across variables is summarized in the bottom table. No cases have more than 3 missing values. 76.8% of cases are complete, 22.7% of cases have one missing value, and only 4 cases have more than one missing values.

2.3. Imputation

A number of imputation methods are available in the package. The purpose of these is not only to examine the dependence between missings or non-missings, but also to produce a complete data set for later analysis. The eight imputation methods available are: “Below 10%”, “Median”, “Mean”, “Random value”, “Regression”, “Nearest neighbor”, “Multiple imputation”, “Mode”. The first four, as well as “Mode”, are imputations on individual variables, and the remainder “Regression”, “Nearest neighbor”, and “Multiple imputation” are imputations on the joint distribution of two or more variables.

Univariate imputations

The simplest example is setting the missing values to 10% below the minimum of each variable. The purpose of this approach is to demonstrate the missing values in a place where they can be distinguished from the non-missing values. In a scatterplot, all missing values will lie along a vertical line on the left or a horizontal line on the bottom of the display (Figure 2.3.1 (a)). In the histogram, missing values will form a bar to the left of other data values. And in the parallel coordinates plot, the missing values are at the bottom of each axis.

Using the median, mean or mode of the complete cases on a variables is a common way to impute missing values. The median and mean are used for the continuous variables, and mode is used for categorical variables. The mean imputation keeps the variable mean as that of the complete cases. For a categorical variable, using the mode imputes the missing as the most common category. To examine the location of these imputed values as well as the complete values in graphs, points and bars are colored according to the missing status of the case. Figure 2.3.1 (b) and (c) give an example of the imputation by median and mean for real-valued variables.

Choosing a “random value” will randomly select from the complete cases of a variable to

impute the missing values, as shown in Figure 2.3.1 (d).

Because these imputation methods operate separately on each variable, the resulting data have different covariance and correlation estimates. In some circumstances this may still enable reasonable further analysis.

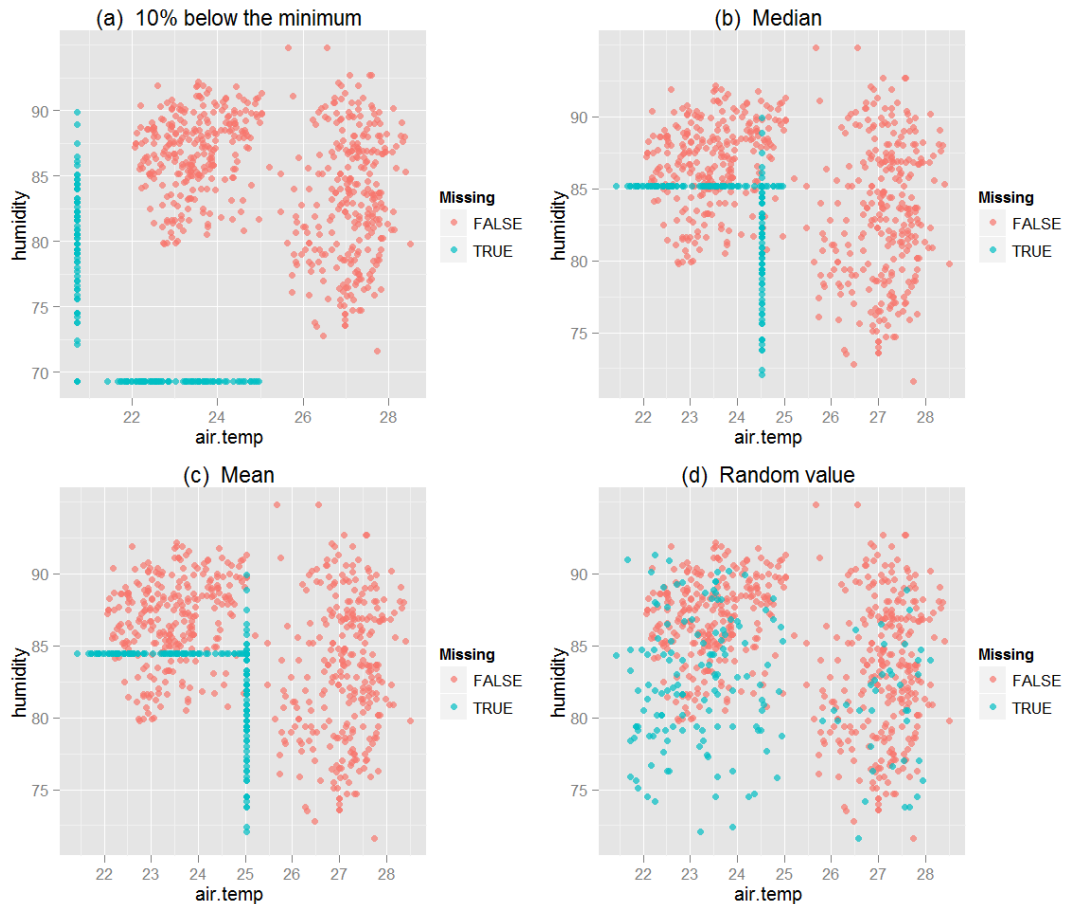


Figure 3: Four panels of scatterplots displaying the results of different univariate imputations (cyan=missing, peach=not missing): (a) 10% below the minimum (not strictly an imputation method, it is used more for displaying missings as part of a plot of complete cases); (b) median of each variable; (c) mean of each variable; (d) random selection from the complete cases.

Multiple imputations

These methods will conduct imputation on the joint distribution of the selected variables.

The “regression” method uses function `aregImpute` from package **Hmisc**. The function provides multiple imputation using additive regression, bootstrapping, and predictive mean matching (Harrell 2012). The “multiple Imputation” method uses functions from package **norm**. The process generates samples from a multivariate normal model with estimated pa-

rameters via EM algorithm (Novo and Schafer 2010), so it requires all of the selected variables to be numeric (at least integers).

The “nearest neighbor” method replaces a missing value with the mean of its 5 nearest neighbors by squared Euclidean distance. If there are ties in the distance ranking, then only the first five points are used, regardless to the tie. This method requires at least one case in the dataset to be complete, and no character variables. If there are less than five complete cases, the mean of them will be imputed. If none of the cases are complete, then the median of each variable is returned. The algorithm and code is described in the Appendix.

The strength of the above methods includes 1) they incorporate covariace information when calculating imputed values, and 2) “regression” and “nearest neighbor” can accommodate both continuous and categorical data.

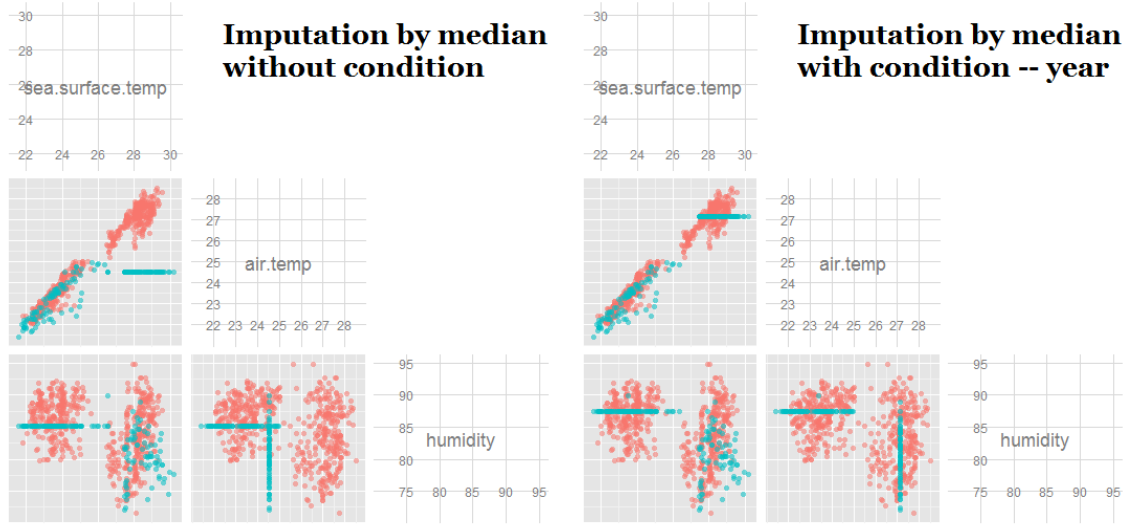


Figure 4: Comparison between imputations with and without conditions. The left panel is the imputation by median without condition and the right one is conditioned on year. In the left plot we can see that the imputed values fall between the two clusters, at the overall median. But when the imputation is conditioned on year (right plot), the imputed values are now better placed into the two clusters in the data.

Conditional on the categorical variables

When the variables of interest are bimodal or multi-modal, using the center statistics like mean or median as the imputations is inadequate because the center can not reflect the shape of distribution properly. In many situations, the modalities arise from the mixture of groups. Hence, a better imputation method is to use the group means or medians instead of the population mean or median.

The implementation of this idea produces the widget named “categorical variables to condition on”. All categorical variables are listed with checkboxes. The variables checked will partition

the data into blocks and then the imputation method is implemented in each block of the data. The procedure is as computing based on a conditional model given the category. However, the condition is invalid when the imputation method is “Below 10%”, since the aim of “Below 10%” is only displaying the missings away from the non-missings, but giving the condition will mix the points again.

The role of conditions in the imputation is revealed in Figure 4. Without the condition, the imputations may locate far away from the distribution of values (Figure 4 left). But calculating separately by group provides a much better imputation for the data (Figure 4 right).

2.4. Plot types

Five types of graphs are available in the GUI: histogram (for continuous data)/barchart (for discrete data), spinogram/spineplot, pairwise plots, parallel coordinates plot, and missingness maps. For all those graphs, color represents missing or not missing of one or more variables with missing values.

The histograms and barcharts are shown one by one for all the variables selected. When the missing values and the complete values share one bar, the bar is cut to two parts, and the ratio of two heights is equal to the ratio of missing and non-missing values in that bar. Besides, the histogram is laid vertically while barchart is horizontal, which will clearly differ the continuous and discrete data.

The spinograms and spineplots are presented similar as histograms. Each bar has the same height, but is partitioned by two colors which represent the missing and non-missing values. The ratio of two heights is equal to the ratio of missings and non-missings too. Both histogram/barchart and spinogram/spineplot are based on the package **ggplot2** (Wickham 2009).

Pairwise plots are drawn by the function **ggpairs** of package **GGally** (Schloerke, Crowley, Cook, Hofmann, and Wickham 2012). The variable names and scales lay on the diagonal. For the continuous variables, the pairwise scatterplots are in the lower triangle while the correlation coefficients for both missing and non-missing values between every paired variables are shown in the upper triangle. For the categorical variables, barcharts by the categories of the vertical variable are given on both triangles. Again, the bars are colored in proportion to the missings. The combination of continuous and categorical variables is displayed as side-by-side boxplots of missing and non-missing values for each category on the upper triangle and side-by-side histograms on the lower triangle. Limited by the room of the graphics device in the main window, the pairwise plots cannot contain too many variables. The upper limit of the number of variables is set to be 5 and the lower limit is apparently 2.

Parallel coordinates plot is in the use of function **ggpcp** from package **ggplot2** (Wickham 2009).

The missingness map works as a graphical version of the shadow matrix, which provides an overview of the place of missing values in all variables. Assume that changing the order of variables and observations does not reduce any information, then agglomerating the missing values into blocks could enhance the understanding of missing patterns, especially for large

data. Hence two re-ordered missingness maps are given besides the original map. One arranges the variables and cases by the number of missings, from the largest to the smallest; the other applies hierarchical clustering to both rows and columns.

Figure 5 displays the different types of graphs in the missing data GUI. The color is based on whether missing in humidity except for the missingness maps. It is clear to see the location of incomplete cases at other covariates. Categorical covariates could also be displayed as boxplots or barcharts in pairwise plots.

2.5. Design Issues

The missing data GUI is designed in one window. The list of variables, the radio for imputation methods, the checkbox group for the conditional variables, and the graphics device, except for the numeric summary, are all in the same window. An appropriate layout makes the widgets look not crowded, but very easy to maintain.

2.6. Data Input and Output

Data can be read in as either a data frame or from a csv file. `MissingDataGUI(data=NULL)` is the starting function. To read in an existing data frame we only need to replace `NULL` with the data name. An advantage is that the type of variables (factor, numeric, ...) as characterized by R are used. This is the preferred approach.

It is also possible to read from a csv file. If `MissingDataGUI()` is called without a data frame argument, data import GUI is called (Figure 6). The “Open” button is for choosing files and the “Watch Missing Values” buttons will launch the missing data GUI. The file format must be csv(comma separated values) currently, and only one data set can be imported at any time.

When other imputation methods are implemented on the data, it is easy to load the imputed data into the GUI. The user only need to provide a shadow matrix which is used to indicate the imputed values. In this situation, the imported structure should be a data frame or a csv file with first n columns being the imputed data and the next n columns being the shadow matrix.

The imputed data can be saved by the “Export the data” button. Only the selected variables will be imputed, but users could choose whether to export the selected columns or all the columns (with NA’s existing in the unselected variables). The shadow matrix is exported by default, so that analysts can always track back to find the locations of the original missing values. As seen in Figure 7, data could be saved in three ways: csv file, rda file, or a data frame in R session.

2.7. Help tab

The help tab shown in Figure 8 has the same layout as the summary tab. The only difference is that the graphics device is replaced by the help document of each widget.

2.8. Additional features of the GUI

In this part some additional features of the missing data GUI are explained.

- Double clicking on any variables in the top left table will open an attribute window, as displayed in Figure 2.8. When the class of a variable is changed from numeric or integer to factor or character, the variable will be automatically loaded into the checkbox group as the potential conditions.
- The color-by-variable selector allows text entry to find the variable. This feature is especially useful when there are many variables with missing values.
- The plots can be saved in a png file by “Save the plot” button. The imputation method and plot type will be auto-completed in the file name. All of the figures in the Example section were saved this way.

3. Example

3.1. Data

Two data sets are provided with the package: `tao`, which is used as the example in this section, and `brfss`. `brfss` is a subset of the 2009 survey from the Behavioral Risk Factor Surveillance System, an ongoing data collection program designed to measure behavioral risk factors for the adult population (18 years of age or older) living in households. The website for this program is <http://www.cdc.gov/BRFSS/index.htm>.

`tao` is from the Tropical Atmosphere Ocean project (TAO) (McPhaden 2011). The TAO array consists of approximately 70 moorings in the Tropical Pacific Ocean, telemetering oceanographic and meteorologic al data to shore in real-time via the Argos satellite system. A subset of data from 6 moorings in 1993 and 1997 is used for the example. The data has 8 variables (year, latitude, longitude, sea surface temperature, air temperature, humidity, uwind and vwind) and 736 observations. This subset is provided by Cook and Swayne (2007). We can open the GUI by the following commands:

```
library(MissingDataGUI)
data(tao)
MissingDataGUI(tao)
```

The numeric summary of all 8 variables in this data is shown in Figure 2.

3.2. Exploring Missings

Three of the 8 variables have missing values. First let’s look at the distribution of missings on these variables. Figure 10 (left) shows the pairwise plots of these three variables with missing

values on humidity colored (cyan). Cases which are missing on humidity have low values of sea and air temperature. This suggests the dependence between humidity missingness and the temperature variables. Imputation methods that incorporate this dependence may be preferable.

Figure 10 (right) shows the data imputed with median values (cyan). This imputation imposes a cross structure on the data, which does not match the shape of the complete cases. For example, there is a line of imputed values in the plot of air temperature versus sea surface temperature which is far from the rest of the complete cases. Thus the imputation method does not work well for this data.

Figure 11 (left) shows the data conditional imputing with median values (cyan) by year. This better matches the distribution of complete cases, although the imputed values still form bands in the scatterplot. This might be a problem because the variance estimation will be affected.

For this data, the better ways to impute the data would take the strong association between the variables into account. This suggests that regression, nearest neighbors, or multiple imputation might be the more desirable imputation methods. Figure 11 (right) shows the results for regression-based imputation, conditional on year. The imputed values match the distribution of complete cases reasonably well. There are a few slight concerns: some of the imputed values have lower air temperature values than any of the complete cases, the spread of the imputed values is a little greater than the complete cases. But overall, this is probably as good as it is going to get with imputing the missings for this data set. It would be reasonable to export the imputed data for further analysis at this point.

4. Discussion

The main goal of this work is to make it possible to see the the missing data and the impact of various imputation methods. In the future interactive data visualization will make it possible to brush points in a plot to more completely explore missing structure as we can in GGobi and MANET.

Software

This missing data GUI is written in R 2.15.2 (R Core Team 2012) and based on the package **gWidgets** (Verzani, Urbanek, Grosjean, and Lawrence 2011) with the toolkit RGtk2.

On different platforms (Windows, Linux, Mac) the appearance of the GUI will differ slightly, but the functionality will be the same.

Acknowledgements

This work was partially supported by an unrestricted fellowship from Novartis, and National Science Research grant DMS0706949.

References

- Cook D, Swayne DF (2007). *Interactive and Dynamic Graphics for Data Analysis: with R and GGobi*. Springer, New York, NY.
- Harrell FE (2012). **Hmisc**: *Harrell Miscellaneous*. R package version 3.9-3, URL <http://CRAN.R-project.org/package=Hmisc>.
- McPhaden MJ (2011). “Tropical Atmosphere Ocean project.” <http://www.pmel.noaa.gov/tao/index.shtml>.
- Novo AA, Schafer JL (2010). **norm**: *Analysis of Multivariate Normal Datasets with Missing Values*. R package version 1.0-9.2, URL <http://CRAN.R-project.org/package=norm>.
- R Core Team (2012). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria. ISBN 3-900051-07-0, URL <http://www.R-project.org/>.
- Schloerke B, Crowley J, Cook D, Hofmann H, Wickham H (2012). **GGally**: *Extension to ggplot2*. R package version 0.4.2, URL <http://CRAN.R-project.org/package=GGally>.
- Swayne D, Buja A (1998). “Missing Data In Interactive High-dimensional Data Visualization.” *Computational Statistics*, **13**(1), 15–26. ISSN 0943-4062.
- Swayne DF, Temple Lang D, Buja A, Cook D (2003). “GGobi: Evolving from XGobi into an Extensible Framework for Interactive Data Visualization.” *Computational Statistics & Data Analysis*, **43**, 423–444. URL <http://www.ggobi.org>.
- Templ M, Alfons A, Kowarik A, Prantner B (2013). **VIM**: *Visualization and Imputation of Missing Values*. R package version 3.0.3, URL <http://CRAN.R-project.org/package=VIM>.
- Templ M, Filzmoser P (2008). “Visualization of Missing Values Using the R-package **VIM**.” *Reserach report cs-2008-1, Department of Statistics and Probability Therory, Vienna University of Technology*.
- Unwin A, Hawkins G, Hofmann H, Siegl B (1996). “Interactive Graphics for Data Sets With Missing Values: MANET.” *Journal of Computational and Graphical Statistics*, **5**(2), 113–122. ISSN 1061-8600.
- Verzani J, Urbanek S, Grosjean P, Lawrence M (2011). **gWidgets**: *gWidgets API for Building Toolkit-independent, Interactive GUIs*. R package version 0.0-52, URL <http://CRAN.R-project.org/package=gWidgets>.
- Wickham H (2009). **ggplot2**: *Elegant Graphics for Data Analysis*. Springer New York. ISBN 978-0-387-98140-6. URL <http://had.co.nz/ggplot2/book>.

Appendix: Code for Nearest Neighbor Imputation

```
myNNdat = dat[complete.cases(dat),]
Missing_any = factor(apply(is.na(dat),1,any),levels=c(FALSE,TRUE))
for (i in which(Missing_any=='TRUE')){
  usecol = which(!is.na(dat[i,]))
```

```

if (length(usecol)!=0){
  NNdat = myNNdat
  a = rbind(dat[i,], NNdat)[,usecol]
  NNdat$distance = dist(a)[1:nrow(NNdat)]
  k5NNdat = NNdat[order(NNdat$distance,decreasing=FALSE),][1:min(5,nrow(NNdat)),]
  if (nrow(k5NNdat)>1 & n-length(usecol)>1) {
    dat[,1:n][i,-usecol] = apply(k5NNdat[,1:n][,-usecol],2,mean)
  } else {
    if (nrow(k5NNdat)==1) {
      dat[,1:n][i,-usecol] = k5NNdat[,1:n][1,-usecol]
    } else {
      dat[,1:n][i,-usecol] = mean(k5NNdat[,1:n][,-usecol])
    }
  }
} else {
  for (j in 1:n) {
    dat[i,j] = median(dat[,j], na.rm=TRUE)
  }
}
}

```

Affiliation:

Xiaoyue Cheng
Department of Statistics and Statistical Laboratory
Iowa State University
2406 Snedecor Hall
Ames, IA, 50011, United States of America
E-mail: xycheng@iastate.edu
URL: <http://xycheng.public.iastate.edu/>

Heike Hofmann
Department of Statistics and Statistical Laboratory
Iowa State University
2413 Snedecor Hall
Ames, IA, 50011, United States of America
E-mail: hofmann@iastate.edu
URL: <http://hofmann.public.iastate.edu/>

Dianne Cook
Department of Statistics and Statistical Laboratory
Iowa State University
2415 Snedecor Hall
Ames, IA, 50011, United States of America
E-mail: dicook@iastate.edu
URL: <http://dicook.public.iastate.edu/>



Figure 5: Results for five types of graphs. The left two graphs on the first row are a barchart and a histogram; the right two on the first row are a spineplot and a spinogram. The left panel on the second row presents the pairwise plots, and the right on the second row is the parallel coordinates plot. All the plots above use “below 10%” imputation and color by the missingness of one variable - humidity. The graphs on the third row are missingness maps with different orders of variables and cases. The left panel gives the original order; the middle one sorts the variables and cases by a decreasing number of missing values; the right one sorts them by hierarchical clustering of missingness.

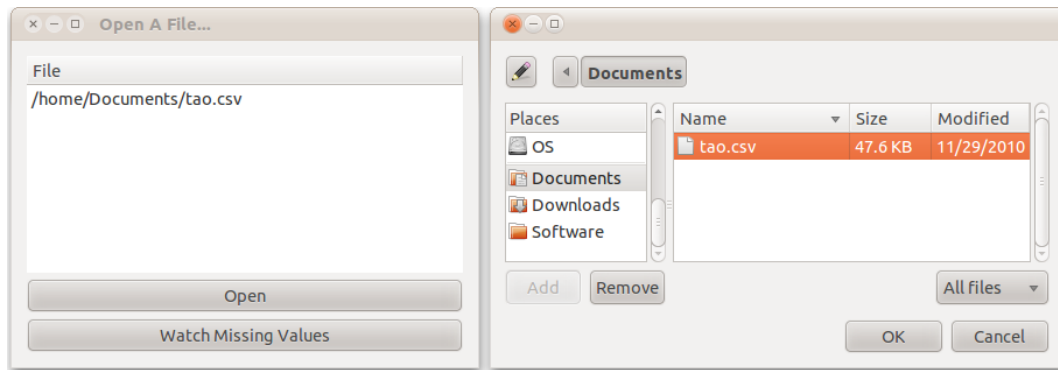


Figure 6: The data import GUI, with file selector, which is called by the “open” button. More than one file could be listed in the GUI, but only one data set is allowed active. The first file is automatically imported if none of the data sets are chosen when the “Watching Missing Values” button is hit.

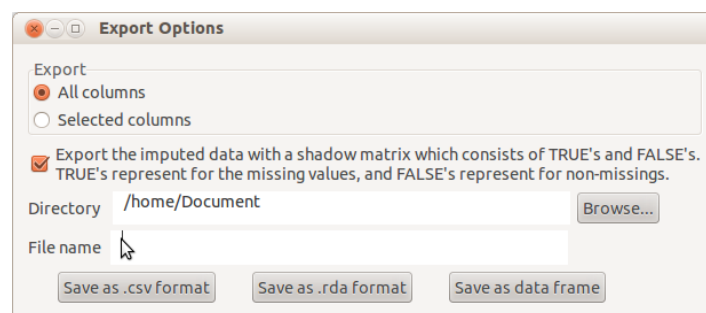


Figure 7: The data export GUI. By default, all columns are exported with a shadow matrix. The current working directory is set to be the default directory.

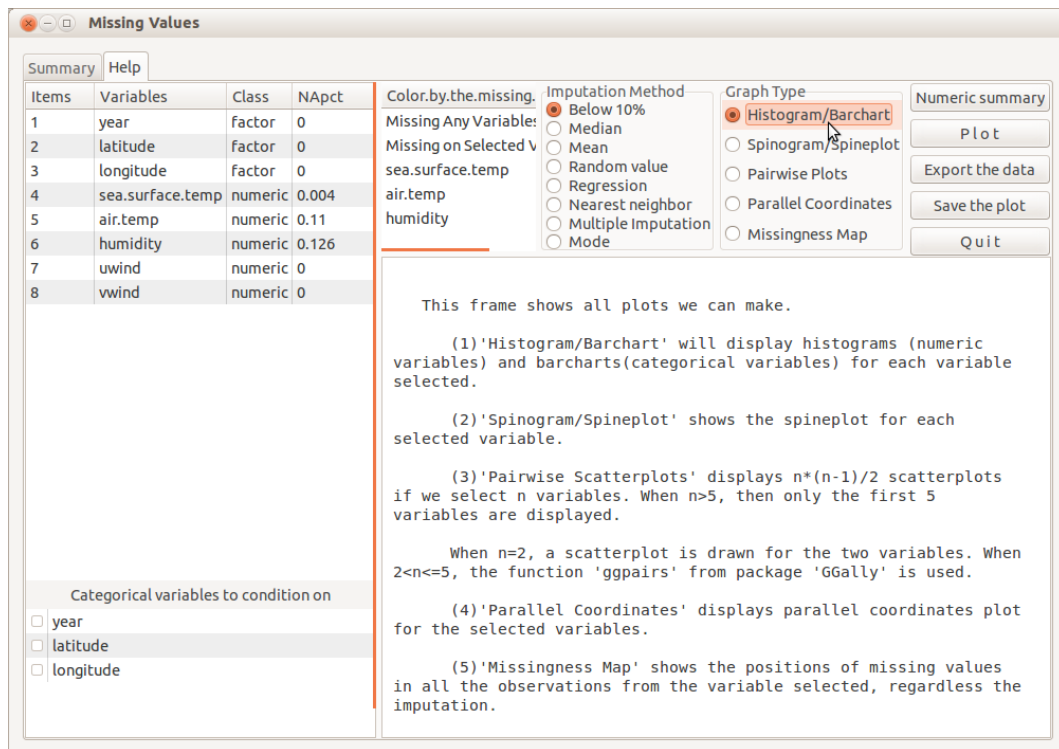


Figure 8: The help tab of missing data GUI. Mousing over any part of the GUI or clicking the radio/checkbox items will pop up text explanations in the summary region. All the widgets have their detailed introduction.

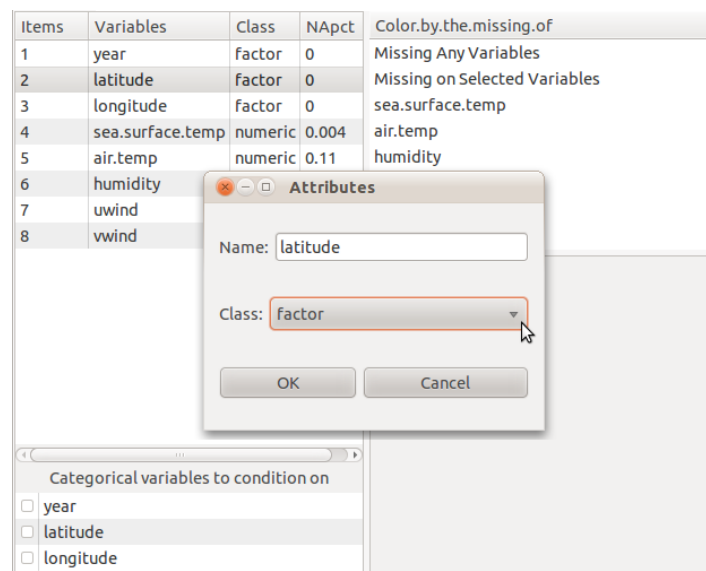


Figure 9: The attributes list for variable selection is interactive. The name can be edited, and the class could be changed to one of the four classes: integer, numeric, factor, and character. When a numeric variable is changed to a categorical variable, the widget for conditions will be updated.

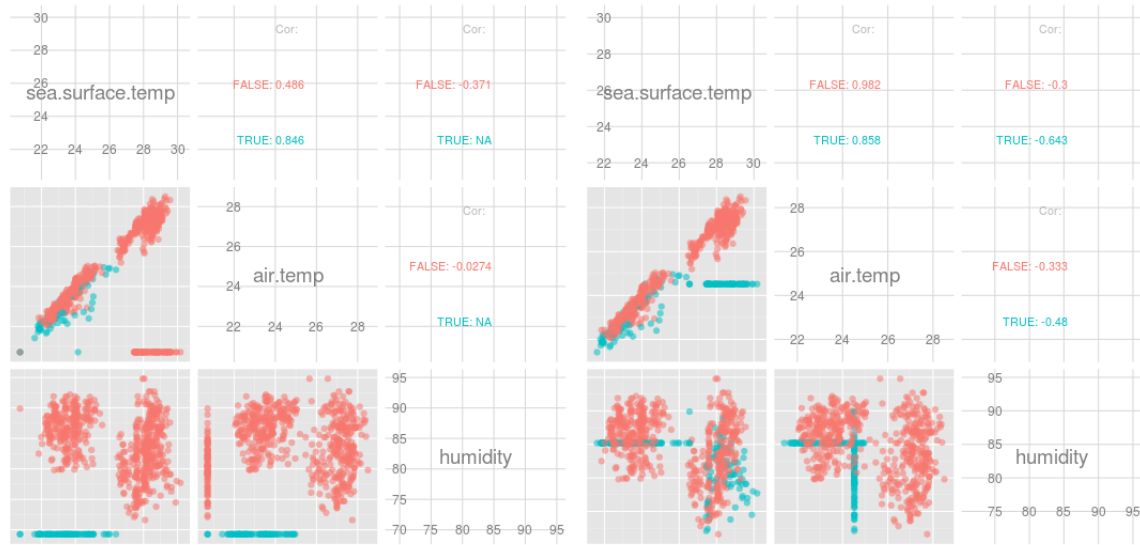


Figure 10: (Left) Exploring the effect missingness of humidity (cyan) on sea and air temperature. Missings on humidity occur at the lower temperature values, suggesting a dependent relationship. Missing values are not missing at random. (Right) Exploring imputation methods. Imputation using the medians is shown here. Values that have been imputed are shown as cyan. Median imputation introduces a cross structure to the point scatter, and the imputed values don't match the data well, for example the line of imputed values is very apart from the complete cases in the plot of the two temperature variables.

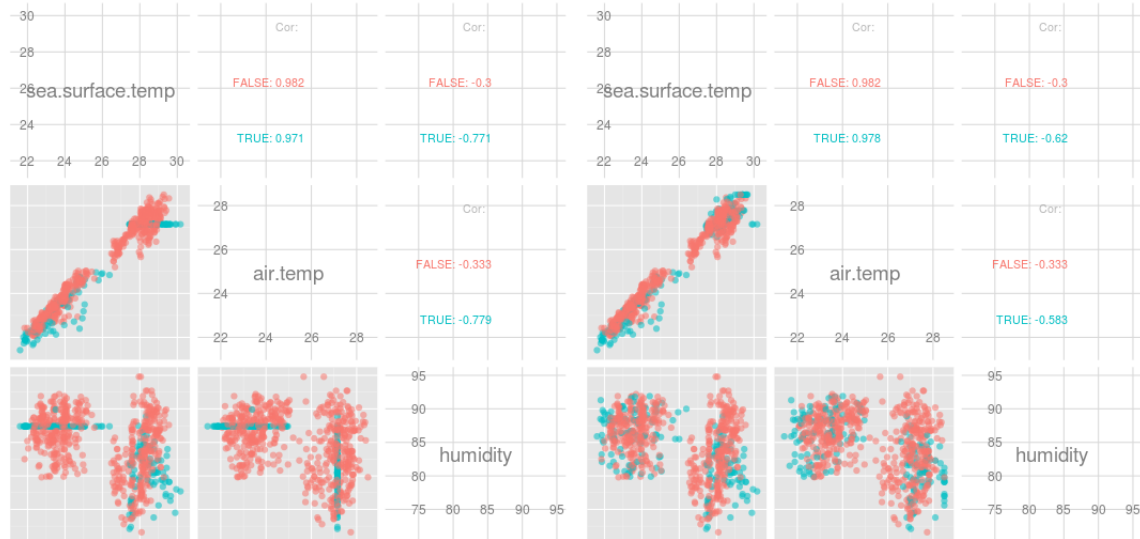


Figure 11: (Left) Imputation using the median conditional on year. Imputed values better match the complete cases, with the exception of the banding due to fixed median value. (Right) Imputation using the regression conditional on year. The distribution of imputed values is fairly close to the distribution of complete cases.