

SEMINARARBEIT

Im Studiengang FH Technikum Wien, Bachelorstudiengang BIF
Lehrveranstaltung BIF-VZ-3-WS2025-CLCOM-EN/158471

Semesterprojekt – DevOps und Cloud Computing 3B

Ausgeführt von: Benjamin Feichtlbauer, Kevin Forter,
Mikulovic Luka
Tepsurkaev Abdulah

Wien, den 27. Januar 2026

Inhaltsverzeichnis

1	Milestone 2	1
1.1	Network Setup	1
1.1.1	VPC Configuration	1
1.1.2	Subnets	2
1.1.3	Internet Gateway	3
1.1.4	Route Tables	3
1.1.5	Security Groups	4
1.2	DNS Setup	7
1.2.1	Primary DNS	7
1.2.2	Secondary DNS	9
1.3	GitLab Server Setup	11
1.3.1	Installation	11
1.3.2	Verification	12
1.3.3	System Configuration	13
1.4	GitLab Runner Setup	13
1.4.1	Configuration	14
1.4.2	Registration	15
1.5	GitLab Workflow Verification	15
1.5.1	Repository Creation	15
1.5.2	SSH Configuration	17
1.5.3	Cloning and Committing	18
1.5.4	Pushing Changes	19
2	Milestone 3	21
2.1	LDAP Setup – Technical Documentation	21
2.1.1	Goal	21
2.1.2	LDAP EC2 Instance Creation	22
2.1.3	Connection and Installation	23
2.1.4	Base Structure Configuration	23
2.1.5	User Creation	24
2.1.6	GitLab LDAP Integration	24
2.1.7	Result	24
2.2	CI/CD Pipeline Setup	27
2.2.1	Objective	27

2.2.2	Pipeline Decisions & Tools	27
2.2.3	Pipeline Stages	28
2.2.4	Environment & Configuration	28
2.2.5	Branching Strategy	28
2.3	Cost Estimation	29

1 Milestone 2

1.1 Network Setup

In this section, we describe the setup of the Virtual Private Cloud (VPC) and the associated network components within AWS.

1.1.1 VPC Configuration

We created a new VPC with the IPv4 CIDR block `10.0.0.0/16`. This provides a private network space for our infrastructure.

The screenshot shows the 'VPC settings' section of the AWS VPC console. It includes options for 'Resources to create' (VPC only selected), 'Name tag' (lph-vpc), 'IPv4 CIDR block' (10.0.0.0/16), 'IPv6 CIDR block' (No IPv6 CIDR block selected), 'Tenancy' (Default), and 'VPC encryption control' (None selected). Below this is a 'Tags' section with a key 'Name' and value 'lph-vpc'.

VPC settings

Resources to create [Info](#)
Create only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional
Creates a tag with a key of 'Name' and a value that you specify.

lph-vpc

IPv4 CIDR block [Info](#)
☒ IPv4 CIDR manual input
☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR
10.0.0.0/16
CIDR block size must be between /16 and /28.

IPv6 CIDR block [Info](#)
☒ No IPv6 CIDR block
☐ IPAM-allocated IPv6 CIDR block
☐ Amazon-provided IPv6 CIDR block
☐ IPv6 CIDR owned by me

Tenancy [Info](#)
Default

VPC encryption control (\$) - new [Info](#)
Monitor mode provides visibility into encryption status without blocking traffic. Enforce mode prevents unencrypted traffic. [Additional charges apply](#)

☒ None ☐ Monitor mode
See which resources in your VPC are unencrypted but allow the creation of unencrypted resources. ☐ Enforce mode
Requires all resources, except exclusions, in your VPC to be encryption-capable and blocks creation of unencrypted resources.

Tags
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key **Value - optional**

Q Name X Q lph-vpc X [Remove tag](#)

[Add tag](#)
You can add 49 more tags

Abbildung 1: VPC Configuration

1.1.2 Subnets

A public subnet was created within the VPC with the CIDR block `10.0.0.0/24`. This subnet hosts our instances and allows them to communicate with each other and the internet.

Create subnet [Info](#)

VPC
VPC ID
Create subnets in this VPC.
vpc-0456ae6dc8078ccee (lph-vpc) ▼
Associated VPC CIDRs
IPv4 CIDRs
10.0.0.0/16

Subnet settings
Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1
Subnet name
Create a tag with a key of 'Name' and a value that you specify.
lph-subnet
The name can be up to 256 characters long.
Availability Zone [Info](#)
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
United States (N. Virginia) / use1-az1 (us-east-1a) ▼
IPv4 VPC CIDR block [Info](#)
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
10.0.0.0/16 ▼
IPv4 subnet CIDR block
10.0.0.0/24 256 IPs
< > ^ v
Tags - optional
Remove
Add new subnet

Cancel Create subnet

Abbildung 2: Subnet Configuration

Edit subnet settings [Info](#)

Subnet

Subnet ID: [subnet-04a0418d89832580c](#) Name: [lph-subnet](#)

Auto-assign IP settings [Info](#)
Enable AWS to automatically assign a public IPv4 or IPv6 address to a new primary network interface for an instance in this subnet.

☒ Enable auto-assign public IPv4 address [Info](#)

☐ Enable auto-assign customer-owned IPv4 address [Info](#)
Option disabled because no customer owned pools found.

Resource-based name (RBN) settings [Info](#)
Specify the hostname type for EC2 instances in this subnet and optional RBN DNS query settings.

☐ Enable resource name DNS A record on launch [Info](#)

☐ Enable resource name DNS AAAA record on launch [Info](#)

Hostname type [Info](#)

☐ Resource name

☒ IP name

DNS64 settings
Enable DNS64 to allow IPv6-only services in Amazon VPC to communicate with IPv4-only services and networks.

☐ Enable DNS64 [Info](#)

[Cancel](#) [Save](#)

Abbildung 3: Subnet Settings

1.1.3 Internet Gateway

To enable internet access for the resources in our public subnet, we attached an Internet Gateway to the VPC.

[VPC](#) > [Internet gateways](#) > Create internet gateway ⓘ 🖨 🔍

Create internet gateway [Info](#)
An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.

Internet gateway settings

Name tag
Creates a tag with a key of 'Name' and a value that you specify.

Tags - optional
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key	Value - optional	
Name	lph-igw	Remove

[Add new tag](#)
You can add 49 more tags.

[Cancel](#) [Create internet gateway](#)

Abbildung 4: Internet Gateway

1.1.4 Route Tables

A custom route table was configured to direct traffic destined for the internet (0.0.0.0/0) to the Internet Gateway. This route table is associated with our public subnet.

Create route table [info](#)

A route table specifies how packets are forwarded between the subnets within your VPC, the internet, and your VPN connection.

Route table settings

Name - optional

Create a tag with a key of 'Name' and a value that you specify.

lph-rt

VPC

The VPC to use for this route table.

vpc-0456ae6dc8078ccee (lph-vpc)

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name X

Value - optional

Q lph-rt X

Remove

Add new tag

You can add 49 more tags.

Cancel

Create route table

Abbildung 5: Route Table

Edit routes

Destination	Target	Status	Propagated	Route Origin
10.0.0.0/16	local	Active	No	CreateRouteTable
Q 0.0.0.0/0 X	Q local X	-	No	CreateRoute
	Internet Gateway			
	Q igw-0f6c6a63cc8b3d95f X			

Add route

Cancel

Preview

Save changes

Abbildung 6: Route Table Default Route

Edit subnet associations

Change which subnets are associated with this route table.

Available subnets (1/1)

Name	Subnet ID	IPv4 CIDR	IPv6 CIDR	Route table ID
☒ lph-subnet	subnet-04a0418d89832580c	10.0.0.0/24	-	Main (rtb-0c7f5277cb71b4682)

Selected subnets

subnet-04a0418d89832580c / lph-subnet X

Cancel

Save associations

Abbildung 7: Route Table Subnet Association

1.1.5 Security Groups

Specific security groups were created for each component to control inbound and outbound traffic.

Create security group [Info](#)

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name [Info](#)

Name cannot be edited after creation.

Description [Info](#)

VPC [Info](#)

Inbound rules [Info](#)

Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	
DNS (UDP)	UDP	53	Custom	Q 10.0.0.0/16	Delete
				10.0.0.0/16	
DNS (TCP)	TCP	53	Custom	Q 10.0.0.0/16	Delete
				10.0.0.0/16	
SSH	TCP	22	Custom	Q 84.115.226.143/32	Delete
				84.115.226.143/32	

Outbound rules [Info](#)

Type Info	Protocol Info	Port range Info	Destination Info	Description - optional Info	
All traffic	All	All	Custom	Q	Delete
				0.0.0.0/0	

Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

You can add up to 50 more tags

[Cancel](#)

Abbildung 8: DNS Security Group

Create security group [Info](#)

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name [Info](#)

lph-gitlab-sg

Name cannot be edited after creation.

Description [Info](#)

Allows public access to GitLab (HTTP/HTTPS) and internal DNS queries; SSH only fo

VPC [Info](#)

vpc-0456ae6dc8078ccee (lph-vpc)

Inbound rules [Info](#)

Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	
HTTP	TCP	80	Anywh...	0.0.0.0/0	Delete
HTTPS	TCP	443	Anywh...	0.0.0.0/0	Delete
DNS (UDP)	UDP	53	Custom	10.0.0.0/16	Delete
DNS (TCP)	TCP	53	Custom	10.0.0.0/16	Delete
SSH	TCP	22	Custom	84.115.226.143/32	Delete

Add rule

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Outbound rules [Info](#)

Type Info	Protocol Info	Port range Info	Destination Info	Description - optional Info	
All traffic	All	All	Custom	0.0.0.0/0	Delete

Add rule

Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags

Cancel

Create security group

Abbildung 9: GitLab Security Group

Create security group [Info](#)

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name [Info](#)

Name cannot be edited after creation.

Description [Info](#)

VPC [Info](#)

Inbound rules [Info](#)

Type	Protocol	Port range	Source	Description - optional	
HTTP	TCP	80	Custom	Q sg-01e7e340b978df65c	Delete
DNS (UDP)	UDP	53	Custom	Q sg-01e7e340b978df65c	Delete
DNS (TCP)	TCP	53	Custom	Q 10.0.0.0/16	Delete
SSH	TCP	22	My IP	Q 10.0.0.0/16	Delete
				Q 84.115.226.143/32	

Add rule

Outbound rules [Info](#)

Type	Protocol	Port range	Destination	Description - optional	
All traffic	All	All	Custom	Q 0.0.0.0/0	Delete

Add rule

Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags

Cancel **Create security group**

Abbildung 10: Runner Security Group

1.2 DNS Setup

We implemented a split-horizon DNS architecture using Bind9, with a primary and a secondary DNS server to ensure redundancy. The domain configured is `ci.intern`.

1.2.1 Primary DNS

The primary DNS server is hosted on an EC2 instance with the private IP `10.0.0.10`.

i-0d67bc652ad85ca6c (primary.dns.ci.intern)

Details

Status and alarms

Monitoring

Security

Networking

Storage

Tags

▼ Instance summary Info

Instance ID

i-0d67bc652ad85ca6c

IPv6 address

–

Hostname type

IP name: ip-10-0-0-10.ec2.internal

Answer private resource DNS name

–

Auto-assigned IP address

3.239.108.116 [Public IP]

IAM Role

–

IMDSv2

Optional

EC2 recommends setting IMDSv2 to required | Learn more

Operator

–

Public IPv4 address

3.239.108.116 | open address

Instance state

Running

Private IP DNS name (IPv4 only)

ip-10-0-0-10.ec2.internal

Instance type

t3.micro

VPC ID

vpc-0456gae6dc8078ccee (lph-vpc)

Subnet ID

subnet-04a0418d89832580c (lph-subnet)

Instance ARN

arn:aws:ec2:us-east-1:302123595647:instance/i-0d67bc652ad85ca6c

Private IPv4 addresses

10.0.0.10

Public DNS

–

Elastic IP addresses

–

AWS Compute Optimizer finding

Opt-in to AWS Compute Optimizer for recommendations. | Learn more

Auto Scaling Group name

–

Managed

false

▼ Instance details Info

AMI ID

ami-0c398cb65a93047f2

AMI name

ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20251015

Stop protection

Disabled

Instance reboot migration

Default (On)

Stop-hibernate behavior

Disabled

Monitoring

disabled

Allowed image

–

Launch time

Sat Dec 06 2025 22:41:29 GMT+0100 (Mitteleuropäische Normalzeit) (7 minutes)

Instance auto-recovery

Default

AMI Launch index

0

Platform details

Linux/UNIX

Termination protection

Disabled

AMI location

amazon/ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20251015

Lifecycle

normal

Key pair assigned at launch

–

Abbildung 11: Primary DNS Instance Details

Installation

We installed Bind9 on the Ubuntu 22.04 LTS instance:

```
sudo apt update
sudo apt install bind9 bind9utils -y
```

Configuration

The zone configuration in `/etc/bind/named.conf.local` defines the forward and reverse lookup zones:

```
zone "ci.intern" {
    type master;
    file "/etc/bind/db.ci.intern";
    allow-transfer { 10.0.0.11; };
};

zone "0.0.10.in-addr.arpa" {
    type master;
```

```
file "/etc/bind/db.10";
allow-transfer { 10.0.0.11; };
};
```

The forward zone file `/etc/bind/db.ci.intern` maps hostnames to IP addresses:

```
$TTL 3600
@ IN SOA primary.dns.ci.intern. admin.ci.intern. (
    2025010101 ; Serial
    3600       ; Refresh
    1800       ; Retry
    604800     ; Expire
    86400 )    ; Negative Cache TTL

    IN NS primary.dns.ci.intern.
    IN NS secondary.dns.ci.intern.

primary.dns IN A 10.0.0.10
secondary.dns IN A 10.0.0.11
gitlab IN A 10.0.0.20
runner IN A 10.0.0.21
```

The reverse zone file `/etc/bind/db.10` maps IP addresses back to hostnames:

```
$TTL 3600
@ IN SOA primary.dns.ci.intern. admin.ci.intern. (
    2025010101
    3600
    1800
    604800
    86400 )

    IN NS primary.dns.ci.intern.
    IN NS secondary.dns.ci.intern.

10 IN PTR primary.dns.ci.intern.
11 IN PTR secondary.dns.ci.intern.
20 IN PTR gitlab.ci.intern.
21 IN PTR runner.ci.intern.
```

1.2.2 Secondary DNS

The secondary DNS server is hosted on an EC2 instance with the private IP `10.0.0.11`. It acts as a slave to the primary server.

i-002558c0145a1ee9b (secondary.dns.ci.intern)		
Details Status and alarms Monitoring Security Networking Storage Tags		
▼ Instance summary Info		
Instance ID i-002558c0145a1ee9b	Public IPv4 address 34.201.9.150 open address	Private IPv4 addresses 10.0.0.11
IPv6 address -	Instance state Running	Public DNS -
Hostname type IP name: ip-10-0-0-11.ec2.internal	Private IP DNS name (IPv4 only) ip-10-0-0-11.ec2.internal	
Answer private resource DNS name -	Instance type t3.micro	Elastic IP addresses -
Auto-assigned IP address 34.201.9.150 [Public IP]	VPC ID vpc-0456ae6dc8078ccee (lph-vpc)	AWS Compute Optimizer finding Opt-in to AWS Compute Optimizer for recommendations. Learn more
IAM Role -	Subnet ID subnet-04a0418d89832580c (lph-subnet)	Auto Scaling Group name -
IMDSv2 Optional EC2 recommends setting IMDSv2 to required Learn more	Instance ARN arn:aws:ec2:us-east-1:302123595647:instance/i-002558c0145a1ee9b	Managed false
Operator -		
▼ Instance details Info		
AMI ID ami-0c398cb65a93047f2	Monitoring disabled	Platform details Linux/UNIX
AMI name ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20251015	Allowed image -	Termination protection Disabled
Stop protection Disabled	Launch time Sat Dec 06 2025 23:18:29 GMT+0100 (Mitteleuropäische Normalzeit) (less than a minute)	AMI location amazon/ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20251015
Instance reboot migration Default (On)	Instance auto-recovery Default	Lifecycle normal
Stop-hibernate behavior -	AMI Launch index -	Key pair assigned at launch -

Abbildung 12: Secondary DNS Instance Details

Configuration

The configuration in `/etc/bind/named.conf.local` specifies the master server for zone transfers:

```
zone "ci.intern" {
    type slave;
    masters { 10.0.0.10; };
    file "/var/cache/bind/db.ci.intern";
};

zone "0.0.10.in-addr.arpa" {
    type slave;
    masters { 10.0.0.10; };
    file "/var/cache/bind/db.10";
};
```

1.3 GitLab Server Setup

We deployed a self-hosted GitLab CE server using Docker on an EC2 instance with the private IP 10.0.0.20.

i-0ae3da6c70d14ad10 (gitlab.ci.intern)		
Details	Status and alarms	Monitoring Security Networking Storage Tags
▼ Instance summary Info		
Instance ID i-0ae3da6c70d14ad10	Public IPv4 address 44.211.119.180 open address	Private IPv4 addresses 10.0.0.20
IPv6 address -	Instance state Running	Public DNS -
Hostname type IP name: ip-10-0-0-20.ec2.internal	Private IP DNS name (IPv4 only) ip-10-0-0-20.ec2.internal	Elastic IP addresses -
Answer private resource DNS name -	Instance type t3.medium	AWS Compute Optimizer finding Opt-in to AWS Compute Optimizer for recommendations. Learn more
Auto-assigned IP address 44.211.119.180 [Public IP]	VPC ID vpc-0456ae6dc8078ccee (lph-vpc)	Auto Scaling Group name -
IAM Role -	Subnet ID subnet-04a0418d89832580c (lph-subnet)	Managed false
IMDSv2 Optional EC2 recommends setting IMDSv2 to required Learn more	Instance ARN arn:aws:ec2:us-east-1:302123595647:instance/i-0ae3da6c70d14ad10	
Operator -		
▼ Instance details Info		
AMI ID ami-0c398cb65a93047f2	Monitoring disabled	Platform details Linux/UNIX
AMI name ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20251015	Allowed image -	Termination protection Disabled
Stop protection Disabled	Launch time Sun Dec 07 2025 14:33:32 GMT+0100 (Mitteleuropäische Normalzeit) (7 minutes)	AMI location amazon/ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20251015
Instance reboot migration Default (On)	Instance auto-recovery Default	Lifecycle normal
Stop-hibernate behavior Not-hibernated	AMI Launch index 0	Key pair assigned at launch gitlab

Abbildung 13: GitLab Server Instance Details

1.3.1 Installation

Docker and Docker Compose were installed, and a persistent volume structure was created. The `docker-compose.yml` configuration is as follows:

```
version: '3.7'
services:
  gitlab:
    image: gitlab/gitlab-ce:latest
    hostname: "gitlab.ci.intern"
    restart: always
    container_name: gitlab
    ports:
      - "80:80"
      - "443:443"
```

```
volumes:
  - /srv/gitlab/config:/etc/gitlab
  - /srv/gitlab/logs:/var/log/gitlab
  - /srv/gitlab/data:/var/opt/gitlab
environment:
  GITLAB_OMNIBUS_CONFIG: |
    external_url 'http://gitlab.ci.intern'
```

1.3.2 Verification

The GitLab instance is accessible via the browser using the public IP or the internal DNS name (within the network).

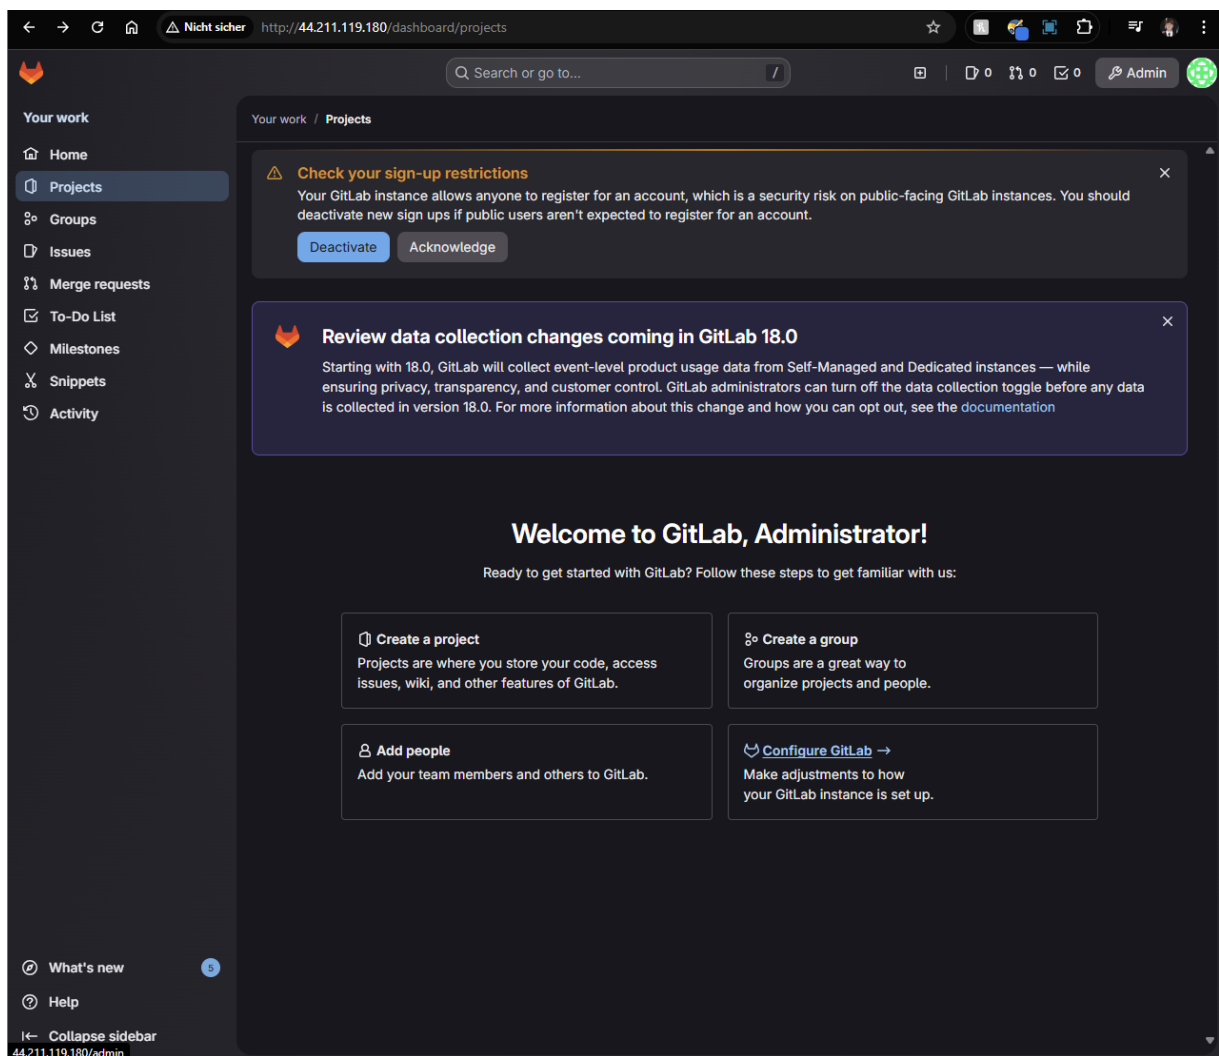


Abbildung 14: GitLab Homepage

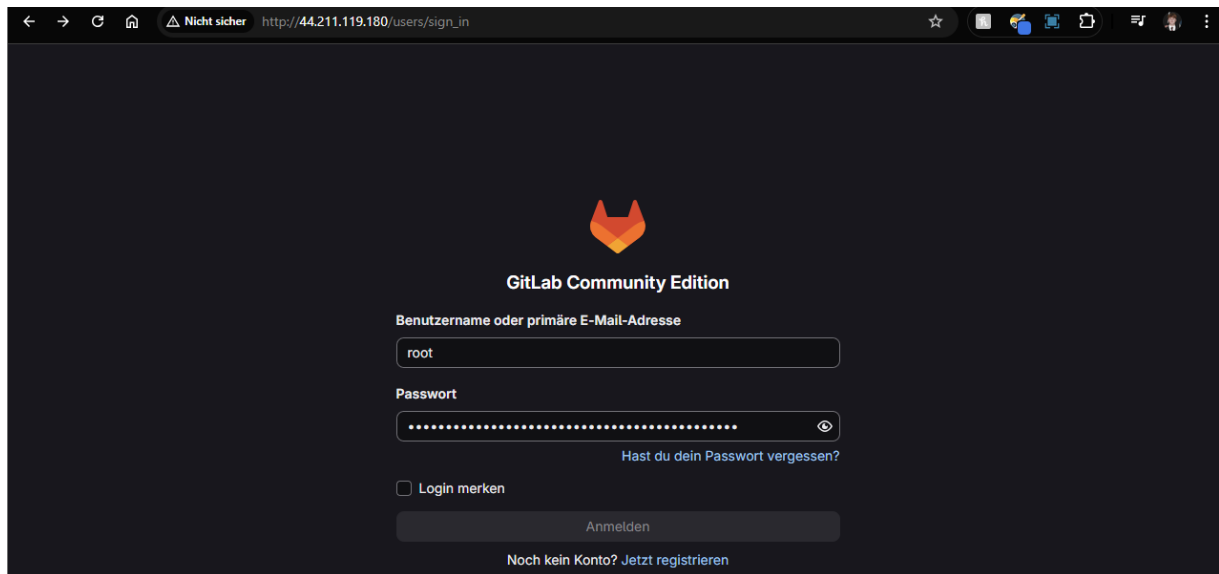


Abbildung 15: GitLab Login

1.3.3 System Configuration

The server runs on a `t3.medium` instance with 20 GB of gp3 storage to ensure sufficient resources for GitLab.

Swap Configuration

To prevent out-of-memory errors, we configured a 4GB swap file:

```
sudo fallocate -l 4G /swapfile
sudo chmod 600 /swapfile
sudo mkswap /swapfile
sudo swapon /swapfile
echo '/swapfile_none_swap_sw_0_0' | sudo tee -a /etc/fstab
```

Initial Access

After installation, the initial root password was retrieved from the container configuration:

```
sudo cat /srv/gitlab/config/initial_root_password
```

1.4 GitLab Runner Setup

A GitLab Runner was set up on a separate EC2 instance (`10.0.0.21`) to execute CI/CD jobs.

i-0ed503e5805fdc68b (runner.ci.intern)		
Details Status and alarms Monitoring Security Networking Storage Tags		
▼ Instance summary Info		
Instance ID i-0ed503e5805fdc68b	Public IPv4 address 3.237.191.41 open address	Private IPv4 addresses 10.0.0.21
IPv6 address -	Instance state Running	Public DNS -
Hostname type IP name: ip-10-0-0-21.ec2.internal	Private IP DNS name (IPv4 only) ip-10-0-0-21.ec2.internal	Elastic IP addresses -
Answer private resource DNS name -	Instance type t3.micro	AWS Compute Optimizer finding Opt-in to AWS Compute Optimizer for recommendations. Learn more
Auto-assigned IP address 3.237.191.41 [Public IP]	VPC ID vpc-0456ae6dc8078ccee (lph-vpc)	Auto Scaling Group name -
IAM Role -	Subnet ID subnet-04a0418d89832580c (lph-subnet)	Managed false
IMDSv2 Optional EC2 recommends setting IMDSv2 to required Learn more	Instance ARN arn:aws:ec2:us-east-1:302123595647:instance/i-0ed503e5805fdc68b	
Operator -		
▼ Instance details Info		
AMI ID ami-0c398cb65a93047f2	Monitoring disabled	Platform details Linux/UNIX
AMI name ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20251015	Allowed image -	Termination protection Disabled
Stop protection Disabled	Launch time Sun Dec 07 2025 17:04:57 GMT+0100 (Mitteleuropäische Normalzeit) (10 minutes)	AMI location amazon/ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20251015
Instance reboot migration Default (On)	Instance auto-recovery Default	Lifecycle normal
Stop-hibernate behavior -	AMI Launch index -	Key pair assigned at launch -

Abbildung 16: GitLab Runner Instance Details

1.4.1 Configuration

The runner was configured to use the internal DNS servers to resolve the GitLab server's hostname.

```
sudo systemctl disable --now systemd-resolved
sudo rm /etc/resolv.conf
echo "nameserver_10.0.0.10" | sudo tee /etc/resolv.conf
echo "nameserver_10.0.0.11" | sudo tee -a /etc/resolv.conf
```

The runner container was started with specific DNS settings:

```
sudo docker run -d --name gitlab-runner \
  --restart always \
  -v /srv/gitlab-runner/config:/etc/gitlab-runner \
  --dns 10.0.0.10 \
  --dns 10.0.0.11 \
  gitlab/gitlab-runner:latest
```

1.4.2 Registration

The runner was registered with the GitLab server using the internal URL `http://gitlab.ci.intern`.

```
sudo docker exec -it gitlab-runner gitlab-runner register
# URL: http://gitlab.ci.intern
# Executor: docker
# Default Docker image: alpine:latest
```

1.5 GitLab Workflow Verification

To ensure the GitLab server and Runner are functioning correctly, we performed a complete workflow test involving repository creation, code changes, and pipeline execution.

1.5.1 Repository Creation

We created a new blank project named `test-runner` in the GitLab web interface.

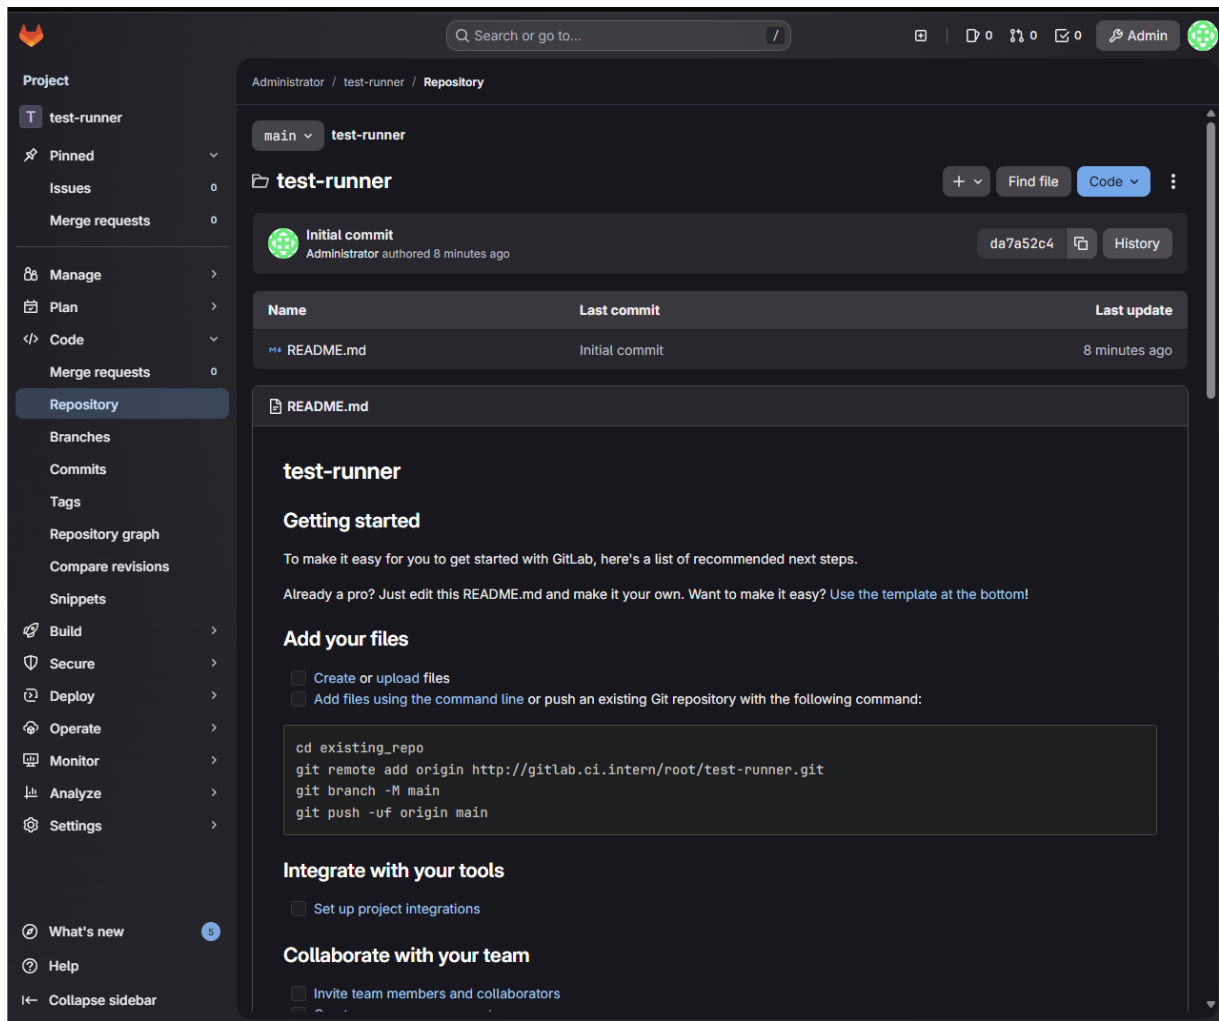


Abbildung 17: Creating a New Project

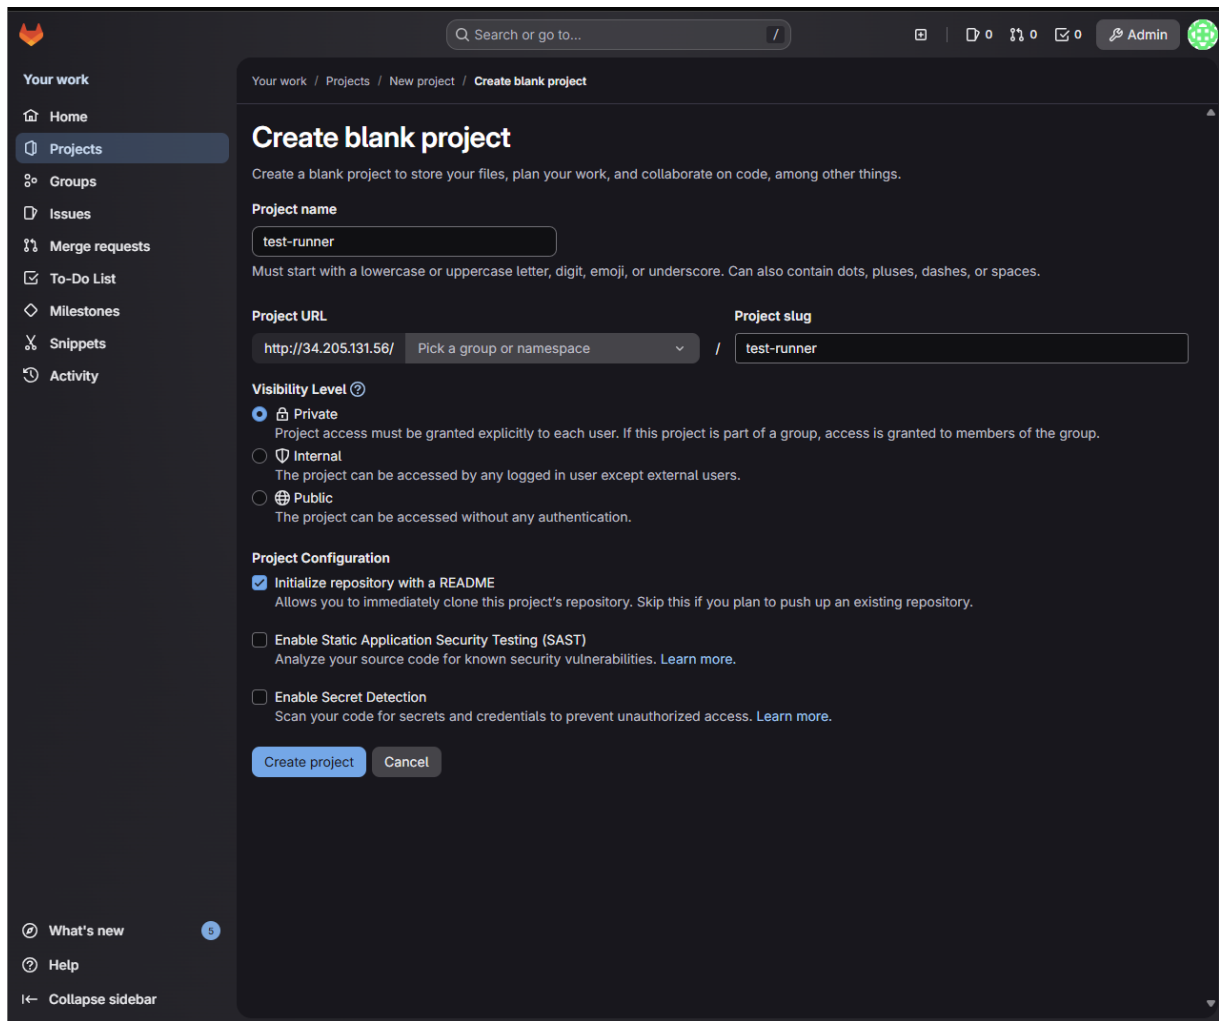


Abbildung 18: Initialized Empty Repository

1.5.2 SSH Configuration

To facilitate secure communication between the local machine and the GitLab server, we generated an SSH key pair and added the public key to the GitLab user profile.

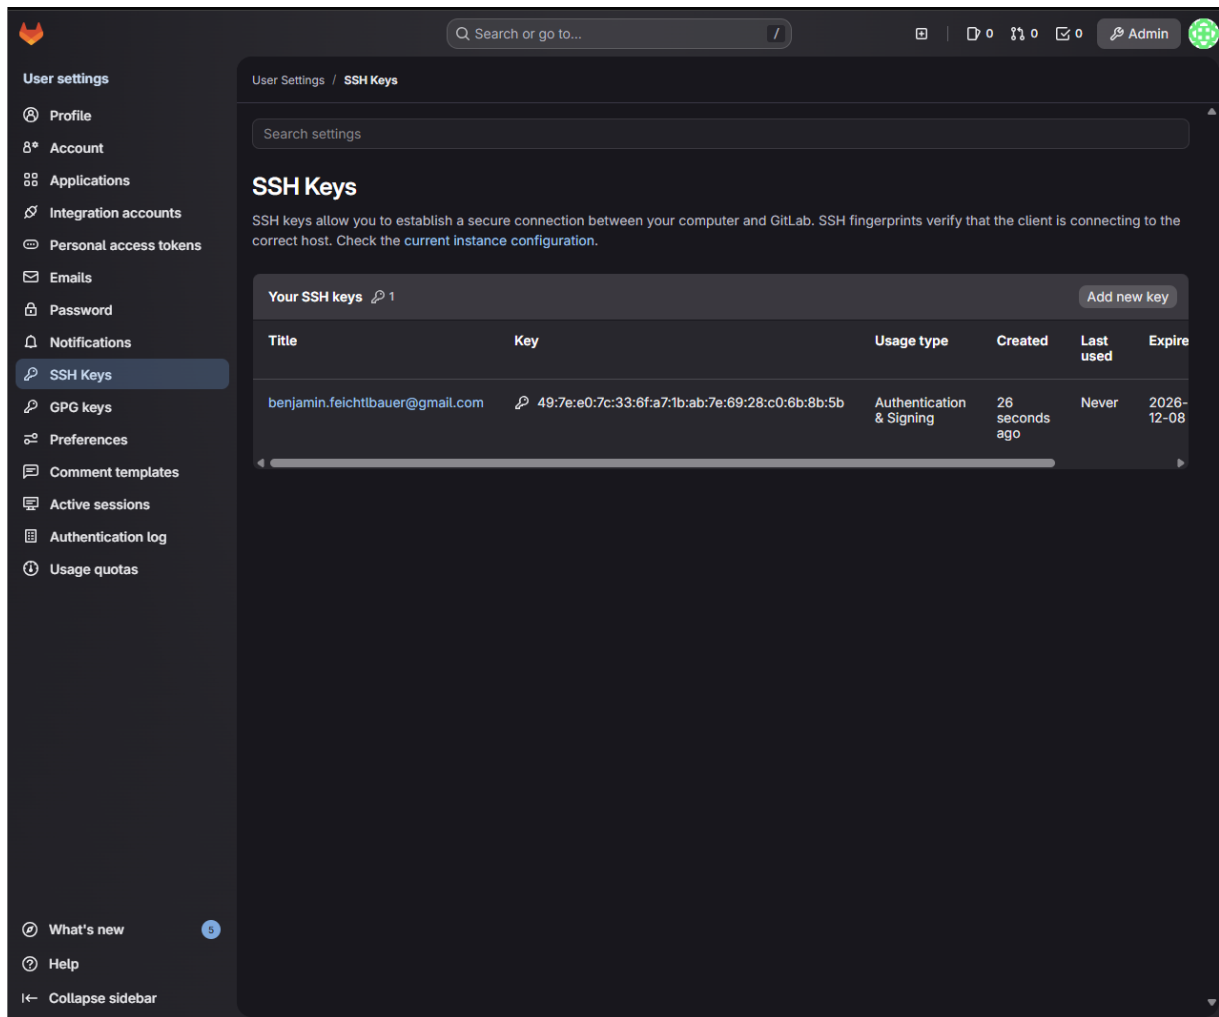


Abbildung 19: Adding SSH Key

1.5.3 Cloning and Committing

Since the local machine is outside the AWS VPC, we cloned the repository using the GitLab server's public IP address.

```
git clone http://<PUBLIC_IP>/root/test-runner.git
cd test-runner
```

We then created a test file `demo.txt` and committed it to the repository.

```
echo "test_run_$(date)" >> demo.txt
git add .
git commit -m "demo_pipeline_test"
```

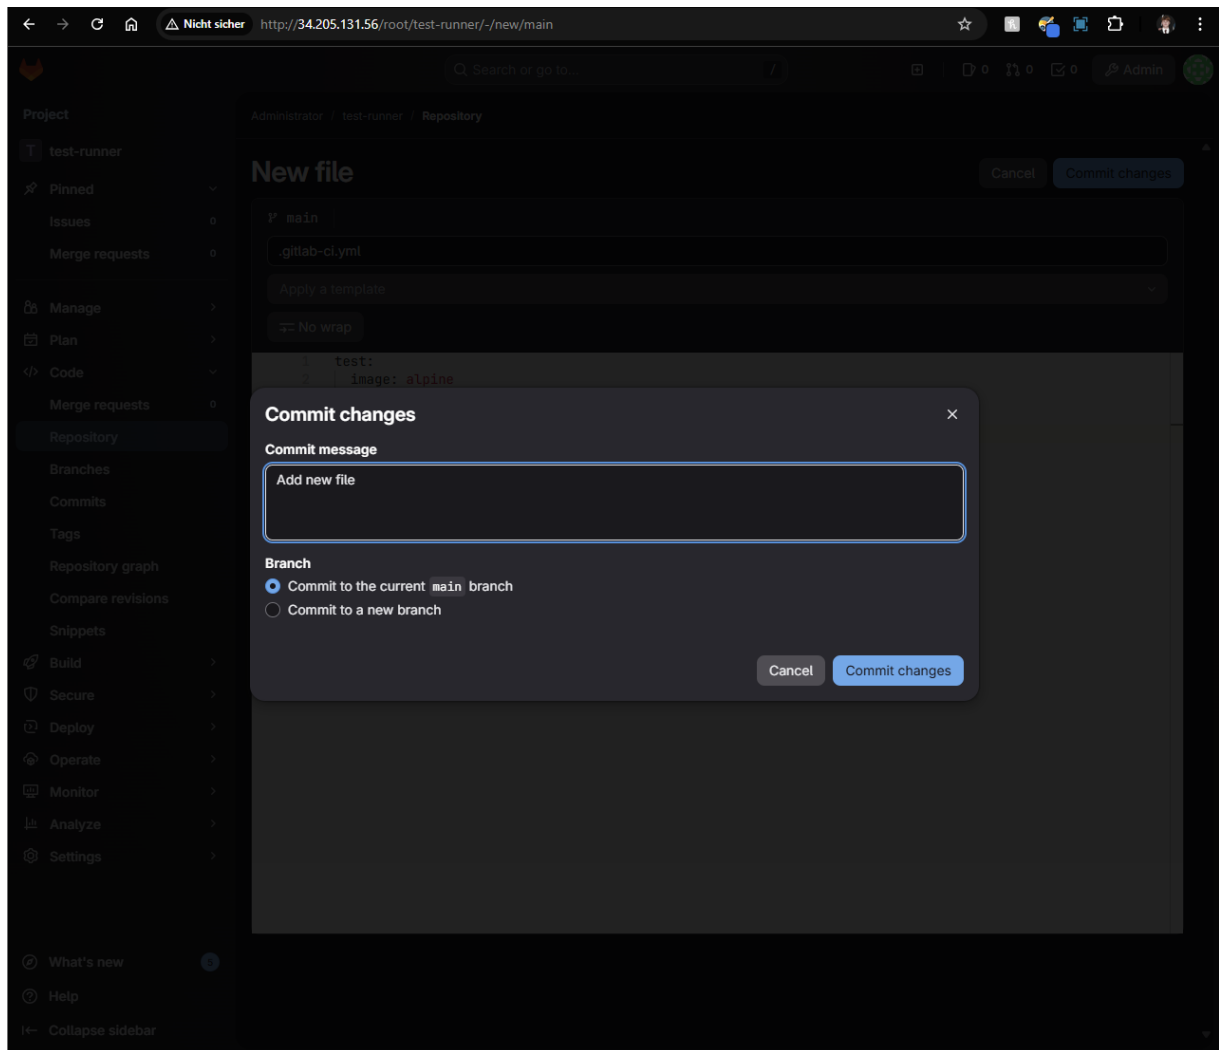


Abbildung 20: Git Commit

1.5.4 Pushing Changes

The changes were pushed to the remote repository.

```
git push
```

```
cinamon@XPS:~/test-runner$ echo "test run $(date)" >> demo.txt
cinamon@XPS:~/test-runner$ git add .
git commit -m "demo pipeline test"
[main 9baa5e2] demo pipeline test
1 file changed, 1 insertion(+)
create mode 100644 demo.txt
cinamon@XPS:~/test-runner$ git push
Username for 'http://34.205.131.56': root
Password for 'http://root@34.205.131.56':
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 364 bytes | 364.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To http://34.205.131.56/root/test-runner.git
   dbc236..9baa5e2  main -> main
```

Abbildung 21: Git Push

After the push, the new file is visible in the repository, and the CI/CD pipeline is automatically triggered.

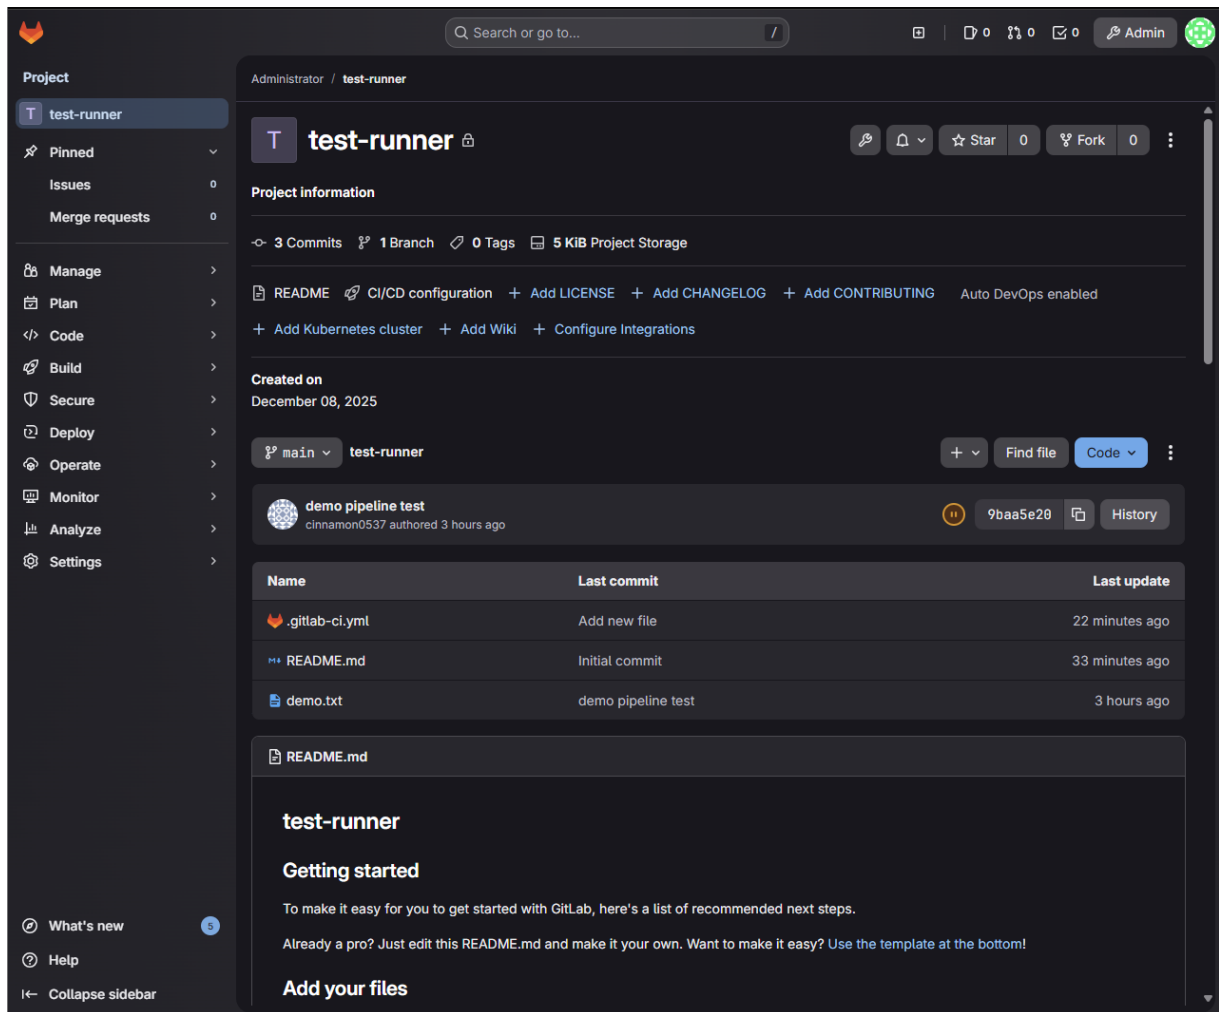


Abbildung 22: Repository after Push

2 Milestone 3

2.1 LDAP Setup – Technical Documentation

2.1.1 Goal

The goal was to implement a central user management system using LDAP for GitLab, enabling users to log in to GitLab via LDAP instead of being maintained locally. Local GitLab users should no longer be necessary, ensuring a centralized authentication source.

2.1.2 LDAP EC2 Instance Creation

Implementation

A dedicated EC2 instance was created in AWS:

- **Name:** ldap.ci.intern
- **AMI:** Ubuntu Server 22.04 LTS
- **Instance Type:** t3.micro
- **Security Group:** Separate security group, operating within the same VPC as GitLab.

Reasoning

LDAP is a core infrastructure service. It should run independently of the GitLab server and be administrable separately to reflect a realistic cloud architecture.

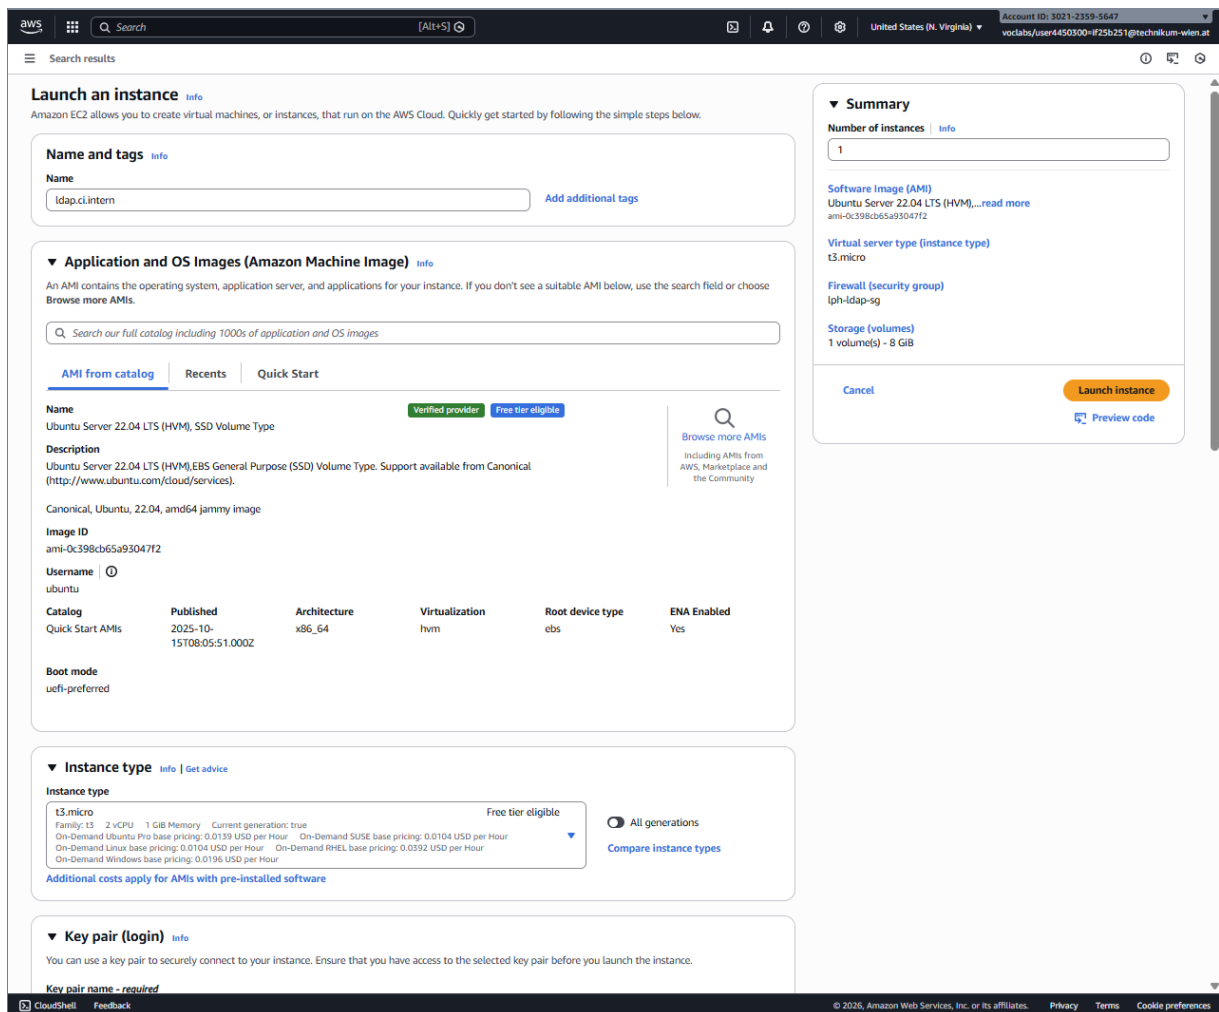


Abbildung 23: LDAP EC2 Instance in AWS

2.1.3 Connection and Installation

After starting the instance, an SSH connection was established (`ssh ubuntu@<ldap-private-ip>`), followed by switching to the root user.

Installation of OpenLDAP

OpenLDAP was installed using the following commands:

```
apt update
apt install slapd ldap-utils -y
```

During installation, the LDAP admin password was set, and the base domain was configured as `ci.intern`, resulting in the Base DN `dc=ci,dc=intern`.

Reasoning

`slapd` is the LDAP server daemon, and `ldap-utils` provides necessary management tools like `ldapadd` and `ldapsearch`.

2.1.4 Base Structure Configuration

An initial structure was defined in a `base.ldif` file to establish the root domain and separate Organizational Units (OUs) for Users and Groups. This structure is essential for GitLab's integration.

```
dn: dc=ci,dc=intern
objectClass: top
objectClass: dcObject
objectClass: organization
o: CI Intern
dc: ci

dn: ou=users,dc=ci,dc=intern
objectClass: organizationalUnit
ou: users

dn: ou=groups,dc=ci,dc=intern
objectClass: organizationalUnit
ou: groups
```

This structure was applied using `ldapadd`.

2.1.5 User Creation

Users are managed centrally in LDAP. Passwords were generated using `slappasswd` (producing an SSHA hash) and users were defined in LDIF files (e.g., `benji.ldif`) with attributes like `uid`, `cn`, `sn`, and `userPassword`.

Example User:

```
dn: uid=benji,ou=users,dc=ci,dc=intern
objectClass: inetOrgPerson
objectClass: posixAccount
objectClass: shadowAccount
cn: Benji Feichtlbauer
uid: benji
...
```

2.1.6 GitLab LDAP Integration

GitLab was configured to authenticate against this LDAP server. The configuration in `/etc/gitlab/gitlab.rb` enabled LDAP and defined the connection details:

```
gitlab_rails['ldap_enabled'] = true
gitlab_rails['ldap_servers'] = {
  'main' => {
    'label' => 'LDAP',
    'host' => 'ldap.ci.intern',
    'port' => 389,
    'uid' => 'uid',
    'bind_dn' => 'cn=admin,dc=ci,dc=intern',
    'password' => 'LDAP_ADMIN_PASSWORD',
    'encryption' => 'plain',
    'base' => 'dc=ci,dc=intern'
  }
}
```

Reasoning

GitLab does not authenticate users itself but checks credentials against LDAP. Upon the first successful login, GitLab automatically creates an internal account linked to the LDAP identity.

2.1.7 Result

- Centralized LDAP server is operational.
- GitLab authentication works via LDAP.

- No local developer accounts are needed on GitLab.
- Separation of infrastructure and application is achieved.

The screenshot shows the AWS Management Console interface for creating a new security group. The page is titled 'Create security group' and includes a brief description: 'A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.'

Basic details

- Security group name:** lph-ldap-sg (Note: Name cannot be edited after creation.)
- Description:** Allows SSH access to developers
- VPC:** vpc-0456ae6dc8078ccee (lph-vpc)

Inbound rules

Type	Protocol	Port range	Source	Description - optional	Action
SSH	TCP	22	Custom: Q 84.115.226.143/32		Delete
LDAP	TCP	389	Custom: Q 84.115.226.143/32		Delete
LDAP	TCP	389	Custom: Q sg-0c282fb2d40e296ae		Delete
LDAP	TCP	389	Custom: Q sg-061d1870ca2d1f20e		Delete
LDAP	TCP	389	Custom: Q sg-061d1870ca2d1f20e		Delete
LDAP	TCP	389	Custom: Q sg-01e7e340b978df65c		Delete
LDAP	TCP	389	Custom: Q sg-01e7e340b978df65c		Delete

Outbound rules

Type	Protocol	Port range	Destination	Description - optional	Action
All traffic	All	All	Custom: Q 0.0.0.0/0		Delete

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

[Add new tag](#)

You can add up to 50 more tags.

[Cancel](#) [Create security group](#)

Abbildung 24: LDAP Security Group Configuration

Search or go to...

Admin

Admin area

Overview

Dashboard

Projects

Users

Groups

Topics

GitLab servers

CI/CD

Analytics

Monitoring

Messages

System hooks

Applications

Abuse reports

Deploy keys

Labels

Settings

What's new

Help

Collapse sidebar

Admin area / Users

To help improve GitLab, we would like to periodically collect usage information. This can be changed at any time in your settings.

Send service data

Don't send service data

Users

New user

Pending approval

0

Filter list

Administrators

2

Filter list

Without two-factor authentication

6

Filter list

Users

Cohorts

Want to send emails to users for free? Read more about the Registration Features Program.

Search by name, email, or username

Search

Name

Name	Projects	Groups	Created on	Last activity	
Administrator gitlab_admin_c823e4@example.com Admin It's you!	1	0	Dec 07, 2025	Jan 23, 2026	Edit
Benjamin Feichtlbauer benjamin.feichtlbauer@gmail.com	0	0	Jan 23, 2026	Never	Edit
GitLab Admin gitlab-admin@ci.intern Admin	0	0	Jan 23, 2026	Never	Edit
GitLab Duo gitlab-duo@gitlab.ci.intern Bot	0	0	Dec 08, 2025	Never	
Luka Mikulovic nemanja.mikul@gmail.com	0	0	Jan 23, 2026	Never	Edit

Abbildung 25: User Overview in GitLab showing LDAP users

26

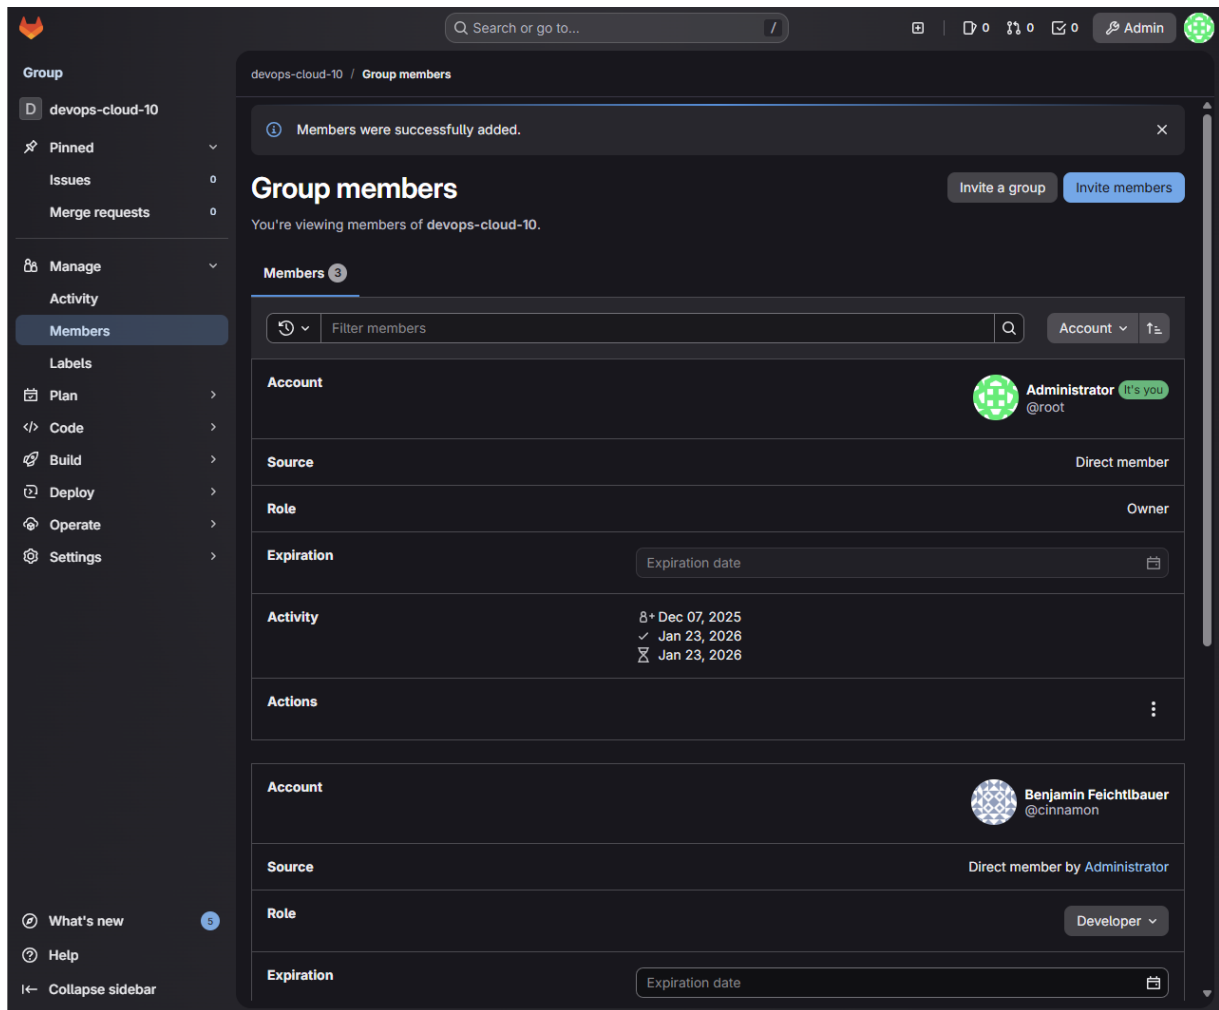


Abbildung 26: Group Members with LDAP Accounts

2.2 CI/CD Pipeline Setup

2.2.1 Objective

The objective was to set up a CI/CD pipeline for a software project that runs on the deployed infrastructure, enabling automated linting, testing, building, and deployment.

2.2.2 Pipeline Decisions & Tools

- **CI/CD Platform:** GitLab CI/CD (Self-hosted).
- **Execution:** Self-hosted GitLab Runner with **Docker Executor**.
 - **Reasoning:** The Docker executor ensures that every job runs in a fresh, clean, and reproducible container, avoiding "works on my machine" issues.

- **Linting Tool: Ruff.**
 - **Reasoning:** Ruff is extremely fast and covers both linting and formatting checks. Added to the CI to "fail fast" if code quality or style standards are not met.
- **Unit Tests: Pytest.**
 - **Reasoning:** Standard test runner for Python with clear exit codes. The pipeline fails automatically if tests fail.
- **Containerization:** Docker (built from Dockerfile). Deployment as a container image is standardized and portable.
- **Container Registry: Docker Hub.**
 - **Reasoning:** Publicly accessible, easy to integrate. Authentication is handled via GitLab CI/CD variables (`DOCKERHUB_USERNAME`, `DOCKERHUB_TOKEN`).

2.2.3 Pipeline Stages

The pipeline is divided into clear stages to ensure fast feedback.

1. **Lint:** Static code analysis using Ruff.
2. **Test:** Unit tests using Pytest.
3. **Build:** Builds the Docker image.
4. **Deploy:** Pushes the Docker image to the registry.

2.2.4 Environment & Configuration

- **Base Image:** `python:3.12-slim` is used for Lint and Test stages. It is lightweight and matches the development runtime.
- **Dependencies:** Installed via `pip install -r requirements.txt` in each job to ensure a clean environment without hidden local packages.
- **Docker-in-Docker (dind):** We use the `docker:27-dind` service and `docker:27` image for the Build and Deploy stages to allow the runner to build and push Docker images from within the CI environment.

2.2.5 Branching Strategy

- **Development:** Pushes to the `develop` branch trigger the pipeline and tag the image as `$DOCKER_IMAGE:develop`.

- **Production:** Pushes to the `main` branch trigger the pipeline and tag the image as `$DOCKER_IMAGE:latest`.

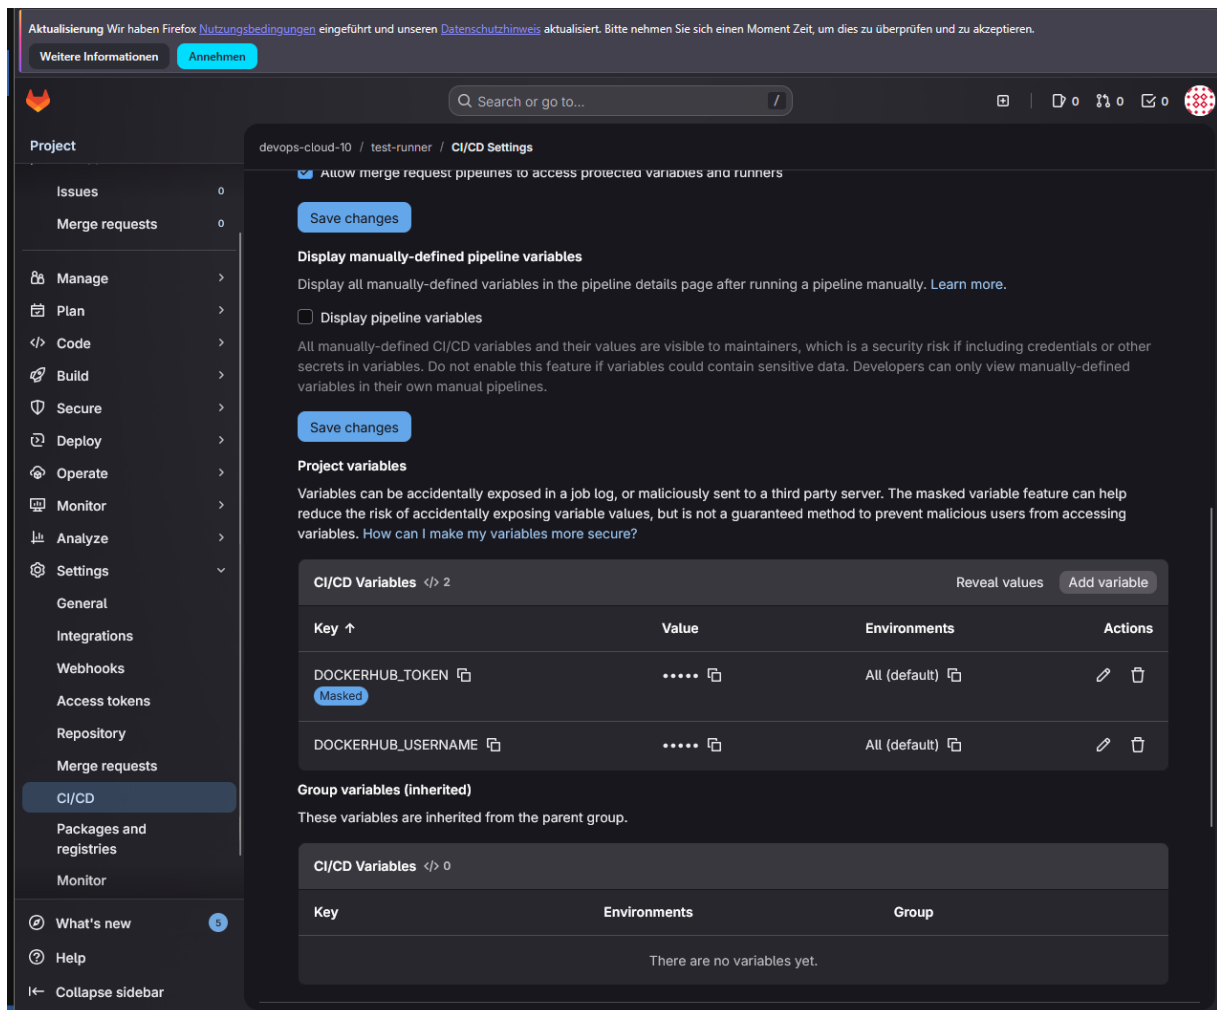


Abbildung 27: CI/CD Variables and Security Tokens

2.3 Cost Estimation

An estimation of the cloud infrastructure costs for one year was performed using the AWS Pricing Calculator.

- **EC2 Instances:** [Cost]
- **Storage (EBS):** [Cost]
- **Network Traffic:** [Cost]
- **Total Estimated Cost (1 Year):** [Total]