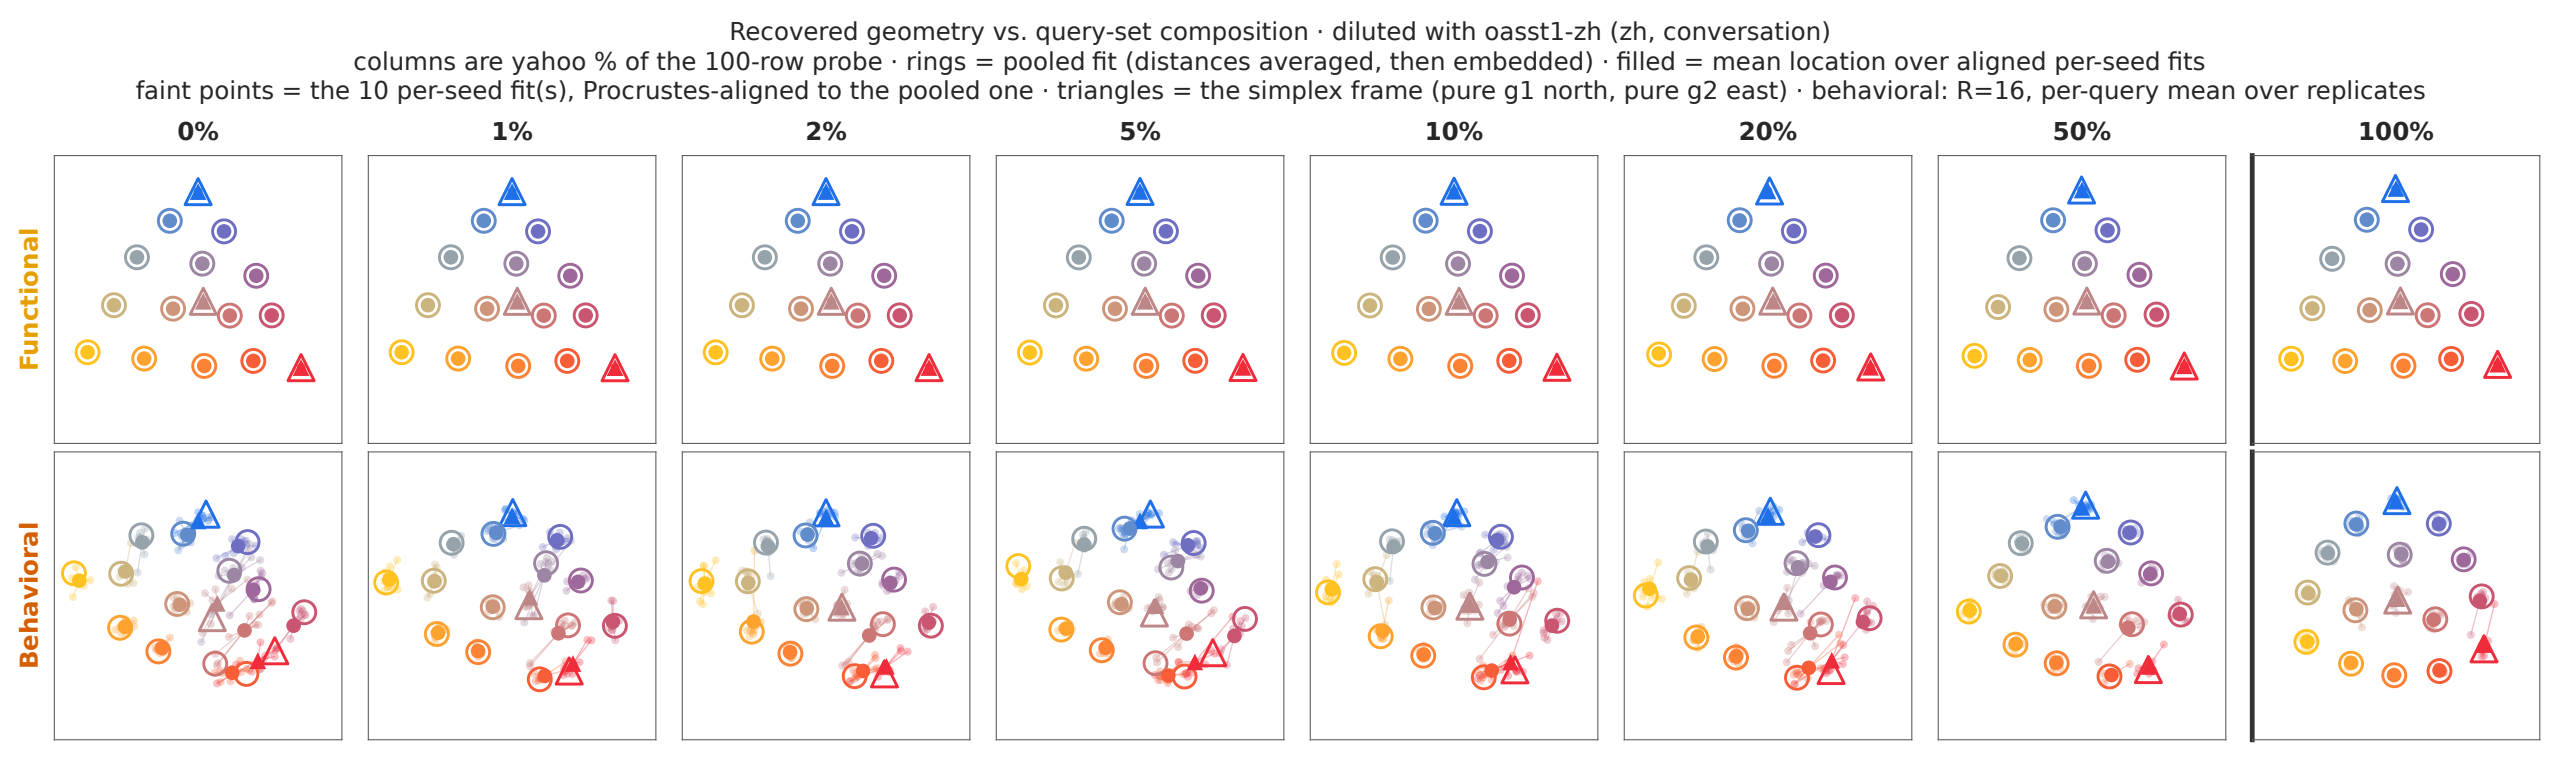

Recovered geometry vs. query-set composition · diluted with oasst1-zh (zh, conversation)
columns are yahoo % of the 100-row probe · rings = pooled fit (distances averaged, then embedded) · filled = mean location over aligned per-seed fits
faint points = the 10 per-seed fit(s), Procrustes-aligned to the pooled one · triangles = the simplex frame (pure g1 north, pure g2 east) · behavioral: R=16, per-query mean over replicates
0%
1%
2%
5%
10%
20%
50%
100%
Functional
Behavioral