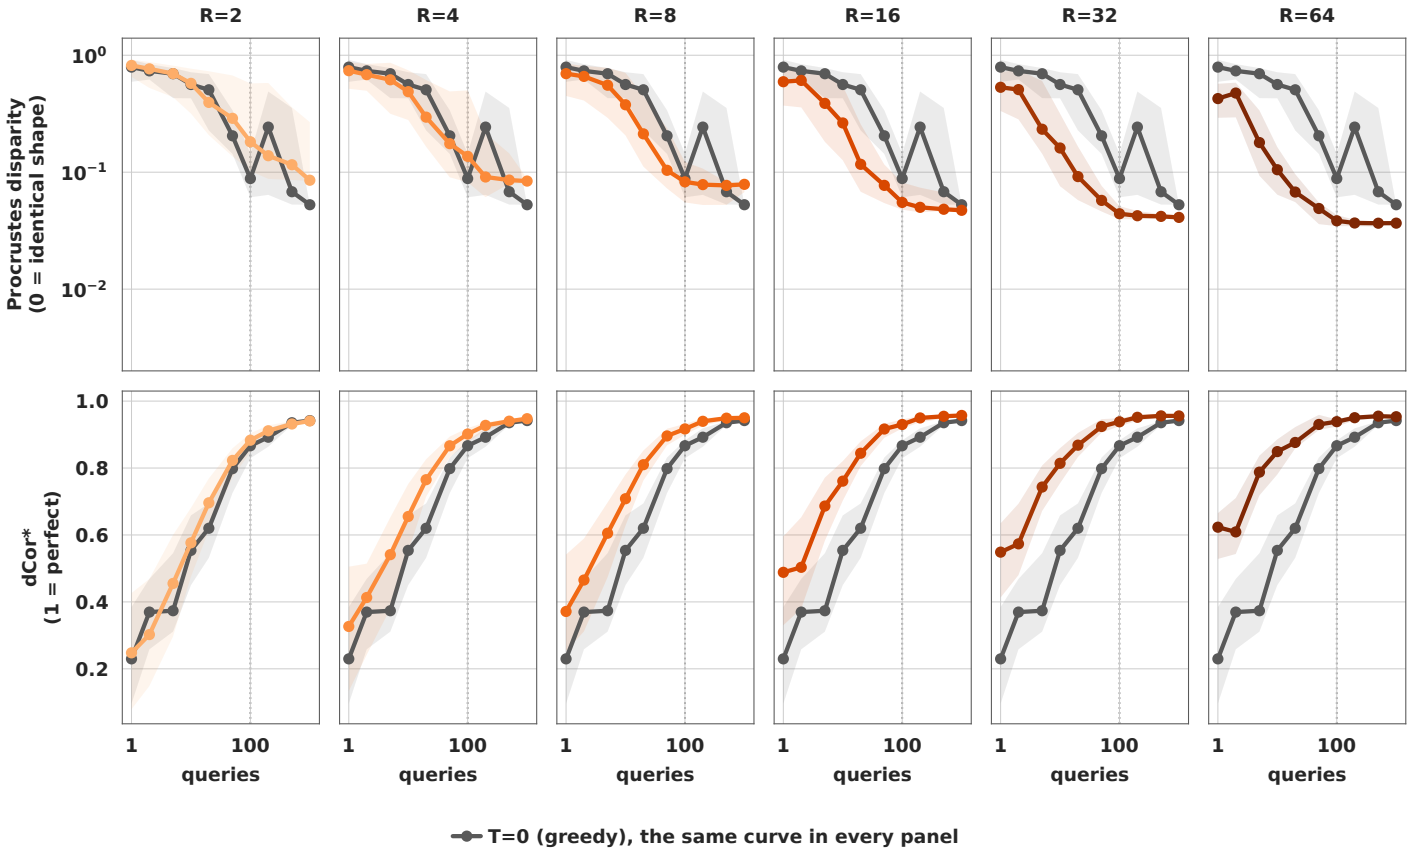

Sampled behavioral recovery vs. probe depth · OLMo-2-1B-Instruct · ONE fixed 16-adapter yahoo simplex
subsampled from one run at 1000 queries (seed 2) x R=64, sampled at T=1 · embedder nomic-embed-text-v2-moe
line = median · band = 10-90% over query x replicate draws · dotted = 100 queries, the standing probe's depth
R=2
R=4
R=8
R=16
R=32
R=64
Procrustes disparity
(0 = identical shape)
10^{0}
10^{-1}
10^{-2}
dCor*
(1 = perfect)
1.0
0.8
0.6
0.4
0.2
1
100
queries
T=0 (greedy), the same curve in every panel