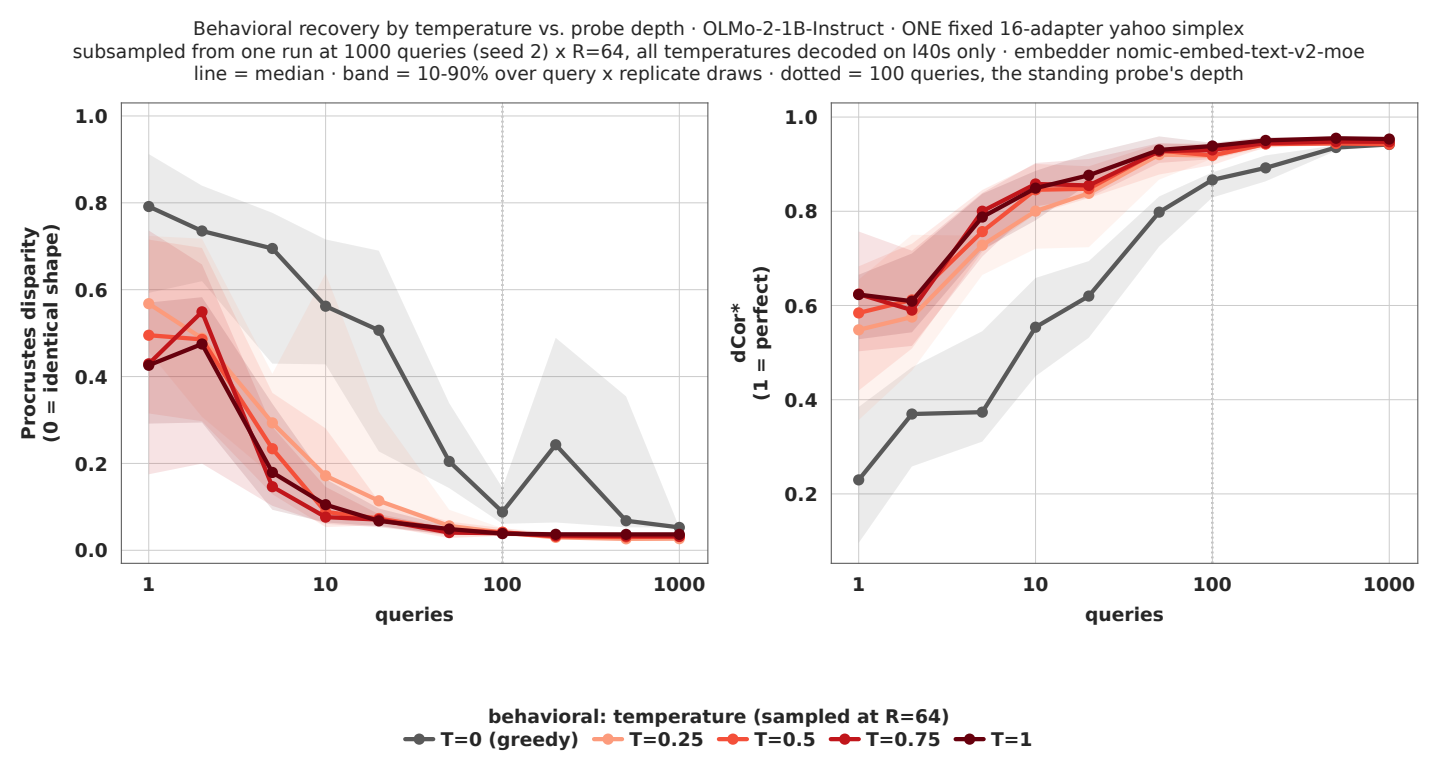

Behavioral recovery by temperature vs. probe depth · OLMo-2-1B-Instruct · ONE fixed 16-adapter yahoo simplex
subsampled from one run at 1000 queries (seed 2) x R=64, all temperatures decoded on l40s only · embedder nomic-embed-text-v2-moe
line = median · band = 10-90% over query x replicate draws · dotted = 100 queries, the standing probe's depth
Procrustes disparity
(0 = identical shape)
1.0
0.8
0.6
0.4
0.2
0.0
1
10
100
1000
queries
dCor*
(1 = perfect)
1.0
0.8
0.6
0.4
0.2
1
10
100
1000
queries
behavioral: temperature (sampled at R=64)
T=0 (greedy)
T=0.25
T=0.5
T=0.75
T=1