

Cisco Live Labs: Online Guides with MKDocs

Overview

Ivan Shirshin


Michal Stanczyk



October 23, 2025

Online Guides with MKDocs

Github + AWS -> HTML and PDF

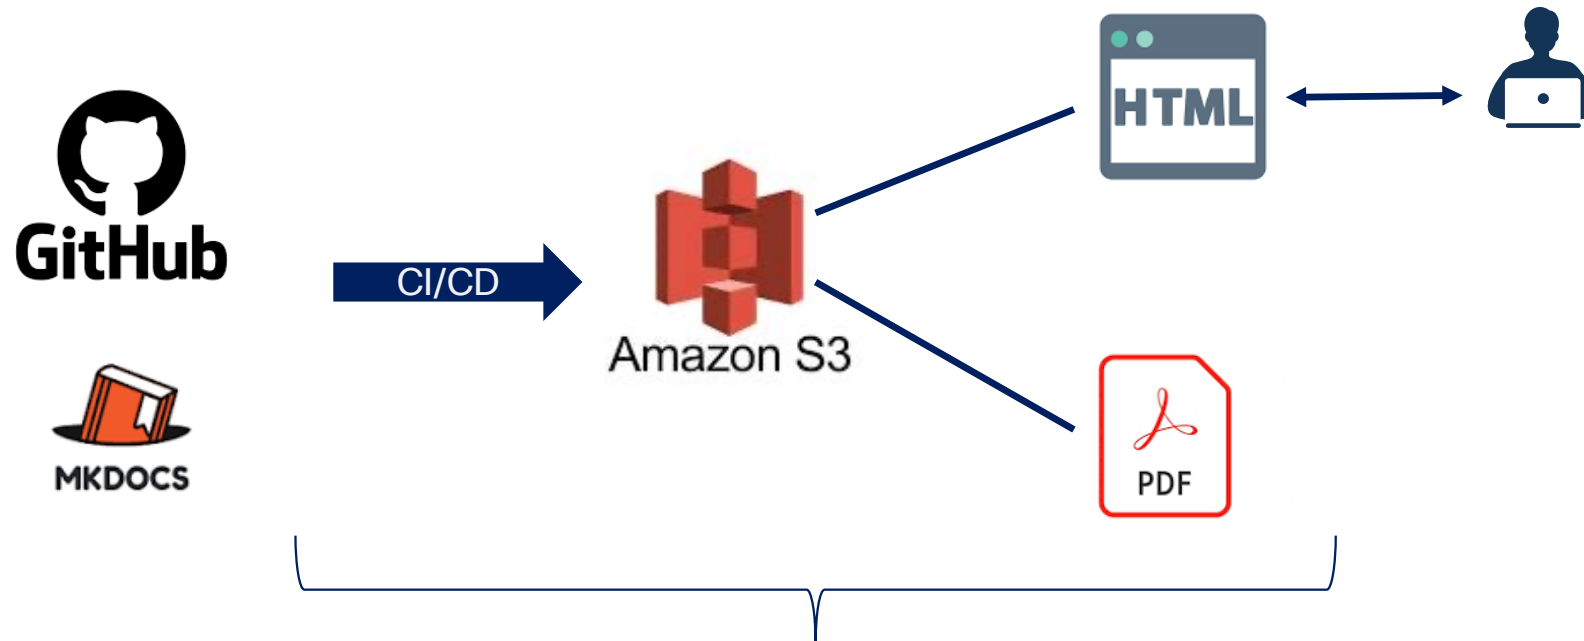

Automated publish from markdown to HTML and PDF



Git benefits: version control, collaboration, etc.

Markdown benefits: simple, styles in SCSS, maintainability, etc.

Online available docs (easy access - can be used for BYOD labs)

Automated Workflow: Git files -> HTML and PDF

<https://cl-ltr.ciscolabs.com/template-clemea26-ltr/>

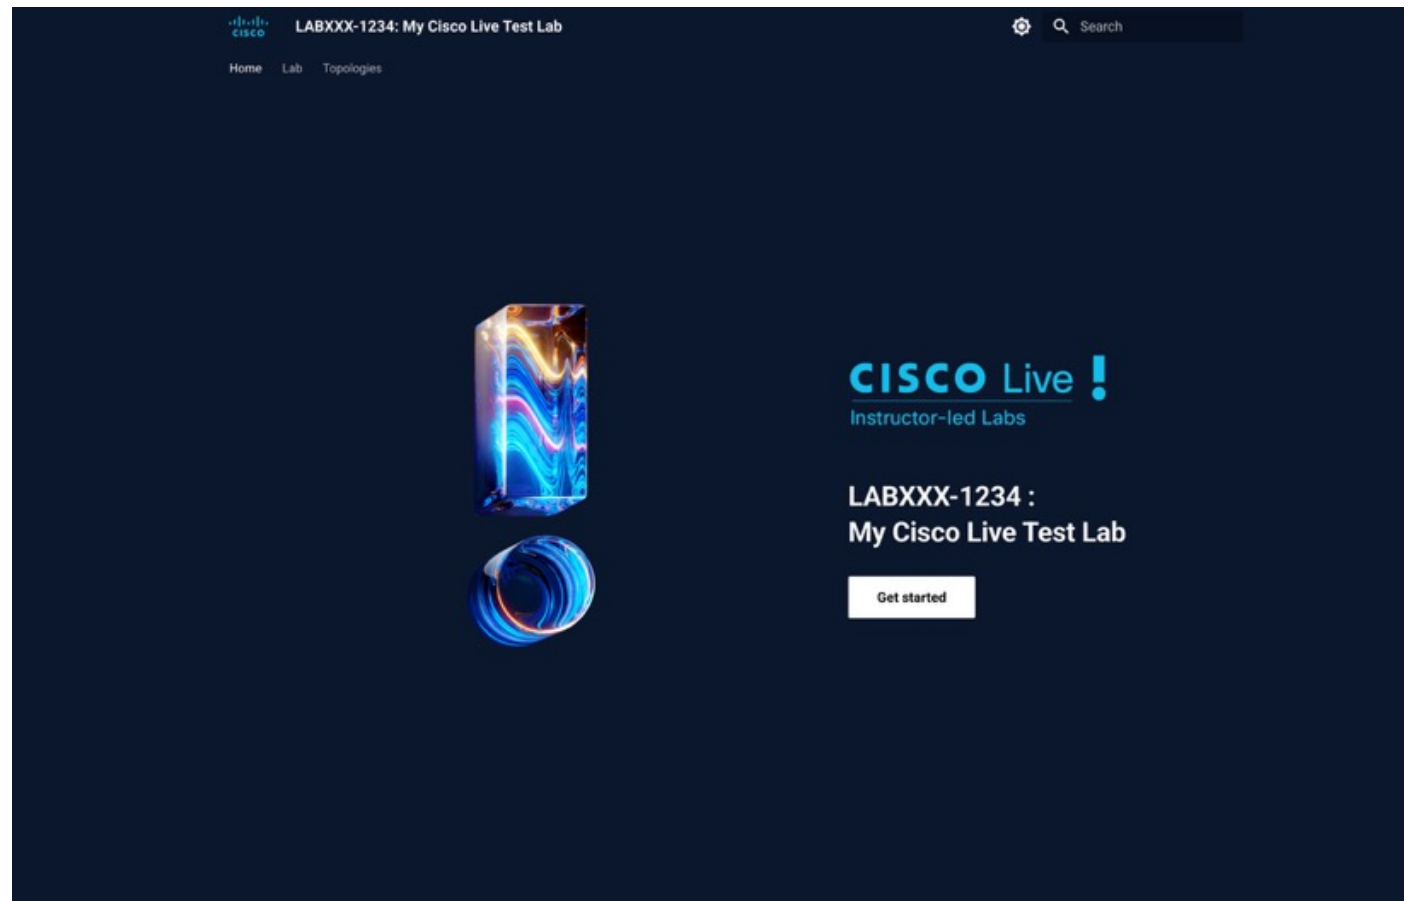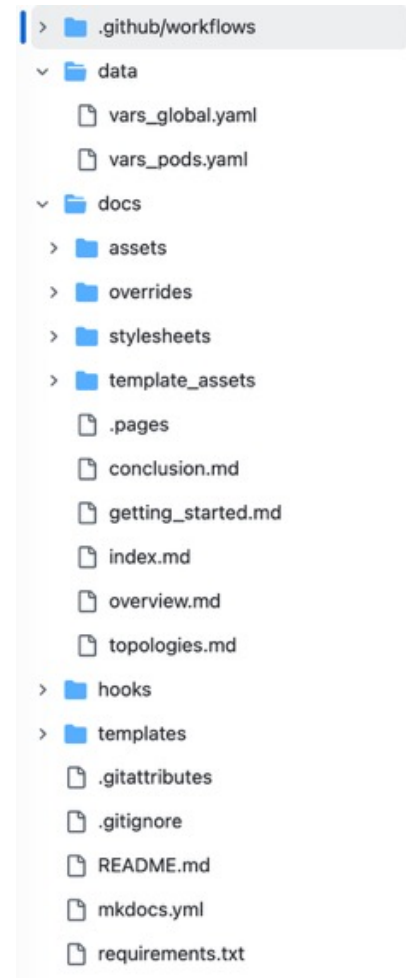

Session ID

3



MD Content -> HTML with CSS and CL Templates

Auto Generated on Git Push

```
1  ✓ # Overview
2
3  ✓ ## Learning Objectives
4
5    This lab will give you an introduction to ...
6
7  ✓ ## Disclaimer
8
9    Although the lab design and configuration examples could be used as a reference, for design related questions please contact
10   your representative at Cisco, or a Cisco partner.
11
12  ✓ ## Lab Access
13
14    From your workstation open an RDP (Remote Desktop) session to the following host named "wkst1":
15
16    - IP: 1.2.3.4
17    - Username: corp\demouser
18    - Password: C1sco12345
19
20  ✓ ## Getting Started
21
22    This lab leverages Cisco dCloud ...
23
24    test
```

 LABXXX-1234: My Cisco Live Test Lab

  Search

[Home](#) [Lab](#) [Topologies](#)

Lab

Overview

Learning Objectives

Disclaimer

Lab Access

Getting Started

Conclusion

Overview

Learning Objectives

This lab will give you an introduction to ...

Disclaimer

Although the lab design and configuration examples could be used as a reference, for design related questions please contact your representative at Cisco, or a Cisco partner.

Lab Access

From your workstation open an RDP (Remote Desktop) session to the following host named "wkst1":

- IP: 1.2.3.4
- Username: corp\demouser
- Password: C1sco12345

Getting Started

This lab leverages Cisco dCloud ...

test

[←](#) [Previous](#)

[Home](#)

[Next](#) [→](#)

Getting Started

Copyright © 2025 Cisco

Podman / Docker Local Build

1. Pull container from GHCR:

```
podman pull ghcr.io/ciscodocs/mkdocs-local:latest
```

• 2. Run container in the MkDocs project folder:

```
cd /LTRABC-1234
```

```
podman run --name mkdocs_lab1 -e ENABLE_PDF_EXPORT=true -p 8000:8000 -v  
$PWD:/home/ci_user ghcr.io/ciscodocs/mkdocs-local:latest
```

Windows:

```
podman run --name mkdocs_project1 -e ENABLE_PDF_EXPORT=true -p 8000:8000 -v  
%CD%:/home/ci_user ghcr.io/ciscodocs/mkdocs-local:latest
```


3. HTML files are served and auto-updated at <http://0.0.0.0:8000>

4. MkDocs local server then can be started or stopped as needed:

```
podman start mkdocs_lab1
```

```
docker stop mkdocs_lab11
```

Vars – Decouple Changing Data from MD files

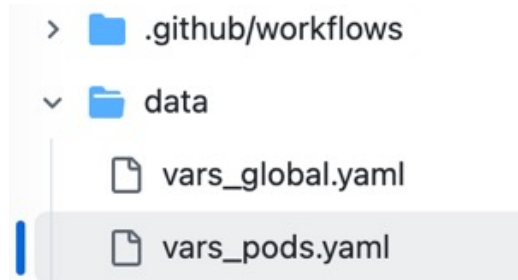

template-clemea26-ltr / data / vars_pods.yaml 



ishirshi Initial commit

Code

Blame

10 lines (10 loc) · 281 Bytes



```
1  # YAML file for defining POD-specific variables
2  pod_default:
3      name: "Default POD name"
4      ip: "192.168.1.x"
5  pod1:
6      name: "This is the best lab POD!"
7      ip: "192.168.1.2"
8  pod2:
9      name: "Also a very good lab POD."
10     ip: "192.168.1.3"
```

Vars Usage Example

✓ ## Section 3 - Example of J2 variables usage (from data/macro_vars.yaml)

To show POD-specific variable - example var value is the name of the POD1: `{{ pod1.name }}`

Similarly, the name of the POD2 from the macro_vars.yaml file is the `"{{ pod2.name }}"`

All PODs have IP addresses in the `{{ pod_default.ip }}` format.

Global var value for global answer to everything is `{{ global.answer_var }}`.



Section 3 - Example of J2 variables usage (from data/macro_vars.yaml)

To show POD-specific variable - example var value is the name of the POD1 `This is the best lab POD!`

Similarly, the name of the POD2 from the macro_vars.yaml file is the `"Also a very good lab POD."`

All PODs have IP addresses in the `192.168.1.x` format.

Global var value for global answer to everything is `42`

Revision Dates, Decoupled Nav structure

- Revision date can be added to the bottom of the pages using the **footer_revision_datetime** parameter
 - disabled by default (set to false) to save on GitHub Actions minutes
 - can be set to true via ENV or a param in mkdocs.yml
- Nav structure is within .pages file in /docs folder.

```
Code Blame 7 lines (7 loc) · 170 Bytes 
```

```
1  nav:
2    - Home: index.md
3    - Lab:
4      - Overview: overview.md
5      - Getting Started: getting_started.md
6      - Conclusion: conclusion.md
7    - Topologies: topologies.md
```


Links

- Webex room for Online Guides questions and discussion: <https://eurl.io/#rYPe1-uQ3>
- Git repositories will be created by October 27th
 - Existing content will be migrated to new template
 - New guides: provide public Git ID to ishirshi@cisco.com for Git repository admin access