



# Introduction to Computer Graphics with WebGL

---

Ed Angel

Professor Emeritus of Computer Science

Founding Director, Arts, Research,  
Technology and Science Laboratory

University of New Mexico



The University of New Mexico


---

# Programming with WebGL

## Part 3: Shaders

Ed Angel

Professor of Emeritus of Computer Science  
University of New Mexico




The University of New Mexico

# Objectives

---

- Simple Shaders
  - Vertex shader
  - Fragment shaders
- Programming shaders with GLSL
- Finish first program

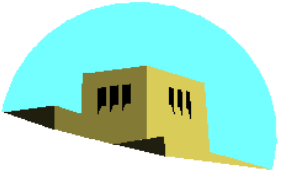


The University of New Mexico

# Vertex Shader Applications

---

- Moving vertices
  - Morphing
  - Wave motion
  - Fractals
- Lighting
  - More realistic models
  - Cartoon shaders



The University of New Mexico

# Fragment Shader Applications

---

## Per fragment lighting calculations



per vertex lighting



per fragment lighting




The University of New Mexico

# Fragment Shader Applications

---


## Texture mapping

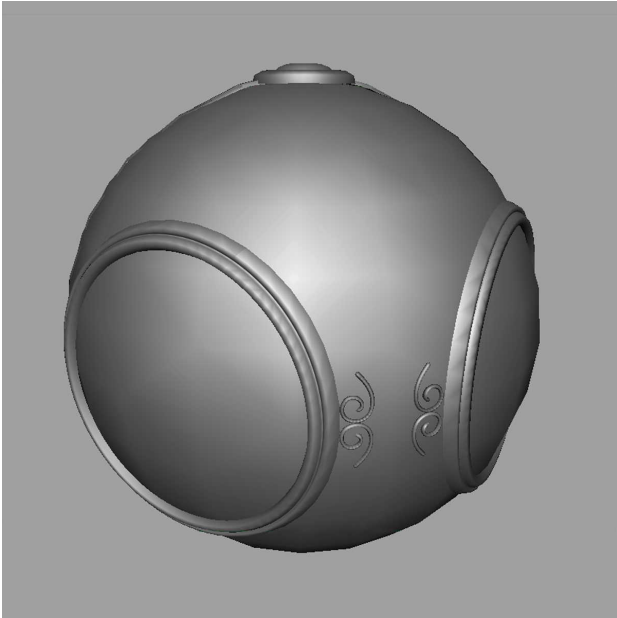

smooth shading



environment  
mapping

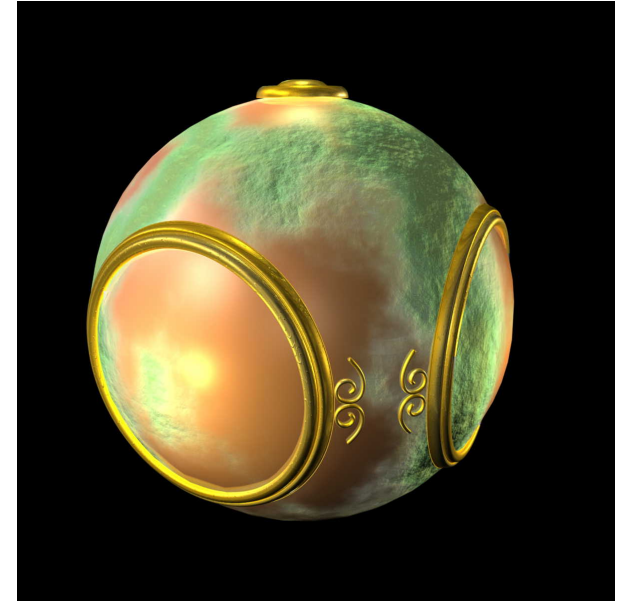

bump mapping



# Writing Shaders

---

- First programmable shaders were programmed in an assembly-like manner
- OpenGL extensions added functions for vertex and fragment shaders
- Cg (C for graphics) C-like language for programming shaders
  - Works with both OpenGL and DirectX
  - Interface to OpenGL complex
- OpenGL Shading Language (GLSL)




The University of New Mexico

# GLSL

- 
- OpenGL Shading Language
  - Part of OpenGL 2.0 and up
  - High level C-like language
  - New data types
    - Matrices
    - Vectors
    - Samplers
  - As of OpenGL 3.1, application must provide shaders



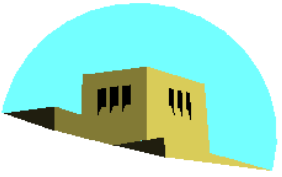


The University of New Mexico

# Simple Vertex Shader

---


```
    ← input from application
attribute vec4 vPosition;
void main(void) ← must link to variable in application
{
    gl_Position = vPosition;
}
    ← built in variable
```

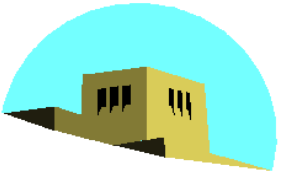


The University of New Mexico

# Execution Model

---

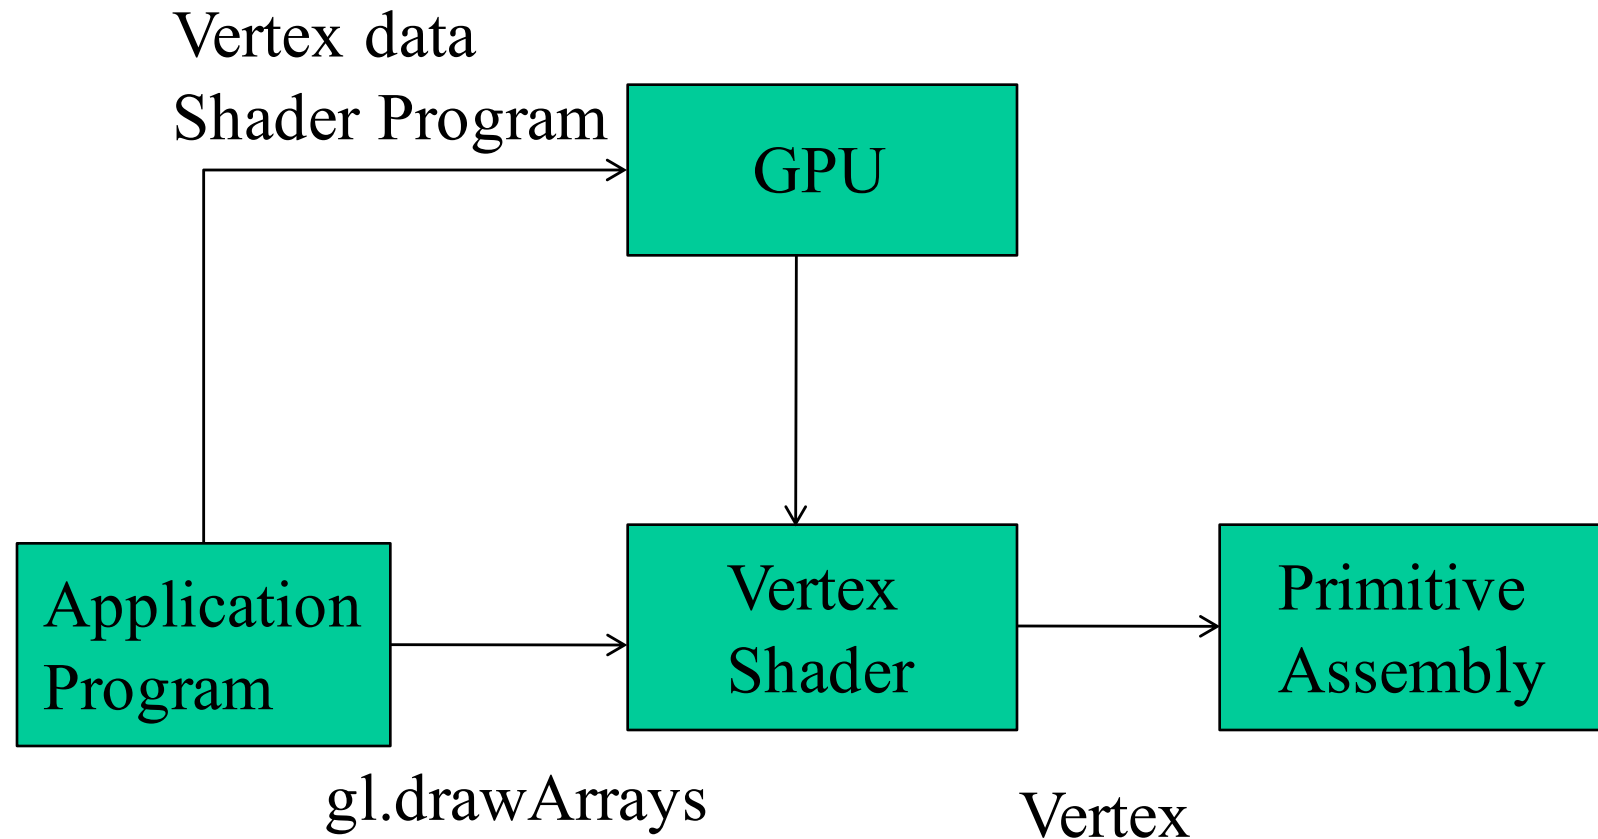

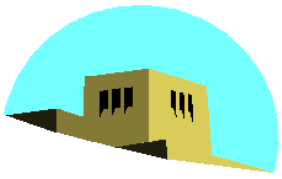


The University of New Mexico

# Simple Fragment Program

---

```
precision mediump float;  
void main(void)  
{  
    gl_FragColor = vec4(1.0, 0.0, 0.0, 1.0);  
}
```



The University of New Mexico

# Execution Model

---

