

Creating new Kubernetes clusters

By employing OpenStack **Magnum** you can easily create Kubernetes clusters over OpenStack, using either the Cleura Cloud Management Panel or the OpenStack CLI. Let us demonstrate the creation of a Kubernetes cluster following both approaches.

Prerequisites

First and foremost, you need an **account in Cleura Cloud**. If you prefer to work with the OpenStack CLI, go ahead and **enable it first**. Then, in addition to the Python `openstackclient` module, make sure you also install the corresponding plugin module for Magnum. Use either the package manager of your operating system or `pip` :

Debian/Ubuntu

```
apt install  
python3-  
magnumclient
```

Mac OS X with Homebrew

Python Package

This Python
module is
unavailable via

`brew`, but you
can install it via

Creating a Kubernetes cluster

To create a Kubernetes cluster from the Cleura Cloud Management Panel, fire up your web browser, navigate to the **Cleura Cloud Management Panel** start page and log in to your Cleura Cloud account. On the other hand, if you prefer to use the OpenStack CLI, please do not forget to **source the RC file first**.

```
pip install  
python-  
magnumclient
```

On the top right-hand side of the Cleura Cloud Management Panel, click the *Create* button. A new



Compute



Networking



Storage



Images



Security Groups



Orchestration



Kubernetes



Logs



Users



Invoices



Support




API



Monitoring



Cores (0 used)

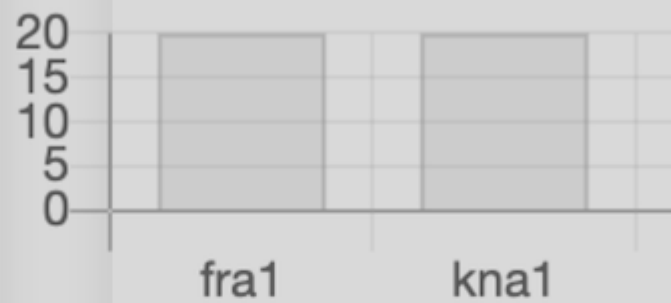

☐ Show Quota


Create a Server

Operating systems


No servers defined

Alerts (last 24H)

You will notice several rounded boxes on that pane. Go ahead and click the one labeled *Magnum C*

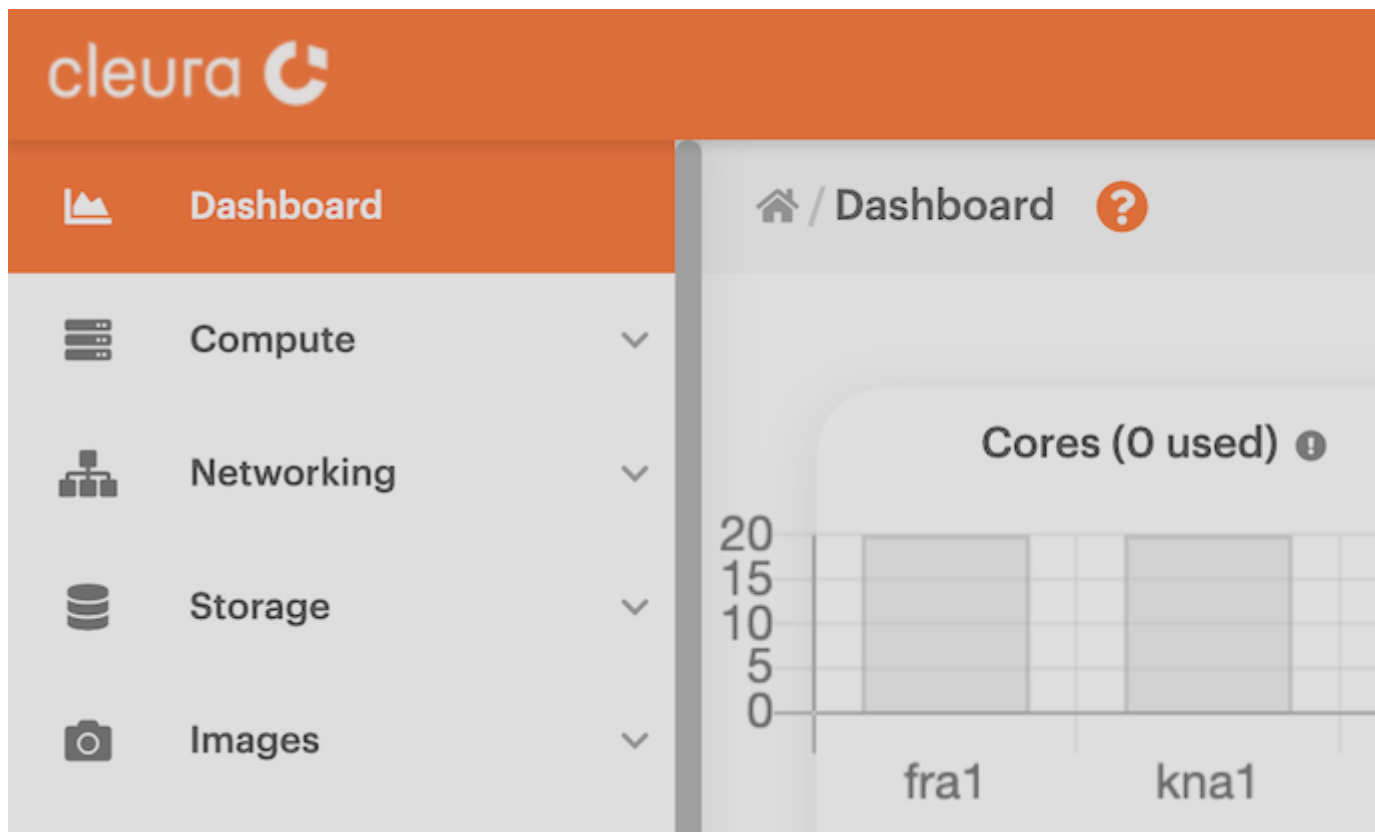

Then, select one of the available templates to base the new cluster on. In the example below, we have a cluster about to be deployed, the characteristics of the cluster nodes, the operating system they run, and the

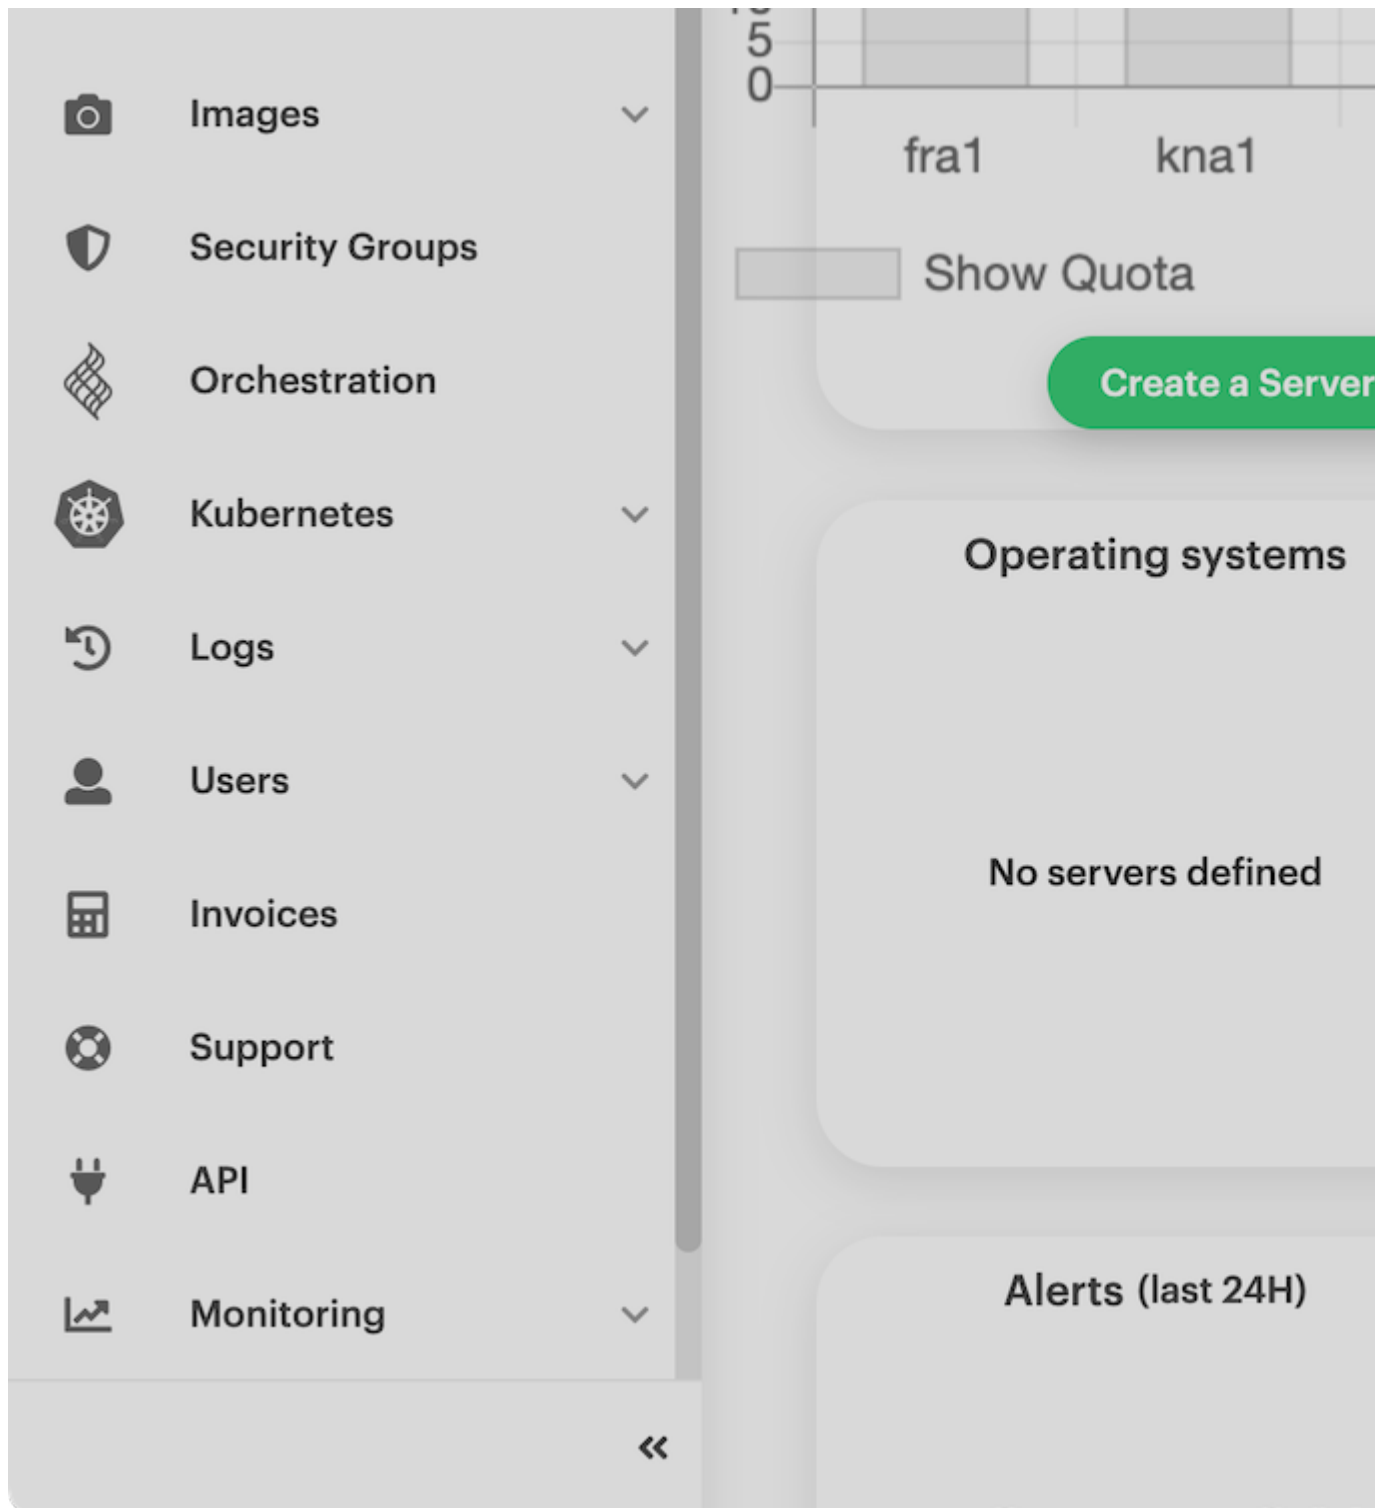

For now, you may skip the *Advanced Option* section. Click the green *Create* button, and Magnum will create a new Kubernetes cluster. A simple, general command for creating a new Kubernetes cluster with Magnum looks like this:

```
openstack coe cluster create \
  --cluster-template $CLUSTER_TMPL \
  --keypair $KEYPAIR \
  $CLUSTER_NAME
```

Let us list all available templates in the region:

```
openstack coe cluster template list
```

```
+-----+-----+-----+
| uuid           | name                                           | tags |
+-----+-----+-----+
| 3f476f01-b3de-4687-a188-6829ed947db0 | Kubernetes 1.15.5 on Fedora-atomic 29 4C-8GB-20GB No Master LB |
| c458f02d-54b0-4ef8-abbc-e1c25b61165a | Kubernetes 1.15.5 on Fedora-atomic 29 2C-4GB-20GB No Master LB |
| f9e1a2ea-b1ff-43e7-8d1e-6dd5861b82cf | Kubernetes 1.18.6 on Fedora-coreos 33 2C-4GB-20GB No Master LB |
+-----+-----+-----+
```

Select the template you want by setting the corresponding `uuid` value to the `CLUSTER_TMPL` variable:

```
CLUSTER_TMPL="f9e1a2ea-b1ff-43e7-8d1e-6dd5861b82cf" # just an example
```

Then, list all available keypairs...

```
openstack keypair list
```

```
+-----+-----+-----+
| Name   | Fingerprint                                | Type |
+-----+-----+-----+
| husavik | 34:3b:58:ba:ec:95:f5:17:17:df:04:38:11:89:e6:3d | ssh   |
+-----+-----+-----+
```

...and set the `KEYPAIR` variable to the name of the keypair you want:

```
KEYPAIR="husavik" # again, this is just an example
```

Finally, decide on a name for your new Kubernetes cluster:

```
CLUSTER_NAME="bangor"
```

With everything in place, go ahead and create your new Kubernetes cluster:

```
openstack coe cluster create \
  --cluster-template $CLUSTER_TMPL \
  --keypair husavik
bangor
```

If everything went well with your request for a new cluster, on your terminal, you would see a message like:

```
Request to create cluster e0df8c62-c6f6-4c7d-b67e-33e3606e9ab6 accepted
```

The cluster creation process takes some time to complete, and while you are waiting, you can check the status of the cluster:

```
openstack coe cluster list -c status
```

If everything is going well, the message you will get will be `CREATE_IN_PROGRESS`. When Magnum

Viewing the Kubernetes cluster

After the Kubernetes cluster is ready, you may at any time view it and get detailed information about it.

In the left vertical pane of the Cleura Cloud Management Panel, click through *Kubernetes*, *Magnum*

cleura

Dashboard

Compute

Networking

Storage

Images

Security Groups

Orchestration

Kubernetes

Get started

Magnum

Clusters

Templates

Home

Containers

Clusters

Region

Id

Frankfurt / Germany (1:1)

Stockholm / Sweden (0:0)

Tokyo / Japan (0:0)

Karlskrona / Sweden (0:0)

Dubai / UAE (0:0)

Click on the three-dot icon on the right of the cluster you want to inspect, and select *View details*.



Dashboard



Compute



Networking



Storage



Images



Security Groups



Orchestration



Kubernetes



Get started



/ Con



Fra



N

M

D

To list all available Kubernetes clusters, just type:

```
openstack coe cluster list
```

| uuid | name | keypair | node_count | master_count | status | health_status |
|--------------------------------------|--------|---------|------------|--------------|---------------|---------------|
| e0df8c62-c6f6-4c7d-b67e-33e3606e9ab6 | bangor | husavik | 1 | 1 | CREATE_COMPLE | HEALTHY |

For many more details on a specific cluster, note its name and run a command like this:

```
openstack coe cluster show bangor
```

| Field | Value |
|----------------------|---|
| status | CREATE_COMPLETE |
| health_status | HEALTHY |
| cluster_template_id | f9e1a2ea-b1ff-43e7-8d1e-6dd5861b82cf |
| node_addresses | ['185.52.156.105'] |
| uuid | e0df8c62-c6f6-4c7d-b67e-33e3606e9ab6 |
| stack_id | e3725aed-f665-4e8d-9409-85f5ee5e2f4a |
| status_reason | None |
| created_at | 2022-11-14T07:32:02+00:00 |
| updated_at | 2022-11-14T07:37:26+00:00 |
| coe_version | v1.18.6 |
| labels | {'kube_tag': 'v1.18.6', 'heat_container_agent_tag': 'train-stable'} |
| labels_overridden | {} |
| labels_skipped | {} |
| labels_added | {} |
| fixed_network | None |
| fixed_subnet | None |
| floating_ip_enabled | True |
| faults | |
| keypair | husavik |
| api_address | https://89.46.80.136:6443 |
| master_addresses | ['89.46.80.136'] |
| master_lb_enabled | False |
| create_timeout | 60 |
| node_count | 1 |
| discovery_url | https://discovery.etcd.io/23af721dc3ee773d2674db4881ff70cb |
| docker_volume_size | 50 |
| master_count | 1 |
| container_version | 1.12.6 |
| name | bangor |
| master_flavor_id | 2C-4GB-20GB |
| flavor_id | 2C-4GB-20GB |
| health_status_reason | {'bangor-id6nijycp2wy-master-0.Ready': 'True', 'bangor-id6nijycp2wy-node-0.Ready': 'True', 'api': 'ok'} |

| project_id | dfc700467396428bacba4376e72cc3e9 |

+-----+-----+

Accessing the Kubernetes cluster with kubectl

You may install the Kubernetes command line tool, `kubectl`, on your local computer, and run commands against your cluster. To install `kubectl`, use the package manager of your operating system.

Debian/Ubuntu

Mac OS X with Homebrew

```
apt
install
kubectl
```

```
brew
install
kubectl
```

When running commands against a specific cluster, you must have the following `config` file on your computer.

Cleura Cloud Management Panel

OpenStack CLI

Downloading

a `config` file

from the

Cleura

Cloud

Management

Panel is

currently not

supported.

You can still

fetch the

`config` file of

your newly

created

Kubernetes

cluster using

the

OpenStack

CLI.

To download

the `config`

file for your

Kubernetes

cluster, type

the
following:

```
openstack
coe
cluster
config --
dir=
export KUBECONFIG=${PWD}/config
```

Then, you can use `kubectl` to run commands against your cluster. See, for instance, all cluster nodes...

```
kubectl get nodes
```

| NAME | STATUS | ROLES | AGE | VERSION |
|------------------------------|--------|--------|------|---------|
| bangor-id6nijycp2wy-master-0 | Ready | master | 113m | v1.18.6 |
| bangor-id6nijycp2wy-node-0 | Ready | <none> | 111m | v1.18.6 |

...or all running pods in every namespace:

```
kubectl get pods --all-namespaces
```

| NAMESPACE | NAME | READY | STATUS | RESTARTS | AGE |
|-------------|--|-------|---------|----------|------|
| kube-system | coredns-786ffb7797-tw2hg | 1/1 | Running | 0 | 167m |
| kube-system | coredns-786ffb7797-vbqwn | 1/1 | Running | 0 | 167m |
| kube-system | csi-cinder-controllerplugin-0 | 5/5 | Running | 0 | 167m |
| kube-system | csi-cinder-nodeplugin-4nr69 | 2/2 | Running | 0 | 166m |
| kube-system | csi-cinder-nodeplugin-vtwqf | 2/2 | Running | 0 | 167m |
| kube-system | dashboard-metrics-scraper-6b4884c9d5-4mlrg | 1/1 | Running | 0 | 167m |
| kube-system | k8s-keystone-auth-wk5v2 | 1/1 | Running | 0 | 167m |
| kube-system | kube-dns-autoscaler-75859754fd-2wsd9 | 1/1 | Running | 0 | 167m |
| kube-system | kube-flannel-ds-7z9dp | 1/1 | Running | 0 | 167m |
| kube-system | kube-flannel-ds-dmvr6 | 1/1 | Running | 0 | 166m |
| kube-system | kubernetes-dashboard-c98496485-stn42 | 1/1 | Running | 0 | 167m |
| kube-system | magnum-metrics-server-79556d6999-xdlpm | 1/1 | Running | 0 | 167m |
| kube-system | npd-5p6gk | 1/1 | Running | 0 | 165m |
| kube-system | openstack-cloud-controller-manager-44rz9 | 1/1 | Running | 0 | 167m |

Last update: 2022-12-21

Created: 2022-11-14

Authors: Christos Varelas, Florian Haas