



1,

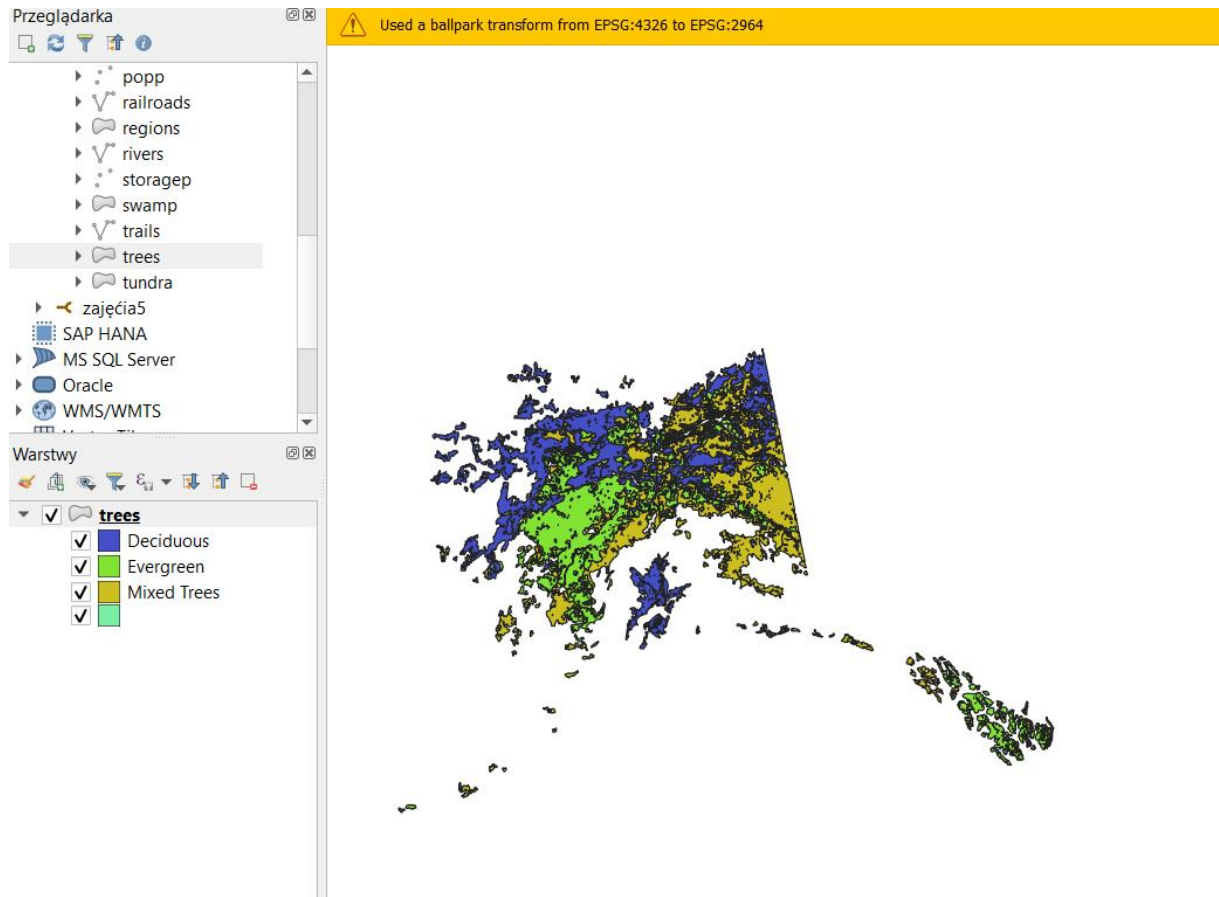

2.

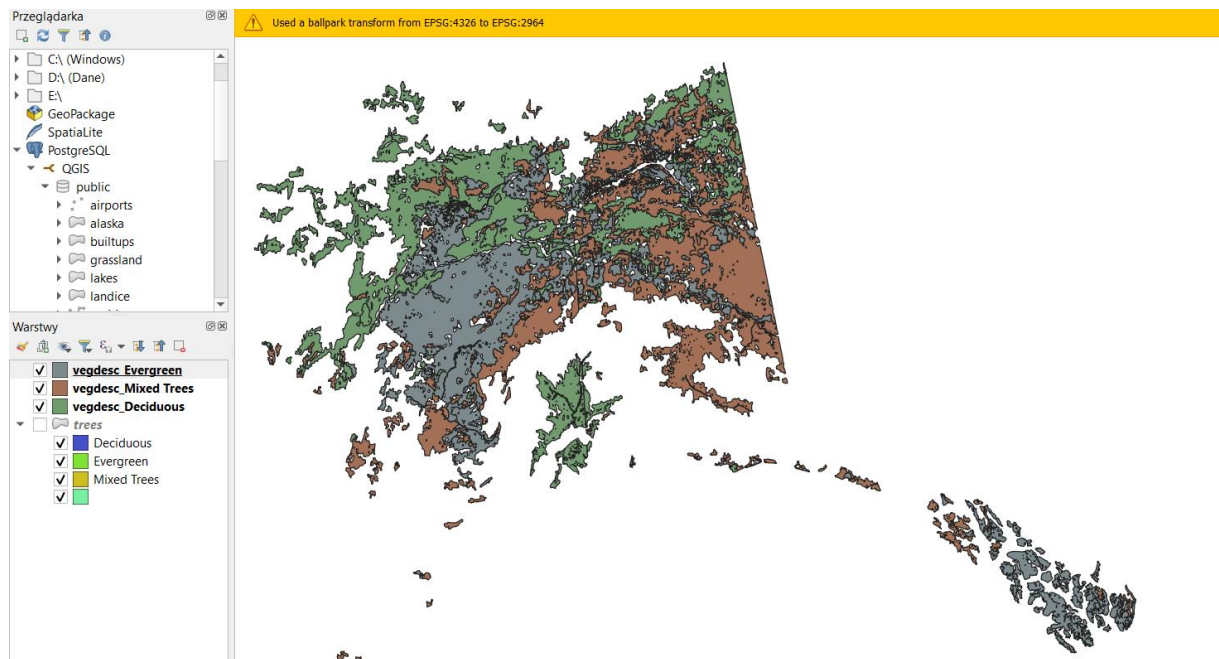

Przeglądarka

Used a ballpark transform from EPSG:4326 to EPSG:2964

lakes
landice
majrivers
pipelines
popp
railroads
regions
rivers
storagep
swamp
trails
trees
tundra
zajęcia5

Warstwy

railroads
Długość linii
Przecięcie (Intersection)
Przycięte
regions
vegdesc_Evergreen
vegdesc_Mixed Trees
vegdesc_Deciduous trees



Długość linii — Łącznie obiektów: 1, odfiltrowanych: 1, wybranych: 0

id	name_2	type_2	LENGTH	COUNT
1	15 Matanuska-Susi...	Borough	268212,650872...	22

pokaż wszystkie obiekty

The screenshot shows the QGIS desktop environment. On the left, the 'Przeglądarka' (Browser) panel displays a tree structure of data sources, including 'GeoPackage', 'SpatialLite', 'PostgreSQL', and 'QGIS'. The 'public' schema is expanded, showing various layers like 'airports', 'alaska', 'builtups', 'grassland', 'lakes', 'landice', 'majrivers', 'pipelines', and 'popp'. Below this, the 'Warstwy' (Layers) panel shows a list of loaded layers, with 'use_Military' selected and highlighted in red. The main map area displays several brown circular markers representing military locations. In the bottom right, a table view for the 'use_Military' layer is open, showing 8 objects. The table has columns: fid, id, fk_region, elev, name, use, and av_elev. The first three rows are highlighted with a green border.

	fid	id	fk_region	elev	name	use	av_elev
1	1	16	26	1461	KALAKAKET CR...	Military	593,25
2	4	40	22	1167	ALLEN AAF	Military	593,25
3	7	55	14	606	BIG MOUNTAIN...	Military	593,25

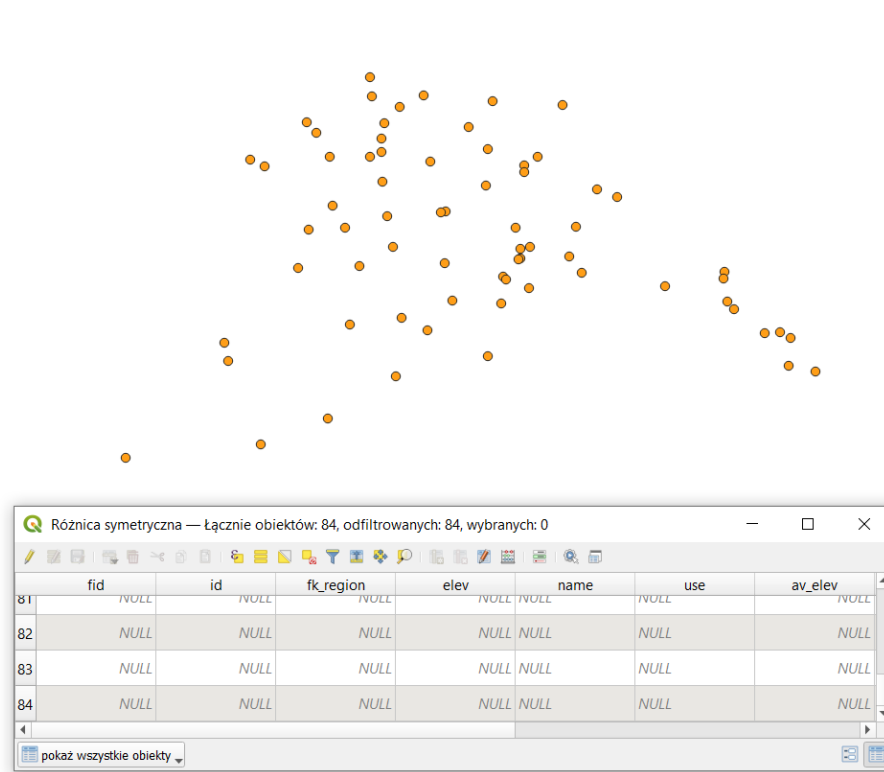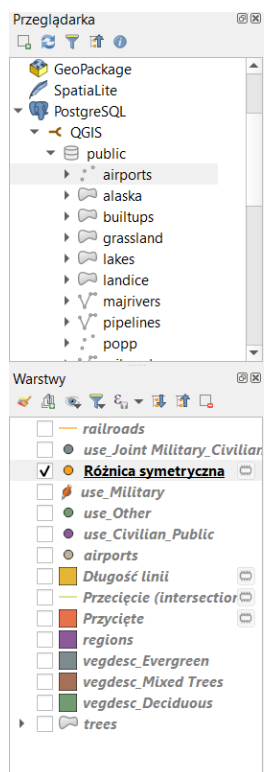


Różnica symetryczna — Łącznie obiektów: 84, odfiltrowanych: 84, wybranych: 0


	fid	id	fk_region	elev	name	use	av_elev
81	NULL	NULL	NULL	NULL	NULL	NULL	NULL
82	NULL	NULL	NULL	NULL	NULL	NULL	NULL
83	NULL	NULL	NULL	NULL	NULL	NULL	NULL
84	NULL	NULL	NULL	NULL	NULL	NULL	NULL

pokaż wszystkie obiekty


5.

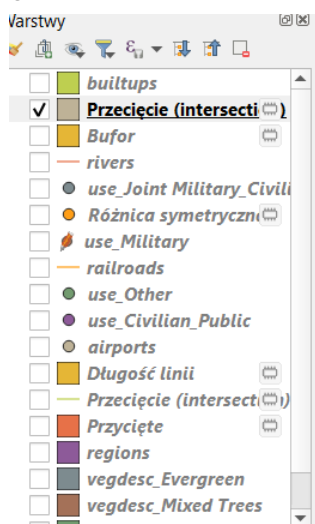

6.

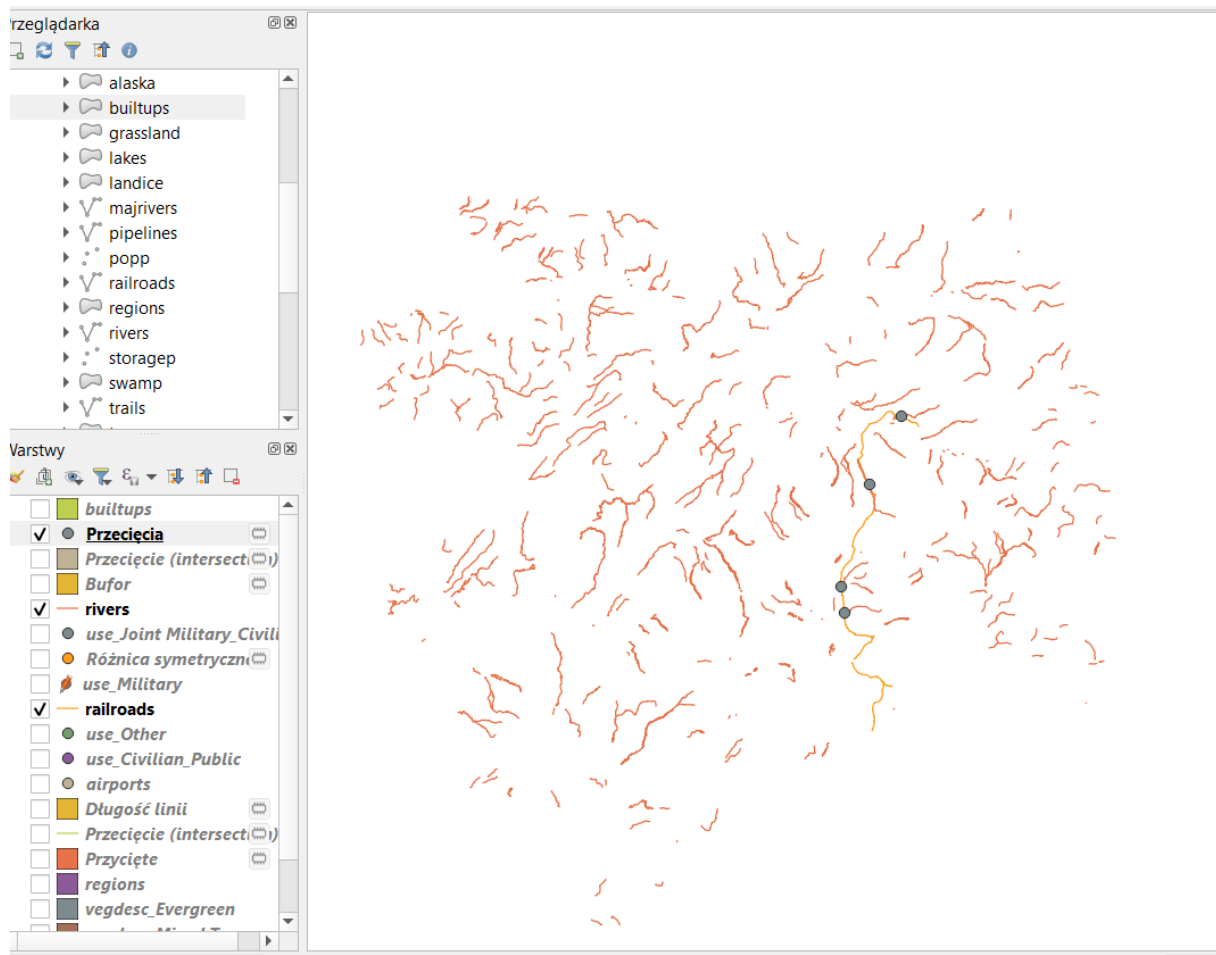

7.

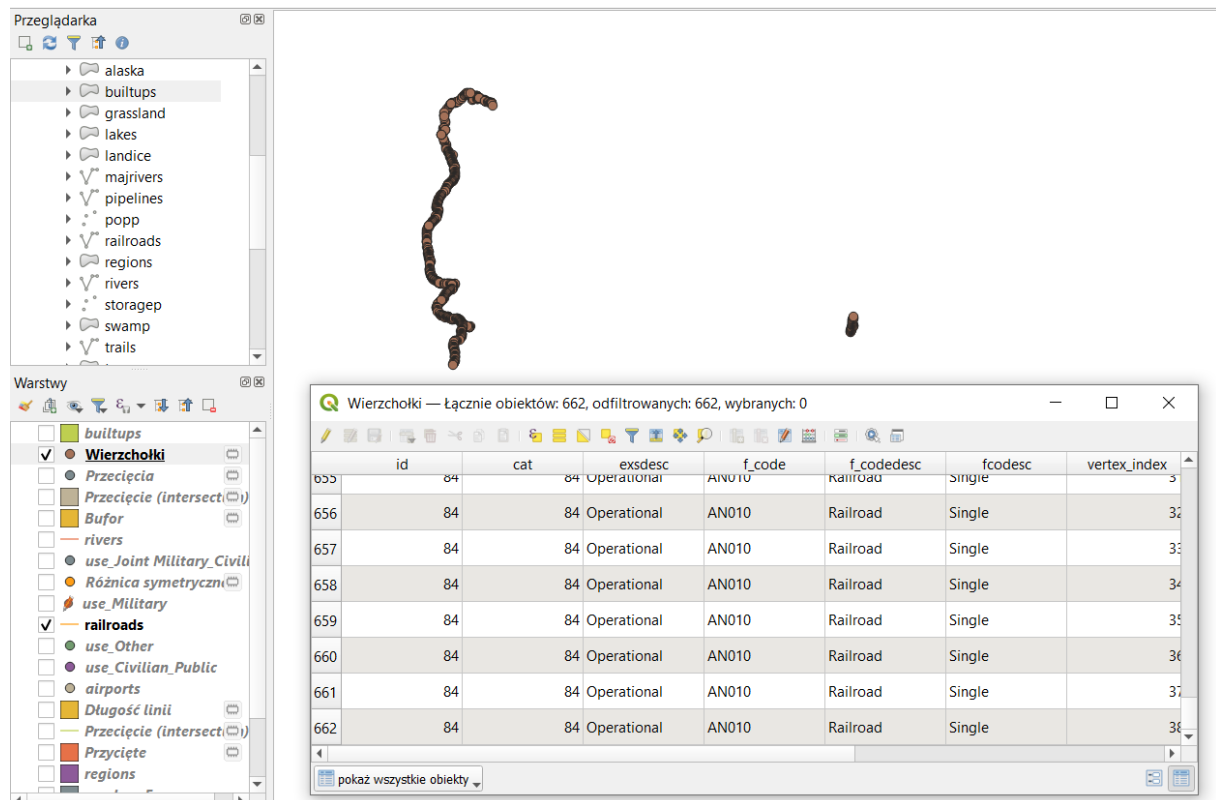

8.

