

An index has to fit

Week of 9-15 December 2024 · Melbourne

Matthew · editorial narration. Historical reconstruction from retrieved conversation summaries; original transcript links remain unconfirmed. Dates are reported by those summaries. Earliest recovered discussion, not a proved invention date.

01 9 December



In the earliest conversation recovered so far, I was exploring colour markers, counts and pattern indices.

02 9 December



The next question in my record is harder: can the index hold all those nearly balanced patterns?

03 9 December



My later sketch groups patterns by frequency and keeps a fallback for blocks that do not shrink.


04 9 December



I find an early report of successful restoration—and larger output. Reversibility alone did not remove the overhead.

[Reported test](#) · [original log not inspected](#)


05 12 December

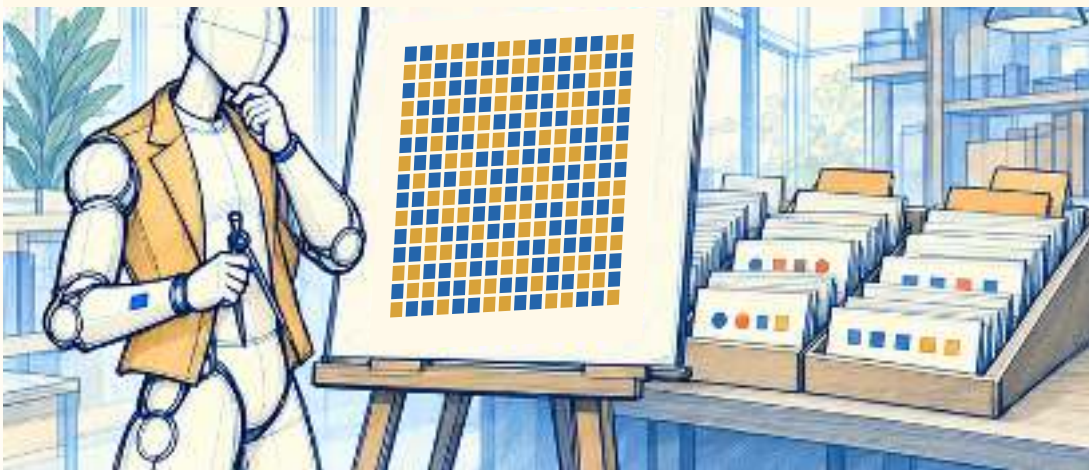

The next recovered proposal in my record explores 15-bit rows and dictionary order.

[Proposal](#)

06 12 December

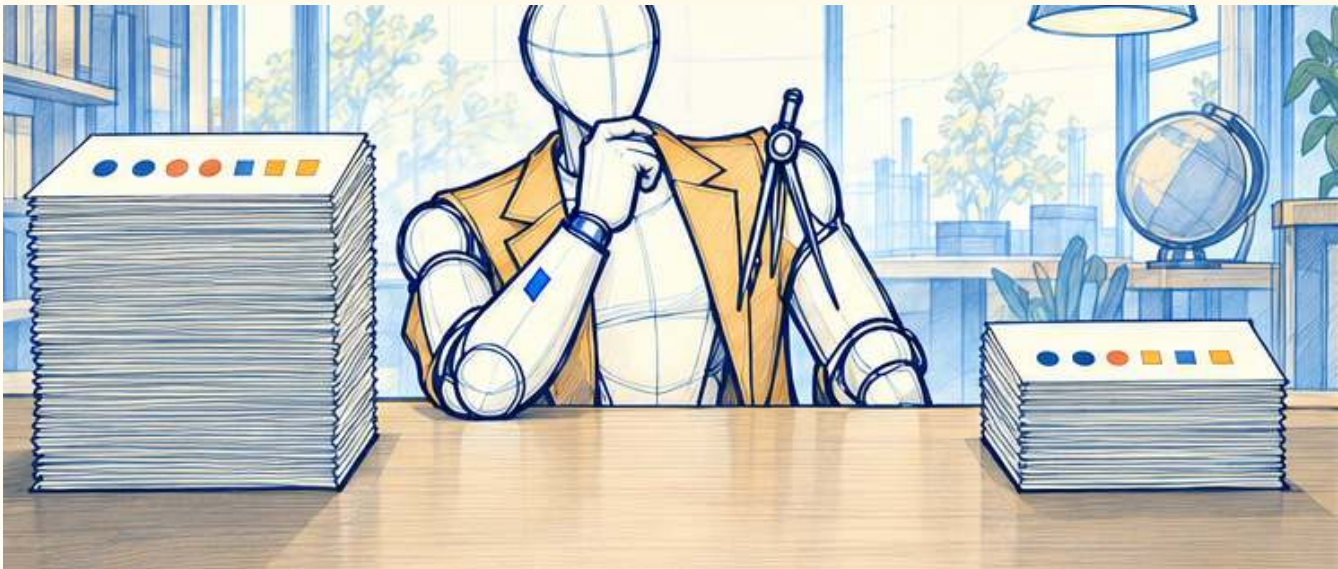

3,003 patterns
2,048 index values

I reach a concrete limit: choosing five marked positions among fifteen gives 3,003 patterns, more than an 11-bit index can hold.

[Mathematical explanation in the recovered discussion](#)